


Morey's Grease

Specifications	Green EP-MP2 (Heavy Duty MP)	SUPER RED (Extra Heavy Duty MP)	BIGFOOT (Extreme Conditions Heavy Duty MP)	Red-I MARINE	HIGH TEMP	MOLYBENTONE (1% Moly)	Moly-Complex (5% Moly)	High Speed Bearing Grease	Guardian Aluminium Complex (MP White Grease)	CRYSTAL CLEAR	CRYSTAL BLUE
Colour	Green	Red	Fire Orange	Blue/Green	Purple	Grey	Dark Grey	Dark Brown	White	Clear	Blue
Grade NLGI	EP2	EP2	EP2	EP2	EP2	EP2	EP2	EP2	EP2	EP2	EP2
Operating Range	-20 to 150C	-20°C to 170°C	4°C to 200°C	-20°C to 230°C	-40°C to 200°C	-20C to 250°C	-40C to 204C	-40C to 150C	-30°C to 190°C	-40°C to 232°C	-40°C to 315 °C
Dropping Point	193° C	288° C	288° C	260° C	260° C	None	288° C	190 ° C	288 ° C	None	None
Timken OK Load	16kg	32Kg	34kg	39kg	22kg	NA	31kg	N/A	NA	12kg	18kg
Base	Lithium Complex	Lithium Complex	Lithium Complex	Lithium Complex	Lithium Complex	Clay	Lithium Complex	Lithium Complex	Aluminium Complex	Synthetic	Synthetic
Appearance	Smooth/Tacky	Smooth/Tacky	Smooth/Superior Tacky	Smooth/Tacky	Smooth/Tacky	Buttery	Smooth	Smooth/Tacky	Smooth	Tacky	Tacky
Water	Waterproof	Waterproof	Resistance	Waterproof	Waterproof	Resistance	Resistance	Resistance	Resistance	Resistance	Resistance
Food Approval	No	C11	C11	No	No	C11	No	No	H-1	H-1	H-1
Application	Agriculture, Industry, Automotive	Automotive, Industrial, Truck, Farm Equipment, Marine	Off-Road 4WD, Earthmoving, Logging, Truck/Road Trains, Rail, Quarry, Mining	Universal Marine Application	General High Temperature Application, Electric motors	Extreme High Temperature	CV-Joints, Pin and Bush, Extreme High and Shock Load	Rolling Mills, Construction Machinery, Spinning and Grinding Spindles, Lathe and CNC	All Types of Food Machinery	O'Ring, Rubber components, Food Machinery	Food Grade Extreme High Temperature
Sizes	450g (40004-EP), 500g (400045-EP), 2.5kg (40005-EP), 20kg (40020-EP), 180kg (40180-EP)	400g (420014-SR), 450g (42004-SR), 500g (420045-SR), 2.5kg (42005-SR), 20kg (42020-SR), 180kg (42180-SR)	60g (4300060-TT), 400g (430014-BF), 450g (43004-BF), 500g (430045-BF), 2.5kg (43005-BF), 20kg (43020-BF), 180kg (43180-BF)	450g (43004-MG), 500g (43005-MG), 2.5kg (43005-MG), 20kg (43020-MG), 180kg (43180-MG)	450g (41004-HT), 500g (410045-HT), 2.5kg (41005-HT), 20kg (41020-HT), 180kg (41180-HT)	450g (43004-MB), 2.5kg (43005-MB), 20kg (43020-MB), 180kg (43180-MB)	450g (43004-MCG), 2.5kg (43005-MCG), 20kg (43020-MCG), 180kg (43180-MCG)	450g (43004-HS), 20kg (43020-HS), 180kg (43180-HS)	450g (44004-AL), 2.5kg (44005-AL), 20kg (44020-AL), 180kg (44180-AL)	80g (4300080-CR), 450g (43004-CC2), 2.5kg (43005-CC2), 20kg (43020-CC2), 180kg (43180-CC2)	450g (43004-CB2), 2.5kg (43005-CB2), 20kg (43020-CB2), 180kg (43180-CB2)
Box Qty	400g Cartridge, 450g Cartridge and 500g pots are 12 per box, 2.5kg tins are 4 per box, 20kg and 180kg drums are 1 unit, 60g Turntable sachet and 80g tubes are 30 per box										

*MP = Multi-Purpose

Aims Industrial
 88 Bryant St Padstow NSW 2211
 Ph: (02) 9773 0122
 Email: sales@aimsindustrial.com.au

Please note that this is a guide and is subjected to change

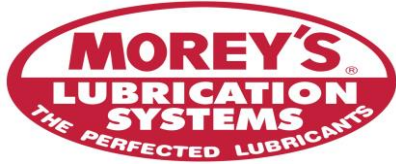


Morey's Semi-Fluid Grease

Specifications	CRYSTAL CLEAR	Poly MP	SR Arctic		EP Lithium	
Colour	Clear	White	Red		Blue	
Grade NLGI	EP1	EP1	EP1	EPO	EPO	EP00
Operating Range	-40°C to 200°C	-23C to 148C	-40C to 150C		-20C to 148C	
Dropping Point	None	193C	288C		193C	182C
Timken OK Load	12kg	N/A	32kg		18kg	
Base	Synthetic	Li12HSA	Lithium Complex		Li12HSA	
Appearance	Tacky	Buttery	Smooth and Tacky		Buttery	
Water	Resistance	N/A	Resistance		Resistance	
Food Approval	H-1	H-2	No		No	
Application	O'Ring, Rubber components, Food Machinery	Plain and Anti-Friction Bearings	Extreme Low Temperature		Lubricated Couplings, Gearboxes, Centralised greasing systems	
Sizes	20kg (43020-CC1), 180kg (43180-CC1)	10g (4300010-W1), 500g (430045-W1), 2.5kg (43005-W1), 20kg (43020-W1), 180kg (43180-W1)	20kg (422020-SRA1), 180kg (422180-SRA1)	20kg (422020-SRA0), 180kg (422180-SRA0)	20kg (402020-LG0), 180kg (402180-LG0)	2.5kg (402005-LG), 20kg (402020-LG), 180kg (402180-LG)
Box Qty	10g Sachet are 500 per Box, 500g pot are 12 per box, 2.5kg tins are 4 per box, 20kg and 180kg Drums are 1 Unit					

Aims Industrial
 88 Bryant St Padstow NSW 2211
 Ph: (02) 9773 0122
 Email: sales@aimsindustrial.com.au

Please note that this is a guide and is subjected to change

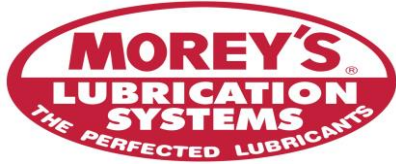


Morey's Additives and Oils

Specifications	Heavy Duty Oil Stabilizer	Upper Cylinder Lubricant & Injector Cleaner	Diesel Smoke Killer & Injector Cleaner	Power Steering Oil Conditioner
Application	All Mineral, Semi-Synthetic & Full Synthetic Oils	All Petrol, E10 and LPG	All Diesel Fuels	All Power Steering
Sizes	500ml(000005-OS), 1Lt(00001-OS), 5Lt(00005-OS), 20Lt(00020-OS), 208Lt(00208-OS)	250ml(100002-IC), 1Lt(10001-UC), 5Lt(10005-UC), 20Lt(10020-UC), 208Lt(10208-UC)	1Lt(11001-SK), 5Lt(11005-SK), 20Lt(11020-SK), 208Lt(11208-SK)	250ml (200002-PS)
Box Qty	250ml, 500ml and 1Lt Bottle are 12 per box, 5Lt Bottle are 3 per box, 20L and 208L Drums are 1 unit.			

Specifications	Air tool	Chain	Hub Oil
Grade ISO	32	68	N/A
Min Temp Pour Point	-18	-23	N/A
Food Approval	No	No	No
Application	All Types of Air tools	Industrial Chain, Chainsaw Bar and Chain, Boat Chain, Bicycle and Motorcycle Chain, Wire Rope	Oil Filled Hubs
Sizes	250ml(500002-AT), 1Lt(50001-AT), 20Lt(50020-AT), 208Lt(50208-AT)	250ml (600002-CH), 1Lt (60001-CH), 20Lt (60020-CH), 208Lt (60208-CH)	1Lt (90001-HUB), 20Lt (90020-HUB), 208Lt (90180-HUB)
Box Qty	250ml and 1Lt Bottles are 12 per Box, 20Lt and 208Lt Drums are 1 unit		

Aims Industrial
 88 Bryant St Padstow NSW 2211
 Ph: (02) 9773 0122
 Email: sales@aimsindustrial.com.au

Please note that this is a guide and is subjected to change

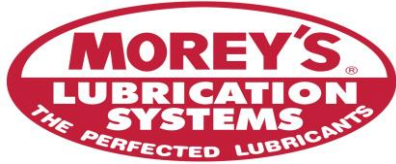

Morey's Food Grade Oils

Specifications	FG Chain			FG Gear			
Grade ISO	100	220	Synthetic Hi-Temp	150	220	460	680
Min Temp Pour Point	-34C	-30C	-36C	-9C	-9C	-7C	-7C
Flash Point	166C	166C	282C	266C	266C	302C	304C
Food Approval	H-1	H-1	H-1	H-1	H-1	H-1	H-1
Sizes	5Lt (FMCO100-005), 20Lt (FMCO100-020), 208Lt (FMCO100-208)	5Lt (FMCO220-005), 20Lt (FMCO220-020), 208Lt (FMCO220-208)	5Lt (FMCOSYN-005), 20Lt (FMCOSYN-020), 208Lt (FMCOSYN-208)	20Lt (FMGO150-020), 208Lt (FMGO150-208)	5Lt (FMGO220-005), 20Lt (FMGO220-020), 208Lt (FMGO220-208)	5Lt (FMGO460-005), 20Lt (FMGO460-020), 208Lt (FMGO460-208)	20Lt (FMGO680-020), 208Lt (FMGO680-208)
Box qty	5L Bottle are 3 per box, 20L and 208L Drums are 1 unit.						
Specifications	Food Grade Hydraulic/Airline			FG Air Compressor	FG White Oil		
Grade ISO	32	46	68	100	46	9USP (ISO16)	35USP (ISO68)
Min Temp Pour Point	-12C	-9C	-9C	-7C	-40C	-18C	-15C
Flash Point	182C	193C	204C	227C	264C	185C	241C
Food Approval	H-1	H-1	H-1	H-1	H-1	H-1	H-1
Sizes	5Lt (FMHY 32-005), 20Lt (FMHY 32-020), 208Lt (FMHY 32-208)	20Lt (FMHY 46-020), 208Lt (FMHY 46-208)	5Lt (FMHY 68-005), 20Lt (FMHY 68-020), 208Lt (FMHY 68-208)	20Lt (FMHY 100-020), 208Lt (FMHY 100-208)	18.9Lt (FMSY AIR46)	18.9Lt (FMUSP09-020), 208Lt (FMUSP09-208)	18.9Lt (FMUSP35-020), 208Lt (FMUSP35-208)
Box qty	5L Bottle are 3 per box, 20L and 208L Drums are 1 unit.						

Aims Industrial
 88 Bryant St Padstow NSW 2211
 Ph: (02) 9773 0122
 Email: sales@aimsindustrial.com.au

Please note that this is a guide and is subjected to change