FYH®

BALL BEARING UNITS

fyhbearings.com

CAT.NO.3310

NIPPON PILLOW BLOCK CO.,LTD.

ISO 9001
JIS Q 9001
JAB CM004

FYH®

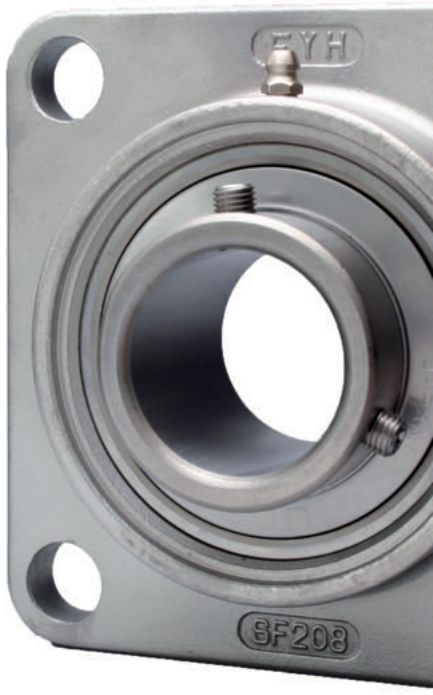

Problems with corrosion?

CORROSION RESISTANT UNITS

The corrosion resistant series is available in a wide array of sizes and styles, and units may be customized with a number of different specialized options to accommodate virtually any application. Federal compliance can be assured with FYH Bearing Units. (Page 21)

Looking for high speed?

AIR HANDLING UNITS

FYH Air Handling units are designed for a wide range of highly demanding HVAC applications. The tighter C2 internal ball clearance reduces noise and vibration in high speed applications. Our original "Bullet Point" set screw is designed so that the threads of the screw expand outward and tightly grasp the threads of the inner ring of the bearing to reduce the possibility of backing out due to vibration. (Page 20)

BULLET POINT®
(Page 61)

NU-LOC®
(Page 21)

High temperature?

Heat resistant units are available in the following temperature ranges:D1K2 (~ 180°C/356°F), D9K2 (~ 220°C/428°F), D9P4 (~ 250°C/482°F).
CERABALL SERIES, with our original Silicon Nitride ceramic balls, operate at temperatures as high as 840°F in extreme operating environments where corrosion, high speed, and vacuum are all factors. (Page 21, 312)

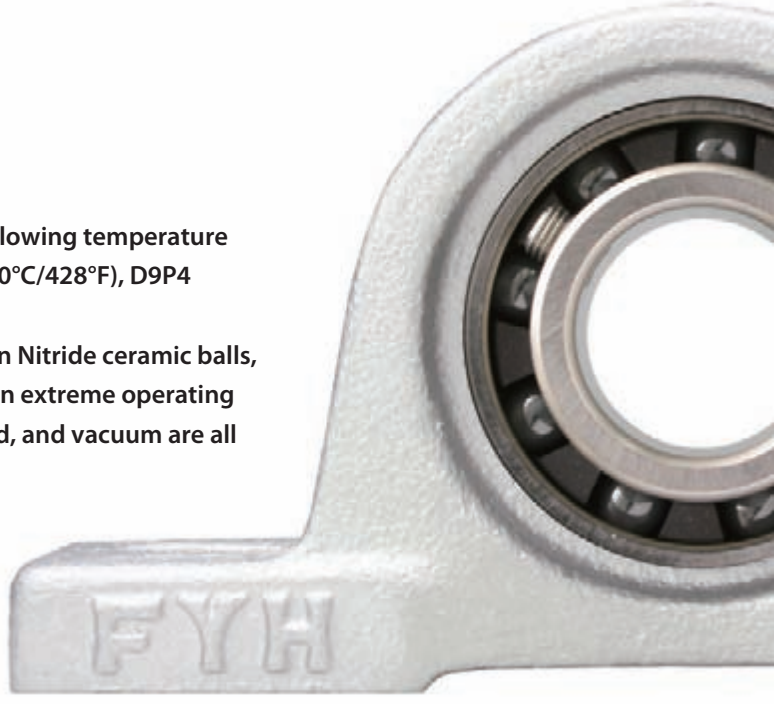

Ball Bearing Units (contents)

Technical section	Technical section
Pillow type units	
Square four-bolt flange type units	
Oval flange type units	
Round flange cartridge type units	
Stamped steel plate flange type units	
Take-up type units	
Cartridge type units	
Hanger type units	
Ball bearing inserts	
Parts and accessories	Parts and accessories
Example of use	Example of use
Appendix table	Appendix table

Contents

Technical section

1 Structure and features

1.1 Structure 5
1.2 Features 6

2 Models

2.1 Model list 8
2.2 Models and features 10
2.3 Units for special use 19

3 Selection of units

3.1 Outline of selection 22
3.2 Selection of model specifications 23
3.3 Selection of bearings from a maintenance viewpoint 24

4 Rating life of bearings

4.1 Basic rating life and basic load rating 25
4.2 Calculation of rating life 25
4.3 Grease life 27

5 Bearing load

5.1 Loads applied to bearings 28
5.2 Distribution of bearing load 30
5.3 Dynamic equivalent load 30
5.4 Basic static load rating and static equivalent load 31
5.5 Example of applied calculation 32

6 Allowable rotating speed

6.1 Allowable rotating speed 35
6.2 Rotational speed adjustment due to shaft fit 36

7 Operating temperature and bearing specifications

7.1 Operating temperature range 36
7.2 Operating temperature and internal clearance of bearings 36

8 Strength of housings

8.1 Strength of cast iron housings 37
8.2 Strength of ductile cast iron housings 37
8.3 Strength of cast steel housings 43
8.4 Strength of stamped steel housings 43
8.5 Strength of stainless steel housings 43
8.6 Strength of die-cast housings 43
8.7 Static rupture strength of plastic housings ... 44

9 Design of shaft and base

9.1 Design of shaft 45
9.2 Mounting base design 48
9.3 Dowel pins for accurate unit mounting 49

10 Nomenclature 50

11 Accuracy and internal clearance

11.1 Accuracy of bearings 52
11.2 Accuracy of housings 54
11.3 Internal bearing clearance 56

12 Materials

12.1 Bearing material 57
12.2 Housing material 57
12.3 Materials of parts and accessories 58

13 Performance

13.1 Bearing friction torque 59
13.2 Bearing temperature increase 59
13.3 Dustproof and waterproof performance ... 60

14 Handling

14.1 Installation 61
14.2 Test run inspection 65
14.3 Periodic inspection 65
14.4 Supply of grease 66
14.5 Replacing bearings 68

Unit dimensional table

15 Dimensional tables for ball bearing units 69

1 Pillow type units

Pillow type units 72
Thick pillow type units 98
Tapped-base pillow type units 102
High centerheight pillow type units 110
Lightweight pillow type units 112
Lightweight (die-cast) pillow type units 114
Corrosion resistant series stainless steel pillow type units 116
Corrosion resistant series stainless steel tapped-base pillow type units 118
Corrosion resistant series stainless steel pillow type units 120
Corrosion resistant series plastic pillow type units ... 122
Steel plate pillow type units 126

2 Square four-bolt flange type units

Square four-bolt flange type units 128
Square four-bolt flange cartridge type units 150
Corrosion resistant series stainless steel square four-bolt flange type units 154
Corrosion resistant series plastic square four-bolt flange type units 158

3 Oval flange type units

Oval two-bolt flange type units 162
Adjustable oval two-bolt flange type units 182
Three-bolt flange type units 184
Lightweight oval two-bolt flange type units 186
Lightweight oval three-bolt flange type units 188
Lightweight (die-cast) oval two-bolt flange type units 190
Corrosion resistant series stainless steel oval two-bolt flange type units 192
Corrosion resistant series plastic oval two-bolt flange type units 198

4 Round flange cartridge type units 202

5 Stamped steel plate flange type units

Stamped steel plate round three-bolt flange type units 216
Stamped steel plate oval two-bolt flange type units 218

6 Take-up type units

Take-up type units 220
Corrosion resistant series stainless steel take-up type units 242
Section steel frame take-up type units 246
Channel steel frame take-up type units 248
Steel plate frame take-up type units 254

7 Other units

Cartridge type units 258
Hanger type units 264

8 Ball bearing inserts

Cylindrical bore (with set screws) 266
Stainless steel series, Cylindrical bore (with set screws) 272
Cylindrical bore (with eccentric locking collar) ... 274
Cylindrical bore (with concentric locking collar) ... 280
Tapered bore (with adapter) 284
Cylindrical bore (with set screws), Cylindrical O. D. 290
Cylindrical bore (with eccentric locking collar) Cylindrical O. D. 292
Cylindrical bore 294

9 Bearing adapters 296

Parts and accessories

16 Parts and accessories 300

16.1 Part No. of steel plate covers 300

16.2 Part No. of cast iron covers 301

16.3 Nominal code and dimensions of grease fittings and reducing socket 302

16.4 Nominal code and dimensions of Allen key wrench 302

17 Example of use 303

18 Appendix table (contents) 305

1 Simplified chart of ball bearing unit combinations 306

2 Tightening torques of housings and cast iron cover mounting bolts 308

3 Tightening torques of inner rings and eccentric locking collar set screws 308

4 Tightening torques of adapter lock nuts (reference) 309

5 Machining dimensions of holes of housing dowel pins 310

6 Ceraball selection chart 312

7 Dimensional tolerances of shafts 314

8 Dimensional tolerances of housing bores ... 316

9 Basic tolerance values 318

10 SI unit conversion charts 319

11 Inch-meter conversion chart 320

12 Hardness conversion chart 321

13 Viscosity conversion chart 322

14 Mechanical properties of metal materials (reference) 323

15 Hexagon socket head cap screws (abstract from JIS B 1176) 324

16 Hexagon head bolts (abstract from JIS B 1180) 326

17 Hexagon head nuts (abstract from JIS B 1181) 328

18 Comparison table of Part No. by manufacturers (cylindrical bore type) 329

★The contents of this catalogue are subject to change without prior notice. Every possible effort has been made to ensure that the data listed in this catalog is correct. However, we can not assume responsibility for any errors or omissions.

All rights reserved.

1 Structure and features

FYH Ball Bearing Units are manufactured to exacting standards comprising grease sealed deep groove ball bearings and housings in various forms. Self-aligning units allow for easy installation and are supplied with grease fittings in order to facilitate quick and convenient re-lubrication.

1.1 Structure

FYH Ball Bearing Units are constructed of high-carbon chromium bearing steel and have precision honed raceways and riveted steel cages (**Fig. 1.1**).

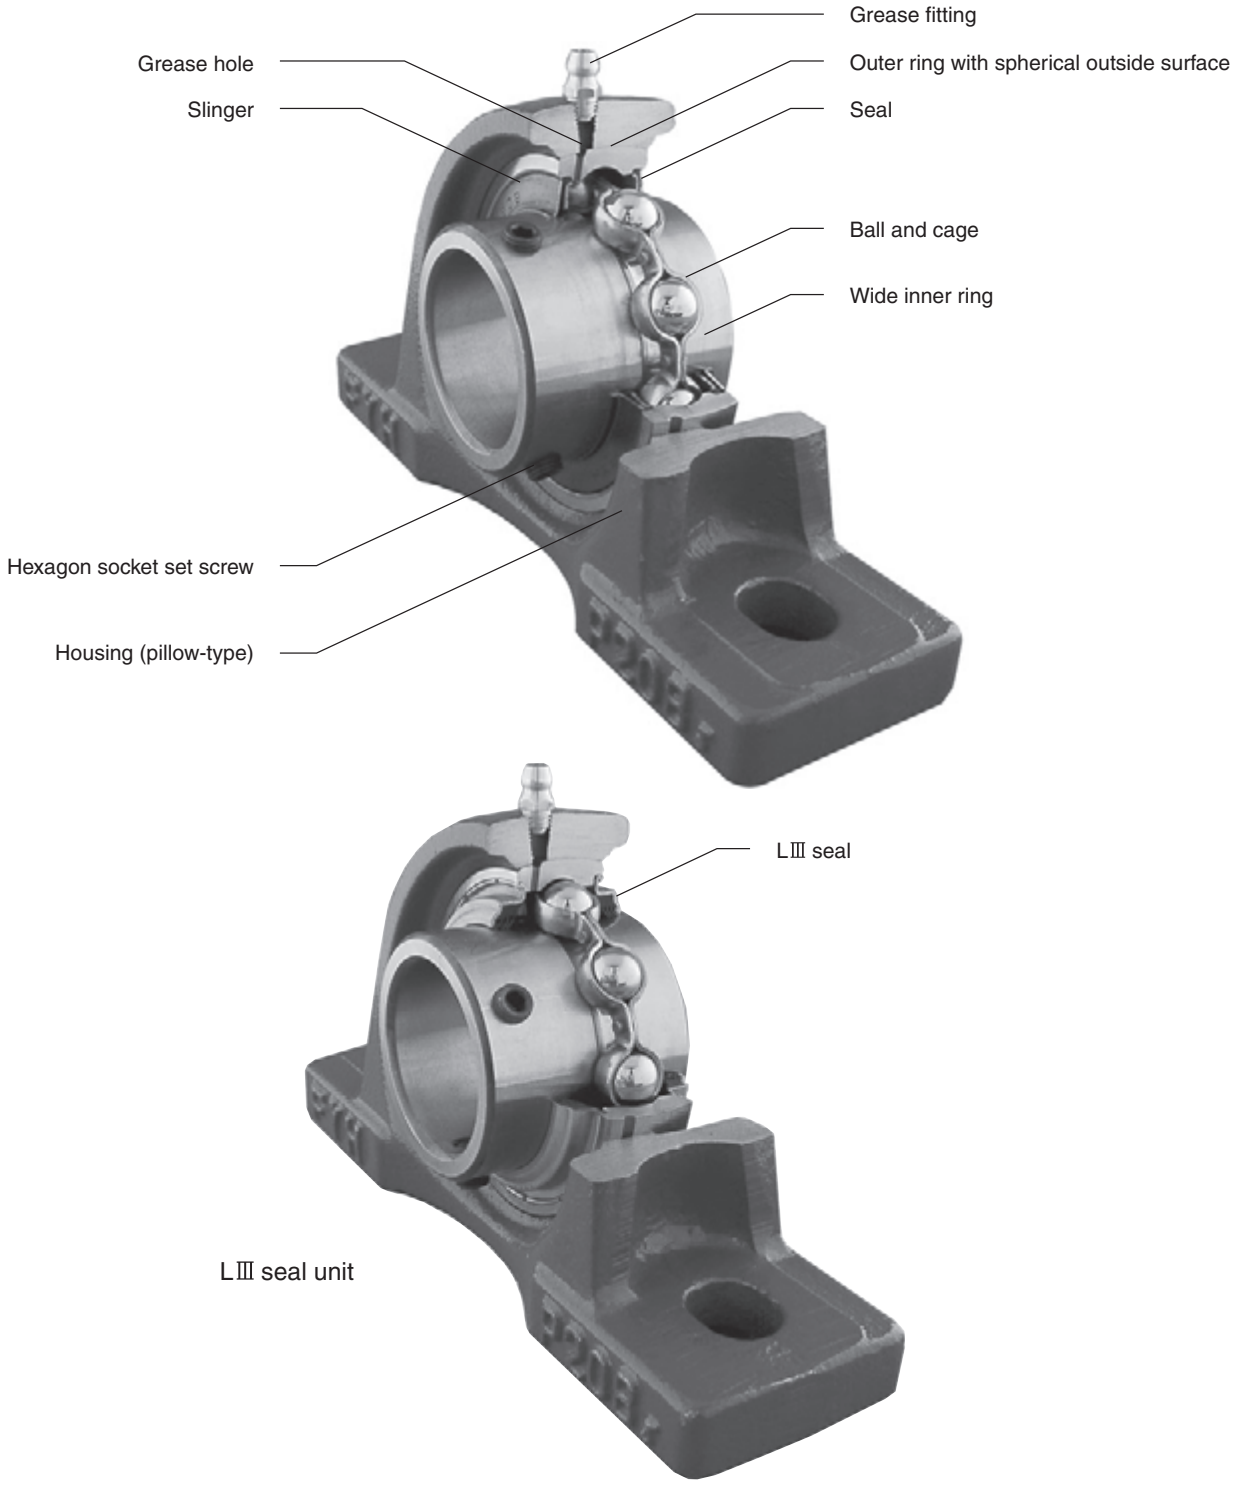

Fig. 1.1 Structure of ball bearing units (representative example)

1.2 Features

FYH Ball Bearing Units have many features and are available in various models. A wide selection of mounted units is offered to fit virtually any application.

1 Supreme load capacity and accuracy

FYH Ball Bearing Units feature an internal structure identical to single row deep groove ball bearings can and bear significant radial load, as well as a great deal of axial load in both directions. The hardened steel balls exhibit a high degree of “roundness” and the races are highly polished to accommodate a smooth ride at a wide range of speeds.

2 Rational self-aligning mechanism and optimal fit

FYH Ball Bearing Units have the special ability to self-align inside the housing because of the spherical shape of the outer diameter of the bearing insert and the concave shape of the inner diameter of the housing into which it fits. This design allows the bearing unit to self-adjust for shaft deviation and reduce abnormal bearing load. Therefore, the original rated life of the bearing can be guaranteed.

Since the spherical outside surface of the bearing is precision ground and the spherical bore of the housing is machined by a boring machine with great accuracy, optimal fitting of the bearing and the housing can be obtained, as well as superior aligning performance.

The allowable aligning angle of standard ball bearing units is 3º, while units with covers is 1º.

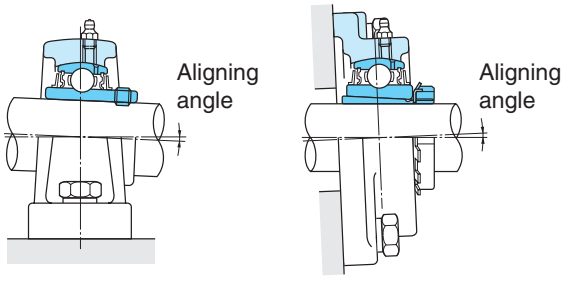

Fig. 1.2 Allowable aligning angle of ball bearing units

3 Superior sealing performance

FYH Ball Bearing Units efficiently prevent grease from leaking out of the interior of the bearing, and perform extremely well at keeping contaminates, such as dust and water, from entering. This is achieved by installing the seal to the outer ring of the bearing and installing the slinger to the inner ring of the bearing.

The seal is made of synthetic rubber with supreme oil proof characteristics, and the lip of the seal contacts the inner ring of the bearing with optimal tension.

When operating in moist or dusty environments, the triple lip seal unit (suffix code: L3) or a covered unit (accessory code: C, CD, FC, FD) is recommended.

The triple lip seal unit, or unit with cover, helps prevent ingress of water and dust from the outside, and extends the rated life of the bearing.

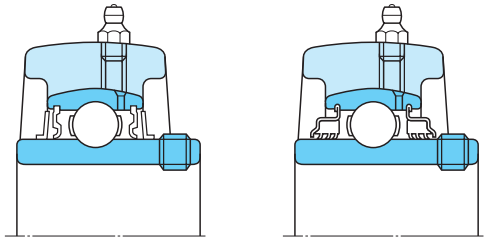

Standard type | **Triple lip seal type** (Suffix code: L3)

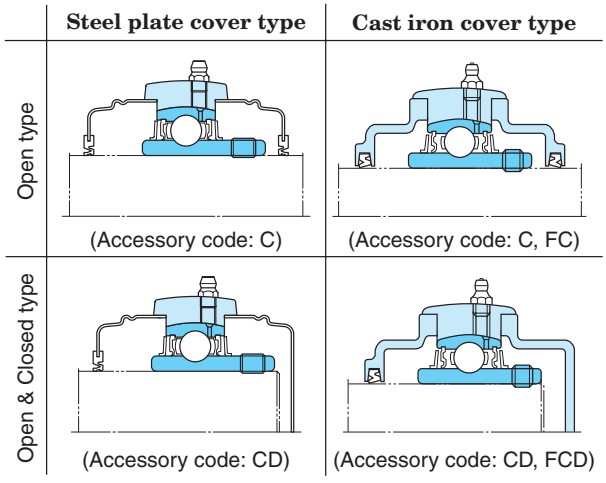

Unit with covers

Fig. 1.3 Sealing mechanism of ball bearing units

4 Simple lubrication

FYH Ball Bearing Units are tapped to accept a grease fitting which is also supplied with every mounted unit. Bearings are pre-lubricated at the factory and do not require additional grease upon installation. When operating in excessively moist, dusty, or hot environments it is recommended that grease be supplied at regular intervals. If appropriately maintained, the rated life of the bearing can be extended.

The grease fittings that are supplied with FYH mounted units include 1/4-28 for smaller units and 1/8 PT for larger units. Additional styles are available upon request. (see **Table 16.6**)

5 Highly rigid and rugged cast iron housings

FYH Ball Bearing Unit housings are designed so that they are optimized for reduction of deformation due to centralization of stress and load. Only the best material is selected to be cast by a highly advanced technique or press working technique, depending on the housing.

Since any abnormal load on the bearing is eliminated by the housing, the life of the bearing can be extended. A special coating helps resist corrosion and protect the surface of the housing for an extended period of time.

6 Simple installation and handling

FYH Ball Bearing Units interchange with many different models and can be bolted to machinery without any modification. The exact amount of clearance is allowed between the bore and the shaft to allow a perfect fit.

Therefore, FYH Ball Bearing Units do not require any additional lubrication or seal installation. As a result, handling and downtime can be drastically reduced.

Four different locking mechanisms are available:

(1) set screw
(2) eccentric locking collar
(3) tapered adapter
(4) concentric roller

Mounting the bearing to the shaft can be executed easily and securely by adopting any of these methods.

7 Series and models

FYH Ball Bearing Units are available in various series and models.

Reliability of machinery or equipment, used together with these units, can be improved by selecting and using units optimal for the application and operating conditions.

- Dust resistant series (Dust, water, and debris protection)
  - Triple lip seal inserts
  - Units with covers
- Heat and cold resistant series
- Corrosion resistant series
  - Stainless units
  - Plastic units
  - Nickel plated units
- Tougher casting series
  - Cast steel housings
  - Ductile iron housing
- Compact and lightweight series
  - Small die cast units
  - Lightweight casting units
  - Stamped units
- Special environment series (Ability to withstand severe environments, exposure to water, chemicals, high temperature, or high speed)
  - Ceraball series
- Air handling series
  - S3 & S5 bearing units
  - NU-LOC units

2 Models

2.1 Model list

Table 2.1 and **Table 2.2** show the models of FYH Ball Bearing Units and ball bearing inserts.

Table 2.1 FYH Ball Bearing Units models

Model	Type	Bearing bore dia. Surface (fixing to shaft)	Model code	Shaft dia. (inch)	Shaft dia. (mm)	Dimension table
1 Pillow type	(1) Standard	Cylindrical bore (with set screws)	**UCP**	1/2 – 4	12 – 140	P.72
		Cylindrical bore (with eccentric locking collar)	**NAP**	1/2 – 2 15/16	12 – 75	P.78
			NAPK	1/2 – 2 15/16	12 – 75	P.80
		Cylindrical bore (with concentric locking collar)	**NCP**	3/4 – 2 7/16	20 – 60	P.82
		Tapered bore (with adapter)	**UKP**	3/4 – 4 1/2	20 – 125	P.84
	(2) Cast steel type	Cylindrical bore (with set screws)	**UCP-sc**	7/8 – 4	25 – 140	P.90
		Tapered bore (with adapter)	**UKP-sc**	3/4 – 4 1/2	20 – 125	P.94
	(3) Thick type	Cylindrical bore (with set screws)	**UCIP**	1 1/2 – 4	40 – 140	P.98
		Tapered bore (with adapter)	**UKIP**	1 1/4 – 4 1/2	35 – 125	P.100
	(4) Tapped-base type	Cylindrical bore (with set screws)	**UCPA**	1/2 – 2	12 – 50	P.102
			UCPAN	3/4 – 1 7/16	20 – 35	P.104
		Cylindrical bore (with concentric locking collar)	**NCPA**	3/4 – 2	20 – 50	P.106
			NCPAN	3/4 – 1 7/16	20 – 35	P.108
	(5) High centerheight type	Cylindrical bore (with set screws)	**UCPH**	1/2 – 2	12 – 50	P.110
	(6) Lightweight type	Cylindrical bore (with set screw locking)	**BLP**	1/2 – 1 9/16	12 – 40	P.112
		Cylindrical bore (with eccentric locking collar)	**ALP**			
	(7) Lightweight (die-cast) type	Cylindrical bore (with set screws)	**UP**	N/A	10 – 30	P.114
	(8) Corrosion resistant type	Cylindrical bore (with set screws)	**UCSP-H1S6**	1/2 – 2 7/16	12 – 60	P.116
			UCSPA-H1S6	1/2 – 1 9/16	12 – 40	P.118
			USP-S6	N/A	10 – 30	P.120
			UCVP-S6	3/4 – 2	20 – 50	P.122
			UCVP-ES7	3/4 – 2	20 – 50	P.124
	(9) Steel plate type	Cylindrical bore (with set screw locking)	**SBPP**	1/2 – 1 1/4	12 – 30	P.126
		Cylindrical bore (with eccentric locking collar)	**SAPP**			
2 Square four-bolt flange type	(1) Standard	Cylindrical bore (with set screws)	**UCF**	1/2 – 4	12 – 140	P.128
			UCF-E	1/2 – 3 7/16	12 – 85	P.134
		Cylindrical bore (with eccentric locking collar)	**NANF**	1/2 – 2 7/16	12 – 60	P.138
		Cylindrical bore (with concentric locking collar)	**NCF**	3/4 – 2 7/16	20 – 60	P.140
			NCF-E	3/4 – 2 7/16	20 – 60	P.142
		Tapered bore (with adapter)	**UKF**	3/4 – 4 1/2	20 – 125	P.144
	(2) Piloted cartridge flange type	Cylindrical bore (with set screws)	**UCFS**	1 – 4	25 – 140	P.150
		Tapered bore (with adapter)	**UKFS**	3/4 – 4 1/2	20 – 125	P.152
	(3) Corrosion resistant type	Cylindrical bore (with set screws)	**UCSF-H1S6**	3/4 – 2 7/16	20 – 60	P.154
			UCSF-EH1S6	3/4 – 2 7/16	20 – 60	P.156
			UCVF-S6	3/4 – 1 9/16	20 – 40	P.158
			UCVF-ES7	3/4 – 1 9/16	20 – 40	P.160
3 Oval flange type	(1) Two-bolt type	Cylindrical bore (with set screws)	**UCFL**	1/2 – 4	12 – 130	P.162
			UCFL-E	1/2 – 3 1/4	12 – 85	P.168
		Cylindrical bore (with eccentric locking collar)	**NANFL**	1/2 – 2 3/16	12 – 55	P.172
		Cylindrical bore (with concentric locking collar)	**NCFL**	3/4 – 2 7/16	20 – 60	P.174
			NCFL-E	3/4 – 2 7/16	20 – 60	P.176
		Tapered bore (with adapter)	**UKFL**	3/4 – 4 1/2	20 – 115	P.178
	(2) Adjustable oval two-bolt type	Cylindrical bore (with set screws)	**UCFA**	1/2 – 2 3/16	12 – 55	P.182
	(3) Three-bolt type	Cylindrical bore (with set screws)	**UCFB**	1/2 – 2	12 – 50	P.184
	(4) Lightweight two-bolt type	Cylindrical bore (with set screw locking)	**BLF**	1/2 – 1 7/16	12 – 35	P.186
		Cylindrical bore (with eccentric locking collar)	**ALF**			
	(5) Lightweight three-bolt type	Cylindrical bore (with set screws)	**SATFD-FP9**	1/2 – 1 7/16	12 – 35	P.188
	(6) Lightweight (die-cast) type	Cylindrical bore (with set screws)	**UFL**	N/A	8 – 30	P.190
	(7) Corrosion resistant type	Cylindrical bore (with set screws)	**UCSFL-H1S6**	1/2 – 2	12 – 50	P.192
			UCSFL-EH1S6	1/2 – 2	12 – 50	P.194
			USFL-S6	N/A	10 – 30	P.196
			UCVFL-S6	3/4 – 1 9/16	20 – 40	P.198
			UCVFL-ES7	3/4 – 1 9/16	20 – 40	P.200

Table 2.1 FYH Ball Bearing Units models (continued)

Model	Type	Bearing bore dia. Surface (fixing to shaft)	Model code	Shaft dia. (inch)	Shaft dia. (mm)	Dimension table
4 Round flange cartridge type	Standard	Cylindrical bore (with set screws)	**UCFC**	1/2 – 4	12 – 100	P.202
			UCFCX-E	1 – 4	25 – 100	P.206
		Cylindrical bore (with set screw locking)	**UCFCF**	7/8 – 2 3/16	25 – 55	P.208
		Cylindrical bore (with concentric locking collar)	**NCFC**	3/4 – 2 7/16	20 – 60	P.210
		Tapered bore (with adapter)	**UKFC**	3/4 – 3 1/2	20 – 90	P.212
5 Stamped steel plate flange type	(1) Round three-bolt flange type	Cylindrical bore (with set screw locking)	**SBPF**	1/2 – 1 7/16	12 – 35	P.216
		Cylindrical bore (with eccentric locking collar)	**SAPF**			
	(2) Oval two-bolt flange type	Cylindrical bore (with set screw locking)	**SBPFL**	1/2 – 1 7/16	12 – 35	P.218
		Cylindrical bore (with eccentric locking collar)	**SAPFL**			
6 Take-up type	(1) Standard	Cylindrical bore (with set screws)	**UCT**	1/2 – 4	12 – 140	P.220
			UCT-E	1/2 – 3 7/16	12 – 85	P.226
		Cylindrical bore (with eccentric locking collar)	**NAT-E**	1/2 – 2 15/16	12 – 75	P.230
		Cylindrical bore (with concentric locking collar)	**NCT**	3/4 – 2 7/16	20 – 60	P.232
			NCT-E	3/4 – 2 7/16	20 – 60	P.234
		Tapered bore (with adapter)	**UKT**	3/4 – 4 1/2	20 – 125	P.236
	(2) Corrosion resistant type	Cylindrical bore (with set screws)	**UCST-H1S6**	3/4 – 2	20 – 50	P.242
			UCST-EH1S6	3/4 – 2	20 – 50	P.244
	(3) Section steel frame type	Cylindrical bore (with set screws)	**UCTH**	1/2 – 2 1/2	12 – 65	P.246
	(4) Channel steel frame type	Cylindrical bore (with set screws)	**UCTL**	N/A	20 – 45	P.248
			UCTU	N/A	40 – 90	P.250
	(5) Steel plate frame type	Cylindrical bore (with set screws)	**SBPTH**	N/A	12 – 25	P.254
			SBNPTH	N/A	12 – 25	P.256
7 Cartridge type		Cylindrical bore (with set screws)	**UCC**	1/2 – 4	12 – 140	P.258
		Tapered bore (with adapter)	**UKC**	3/4 – 4 1/2	20 – 125	P.262
8 Hanger type		Cylindrical bore (with set screws)	**UCHA**	1/2 – 3	12 – 75	P.264

Table 2.2 Bearing insert models

Model	Type	Bearing bore dia. Surface (fixing to shaft)	Model code	Shaft dia. (inch)	Shaft dia. (mm)	Dimension table
Ball bearing inserts	(1) Standard	Cylindrical bore (with set screws)	**UC**	1/2 – 4	12 – 140	P.266
	(2) Standard	Tapered bore (with adapter)	**UK**	3/4 – 4 1/2	20 – 125	P.284
	(3) Standard	Cylindrical bore (with eccentric locking collar)	**NA**	1/2 – 3	12 – 75	P.274
	(4) Standard	Cylindrical bore (with concentric locking collar)	**NC2**	3/4 – 2 7/16	20 – 60	P.280
	(5) Lightweight	Cylindrical bore (with set screws)	**SB**	1/2 – 1 1/2	12 – 40	P.266
	(6) Lightweight	Cylindrical bore (with eccentric locking collar)	**SA**	1/2 – 1 9/16	12 – 40	P.274
			SA-F	1/2 – 2 3/16	12 – 55	
	(7) Small	Cylindrical bore (with set screws)	**SU**	N/A	8 – 30	P.266
	(8) Stainless steel	Cylindrical bore (with set screws)	**UC-S6**	1/2 – 2 7/16	12 – 60	P.272
			SU-S6	N/A	10 – 30	
	(9) Cylindrical O. D. (with lubricating mechanism and snap ring)	Cylindrical bore (with set screws)	**ER**	1/2 – 2 7/16	12 – 60	P.290
		Cylindrical bore (with concentric locking collar)	**ERC**	3/4 – 2 7/16	20 – 60	P.282
	(10) Cylindrical O. D.	Cylindrical bore (with set screws)	**RB**	1/2 – 1 9/16	12 – 40	P.290
	(11) Cylindrical O. D.	Cylindrical bore (with eccentric locking collar)	**SAA-F**	1/2 – 2 3/16	12 – 55	P.292
			SBB-RK	1/2 – 1 1/2	12 – 40	
	(12) Standard	Cylindrical bore	**SC**	N/A	17 – 40	P.294
	(13) Adapter		**H300X**	3/4 – 3 3/16	20 – 80	P.296
			H2300X	3/4 – 5	20 – 125	

2.2 Models and features

FYH Ball Bearing Units are available in a variety of styles and sizes.

Models and features of the Ball Bearing Units are shown below.

Note [1] Descriptions of codes for units with covers are shown in the table below. (common to all the models)

Diameter series	Code	Descriptions
2	C, CD	Stamped steel plate cover type
	FC, FCD	Cast iron cover type
X	C, CD	From **X05** to **X17**: stamped steel plate cover type **X18** and **X20**: cast iron cover type
3	C, CD	Cast iron cover type

1 Pillow type units

1 Pillow type units: P.72

UCP

UKP

UCP-C, CD
UKP-C, CD

UCP-FC, FCD
UKP-FC, FCD

NAP

NAPK

NU-LOC®

NCP

Cylindrical bore (with set screws)
L3
C, CD (FC, FCD)[1]
Cylindrical bore (with eccentric locking collar)
L3
Cylindrical bore (with concentric locking collar)
Tapered bore (with adapter)
L3
C, CD (FC, FCD)[1]

2 Thick pillow type units: P.98

UCIP

UKIP

Cylindrical bore (with set screws)
L3
C, CD (FC, FCD)[1]
Tapered bore (with adapter)
L3
C, CD (FC, FCD)[1]

3 Tapped-base pillow type units: P.102

UCPA

UCPAN

NU-LOC®

NCPA

NCPAN

Cylindrical bore (with set screws)
L3
Cylindrical bore (with concentric locking collar)

4 High centerheight pillow type units: P.110

UCPH

Cylindrical bore (with set screws)
L3

5 Lightweight pillow type units: P.112

BLP

ALP

Cylindrical bore (with set screw locking)
Cylindrical bore (with eccentric locking collar)

6 Lightweight (die-cast) pillow type units: P.114

UP

UP-C, CD

Cylindrical bore (with set screws)
C, CD: Rubber coating cover

7 Corrosion resistant series pillow type units: P.116

UCSP-H1S6

USP-S6

UCSPA-H1S6

UCVP-S6

UCVP-ES7

Cylindrical bore (with set screws)
C, CD: Stainless steel plate cover
C, CD: Plastic cover
Lightweight type
C, CD: Rubber coating cover

8 Steel plate pillow type units: P.126

SBPP

SAPP

Cylindrical bore (with set screw locking)
Cylindrical bore (with eccentric locking collar)

2 Square four-bolt flange type units

1 Square four-bolt flange type units: P.128

UCF
UCF-E

UKF

NU-LOC

NANF

NCF
NCF-E

Cylindrical bore (with set screws)
- **L3**
- **C, D (FC, FD)**[1)]

Cylindrical bore (with eccentric locking collar)
Cylindrical bore (with concentric locking collar)
Tapered bore (with adapter)
- **L3**
- **C, D (FC, FD)**[1)]

2 Square four-bolt flange cartridge type units: P.150

UCFS

UKFS

Cylindrical bore (with set screws)
- **L3**
- **C, D**

Tapered bore (with adapter)
- **L3**
- **C, D**

As for the descriptions of Note [1)], see page 10.

3 Corrosion resistant series square four-bolt flange type units: P.154

UCSF-H1S6
UCSF-EH1S6

UCVF-S6

UCVF-ES7

Cylindrical bore (with set screws)
- **C, D**: Stainless steel plate cover
- **C, D**: Plastic cover

3 Oval flange type units

1 Oval two-bolt flange type units: P.162

UCFL
UCFL-E

UKFL

NU-LOC

NANFL

NCFL
NCFL-E

Cylindrical bore (with set screws)
- **L3**
- **C, D (FC, FD)**[1)]

Cylindrical bore (with eccentric locking collar)
Cylindrical bore (with concentric locking collar)
Tapered bore (with adapter)
- **L3**
- **C, D (FC, FD)**[1)]

2 Adjustable oval two-bolt flange type units: P.182

UCFA

Cylindrical bore (with set screws)
L3

3 Three-bolt flange type units: P.184

UCFB

Cylindrical bore (with set screws)
L3

4 Lightweight oval two-bolt flange type units: P.186

BLF

Cylindrical bore (with set screw locking)

ALF

Cylindrical bore (with eccentric locking collar)

5 Lightweight (ductile iron) oval three-bolt flange type units: P.188

SATFD-FP9

Cylindrical bore (with set screws)

6 Lightweight (die-cast) oval two-bolt flange type units: P.190

UFL

UFL-C, D

Cylindrical bore (with set screws)
C, D: Rubber coating cover

7 Corrosion resistant series oval two-bolt flange type units: P.192

UCSFL-H1S6
UCSFL-EH1S6

USFL-S6

UCVFL-S6

UCVFL-ES7

Cylindrical bore (with set screws)
C, D: Stainless steel cover
C, D: Plastic cover
Lightweight type
C, D: Rubber coating cover

4 Round flange cartridge type units

Round flange cartridge type units: P.202

UCFC
UCFCX-E
UCFCF

UKFC

NU-LOC®

NCFC

Cylindrical bore (with set screws)
L3
C, D (FC, FD)[1)]
Cylindrical bore (with concentric locking collar)
Tapered bore (with adapter)
L3
C, D (FC, FD)[1)]

5 Stamped steel plate flange type units

1 Stamped steel plate round three-bolt flange type units: P.216

SBPF

SAPF

Cylindrical bore (with set screw locking)
Cylindrical bore (with eccentric locking collar)

2 Stamped steel plate oval two-bolt flange type units: P.218

SBPFL



SAPFL

Cylindrical bore (with set screw locking)
Cylindrical bore (with eccentric locking collar)

6 Take-up type units

1 Take-up type units: P.220

UCT
UCT-E

UKT

NU-LOC®

NAT-E

NCT
NCT-E

Cylindrical bore (with set screws)
L3
C, CD (FC, FCD)[1)]
Cylindrical bore (with eccentric locking collar)
L3
Cylindrical bore (with concentric locking collar)
Tapered bore (with adapter)
L3
C, CD (FC, FCD)[1)]

As for the descriptions of Note [1)], see page 10.

2 Corrosion resistant series take-up type units: P.242

UCST-H1S6
UCST-EH1S6
Cylindrical bore (with set screws)
C, CD: Stainless steel plate cover type

3 Section steel frame take-up type units: P.246

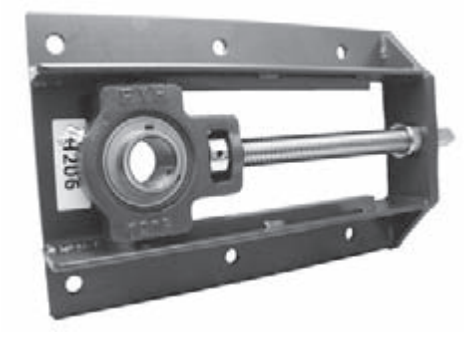

UCTH
Cylindrical bore (with set screws)
L3
C, CD (FC, FCD)[1)]

4 Channel steel frame take-up type units: P.248

UCTL

UCTU
Cylindrical bore (with set screws)
L3
C, CD (FC, FCD)[1)]

5 Steel plate frame take-up type units: P.254

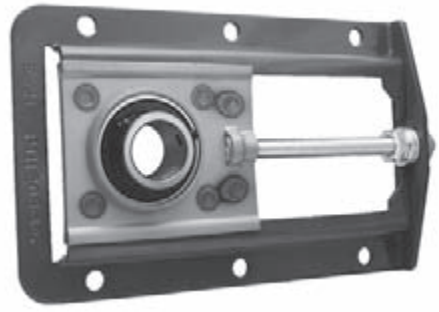

SBPTH

SBNPTH
Cylindrical bore (with set screws)

As for the descriptions of Note [1)], see page 10.

7 Other units

1 Cartridge type units: P.258

UCC

UKC

Cylindrical bore (with set screws)
L3
Tapered bore (with adapter)
L3

2 Hanger type units: P.264

UCHA

Cylindrical bore (with set screws)
L3

3 Ceraball bearing series

Cylindrical bore (with set screws)
UC2 (X, 3)...**Y1** type
UC2 S6...**Y2** type

8 Ball bearing inserts

1 UC type bearing: P.266

UC

UC-S6

Cylindrical bore (with set screws)
L3

2 NC type bearing: P.280

NU-LOC®

AIR HANDLING S3 STANDARD

NC

Cylindrical bore (with concentric locking collar)

3 UK type bearing: P.284

UK

UK+H

Tapered bore (with adapter)
L3

4 NA type bearing: P.274

NA

Cylindrical bore (with eccentric locking collar)

5 SB type bearing: P.266

SB

Cylindrical bore (with set screws)

6 SA type bearing: P.274

SA **SA-F**

Cylindrical bore (with eccentric locking collar)

7 SU type bearing (clean series): P.266

SU **SU-S6**

Cylindrical bore (with set screws)

8 ER bearing inserts: P.290

NU-LOC®

ER **ERC**

Cylindrical bore (with set screws),
Cylindrical O.D., Relubricable
Cylindrical bore (with concentric locking collar)

9 RB bearing inserts: P.290



RB

Cylindrical bore (with set screws),
Cylindrical O. D.

(8 Ball bearing inserts)

10 SAA, SBB type bearing: P.292

SAA-F **SBB-RK**

Cylindrical bore (with eccentric locking collar),
Cylindrical O. D.

11 SC type bearing: P.294



SC

Cylindrical bore

12 Adapter: P.296

H300X, H2300X

2.3 Units for special use

FYH offers a variety of bearing options to meet the needs of many highly specialized applications. There exist a number of qualities that allow FYH bearings to operate in a wide range of challenging environments and conditions. The following information shows some of the ways FYH can provide solutions to many non-standard bearing needs.

1 Dust Resistant Series

1.1 Triple-Lip seals (suffix code: L3)

The L3 seal consists of a stamped steel shield with a molded NBR try-ply seal affixed to the inner portion of the shield, all of which is attached the outer ring of the bearing. The triple-lip seal is excellent for resisting all types of contamination and is appropriate for low to moderate speeds.

1.2 Tight Triple-Lip seals (suffix code: LT3)

The LT3 Triple-Lip seal fits tighter than the standard L3 seal. The rotating torque of the LT3 seal is approximately double that of the standard L3 seal, and it is appropriate where contamination or moisture are very high and rotating speeds are very low.

1.3 Felt Seals (suffix code: K9)

The Felt-Sealed bearing utilizes the standard contact seal and slinger with the addition of a felt disc sandwiched between the seal and the slinger.

It offers less rotational torque than the triple-lip (L3) seal yet still provides great resistance to dust and dry contaminate. Although, it is not appropriate for water resistance or highly humid environments like the L3 seal, it is easy to use and provides good cost performance.

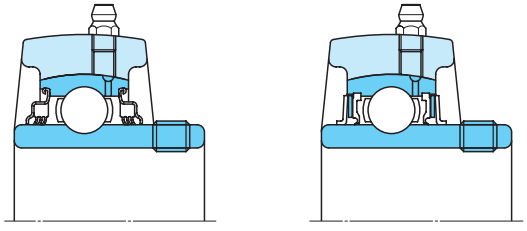

(suffix code: L3 & LT3) (suffix code: K9)

Fig. 2.1 Structure of Dust Resistant Series

1.4 Units with covers (accessory code C, D, FC, FD)

Covers can be fitted onto most types of housings with some machining necessary. The covers come in both pressed steel type as well as cast iron, and they are available in open and closed designs. The open design has a hole with a rubber seal that allows shafting to pass through it. The closed design would be used on a unit where shafting terminates at the end of the unit. The covers help to ensure that dust and other environmental contaminants will not reach the insert.

The covers help improve the rated life of bearing units where conditions have caused other bearings to fail.

Open pressed steel covers use “C” as a suffix designation, and open cast iron covers use “FC”. Closed covers use “D” for pressed steel and “FD” for the cast iron type. Pillow blocks can have covers on both sides, and can come in open/open or open/closed configurations.

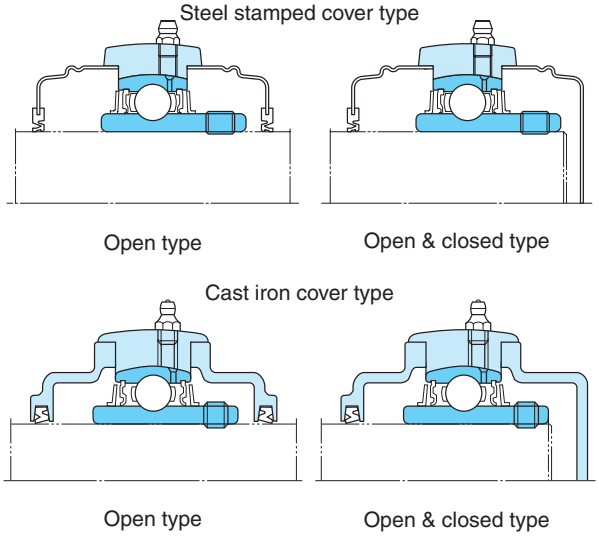

Fig. 2.2 Model and structure of units with cover

2 High / Low Temperature Series (suffix codes - High temperature: D1K2 & D9K2 Low temperature: D2K2)

For applications that require bearing units to be used at a higher or lower temperature range than our standard models FYH offers several options. For high temperature units that require lubrication please specify D1K2 as a suffix to the standard part number. For high temperature units that do not require lubrication specify D9K2. The D9K2 insert uses a fluoro-grease that allows for excellent heat resistance and operation

Table 2.3 Specifications of High / Low Temparature Series

Category	Special code	Operating temperature range (°C)	Operating temperature range (°F)	Grease	Seal rubber material	Bearing internal clearance UC type	Bearing internal clearance UK type
Ordinary	(no code)	–20 to 100	–4 to 212	Gold No.3A or, Alvania No.2 equivalence (lithium soap)	Nitrile	CN	C3
Stainless steel	S6	0 to 100	32 to 212	H1 FOOD GRADE Glease (FDA/USDA)	Nitrile	C3	–
Heat resistant	D1K2	–40 to 180	–40 to 356	SH44M (lithium soap)	Silicone	C4	C5
Heat resistant	D9K2	–20 to 230	–4 to 446	Demnum L-200 (fluorinated grease)	Silicone	C4	C5
Heat resistant	D9P4Y2	–20 to 260	–4 to 500	Demnum L-200 (fluorinated grease)	–	C4	C5
Extreme heat resistant	S6Y3	300 to 450	572 to 842	Solid graphite lubricant	–	Special	Special
Cold resistant	D2K2	–50 to 120	–58 to 248	SH33M (lithium soap)	Silicone	CN	C3

Note[1)] For Lubrication intervals see page 66.

with minimal maintenance.

Specifications for the high temperature and low temperature units are shown in **Table 2.3**.

3 High speed units (suffix code: K3)

High speed units are used in applications where low torque and high RPM's are necessary. These units use a non-contact seal that allows for a free spin that cuts down on temperature and allows for low torque start-up. These units are often used in printing and textile machinery applications.

4 Air Handing Series

4.1 Units for HVAC and air handling (suffix code: S3, S5)

Ball bearing units for blowers must meet the demands of high speed rotation, low vibration, low noise, and decreased temperature output.

To meet these performance needs FYH produces the S3 and S5 series with tighter bore tolerances. S5 uses non-contact seals as well as an improved machining accuracy to cut down on heat, noise, and vibration.

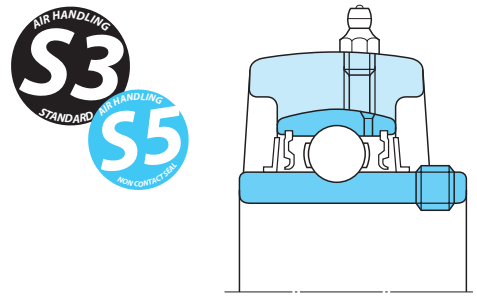

Fig. 2.3 Structure of bearing units for blowers

Table 2.4

SUFFIX

S5 / S3

P18

P18 is the suffix code that designates smaller bore tolerance which allows for a tighter fit with the shaft. This, in turn, reduces vibration and noise, and dramatically increases bearing life.

Tolerance and tolerance values of inner rings of P18 suffix (unit: μm)

Nominal bearing bore dia. d (mm)		Variation of tolerance of average bore dia. in plane Δ_{dmp}		Unequal bore dia. in plane V_{dp}	Radial runout of inner ring K_{ia}
Over	Inc.	Max.	Min.	Max.	Max.
–	10	+13	0	6	7
10	18	+13	0	6	8
18	31.75	+13	0	10	10
31.75	50.8	+15	0	10	10
50.8	80	+18	0	14	13

Tolerance and tolerance values of inner rings of ISO standard (unit: μm)

Nominal bearing bore dia. d (mm)		Variation of tolerance of average bore dia. in plane Δ_{dmp}		Unequal bore dia. in plane V_{dp}	Radial runout of inner ring K_{ia}
Over	Inc.	Max.	Min.	Max.	Max.
–	10	+15	0	10	10
10	18	+15	0	10	15
18	31.75	+18	0	12	18
31.75	50.8	+21	0	14	20
50.8	80	+24	0	16	25

P11

The anti-rotation pin, in conjunction with the standard "J" fit housing, means very secure housing fit in high speed applications.



C2

Internal bearing clearance is defined as the allowable space between the rolling elements and the raceways. C2 is smaller clearance than the standard, and it reduces noise and vibration in high speed applications.

G23

G23 is our original set screw called Bullet Point. The specialized design greatly reduces the potential for damage to both the setscrew and shaft from normal use to applications with severe vibration, shock load, and high speed.

K3

Non contact lip seal is available for the lighter torque.



Sound test

S3 and S5 bearings are sound tested in order to make sure the noise level is low enough to be suitable for high speed applications such as blowers.

4.2 NU-LOC Bearing Units

The NU-LOC series is produced with the specifications of the S3 designation as a standard which is desirable for high speed applications. NU-LOC bearings have tighter bore tolerance and internal clearance which are features that greatly reduce noise and vibration. Though they are high-precision bearings for demanding applications they are also suitable for a variety of other operating conditions.

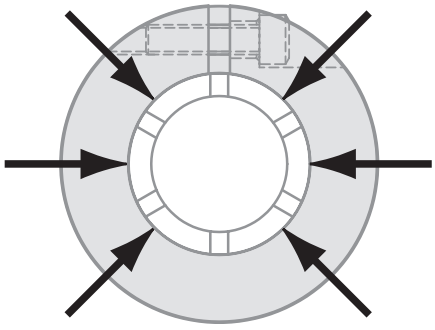

360°LOCKING

NU-LOC concentric locking collar with a single cap screw provides great holding power. The collar is installed over the slotted inner ring on the shaft concentrically.



Fig. 2.4 Structure of NU-LOC

The standard NU-LOC series satisfies all the specifications of our air handling series under the "S3" designation.

This series incorporates a C2 ball clearance which is more exacting than the standard style, and this allows for quieter operation and a considerable reduction of vibration.

The NU-LOC series is a high-precision design and, while it is ideal for air handling applications, it is also excellent for many more highly demanding applications.

5 Corrosion Resistant Series

The Corrosion Resistant Series is available in a wide array of sizes and styles, and units may be customized with a number of different specialized options to accommodate virtually any application. Federal compliance can be assured with FYH Bearing Units.

5.1 Stainless insert (S6)

Stainless steel inserts can be assembled with stainless steel housings, thermoplastic housings, and nickel-plated cast iron housings.

5.2 Plated inserts (S7)

Trivalent chrome plated inserts can be assembled with stainless steel housings, thermoplastic housings, and nickel plated cast iron housings.

6 Clean Series / Lightweight Series (Die-cast)

Our clean series unit is a compact design that allows for light conveying in many manufacturing applications. The setscrew design allows for easy installation, as well as reversing. The housing is made of a special alloy which provides excellent corrosion resistance. Covers coated with rubber increase adhesion with the housing and can be ordered separately in both open and closed designs. The clean series only comes in metric sizes from 10 mm to 30 mm. They are available in both pillow block and 2-bolt flange styles.

7 Ceraball Series (suffix code: Y1 to Y8)

Ceraball bearings have Silicon Nitride (Si3N4) ceramic balls, and they can provide stable performance for long periods of time even in special operating environments.

These environments include: high temperature, corrosion, high-speed rotation, low torque, and vacuum.

Y1 type - High-speed rotation

· This bearing is designed for applications with high speed rotation in which the dN value exceeds 200,000. This is made possible by the lightweight ceramic balls and high level of sphericity.

Y2 type - Standard

· This is the standard model in the Ceraball series. It is designed to withstand temperatures of 260 ºC (Max 300 ºC). It resists corrosive conditions such as heated steam, chemicals, and solvents. It can be used in clean room conditions due to its low dust and low torque properties. It will also perform well in insulated or vacuum conditions.

Y3 type - Extremely high temperature

· This bearing is designed for environments that experience temperatures in excess of 300 ºC, and where greasing is difficult to execute. For these applications FYH offers the Y3 type of bearing with solid lubricant used for the cage. These bearings are designed to withstand temperatures of up to 450 ºC (Max 550 ºC). This bearing is best for light loads and low speed rotation (UNDER-Dn 5,000).

Y7 & Y8 type - Anti-corrosion type

· Y7 uses a strong corrosion resistant grade of stainless steel (SUS630) for the inner and outer rings. Y8 employs polyetheretherketone (PEEK) polymer for the inner and outer rings. These bearings are suited to highly corrosive environments where bearings may be exposed to solvents or underwater applications.

See **Appendix table 7** (page 314).

3 Selection of units

3.1 Outline of selection

FYH ball bearings are available in many models and types. To make sure that you are selecting the bearings that will best suit you application many factors must be considered. These include: the structure and space limitations of the machinery, operating conditions, load, temperature, and speed. The life you will get out of the bearing unit will greatly depend on proper selection.

Procedures for choosing the correct ball bearing unit are shown in **Table 3.1**.

Table 3.1 Procedures of selection of ordinary ball bearing units

Procedures of selection	Items to be examined	Operating conditions to be considered	Reference
1 Selection of model	· Pillow type · Flange type · Take-up type · Cartridge type · Hanger type	Structure of machinery, mounting space, mounting dimensions	2 Models (P.8)
2 Selection of shaft dia. and duty series	· Bearing bore dia.: From 8 to 140 mm · Duty series: 0, 2, X, 3	Rating life of bearings required, load applied to bearings, rotating speed	4 Rating life of bearings (P.25) 5 Bearing load (P.28) 6 Allowable rotating speed (P.35)
3 Selection against atmosphere	· L3 type · Cover type · Clean series · Stainless steel series · Ceramic series · For high speed use · For blower	Environment (dust, mud, water, moisture, chemicals), rotating speed	2 Models (P.8) (P.19) 6 Allowable rotating speed (P.35)
4 Selection against temperature	· Heat resistant type · Cold resistant type · Ceraball series · Measures against expansion and contraction of shaft · Grease supply	Bearing temperature	2 Models (P.8) (P.19) 7 Operating temperature and bearing specifications (P.36) 9 Design of shaft and base (P.45) 14 Handling (P.61)
5 Selection of locking mechanism	· Set screw · Adapter · NU-LOC (concentric locking collar) · Eccentric locking collar	Rotating speed, load conditions, handling	2 Models (P.8) 14 Handling (P.61)
6 Selection of shafts	· Dimensional tolerance · Use of shouldered shaft · Provision of set screw for shaft · Measures against expansion and contraction of shaft	Rotating speed, load conditions, bearing temperature	2 Models (P.8) (P.19) 6 Allowable rotating speed (P.35) 9 Design of shaft and base (P.45) 14 Handling (P.61)
7 Selection of strength of housings	· Cast iron · Cast steel · Steel plate	Load conditions, load directions, presence of impact Temperature	8 Strength of housings (P.37)
8 Selection of lubricant	· Lubricating type · Non-lubricating type · Centralized lubricating type · Greasing interval	Environment, importance of machine, bearing temperature, grease life	14 Handling (P.61)
9 Selection of maintenance and inspection	· Periodic inspection · Grease supply	Environment, importance of machine, bearing temperature, grease life	14 Handling (P.61)

3.2 Selection of model specifications

FYH ball bearing units are available in various models and offer options for different operating environments.

When selecting models and specifications of units care must be taken to consider all factors that can affect the bearing life: **Table 3.2** will help with proper selection of ball bearing unit models.

Table 3.2 Outline of selection of ball bearing unit models and specifications

○: Acceptable or Yes, ×: Unacceptable or No

Category	Performance required		Bearing specifications			Applicable housing
	Operating conditions	Installing to shaft	Sealing structure	Model code	Lubrication	
Bearing	General	Set screw Adapter	Seal and slinger	UC UK	○	C, F, FA, FB, FC, FL, FS, HA, IP, P, PA, PH, T, TH, TL, TU
		Eccentric locking collar		NA	○	C, FC, NF, NFL, P, T
		Concentric locking collar		NC	○	C, F, FA, FB, FC, FL, HA, IP, P, PA, PH, T
	Dustproof and waterproof	Set screw Adapter	L3	UC-L3 UK-L3	○	C, F, FA, FB, FC, FL, FS, HA, IP, P, PA, PH, T, TH, TL, TU
	Weight	Set screw	Seal	SB	×	LF, LP, PF, PFL, PP, PTH, NPTH
	Lightweight	Set screw	Seal	SU	×	FL0, P0
	Anticorrosion	Set screw	Seal and slinger	UC-S6 UC-S7 Y2 · Y7	○	SF-H1, SFL-H1, SP-H1, SPA-H1, ST-H1, VP, VF, VFL
			Seal	SU-S6	×	SFL0, SP0
	Heat resistant Cold resistant For high speed For blower	Set screw Adapter	Seal and slinger	UC UK Y1 · Y2 · Y3 S3 · S5	○	C, F, FA, FB, FC, FL, FS, HA, IP, P, PA, PH, T
		Concentric locking collar		NC	○	C, F, FA, FB, FC, FL, HA, IP, P, PA, PH, T

Category	Performance required		Housing specifications				Applicable bearing
	Type	Operating conditions	Model code	Material	Presence of cover	Lubrication	
Housing	Pillow type	General	P	Cast iron	○	○	UC (-L3), UK (-L3), NC[1)]
		High strength	P_{H4}	Ductile iron			
		Cast steel (rugged)	Psc	Cast steel			
		Thick (rugged)	IP	Cast iron			
		Tapped-base	PA	Cast iron	×	○	UC (-L3), NC[1)]
		High centerheight	PH			○	UC (-L3), NC[1)]
		Lightweight	LP			×	SB
		Small	P0	Special light alloy	○	×	SU
		Anticorrosion	SP-H1,	Stainless steel		○	UC-S6
			SPA-H1	Stainless steel		○	UC-S6
			SP0	Stainless steel		×	SU-S6
			VP	Thermoplastic		○	UC-S6
		Steel plate	PP	Steel plate	×	×	SB
	Flange type	Square	F	Cast iron	○	○	UC (L3), UK (L3), NC[1)]
		High strength	F_{H4}	Ductile iron			
		Anticorrosion	SF-H1	Stainless steel			UC-S6
		Corrosion-resistant	VF	Thermoplastic			UC-S6

Category	Performance required		Housing specifications				Applicable bearing
	Type	Operating conditions	Model code	Material	Presence of cover	Lubrication	
Housing	Flange type	Cartridge (square)	FS	Cast iron	○	○	UC (L3), UK (L3)
		High strength	FSH4	Ductile iron			
		Cartridge (round)	FC	Cast iron	○	○	UC (L3), UK (L3), NC[1)]
		High strength	FCH4	Ductile iron			
		Oval	FL	Cast iron	○	○	UC (-L3), NC[1)]
		High strength	FLH4	Ductile iron			
		Shaft alignment (adjustable oval)	FA	Cast iron	×		
		Flange bracket	FB		×		
		Lightweight (oval)	LF	Cast iron	×	×	SB
			TFD	Ductile iron	×	○	SA-FP9
		Lightweight (die-cast)	FL0	Special light alloy	○	×	SU
		Anticorrosion (oval)	SFL-H1	Stainless steel	○	○	UC-S6
			SFL	Stainless steel		×	SU-S6
			VFL	Thermoplastic		○	UC-S6
		Steel plate (round)	PF	Steel plate	×	×	SB
		(oval)	PFL				
	Take-up type	General	T	Cast iron	○	○	UC (-L3), UK (-L3), NC[1)]
		High strength	TH4	Ductile iron	○	○	
		Anticorrosion	ST-H1	Stainless steel	○	○	UC-S6
		Section steel frame type	T	Cast iron	○	○	UC (-L3)
		Channel steel frame type	TL	Cast iron	○	○	UC (-L3), UK (-L3)
			TU				
		Steel plate frame type	PTH	Steel plate	×	×	SB
			NPTH				
	Cartridge type	General	C	Cast iron	×	○	UC (-L3), UK (-L3)
	Hanger type	General	HA	Cast iron	×	○	UC (-L3)

Note[1)] Covers are not applicable for NC type bearings.

3.3 Selection of bearings from a maintenance viewpoint

FYH ball bearing units require little if any maintenance when used in general operating conditions. Periodic checks will help ensure that the bearings are performing as required and periodic checks should be based upon your application. Bearings operating in a clean environment with low load, and low RPM need to be checked less often than units in a dirty environment, with higher loads. Care should be taken to make sure that the bearings are being properly lubricated and that the right kind of grease is being used. If great axial load will be present a shouldered shaft should be used. If the bearing environment is wet or dusty a cover or LⅢ type of insert should be used. In an environment exposed to high or low temperature the type of grease and the material of the seals must be taken fully into consideration.

4 Rating life of bearings

When ball bearing units are installed and operated on a piece of machinery eventually a failure will occur. The period of operation until the unit cannot be used due to failure is called the bearing life.

Bearing failure is caused by two main reasons. The first is fatigue of bearing material, and the second is lubricant degradation. The life is figured on whichever fails first.

Proper bearing lubrication will eliminate grease degradation and allow full bearing life to be achieved. If the bearing units are run without replenishment of the grease the bearing life will have to be factored by either the grease life or the bearing life. During installation, care must be taken not to damage the bearing. Proper bearing maintenance and lubrication will ensure long bearing life.

4.1 Basic rating life and basic load rating

4.1.1 Basic rating life

When a bearing is rotated under load the raceways and the rolling elements are continuously exposed to load. Damage, such as scaling (flaking or peeling), eventually appears on the material, and the total rotating frequency until the damage appears is called the "fatigue limit of the bearing". Fatigue limit of the bearing can vary greatly even if the bearings have the same structure, dimensions, materials, machining methods, and are operated under the same conditions.

To account for this variation, a group of the same bearings operating under the same conditions are tested, and the total rotating frequency of 90% of the bearings operating with no damage due to rotating fatigue (90% reliability) is called the basic load rating.

4.1.2 Basic load rating

Dynamic ratings are determined by placing a pure radial load on a radial bearing or by placing a central axial load on a thrust bearing. The dynamic rating is the load that the bearing will withstand for one million cycles before failure of the bearing.

These ratings are referred to as the **basic dynamic radial load rating** (C_r) or the **basic dynamic axial load rating** (C_a) These values are indicated in the catalog as the basic dynamic radial load rating (C_r), and the value is shown in the dimensional table.

4.2 Calculation of rating life

The relationship between the basic rating life, the basic dynamic load rating, and the dynamic equivalent load of the ball bearing is indicated in **Formula (4.1)**. If the ball bearing unit is being used at a fixed rotating speed, the life is indicated as time. This is shown in **Formula (4.2)**.

(Total rotating frequency) $$L_{10} = \left(\frac{C_r}{P_r}\right)^3 \quad \cdots\cdots (4.1)$$

(Time) $$L_{10h} = \frac{10^6}{60n}\left(\frac{C_r}{P_r}\right)^3 \quad \cdots (4.2)$$

Whereas,

L_{10}: Basic rating life, 10^6 rotations
L_{10h}: Basic rating life, hr
C_r: Basic dynamic load rating, N
P_r: Dynamic equivalent load, N (see **"5 Bearing load"**)
n: Rotating speed, min^{-1}

Calculation of the basic rating life using the life factor (f_h) and the speed factor (f_n) in **Formula (4.2)** are shown below.

$$L_{10h} = 500\, f_h^3 \quad \cdots\cdots (4.3)$$

Life factor $$f_h = f_n \cdot \frac{C_r}{P_r} \quad \cdots\cdots (4.4)$$

Speed factor $$f_n = \left(\frac{10^6}{500 \times 60n}\right)^{1/3}$$

$$= (0.03n)^{-1/3} \quad \cdots\cdots (4.5)$$

Values of f_n, f_h and L_{10h} can be found using the nomogram of **Fig. 4.1**.

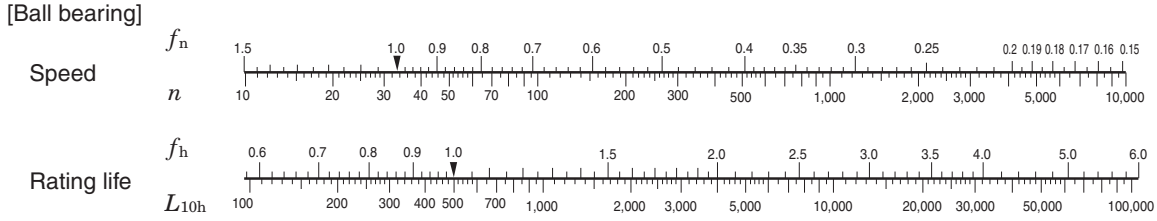

Fig. 4.1 Relation between basic rating life (L_{10h}) and rotating speed (n), speed factor (f_n), and life factor (f_h)

4.2.1 Correction of basic load rating due to temperature

If a ball bearing unit is used at a relatively high temperature the physical composition of the bearing material is changed leading to decreased hardness. This decreased hardness leads to the basic dynamic load rating being reduced. Once the structure of the bearing material has been changed, it will remain this way for the life of the unit, even when it returns to room temperature.

When using a ball bearing unit at 150 ℃ or more, the basic load rating must be corrected by multiplying the basic dynamic load rating shown in the dimensional table by the temperature factor shown in **Table 4.1**.

Table 4.1 Temperature factor

Bearing temperature, ℃	125	150	175	200	250
Temperature factor	1	1	0.95	0.9	0.75

4.2.2 Corrected rating life

The basic L_{10} rating life shown in **Formula (4.1)** is the fatigue life of a bearing with 90% reliability however; there are circumstances where bearings need greater reliability. The bearing life may be extended by using special materials.

Other conditions, including lubrication, may influence the bearing life.

The corrected rating life is found by taking the basic rating life and taking the factors in **Formula (4.6)** into consideration.

$$L_{na} = a_1 a_2 a_3 L_{10} \quad \cdots\cdots (4.6)$$

Whereas,

L_{na}: Corrected rating life, 10^6 rotations
Bearing characteristics and operating conditions are taken into consideration with reliability 100–n% (breakage probability)

L_{10}: Basic load rating, 10^6 rotations
Life with 90% reliability

a_1: Reliability factor ..... see (1)

a_2: Bearing characterization factor ..... see (2)

a_3: Operating condition factor ..... see (3)

(1) Reliability factor a_1

Table 4.2 shows the values used when a corrected bearing life that has less than a 10% breakage probability is necessary.

Table 4.2 Reliability factor a_1

Reliability, %	L_{na}	a_1
90	L_{10a}	1
95	L_{5a}	0.62
96	L_{4a}	0.53
97	L_{3a}	0.44
98	L_{2a}	0.33
99	L_{1a}	0.21

(2) Bearing characterization factor a_2

The material make-up of a bearing can have an affect on its basic rating life. Factors that can influence the bearing include bearing material (type of steel), production procedures, and bearing design. Bearing characterization is shown as factor a_2.

FYH ball bearing inserts use high quality vacuum degassed bearing steel as standard material, and this material allows for a longer rating life. For FYH ball bearing units, the bearing characterization factor a_2 is 1 ($a_2 = 1$). When bearings with special materials are used for a longer fatigue limit the characterization factor can be shown as a_2 being greater than 1 ($a_2 > 1$).

(3) Operating condition factor a_3

Operating conditions may directly influence the life of the bearing (especially proper or improper lubrication). The basic rating life should be corrected using the operating condition factor a_3. If lubrication is being maintained the factor $a_3 = 1$. If excellent re-lubrication practices are being maintained the factor $a_3 > 1$ should be applied.

If any of the following operating conditions are applicable the condition should be applied as $a_3 < 1$.

(1) Kinematic viscosity of lubricant during operation is low:
Ball bearing: 13 mm^2/s or less,
Roller bearing: 20 mm^2/s or less

(2) Rotating speed is low:
$d_m n$: 10,000 or less

Note: d_m (Pitch dia. of ball set in mm) × n (Rotating speed)

(3) Foreign matters are mixed in lubricant

Even if the bearing characterization factor is improved i.e., $a_2 > 1$, the life of the bearing must still be down-rated if the combination, $a_2 \times a_3 > 1$.

4.2.3 Required lifetime of bearings

At some point, the economical nature of a ball bearing begins to decline. The operating conditions, type of bearing used, and type of machine the bearing is used on all influence the operational life of the bearing.

The required lifetime of the ball bearing is shown in **Table 4.3**.

Table 4.3 Required life time of ball bearing units (reference)

Operating conditions	Machines used	Required life time, hrs
Operated in short periods or intermittently	Home electric appliances, electric tools, agricultural machinery, hoist, etc.	4,000 – 8,000
Operated for several minutes or hours at a time, but less than 8 hours per day	Factory motor, ordinary gearing, etc.	12,000 – 20,000
Constantly operated for 8 hours or longer per day or operated continuously for long periods	General machinery, blowers, etc.	20,000 – 30,000
Operated continuously for 24 hours, no fault is allowed	Power plants, mine drainage facility, etc.	100,000 –200,000

4.3 Grease life

The grease life for ball bearing units is influenced by: the level of the load, rotating speed of the bearing, and the operating temperature.

The grease life for ball bearing units being used under appropriate operating conditions cane be found by the formula shown below.

$$\log L = 6.10 - 4.40 \times 10^{-6}\, d_m n - 2.50 \left(\frac{P_r}{C_r} - 0.05\right) - (0.021 - 1.80 \times 10^{-8}\, d_m n)\, T \quad \cdots\cdots (4.7)$$

Whereas,

L: Grease life, hr

d_m: Pitch dia. of ball set, mm

$$d_m = \frac{(D + d)}{2}$$

(D: Nominal bearing outer dia., d: Nominal bearing bore dia.)

n: Rotating speed of bearing, min^{-1}

P_r: Dynamic equivalent radial load, N (see **"5 Bearing load"**)

C_r: Basic dynamic radial load rating of bearing, N

T: Operating temperature of bearing, °C

Applicable conditions for the **Formula (4.7)** are shown below.

1) Operating temperature of bearing: T °C

To be applied if the following condition is satisfied: $T \leq 100$

(If T is smaller than 50 ($T < 50$), following condition should be applied: $T = 50$.)

If T is larger than 100 ($T > 100$), contact FYH.

2) Rotating speed of bearing: $d_m n$

To be applied if the following condition is satisfied: $d_m n \leq 30 \times 10^4$

(If $d_m n$ is smaller than 12.5×10^4 ($d_m n < 12.5 \times 10^4$), following condition should be applied: $d_m n = 12.5 \times 10^4$)

If $d_m n$ is larger than 30×10^4 ($d_m n > 30 \times 10^4$), contact FYH.

3) Load condition of bearing: $\frac{P_r}{C_r}$

To be applied if the following condition is satisfied: $\frac{P_r}{C_r} \leq 0.2$

(If $\frac{P_r}{C_r}$ is smaller than 0.05 ($\frac{P_r}{C_r} < 0.05$), following condition should be applied: $\frac{P_r}{C_r} = 0.05$)

If $\frac{P_r}{C_r}$ is larger than 0.2 ($\frac{P_r}{C_r} > 0.2$), contact FYH.

Reference figure of grease life obtained by the **Formula (4.7)** is shown in **Fig. 4.2**.

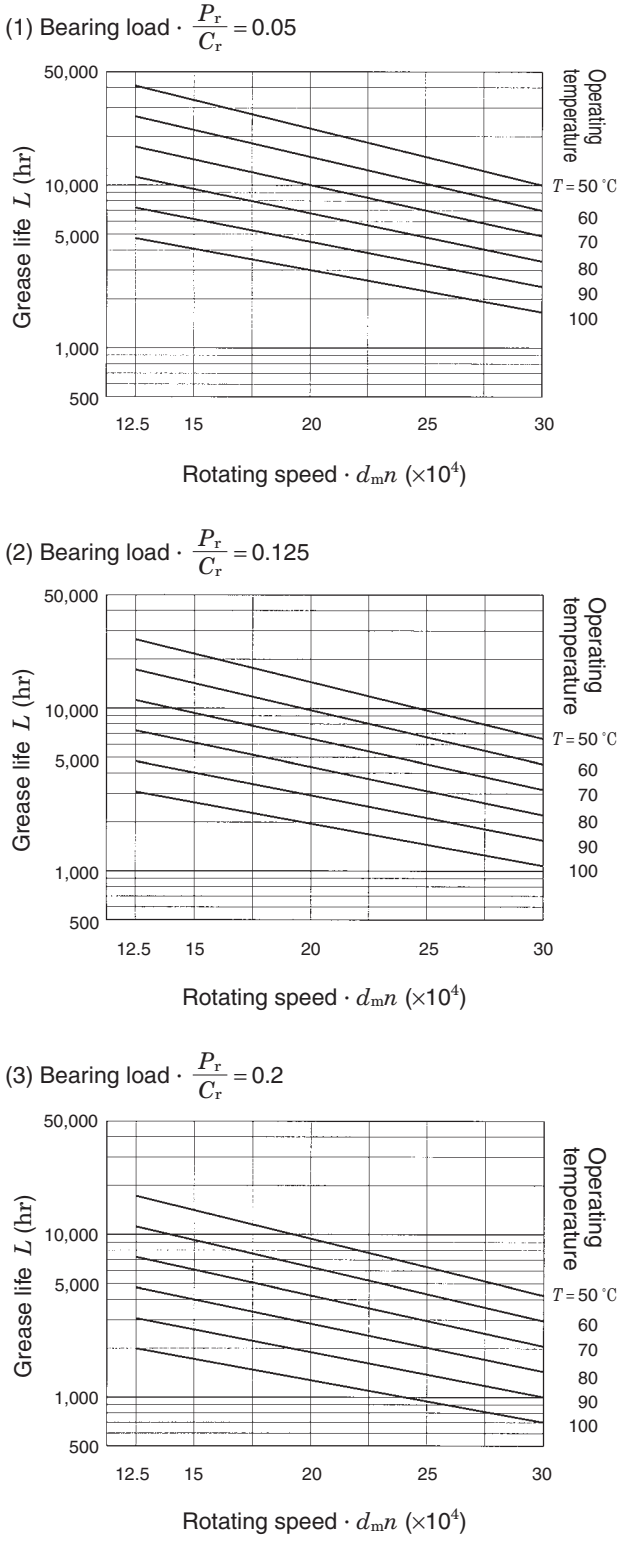

Fig. 4.2 Relation of grease life to bearing load, rotating speed, and operating temperature (reference)

5 Bearing load

Loads that are applied to bearings come from a variety of sources.

In addition to the primary load, other resultant loads include the weight of complementary objects including shafting, gears, pulleys, torsion from chain and belts, and so on. Shock or dynamic load can also be derived from these sources.

In many cases, these loads cannot be determined by a simple or single calculation; and since these loads often fluctuate in intensity, it is difficult to determine the exact magnitude of them prior to actual lab or field measurements on the machinery in question.

However, in order to approximate the loads involved prior to putting a machine into operation, the technique shown below should be used. This technique uses multiplication factors that have been determined empirically from sample measurements taken on actual machines in operation.

5.1 Loads applied to bearings

5.1.1 Load factor

Even if the static radial load and the axial load can be accurately calculated, the actual loads are generally greater than the calculated figures. This is due to the presence of vibration and shock load during actual machine operation.

To find the loads actually applied to a bearing, multiply the values determined for the static load by the following load factors.

$$F = f_w \cdot F_c \quad \cdots\cdots (5.1)$$

Whereas,

F: Load actually applied to bearing, N

F_c: Theoretically calculated load, N

f_w: Load factor (see **Table 5.1**)

Table 5.1 Load factor f_w

Operating conditions	Applications	f_w
Virtually no vibration or impact	Electric machines and instruments	1 –1.2
Ordinary operation (light impact)	Agricultural machines and blower	1.2–2
Great vibration and impact	Construction machines and grinders	2 –3

5.1.2 Loads from belts or chain drives

The load calculated for the bearing is equal to the tensile load of the belt. However, this load must be multiplied by the load factor (f_w), which accounts for vibration and impact of the machine and a belt factor (f_b), which accounts for the vibration and impact generated through the belt.

When calculating loads for a chain drive, use the same factor (f_b) as used for belt drives.

$$F_b = \frac{2M}{D_p} \cdot f_w \cdot f_b$$

$$= \frac{19.1 \times 10^6 W}{D_p \cdot n} \cdot f_w \cdot f_b \quad \text{(5.2)}$$

Whereas,

F_b: Load actually applied to pulley shaft or sprocket shaft, N

M: Torque applied to pulley or sprocket, mN · m

W: Transmitted power, kW

D_p: Pitch circle dia. of pulley or sprocket, mm

n: Rotating speed, min^{-1}

f_w: Load factor (see **Table 5.1**)

f_b: Belt factor (see **Table 5.2**)

Table 5.2 Belt factor f_b

Belt type	f_b
Toothed belt	1.3–2
V belt	2 –2.5
Flat belt (with tension pulley)	2.5–3
Flat belt	4 –5
Chain	1.2–1.5

5.1.3 Load of gear transmissions

Gear transmissions have a load in the tangential direction (K_t), a load in the radial direction (K_r), and an axial load (K_a). Different types of gears are calculated differently.

The following is a sample of a calculation for an ordinary spur gear arrangement. A flat spur gear will not support an axial load.

(1) Load applied to gear in tangential direction (tangential line force)

$$K_t = \frac{2M}{D_p} = \frac{19.1 \times 10^6 W}{D_p n} \quad \text{(5.3)}$$

(2) Load applied to gear in radius direction (separating force)

$$K_r = K_t \tan \alpha \quad \text{(5.4)}$$

(3) Synthetic load applied to gear

$$K_g = \sqrt{K_t^2 + K_r^2} = K_t \sec\alpha \quad \text{(5.5)}$$

Whereas,

K_t: Load applied to gear in tangential direction (tangential line force), N

K_r: Load applied to gear in radius direction (separating force), N

K_g: Synthetic load applied to gear, N

M: Torque applied to gear, mN · m

D_p: Pitch circle dia. of gear, mm

W: Transmission power, kW

n: Rotating speed, min^{-1}

α: Pressure angle of gear, °

Note that the actual gear load must be found by multiplying the theoretical load by the load factor (f_w) obtained by taking into consideration the vibration and impact loads generated while the machine is in operation. The gear factor (f_g) is determined by taking into consideration the accuracy of machining and the finish of the gears.

$$F_g = f_w \cdot f_g \cdot K_g \quad \text{(5.6)}$$

Whereas,

F_g: Load actually applied to gear, N

K_g: Theoretical synthetic load applied to gear, N

f_w: Load factor (see **Table 5.1**)

f_g: Gear factor (see **Table 5.3**)

Table 5.3 Gear factor f_g

Gear type	f_g
Precision gear (both pitch error and tooth profile error should be 0.02 mm or less)	1 –1.1
Ordinary gear (both pitch error and tooth profile error should be 0.1 mm or less)	1.1–1.3

5.2 Distribution of bearing load

In order to determine the radial load distribution to each bearing attached to a shaft, use the procedure shown below. Use the load factors shown in **Table 5.1** to account for vibration and impact.

A standard radial ball bearing bears an axial load component in addition to the radial component. The total vectored load can be calculated by taking the square root of the sum of the squares of each load as shown in the previous calculation.

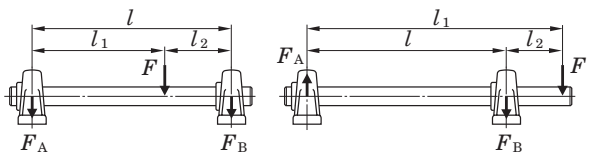

$$F_A = \frac{l_2}{l} \cdot F \quad \cdots\cdots (5.7)$$

$$F_B = \frac{l_1}{l} \cdot F \quad \cdots\cdots (5.8)$$

Fig. 5.1 Distribution of load to bearings

5.3 Dynamic equivalent load

In many cases, a bearing is exposed to the combined vector load of both radial and axial load components. It may also be used under more severe conditions such as vibration and shock load. In this case, a direct comparison to the dynamic load rating is not appropriate.

In such a case, find the load equivalent to a direct radial load only and compare this with the basic dynamic load rating.

The converted virtual load is called dynamic equivalent load (P).

5.3.1 Calculation of dynamic equivalent load

The dynamic equivalent radial load (P_r) of a bearing that bears radial and axial loads as well as vibration and impact is found by the following formula.

$$P_r = XF_r + YF_a \quad \cdots\cdots (5.9)$$

Whereas,

P_r: Dynamic equivalent radial load, N
F_r: Radial load, N
F_a: Axial load, N
X: Radial load factor (see **Table 5.4**)
Y: Axial load factor (see **Table 5.4**)

Table 5.4 Radial load factor (X) and axial load factor (Y)

$\frac{f_0 F_a}{C_{0r}}$	e	$F_a / F_r \le e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19				2.30
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1.00

Remarks 1. C_{0r} (basic static radial load rating) and f_0 (factor) are shown in the dimensional tables.
2. If $f_0 F_a / C_{0r}$ does not conform to the table above, find by interpolation.

5.3.2 Average dynamic equivalent load in the case of fluctuating loads

If the level or direction of the load applied to a bearing is fluctuating, it is necessary to find the average dynamic equivalent load to calculate the bearing life.

Table 5.5 shows the method of finding the average dynamic equivalent load under various types of fluctuating conditions.

Table 5.5 Calculation of average dynamic equivalent load in case of fluctuated load

(1) Graduated fluctuation

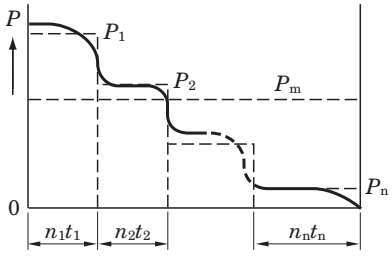

$$P_m = \sqrt[p]{\frac{P_1^p\, n_1t_1 + P_2^p\, n_2t_2 + \cdots\cdots + P_n^p\, n_nt_n}{n_1t_1 + n_2t_2 + \cdots\cdots + n_nt_n}} \quad \cdots\cdots (5.10)$$

(2) Monotone fluctuation



$$P_m = \frac{P_{min} + 2\,P_{max}}{3} \quad \cdots\cdots (5.11)$$

(3) Sine curve fluctuation



$$P_m = 0.68\,P_{max} \quad \cdots\cdots (5.12)$$

(4) Sine curve fluctuation (upper half of sine curve)



$$P_m = 0.75\,P_{max} \quad \cdots\cdots (5.13)$$

Whereas,

P_m: Average dynamic equivalent load, N

P_1: Dynamic equivalent load actuating for t_1 hours at rotating speed of n_1, N

P_2: Dynamic equivalent load actuating for t_2 hours at rotating speed of n_2, N

.
.
.

P_n: Dynamic equivalent load actuating for t_n hours at rotating speed of n_n, N

P_{min}: Minimum dynamic equivalent load, N

P_{max}: Maximum dynamic equivalent load, N

Σn_it_i: Total rotating frequency for t_1 to t_i hours

5.4 Basic static load rating and static equivalent load

5.4.1 Basic static load rating

If a bearing is exposed to excessive static or impact load even when running at low rotational speed, partial permanent deformation occurs to the contact surface of the raceways of the bearing. The amount of permanent deformation increases with increased loads, and at some point, the bearing will no longer rotate smoothly.

The basic static load rating of a bearing is the static load that generates the calculated contact stresses shown below at the center of the contact surfaces of the raceways.

(1) Self aligning ball bearings ..... 4,600 MPa
(2) Other ball bearings
(mounted ball bearings included) ..... 4,200 MPa
(3) Roller bearings ..... 4,000 MPa

The total permanent deformation that occurs to the raceways and the balls under the above critical contact stresses is 0.0001 times the diameter of the ball.

In ball bearing units, this is indicated as the basic static radial load rating (C_{0r}) and these values are shown in the dimensional tables.

5.4.2 Static equivalent loads

Static equivalent load is the equivalent of the combined (vectored) load converted to the equivalent direct radial load. The term "static" refers to no rotation or very little rotation.

Static equivalent radial load (P_{0r}) can be calculated by using the formula below.

$$P_{0r} = 0.6F_r + 0.5F_a \quad \text{(5.14)}$$

$$P_{0r} = F_r \quad \text{(5.15)}$$

Whereas,

P_{0r}: Static equivalent radial load, N

F_r: Radial load, N

F_a: Axial load, N

5.4.3 Safety factor

The static equivalent load that can be withstood by a bearing, in addition to the above considerations, is sometimes dependent upon unforeseen conditions in the operating environment. Therefore, a safety factor is always built in to insure success in the application.

$$f_s = \frac{C_{0r}}{P_{0r}} \quad \text{(5.16)}$$

Whereas,

f_s: Safety factor (see **Table 5.6**)

C_{0r}: Basic static radial load rating, N

P_{0r}: Static equivalent radial load, N

Table 5.6 Safety factor f_s (recommended)

Operating conditions		f_s (Min.)
Being rotated	High rotating accuracy is required	2
	Ordinary operating conditions	1
	Impact	1.5
Not always being rotated (sometimes oscillated)	Ordinary operating conditions	0.5
	Impact, unevenly distributed load	1

5.5 Example of applied calculation

Example 1 Distributing load

Find the load applied to the bearing A and bearing B, if the radial load F_1 (F_1 = 1.5 kN) and F_2 (F_2 = 4.5 kN) are applied.

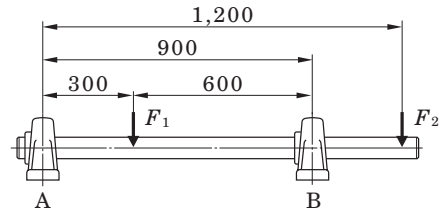

(1) Find the radial load F_{1A} applied to the bearing A by F_1, with **Formula (5.7)** and **Formula (5.8)**.

$$F_{1A} = \frac{600}{900} \times 1.5 = 1.0 \text{ (kN)}$$

In a similar manner, find the radial load F_{2A} applied to the bearing A by F_2.

$$F_{2A} = -\frac{1{,}200 - 900}{900} \times 4.5 = -1.5 \text{ (kN)}$$

Remark: Negative load is the upward load.

Radial load F_A applied to the bearing A:

$$F_A = F_{1A} + F_{2A} = 1.0 + (-1.5) = -0.5 \text{ (kN)}$$

(2) In a similar manner to (1), find the radial load F_B applied to the bearing B.

$$F_{1B} = \frac{300}{900} \times 1.5 = 0.5 \text{ (kN)}$$

$$F_{2B} = \frac{1{,}200}{900} \times 4.5 = 6.0 \text{ (kN)}$$

$$F_B = F_{1B} + F_{2B} = 0.5 + 6.0 = 6.5 \text{ (kN)}$$

Example 2 Calculating load by V-belt transmission

Find the load applied to the bearing A and bearing B when the shaft is driven by the V-belt, transmission power W is 7.5 kw (W = 7.5 kW), rotating speed n is 300 min^{-1} (n = 300 min^{-1}), effective diameter of pulley D_p is 300 mm (D_p = 300 mm).

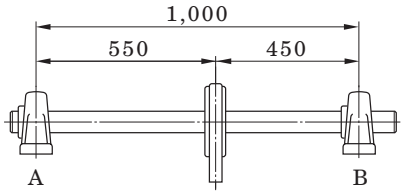

(1) Find the load actually applied to the pulley shaft F_b with **Formula (5.2)**.

From **Table 5.1**, load factor f_w is 1.2 (f_w = 1.2), and the belt factor f_b is 2.5 (f_b = 2.5), from **Table 5.2**.

$$F_b = \frac{19.1 \times 10^6\, W}{D_p \cdot n} \cdot f_w \cdot f_b$$

$$= \frac{19.1 \times 10^6 \times 7.5}{300 \times 300} \times 1.2 \times 2.5 = 4.78 \text{ (kN)}$$

(2) Find the load actually applied to the bearing A and bearing B (F_A and F_B) with **Formulas (5.7)** and **(5.8)**.

$$F_A = \frac{450}{1{,}000} \times 4.78 = 2.15 \text{ (kN)}$$

$$F_B = \frac{550}{1{,}000} \times 4.78 = 2.63 \text{ (kN)}$$

Example 3 Calculating dynamic equivalent radial load

Find the dynamic equivalent radial load P_r when the radial load F_r, 1.5 kN (F_r = 1.5 kN), and the axial load F_a, 0.85 kN, (F_a = 0.85 kN) are applied to the pillow type unit UCP306J (bearing UC306).

(1) Find the radial load factor (X) and the axial load factor (Y) with using the static radial load rating C_{0r} of UCP306J (bearing UC306), 15.0 kN (C_{0r} = 15.0 kN), and **Table 5.4**.

Find the solutions of the following formulas:

$$\frac{f_0 F_a}{C_{0r}} = \frac{13.3 \times 0.85}{15.0} = 0.754,\ e = 0.264$$

$$\frac{F_a}{F_r} = \frac{0.85}{1.5} = 0.567 > e\ (0.264)$$

Therefore, X = 0.56, Y = 1.68

(2) Find the dynamic equivalent radial load P_r with **Formula (5.9)**.

$$P_r = XF_r + YF_a = 0.56 \times 1.5 + 1.68 \times 0.85$$

$$= 2.27 \text{ (kN)}$$

Example 4 Calculating bearing life

Under the conditions shown in **Example 3**, find the bearing life L_{10h} when a bearing is used for a blower with a rotating speed n, 1,000 min^{-1}.

(1) Select the load factor f_w is 1.2 (f_w = 1.2) from **Table 5.1**, and find the bearing load P_r.

$$P_r = f_w \cdot F = 1.2 \times 2.27 = 2.72 \text{ (kN)}$$

(2) The dynamic radial load rating of UCP306J (bearing UC306), C_r, is 26.7 kN (C_r = 26.7 kN), and calculate the bearing life L_{10h} with the **Formula (4.2)**.

$$L_{10h} = \frac{10^6}{60n} \cdot \left(\frac{C_r}{P_r}\right)^3 = \frac{10^6}{60 \times 1{,}000} \times \left(\frac{26.7}{2.72}\right)^3$$

$$\approx 15{,}800 \text{ (hr)}$$

(3) Calculate bearing life L_{10h} with the nomogram shown in **Fig. 4.1**.

When the rotating speed n is 1,000 min^{-1} (n = 1,000 min^{-1}), rotating factor f_n is 0.32 (f_n = 0.32). Next, find the life factor f_h by speed factor f_n, dynamic radial load rating of bearing C_r, and the bearing load P_r.

$$\text{Life factor } f_h = f_n \cdot \frac{C_r}{P_r} = 0.32 \times \frac{26.7}{2.72} = 3.14$$

From life factor f_h, bearing life $L_{10h} \approx$ 16,000 hours.

Example 5 Selecting ball bearing units

If a bearing is operated under the following conditions, select the flange type unit (UCF) with at least two years (5,000 hours) or longer rating life: rotating speed of shaft n is 1,500 min^{-1} (n = 1,500 min^{-1}), and radial load F_r is 5 kN (F_r = 5 kN). The radial load F_r includes the load factor and gear factor.

(1) From the nomogram shown in **Fig. 4.1**, when life time L_h is 5,000 hr (L_h = 5,000 hr), life factor f_h can be found as 2.16 ($f_h \approx$ 2.16), and speed factor f_n can be found as 0.28 ($f_n \approx$ 0.28) when the rotating speed n is 1,500 min^{-1} (n = 1,500 min^{-1}).

$$\text{Dynamic radial load rating } C_r = F_r \cdot \frac{f_h}{f_n} = 5 \times \frac{2.16}{0.28}$$

$$\approx 38.6 \text{ (kN)}$$

(2) Find the flange type unit that meets the following condition: dynamic radial load rating C_r is 38.6 kN (C_r = 38.6 kN). For the 200 series. UCF211J (dynamic radial load rating C_r is 43.4 kN (C_r = 43.4 kN)) can be selected.

Example 6 Selecting pillow type units for low speed

If a bearing is used for a dolly under the following conditions, select the pillow type unit (UCP) with 10,000 hours rating life: radial load F_r is 12 kN (F_r = 12 kN), and rotating speed is 8 min^{-1}.

(1) Find the required dynamic radial load rating C_r with using **Formulas (4.4)** and **(4.5)**.

Speed factor $f_n = (0.03n)^{-1/p} = (0.03 \times 8)^{-1/3} \approx 1.61$

Life factor $f_h = \left(\frac{L_{10h}}{500}\right)^{1/p} = \left(\frac{10{,}000}{500}\right)^{1/3} \approx 2.71$

Dynamic radial load rating $C_r = P_r \cdot \frac{f_h}{f_n} = 12 \times \frac{2.71}{1.61}$

≈ 20.2 (kN)

(2) From **Table 5.6**, define safe factor f_s as 2 (f_s = 2), and find the static radial load rating of bearing required C_{0r}.

$C_{0r} = f_s \cdot P_r = 2 \times 12 = 24$ (kN)

(3) The unit is used for a dolly, and vibration or impact may occur. Thus, select UCP308J (C_r = 40.7 kN, C_{0r} = 24.0 kN).

Example 7 Calculating bearing life in high temperature apprications

Find the bearing life if the heat resistant pillow type unit (UCP215D1K2) is operated under the following conditions: operating temperature is 175 ºC, radial load F_r is 4 kN (F_r = 4 kN), and the rotating speed n is 800 min^{-1} (n = 800 min^{-1}). Note that the radial load F_r includes load factor and gear factor.

(1) From **Table 4.1**, find the dynamic load rating C_r in the case that a bearing is used at 175 ºC.

$C_r = 67.4 \times 0.95 = 64.0$ (kN)

Find the bearing life L_{10h} using **Formula (4.2)**.

$$L_{10h} = \frac{10^6}{60n} \cdot \left(\frac{C_r}{P_r}\right)^3 = \frac{10^6}{60 \times 800} \times \left(\frac{64.0}{4}\right)^3$$

$\approx 85{,}000$ (hr)

(2) If a bearing unit is operated at 175 ºC, grease is degraded faster, and it cannot be used without lubrication. Supply grease at intervals specified in **Table 14.4**.

(3) If the shaft experiences axial expansion due to heat, install a fixed bearing unit on one end of the assembly and install floating bearing unit on the other side that allows the shaft to move freely through the bore of the bearing. More information is offered in **Section 9**. (see **"9 Design of shaft and base"**).

Example 8 Calculating grease life

Find the grease life for pillow type unit UCP204J (bearing UC204) under the following conditions: radial load F_r is 1 kN (F_r = 1 kN), and rotating speed n is 800 min^{-1} (n = 800 min^{-1}). Note that the radial load F_r includes load factor and belt factor. Operating temperature of the bearing should be 40 ºC.

Find the grease life L using **Formula (4.7)**.

$$\log L = 6.10 - 4.40 \times 10^{-6}\, d_m n - 2.50 \left(\frac{P_r}{C_r} - 0.05\right)$$
$$- (0.021 - 1.80 \times 10^{-8}\, d_m n)\, T$$
$$= 6.10 - 4.40 \times 10^{-6} \times 12.5 \times 10^4$$
$$- 2.50 \left(\frac{1}{12.8} - 0.05\right)$$
$$- (0.021 - 1.80 \times 10^{-8} \times 12.5 \times 10^4) \times 50$$
$$= 4.542$$
$$L \approx 34{,}800 \text{ (hr)}$$

Example 9 Calculating life of bearing units in case of non-lubrication

Find the life of a bearing unit in the case that it is operated under the conditions shown in **Example 8**, but without lubrication.

(1) Find the rating life of bearings L_{10h} using **Formula (4.2)**.

$$L_{10h} = \frac{10^6}{60n} \cdot \left(\frac{C_r}{P_r}\right)^3 = \frac{10^6}{60 \times 800} \times \left(\frac{12.8}{1}\right)^3$$

$\approx 43{,}700$ (hr)

(2) Compare the grease life L shown in **Example 8** to the rating life of bearings L_h. Then, grease life L is shorter than the bearing rating life. Therefore, life of a bearing unit should be the same as the grease life L, 34,800 hours (L = 34,800 hours).

6 Allowable rotating speed

6.1 Allowable rotating speed

The rotational speed of a bearing is limited by the temperature increase, mainly due to friction. When the bearing reaches the speed limits shown below, it will seize if operated continuously at these levels.

The limiting rotational speed is the maximum speed at which the bearing can be safely operated continuously.

These allowable rotational speeds of a ball bearing unit are dependent upon the dimensions of the bearing, type of seal, and the fit of the bearing inner ring to the shaft.

Table 6.1 shows the standard allowable rotating speeds of ball bearing units.

Table 6.1 Allowable rotating speed of ball bearing units (standard value)

Unit: min^{-1}

Bore dia. code	UC type bearing, UC-S6 type bearing, UK type bearing, NC type bearing, NA type bearing, ER, RB type bearing									SA type bearing SB type bearing	SU type bearing SU-S6 type bearing
	Standard type, heat resistant (D1K2), cold resistant type (D2K2) Standard blowers (S3), Heat-resistant (D9K2)			LⅢ type (L3)			Heat resistant type (K3), High-speed blowers (S5)				
	Diameter series[3)]			Diameter series[3)]			Diameter series[3)]			Diameter series[3)]	Diameter series[3)]
	2	X	3	2	X	3	2	X	3	2	0
8											10,000
00	–			–			–			–	10,000
01	5,800			2,300			8,700			6,800	8,000
02	5,800			2,300			8,700			6,800	6,600
03	5,800			2,300			8,700			6,800	5,800
04	5,800	–	–	2,300	–		8,700	–	–	5,800	5,000
05	5,100	4,300	4,600	2,100	960		7,700	6,400	6,700	5,100	4,000
06	4,300	3,700	3,900	960	830	–	6,400	5,500	5,800	4,300	3,300
07	3,700	3,300	3,400	830	750	770	5,500	5,000	5,100	3,700	–
08	3,300	3,100	3,100	750	690	690	5,000	4,600	4,600	3,300	
09	3,100	2,800	2,700	690	640	620	4,600	4,300	4,100	3,100	
10	2,800	2,500	2,400	640	570	550	4,300	3,800	3,700	2,800	
11	2,500	2,300	2,300	570	520	510	3,800	3,500	3,400		
12	2,300	2,200	2,100	520	490	470	3,500	3,200	3,100		
13	2,200	2,100	1,900	490	460	440	3,200	3,100	2,900		
14	2,100	2,000	1,800	460	440	410	3,100	2,900	2,700		
15	2,000	1,800	1,700	440	410	380	2,900	2,700	2,600		
16	1,800	1,700	1,600	410	380	360	2,700	2,600	2,400		
17	1,700	1,600	1,500	380	360	340	2,600	2,400	2,300		
18	1,600	1,500	1,400	360	340	320	2,400	2,300	2,100		
19	–	–	1,400	–	–	310	–	–	2,000		
20		1,300	1,300		300	280		2,000	1,900		
21		–	1,200		–	–		–	1,800		
22			1,100			250			1,700		
24			1,100			240			1,600		
26			1,000			220			1,500		
28			910			200			1,400		

Remarks 1. Allowable rotating speed of the units with covers is 80% of the value shown in the table above.
2. If a bearing unit is used with an excessively loose fit, allowable rotating speed must be corrected by multiplying it by the fitting factor f_c shown in **Table 6.2**.
3. The basic bearing size number consists of the duty code (2, X, or 3) followed by the ring size code (07, 10, 24, etc.)

6.2 Rotational speed adjustment due to shaft fit

A marginal degree of clearance is typically used to facilitate easy installation of a bearing to a shaft. The amount of clearance between the bearing and shaft must be factored in to determine the maximum allowable rotational speed, and as rotational speed is increased, the amount of clearance must be decreased.

Table 6.2 shows the factor that must be used to correct the allowable rotational speed. The maximum rotational speed is determined by multiplying the speed found in **Table 6.1** by the factors below. This table includes the multiplying factors for set screw bearings as well as bearings with adapters and eccentric locking collars. Due to the characteristics of bearings with adapters, a loose fit, h8 or h9, is acceptable. Bearings with eccentric locking collars function optimally with less clearance and therefore, an h5 or j5 fit is recommended to achieve the maximum allowable speed.

Table 6.2 Fitting factor of ball bearing units f_c (recommended)

Type of ball bearing units	Fitting factor f_c					
	Shaft tolerance range class					
	h5, j5	j6	h6	h7	h8	h9
With set screws						
Standard type	–	1	1	0.8	0.5	0.2
LⅢ type (Accessory code: L3)	–	–	–	1	1	0.9
Heat resistant type (Special code: D1K2)	–	–	–	1	1	0.7
Cold resistant type (Special code: D2K2)	–	–	–	1	1	0.7
For high speed (Special code: K3)	–	1	0.8	0.6	–	–
For blower (Special code: S3 · S5)	1	–	0.8	0.6	–	–
With adapters	–	–	–	–	1	1
With eccentric locking collar	1	–	–	–	–	–
NU concentric locking collar						

7 Operating temperature and bearing specifications

7.1 Operating temperature range

The operating temperature of a ball bearing unit depends on the type of grease, the material of the seal, and the internal clearance of the bearing.

FYH Ball Bearing Units are available in high temperature (D1K2) and low temperature (D2K2) series, in addition to the standard models, to allow selection of the correct bearing for your operational temperature (see **Table 2.3**).

The correct unit must be chosen for the desired temperature range, and it is equally important to use the appropriate grease according to the specified schedule.

7.2 Operating temperature and internal clearance of bearings

When bearings are operated in a high ambient temperature environment, or when the operating temperature is high because of rotational speed, differential expansion rates occur within the bearing components. This causes higher friction, grease breakdown, and eventual seizure.

If the temperature difference between the inner and outer ring is known, or can be approximated, then the following **Formula (7.1)** may be applied.

Under these conditions, decrease in the internal clearance must be calculated, and the internal clearance of bearing needs to be selected properly.

$$S_{t1} = \alpha \cdot D_e \cdot \Delta_t \quad \cdots\cdots (7.1)$$

Whereas,

S_{t1}: Decrease in the internal clearance of bearings depending on the difference in the temperatures of the bearing inner ring and the bearing outer ring can be found by formula, mm

α: Line expansion factor of bearing steel, 12.5×10^{-6}

D_e: Raceway dia. of bearing outer ring, mm

Diameter series 2, X ····· $D_e \approx 0.92\,D$

Diameter series 3 ····· $D_e \approx 0.9\,D$

D: Nominal bearing outer dia., mm

Δ_t: Difference in temperatures of bearing inner ring and outer ring, ºC

If a ball bearing unit is used in a high temperature environment, an abnormal load will result due to thermal expansion of the shaft. This must be compensated for by allowing free movement of one side of the shaft.

(See **"9 Design of shaft and base"**)

8 Strength of housings

FYH bearings can withstand very high loads due to the use of only high quality material and excellent design. However, when high static or impact loads are encountered, the load capacity of the bearing must be determined.

The housing design is such that it can withstand loads from any angle; however the bearing is strongest with a direct downward load through the base of the unit. For loads in other directions, the allowable load must be determined specifically for the direction in question.

Rigidity of the base and flatness of the mounting surface also influence the housing strength. The equipment designer or installer must examine and perform calculations for the complete supporting structure of the bearing.

8.1 Strength of cast iron housings

Although gray cast iron has many superior characteristics, it may fail under impact loads, particularly in a low temperature environment.

Table 8.1 shows the applicable design safety factors for gray cast iron. **Fig. 8.1** to **8.7** show the static rupture strength of the various housing types.

Table 8.1 Safety factor of gray cast iron products (recommended)

Property of load	Safety factor of gray cast iron
Static load	4
With vibration	10
With impact	15

8.2 Strength of ductile cast iron housings

The high-strength ductile cast iron series has the same shape and dimensions as the standard gray cast iron series, but is acceptable in environments where high-strength is required.

Table 8.2 shows safety factors of the load on ductile cast iron housings, and **tables 8.8** to **8.11** show the approximate rupture strength of pillow type, flange type, and take-up type housings.

Table 8.2 Safety factor of ductile cast iron (recommended)

Property of load	Safety factor of ductile cast iron
Static load	3
With vibration	5
With impact	10



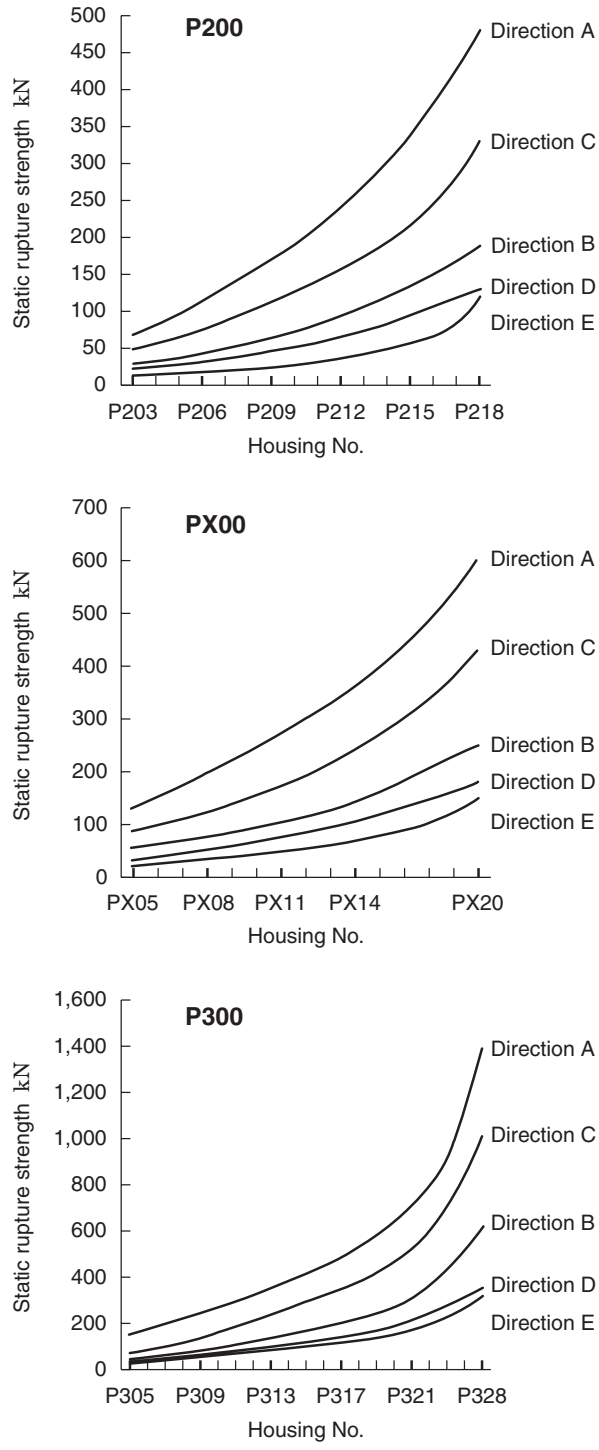

Fig. 8.1 Static rupture strength of pillow type housing (P)

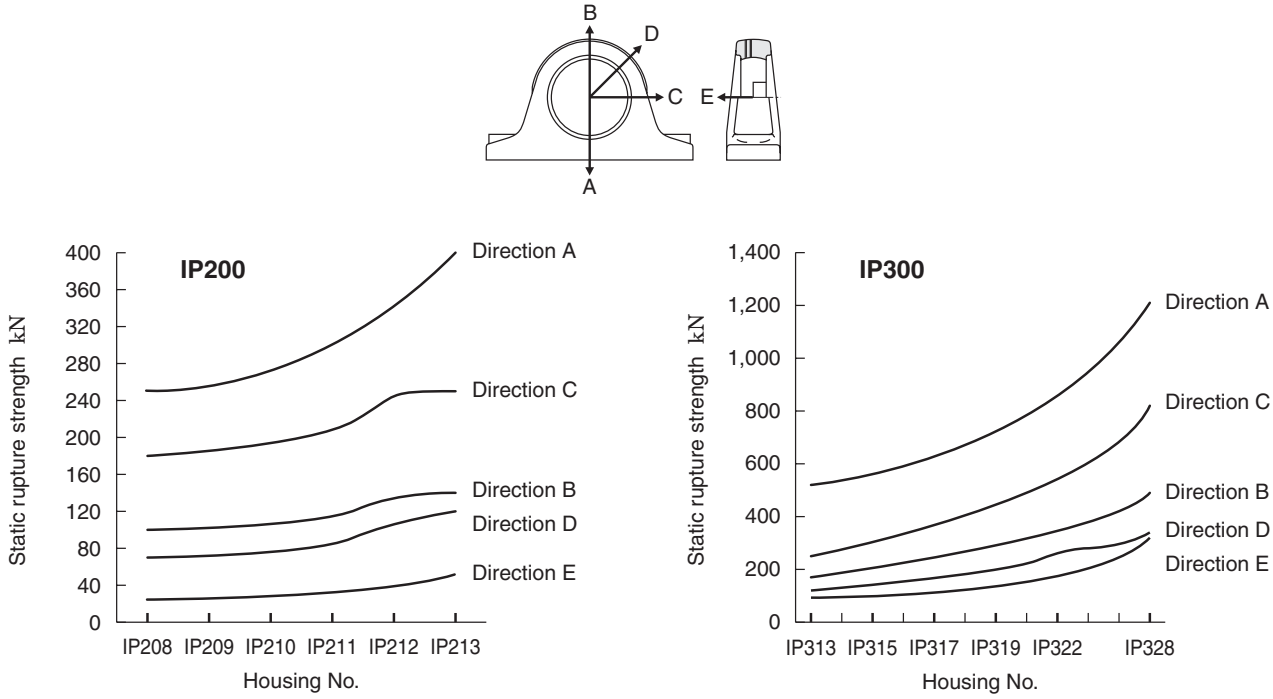

Fig. 8.2 Static rupture strength of thick pillow type housings (IP)

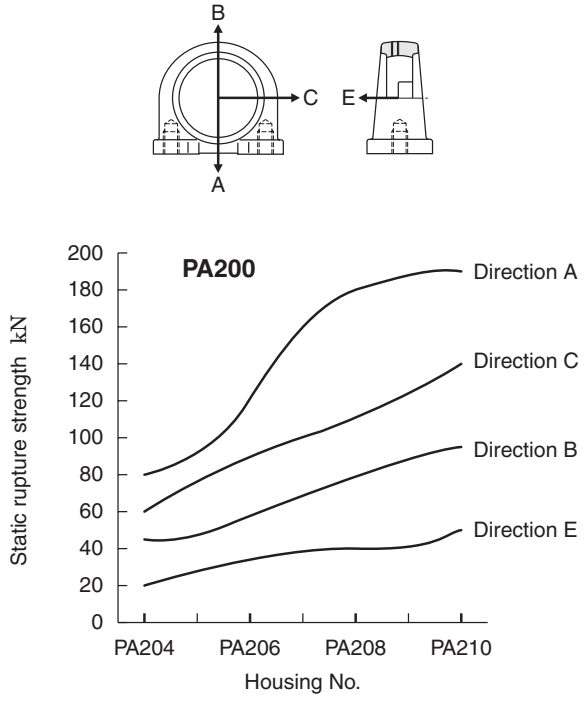

Fig. 8.3 Static rupture strength of tapped base pillow type housings (PA)

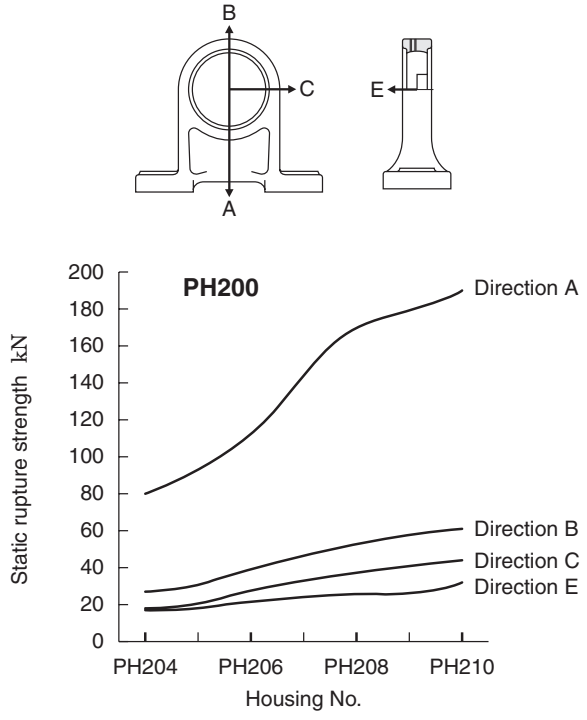

Fig. 8.4 Static rupture strength of higher center height pillow type housings (PH)

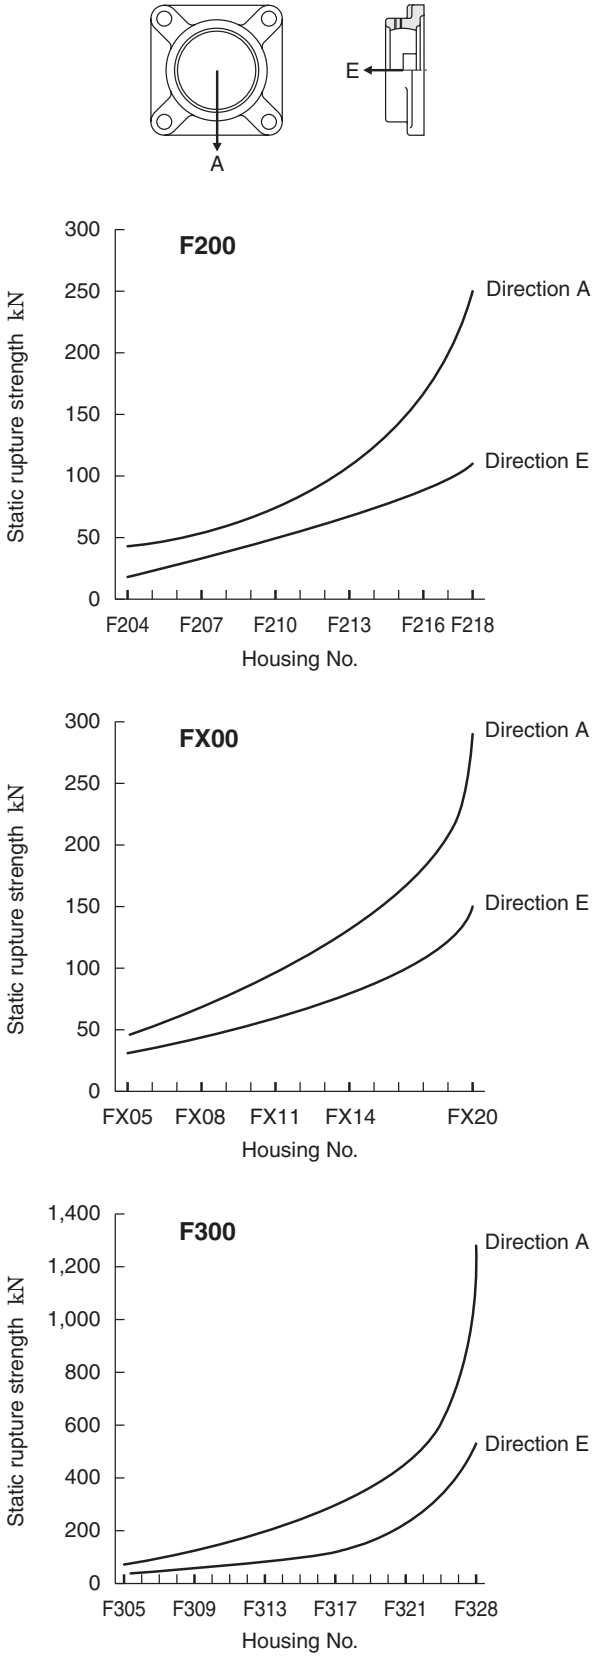

Fig. 8.5 Static rupture strength of square flange type housings (F)

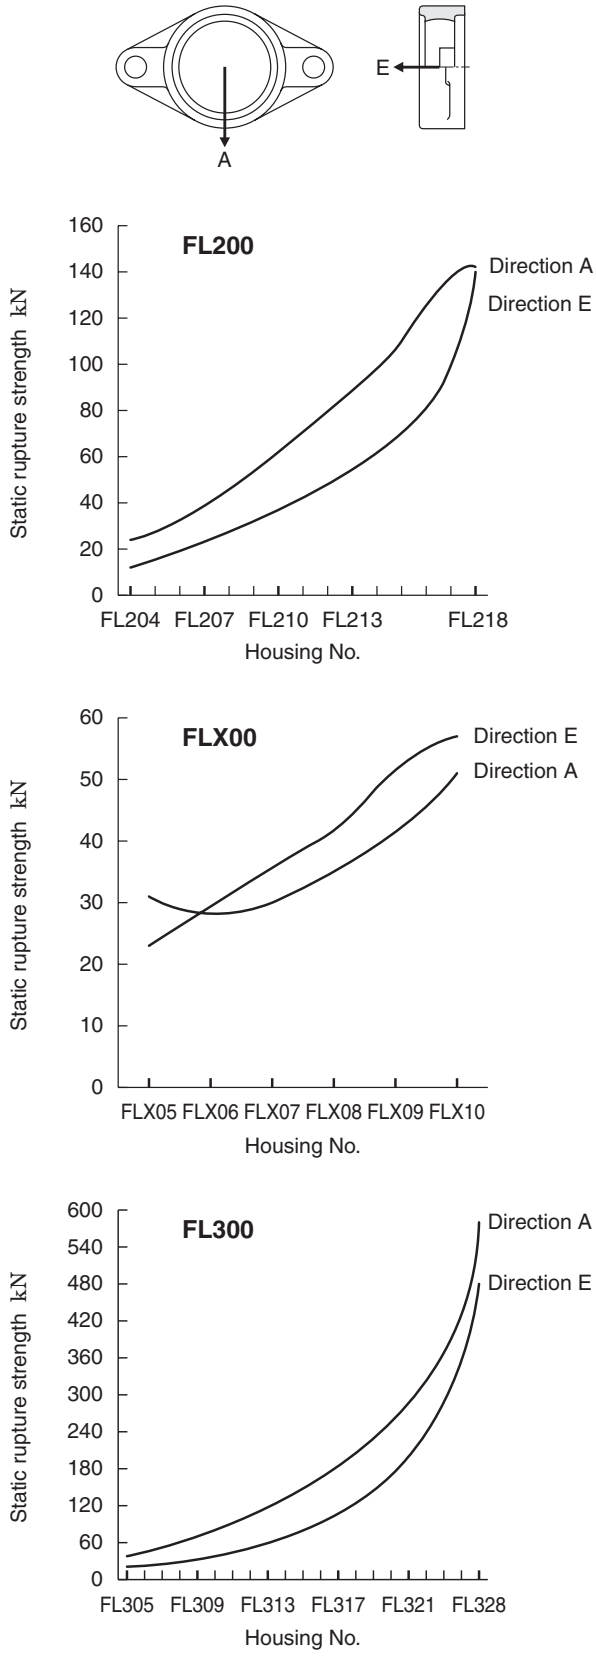

Fig. 8.6 Static rupture strength of oval flange type housings (FL)

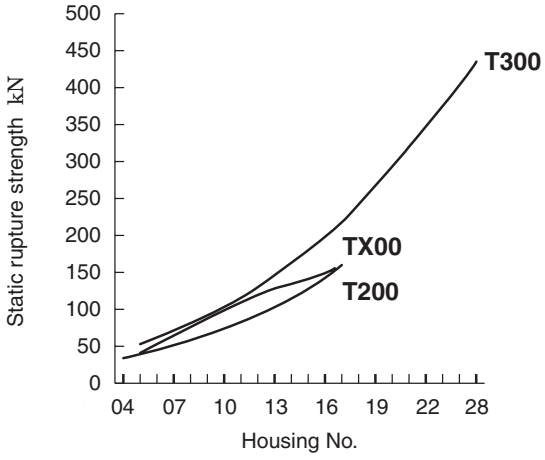

Fig. 8.7 Static rupture strength of take-up type housings (T)





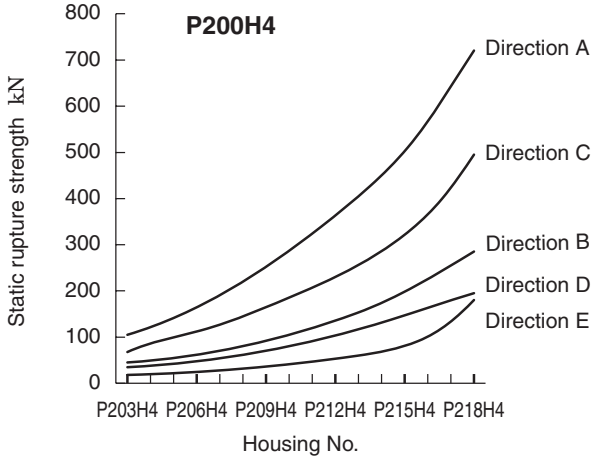

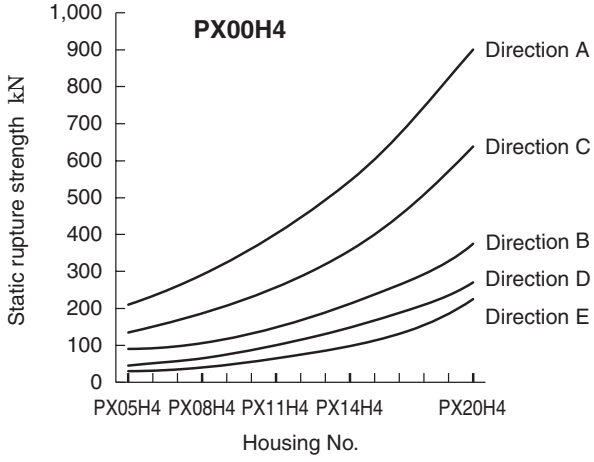

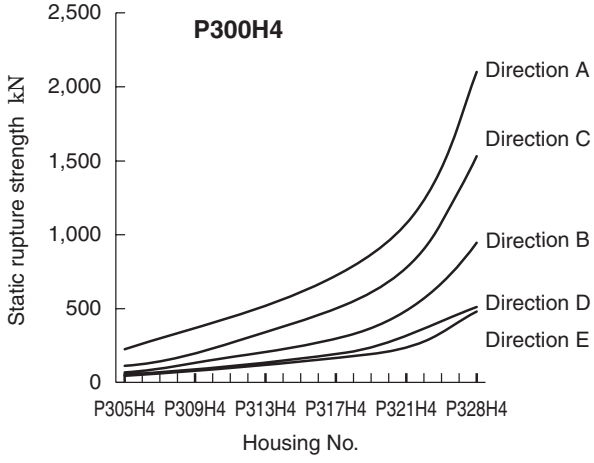

Fig. 8.8 Static rupture strength of ductile cast iron pillow type housings (P_{H4})

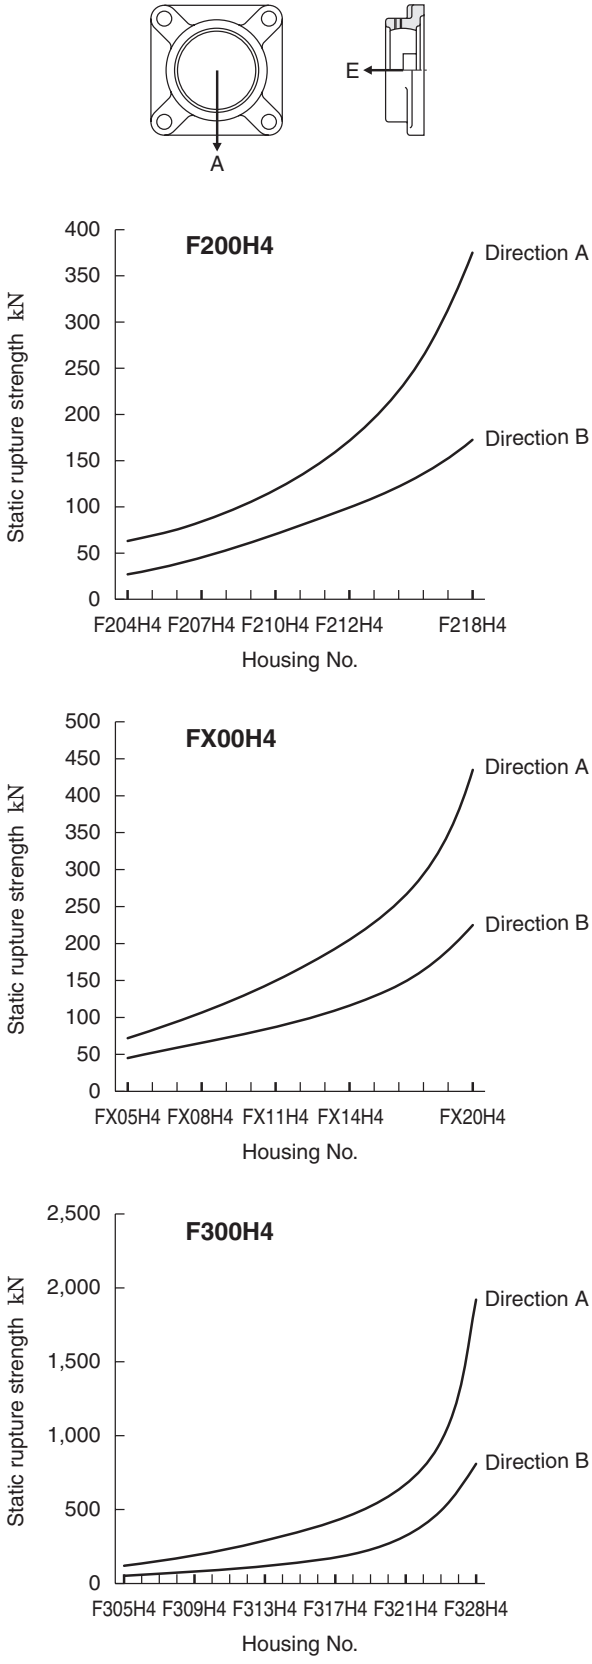

Fig. 8.9 Static rupture strength of ductile cast iron square flange type housings (FH4)

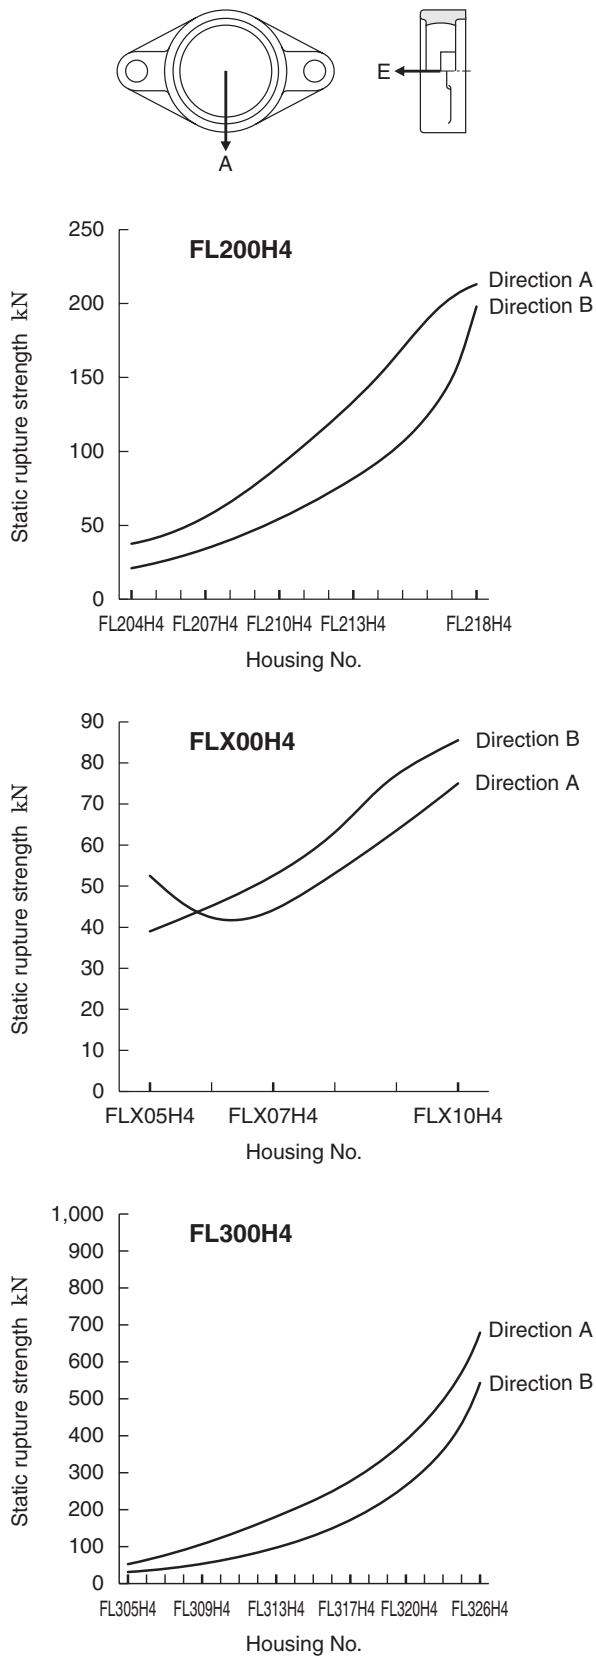

Fig. 8.10 Static rupture strength of ductile cast iron oval flange type housings (FLH4)

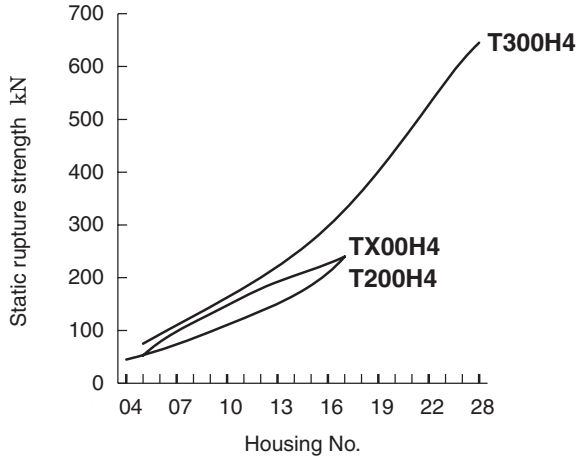

Fig. 8.11 Static rupture strength of ductile cast iron take-up type housings (TH4)





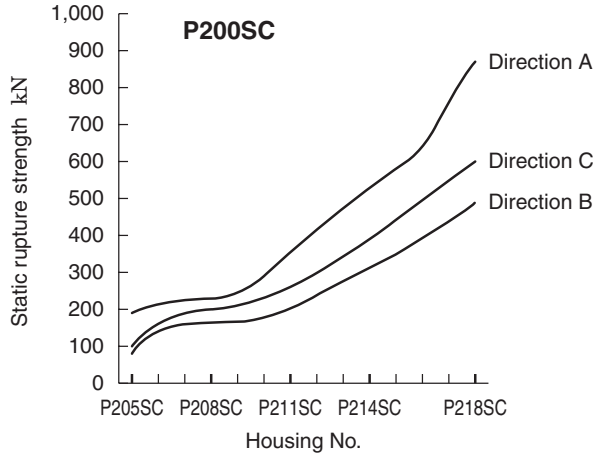

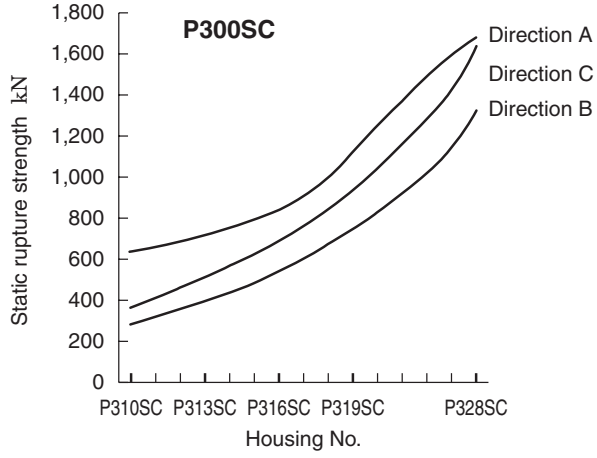

Fig. 8.12 Static rupture strength of cast steel pillow type housings (Psc)

8.3 Strength of cast steel housings

Cast steel housings should be selected where high rupture strength and superior impact resistance are required.

FYH manufactures a cast steel pillow block housing (P200sc, P300sc) series.

To determine the allowable load of a cast steel housing, find the static rupture strength of a steel housing from **Fig. 8.12** and apply the safety factors for steel shown in **Table 8.3**.

Table 8.3 Safety factor of cast steel products (recommended)

Property of load	Safety factor of cast steel product
Static load	3
With vibration	5
With impact	10

8.4 Strength of stamped steel housings

The precisely formed stamped steel housing is very rigid, but it is not as strong as cast iron or cast steel housings. Therefore, it will not support loads to the maximum rating of the bearing itself and must be down-rated per **Table 8.4**.

Table 8.4 Allowable load of steel plate housings (recommended)

Load direction	Allowable load of stamped steel housings
Radial	Approx. 1/6 of basic dynamic radial load rating of bearing (C_r)
Axial	Approx. 1/18 of basic dynamic radial load rating of bearing (C_r)

8.5 Strength of stainless steel housings

FYH supplies stainless steel housings (SP-H1, SPA-H1, SF- H1, SFL-H1, ST-H1, SP, SFL).

Table 8.5 shows the safety factors for stainless steel products. As for the basic values of the static rupture strength of SP-H1, SPA-H1, SF-H1, SFL-H1, ST-H1 type housings, apply P200 of **Fig. 8.1**, PA200 of **Fig. 8.3**, F200 of **Fig. 8.5**, FL200 of **Fig. 8.6** and T200 of **Fig. 8.7**. For the basic values of the static rupture strength of the SP and SFL type housings, see P000 of **Fig. 8.13** and FL000 of **Fig. 8.14** and multiply them by 1.5 respectively.

Table 8.5 Safety factor of stainless steel products

Property of load	Safety factor of stainless steel products
Static load	3
With vibration	5
With impact	10

8.6 Strength of die-cast housings

The clean series housing is made of die-cast zinc alloy, but the zinc alloy material is not as strong as cast iron or cast steel. **Table 8.6** shows safety factors for die-cast zinc alloy, and **Fig. 8.13** and **8.14** show the basic values of the static rupture strength of the die-cast zinc alloy housing.

Table 8.6 Safety factor of zinc alloy die-cast products

Property of load	Safety factor of die-cast products
Static load	8
With vibration	15
With impact	20

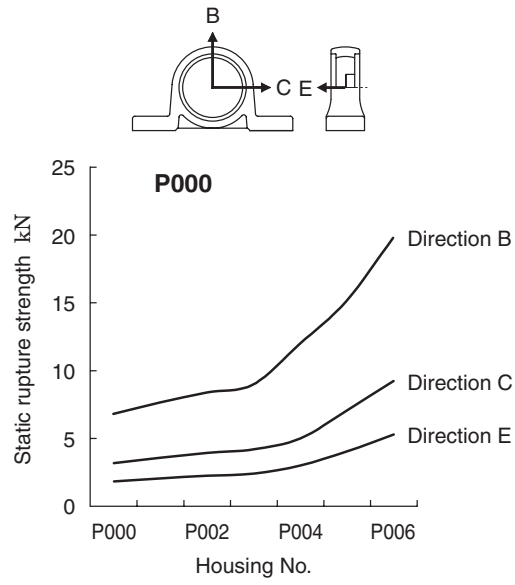

Fig. 8.13 Static rupture strength of clean housings (P)

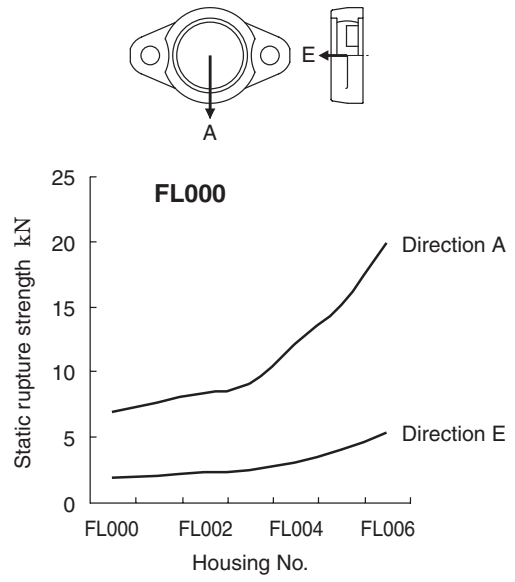

Fig. 8.14 Static rupture strength of clean housings (FL)

8.7 Static rupture strength of plastic housings



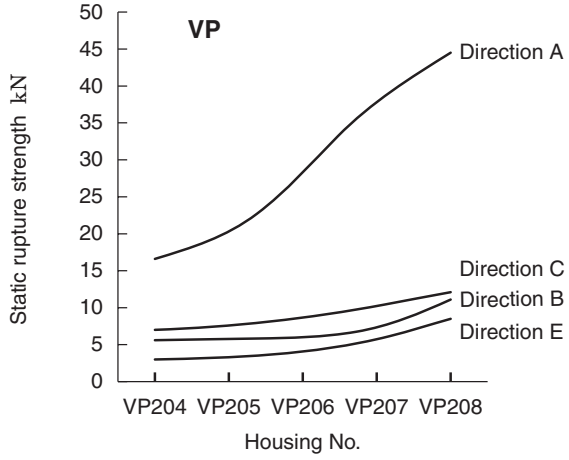

Fig. 8.15 Static rupture strength of plastic housings (VP)



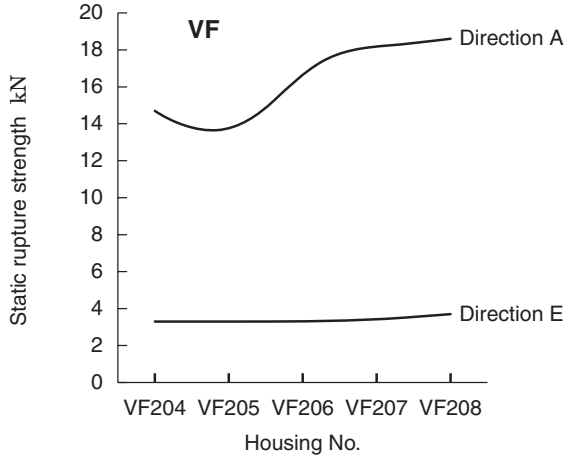

Fig. 8.16 Static rupture strength of plastic housings (VF)

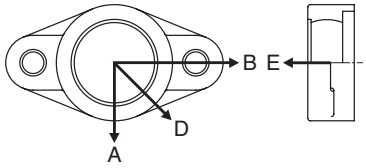

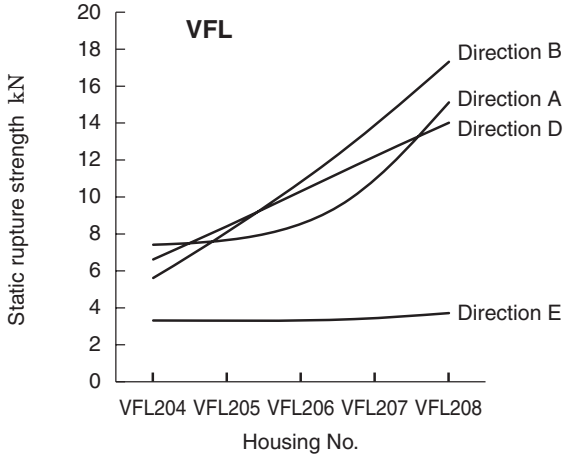

Fig 8.17 Static rupture strength of plastic housings (VFL)

Note:
The figure shows the average static rupture strength of housings.
The correct safety factor should be considered to properly account for combined load in various directions at room temperature (23 ºC ±5 ºC).

9 Design of shaft and base

9.1 Design of shaft

For optimal performance of a ball bearing unit, and for maintenance-free operation for an extended period of time, proper shaft selection is very important. The shaft should be straight, of sufficient tensile strength, and free of burrs and scratches.

9.1.1 Dimensional accuracy of shaft

(1) Dimensional tolerance of shaft used for set screw bearings

For bearings with set screws, a relatively looser class of fit makes assembly easier and is perfectly acceptable at low operating speeds. The clearance between the bore of the bearing and the shaft must be decreased as the rotational speed is increased.

Table 9.1 shows the guidelines for the tolerance class for the rotational speed of bearings with set screws.

If the bearing with set screws is exposed to a heavy load ($P_r / C_r > 0.12$), vibration, or heavy impact, use a tighter shaft tolerance than normal.

Table 9.2 shows the tolerances for tight fits..

Table 9.3 shows the recommended roundness and cylindricity for shafting.

Table 9.1 Dimensional tolerance of shaft used for cylindrical bore bearing with set screws (recommended) (clearance fit or intermediate fit)

Unit: μm

Shaft dia. (mm)		Dimensional tolerance of shaft							
		j6		h6		h7		h8	
Over	Incl.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
6	10	+ 7	− 2	0	− 9	0	−15	0	−22
10	18	+ 8	− 3	0	−11	0	−18	0	−27
18	30	+ 9	− 4	0	−13	0	−21	0	−33
30	50	+11	− 5	0	−16	0	−25	0	−39
50	80	+12	− 7	0	−19	0	−30	0	−46
80	120	+13	− 9	0	−22	0	−35	0	−54
120	180	+14	−11	0	−25	0	−40	0	−63
Applicable rotating speed dn [1]		Over 120,000		Over 100,000, incl. 120,000		Over 60,000, incl. 100,000		Incl. 60,000	

Note [1] $dn = d$ (bearing bore dia., mm) $\times n$ (rotating speed, min^{-1})

Table 9.2 Dimensional tolerance of shaft used for cylindrical bore bearing with set screws (recommended) (intermediate fitting or tight fitting)

Unit: μm

Shaft dia. (mm)		Dimensional tolerance of shaft					
		k6		k7		m6	
Over	Incl.	Max.	Min.	Max.	Min.	Max.	Min.
6	10	+10	+1	+16	+1	+15	+ 6
10	18	+12	+1	+19	+1	+18	+ 7
18	30	+15	+2	+23	+2	+21	+ 8
30	50	+18	+2	+27	+2	+25	+ 9
50	80	+21	+2	+32	+2	+30	+11
80	120	+25	+3	+38	+3	+35	+13
120	180	+28	+3	+43	+3	+40	+15

Table 9.3 Recommended accuracy of shaft used for ball bearing units

Unit: μm

Shaft dia. (mm)		Tolerance of shaft roundness and cylindricity (max.)
Over	Incl.	
6	10	6
10	18	8
18	30	9
30	50	11
50	80	13
80	120	15
120	180	18

(2) Dimensional tolerances of shafts for blowers (used with set screw bearings)

For bearings used in blowers (special code: S3, S5), a C2 internal ball clearance is recommended to reduce vibration and noise during operation.

Therefore, the shaft tolerance classes shown in **Table 9.4** are recommended for bearings with set screws.

Table 9.4 Dimensional tolerance of shaft used for bearings (set screw type) for blowers

Unit: μm

Shaft dia. (mm)		Dimensional tolerance of shaft			
		h5		j5	
Over	Incl.	Max.	Min.	Max.	Min.
10	**18**	0	– 8	+5	– 3
18	**30**	0	– 9	+5	– 4
30	**50**	0	–11	+6	– 5
50	**80**	0	–13	+6	– 7
80	**120**	0	–15	+6	– 9
120	**180**	0	–18	+7	–11

(3) Dimensional tolerance of shaft used with tapered bore bearings

Since tapered bore bearings are fixed to the shaft with an adapter, a looser fit is allowable since the adapter sleeve provides excellent concentricity. This makes mounting of the bearing to the shaft much easier.

Table 9.5 shows the dimensional tolerance of the shaft used with tapered bore bearings (with adapters).

Table 9.5 Dimensional tolerance of shaft used for tapered bore bearings (with adapters) (recommended)

Unit: μm

Shaft dia. (mm)		Dimensional tolerance of shaft			
		h8		h9	
Over	Incl.	Max.	Min.	Max.	Min.
18	**30**	0	–33	0	– 52
30	**50**	0	–39	0	– 62
50	**80**	0	–46	0	– 74
80	**120**	0	–54	0	– 87
120	**180**	0	–63	0	–100

(4) Dimensional tolerance of shaft with eccentric locking collar

Eccentric locking collar bearings have greater clearance (more eccentricity) between the shaft and the bore of the bearing when installed. Therefore, the shaft tolerances must be tighter (h5 or j5) to reduce the clearance (eccentricity). The same clearance fits are recommended as with blower bearings as shown in **Table. 9.4**.

(5) Dimensional tolerance of shaft used for concentric locking collar

Regarding the shaft used for concentric locking collar bearings, the same clearance (h5 or j5) fits are recommended as with air handling bearings as shown in **Table 9.4**.

9.1.2 Dimensions of shouldered shafts

When using a set screw or eccentric locking collar bearing that is exposed to a high axial load, excessive vibration, or impact, a shouldered shaft may be used. The inner ring of the bearing is then tightened in place with a locknut, if the shaft is threaded, or with a locking ring otherwise.

Table 9.6 shows the shoulder diameter and the fillet radius of the shouldered shaft.

Table 9.6 Recommended shoulder diameter and fillet radius of a shouldered shaft

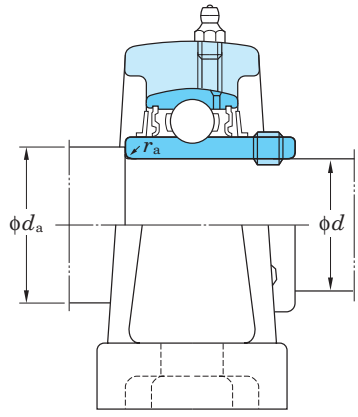

Unit: mm

Bore dia. code	Nominal bearing bore dia. d	Diameter Series[1)] UC200, UCX00		Diameter Series[1)] UC300	
		Shoulder dia. d_a	Fillet roundness radius r_a (max.)	Shoulder dia. d_a	Fillet roundness radius r_a (max.)
01	**12**	17	0.6		
02	**15**	20	0.6		
03	**17**	22	0.6		
04	**20**	30	1	–	–
05	**25**	35	1	35	1
06	**30**	40	1	40	1
07	**35**	45	1	45	1.5
08	**40**	50	1	50	1.5
09	**45**	55	1	55	1.5
10	**50**	60	1	60	2
11	**55**	65	1.5	65	2
12	**60**	70	1.5	75	2
13	**65**	75	1.5	80	2
14	**70**	80	1.5	85	2
15	**75**	85	1.5	90	2
16	**80**	90	2	95	2
17	**85**	95	2	100	2.5
18	**90**	100	2	105	2.5
19	**95**	–	–	110	2.5
20	**100**			115	2.5
21	**105**			120	2.5
22	**110**			125	2.5
24	**120**			135	2.5
26	**130**			150	3
28	**140**			160	3

The basic bearing size number consists of the duty code (2, X, or 3) followed by the ring size code (07, 10, 24, etc.)

9.1.3 High temperature applications

In general, two bearing units are used per shaft. If the distance between the bearings is small, or if the temperature change of the shaft is small, both bearings may be fixed in position.

However, if the distance between the bearings is large and the shaft is exposed to heat, then only one bearing should be fixed and the opposing bearing must be free to float in the axial direction.

This is because shaft expansion due to temperature change of the shaft causes a high axial load and can cause failure of fixed bearings. The amount of shaft expansion due to temperature change may be calculated by using **Formula (9.1)**.

$$\Delta_\ell = \alpha \cdot \Delta_t \cdot l \quad \cdots\cdots (9.1)$$

Whereas,

Δ_ℓ: Expansion of shaft, mm

α: Linear expansion coefficient of shaft in the case of ordinary steel, $11\sim12 \times 10^{-6}$

Δ_t: Temperature increase, ºC

l: Installation distance of unit, mm

Proper installation procedures for a shaft exposed to temperature changes are shown below.

(1) Installation with a dog point set screw on the free side

To accommodate shaft expansion in the axial direction, the bearing must be installed so that the shaft can move freely through the bore in either axial direction.

To accomplish this, the shaft must be grooved for a full dog point set screw (special code: G6). This should be done on the free side only. The dog point screw allows free movement in the axial direction and provides force to rotate the bearing in the radial direction.

Fig. 9.1 shows an example of the structure of a bearing with a key groove on the shaft and a full dog point set screw. **Table 9.7** shows the dimensions of the key groove for the full dog point set screw. Note that the full dog point set screw in the image is also capped so that it may be tightened against the bearing, not the shaft. A full dog point set screw with a jam nut will also work to achieve this function.

The tolerance class of the shaft to be used is h7.

If the temperature of the shaft is higher than that of the bearing, then a looser fit tolerance class is specified.

When using this method to allow for free expansion, there is the possibility of fretting corrosion between the shaft and the inner race. In order to prevent fretting corrosion, a high temperature grease must be applied to the inner ring of the bearing and the shaft prior to installation.

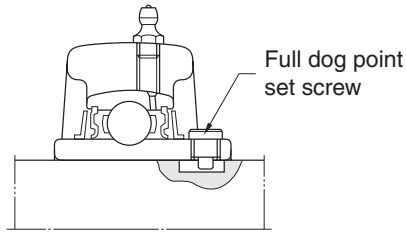

Fig. 9.1 Use on free side with full dog point set screw

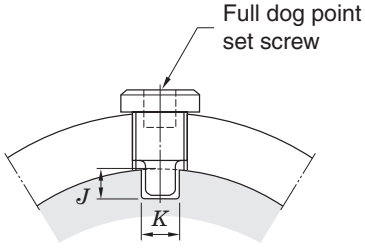

Table 9.7 Dimensions of key groove for full dog point set screw (use on free side)

Nominal size of set screw	Dimensions of key groove (mm)		Applicable nominal bearing code		
	J	*K*	UC200	UCX00	UC300
M6 × 0.75	5	4	201–206	X05	305, 306
M8 × 1	6	6	207–209	X06–X08	307
M10 × 1.25	6.5	7	210–212	X09–X11	308, 309
M12 × 1.5	7	9	213–218	X12–X17	310–314
M14 × 1.5	7	10		X18	315, 316
M16 × 1.5	8	12		X20	317–319
M18 × 1.5	8	13			320–324
M20 × 1.5	8	15			326, 328

Allowable tolerance of key groove dimension “K” (Recommended value: 0~+0.2mm)

(2) Installation of cartridge type units on the free side

If the rotational speed is high or if the bearing is exposed to high vibration, the cartridge type unit is recommended on the free side. In this case, the housing of the cartridge unit is free to move axially within the mounting bore and the bearing insert is rigidly attached to the shaft.

Fig. 9.2 shows the required structure for the cartridge type unit on the free side.



Fig. 9.2 Use of cartridge type units on free side

If, in addition to the expansion of the shaft, the ball bearing itself is exposed to heat, then a calculation of the decrease in internal clearances of the bearing must be made. The appropriate bearing internal clearance must be specified. (see **"7 Operating temperature and bearing specifications"**).

9.2 Mounting base design

9.2.1 Rigidity of base and flatness of mounting Surface

If rigidity of the base on which a ball bearing unit is to be mounted is not sufficient, or if the flatness of the mounting surface is poor, then vibration or abnormal noise may occur during operation. This may lead to premature bearing failure since the strength of the housing is diminished from improper support.

The mounting surface must be accurately machined to eliminate deformation of the housing.

Fig. 9.3 shows the recommended values for flatness of the mounting surface on which the ball bearing unit is to be installed.

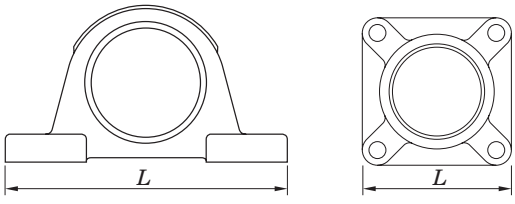

Max.: L / 1,000 mm

Fig. 9.3 Flatness of mounting surface of base (recommended value)

9.2.2 Mounting cartridge type units in high temperature applications

Cartridge units are designed to fit into an accurately bored cylindrical opening in the mounting base. Under ordinary operating conditions, H7 is an adequate choice for the tolerance class of the cylindrically bored hole.

In instances where both the bearing and the shaft are heated during operation, select G7 as the tolerance class of the cylindrical bore.

If the bearing is exposed to excessive vibration or impact, then an even tighter tolerance class must be specified.

Table 9.8 shows the dimensional requirements for the cylindrical bore.

Table 9.8 Dimensional tolerance of cylindrical bore for mounting cartridge type units (recommended values)

Unit: μm

Nominal bore dia. of cylindrical bore (mm)		Dimensional tolerance of cylindrical bore			
		H7		G7	
Over	Incl.	Max.	Min.	Max.	Min.
50	**80**	+30	0	+40	+10
80	**120**	+35	0	+47	+12
120	**180**	+40	0	+54	+14
180	**250**	+46	0	+61	+15
250	**315**	+52	0	+69	+17
315	**400**	+57	0	+75	+18

9.2.3 Installation of take-up units

A take-up unit is positioned between two guide rails and enables linear adjustment by means of the threaded rod and bolt.

Table 9.9 shows the dimensions of the guide rail, adjuster bolt, and fixed nut.

Table 9.9 Dimensions relative to installation of take-up type units (recommended values)

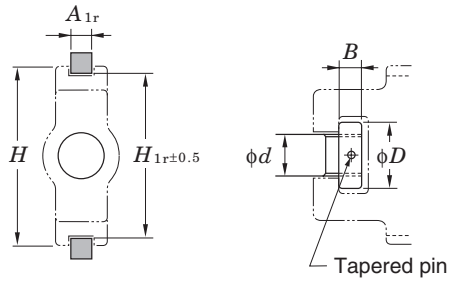

Unit: mm

Nominal bearing code	Dimensions of guide rail			Dimensions of adjuster bolt and round nut		
	A_{1r}	H_{1r}	H (Reference)	d	D	B
T204 **T205**	11	77	89	16	28	14
T206 **T207**	11	90	102	18	32	14
T208	15	103	114	24	42	16
T209 **T210**	15	103	117	24	42	16
T211 **T212**	20	131	146	30	55	20 27
T213 **T214** **T215**	24	152	167	36	60	27
T216	24	166	184	36	60	27
T217	28	174	198	42	60	30
TX05 **TX06**	11	90	102	18	32	14
TX07	15	103	114	24	42	16
TX08 **TX09**	15	103	117	24	42	16
TX10 **TX11**	20	131	146	30	55	20 27
TX12 **TX13** **TX14**	24	152	167	36	60	27
TX15	26	166	184	36	60	27
TX16 **TX17**	26	174	198	42	60	30

Remark This table is also applicable to stainless steel housings.

Unit: mm

Nominal bearing code	Dimensions of guide rail			Dimensions of adjuster bolt and round nut		
	A_{1r}	H_{1r}	H (Reference)	d	D	B
T305	11	81	89	22	32	12
T306 **T307**	15	91 101	100 111	24 26	36 40	14
T308 **T309**	16	113 126	124 138	28 30	45 50	16 18
T310	18	141	151	32	55	20
T311 **T312**	20	151 161	163 178	34 36	60 65	22 24
T313 **T314** **T315**	24	171 181 193	190 202 216	38 40 40	65 80 80	26 28 28
T316	28	205	230	46	90	34
T317 **T318**	30	216 230	240 255	46 50	90 95	34 38
T319	32	242	270	50	95	38
T320 **T321**	32	262	290	52	100	40
T322	36	287	320	55	110	44
T324	42	322	355	60	120	50
T326 **T328**	47	352 382	385 415	65 70	130 140	55 60

9.3 Dowel pins for accurate unit mounting

The pillow type, square flange type, and oval flange type housings all have a dowel pin seat on the mounting base. If accurate positioning of the housing is required, then the bottom of the housing may be drilled for dowel pins which fit into corresponding holes in the mounting surface. The dimensions for the hole and pin sizes can be found in **Appendix table 5** in the back of the catalog.

10 Nomenclature

Nomenclature of FYH Ball Bearing Units conform to JIS B 1557, and comprise the bearing unit model code (comprising bearing model code and housing model code), diameter series code, bore diameter. code, accessory code, and special code.

UC P 207 J L3

Bearing No.:	UC207L3
Housing No.:	P207J

UK P 209 J CD + H309X

Bearing No.:	UK209+H309X
Housing No.:	P209JE1
Steel plate cover No.:	(Open type) C-9x40
	(Closed type) D-9

UC F 209 J L3 FD D1K2 G6 A1

Bearing No.:	UC209L3D1K2G6
Housing No.:	F209JA1E3
Cast iron cover No.:	(Closed type) 209FD

- A1 — Housing special code (**Table 10.8**)
- D1K2 G6 — Bearing special code (**Table 10.7**)
- FD — Accessory code (**Table 10.6**)
- L3 — Fitting code (**Table 10.5**)
- 209 — Bore dia. code (**Table 10.4**)
- 209 — Diameter series code (**Table 10.3**)
- F — Housing model code (**Table 10.2**)
- UC — Bearing model code (**Table 10.1**)

Remark The above code shows an example of nomenclature structure. It may depend on the bearing unit model.

Table 10.1 Bearing model code

Bearing model code	Details
UC	Cylindrical bore, with set screws
UC-S6	Cylindrical bore, with set screws (stainless steel series)
UK	Tapered bore with adapter sleeve
NA	Cylindrical bore, with eccentric locking collar
NC	Cylindrical bore, with concentric locking collar
SB	Cylindrical bore, with set screws (lightweight type)
SU	Cylindrical bore, with set screws (clean series)
SA	Cylindrical bore, with eccentric locking collar (lightweight type)
SU-S6	Cylindrical bore, with set screws (stainless steel series)
ER	Cylindrical bore, with set screws, cylindrical outer diameter, Lubricating mechanism, snap ring
RB	Cylindrical bore, with set screws, cylindrical outer diameter

Table 10.2 Housing model code

Housing model code	Details
P	Pillow type
P-SC	Cast steel pillow type
IP	Thick pillow type
PA	Tapped-base pillow
PAN	Tapped-base pillow
PH	High centerheight pillow type
LP	Lightweight pillow type
P	Pillow type (clean series)
SP-H1	Pillow type (stainless steel series)
SPA-H1	Tapped-base pillow (stainless steel series)
VP	Pillow type (thermoplastic series)

Table 10.2 Housing model code (continued)

Housing model code	Details
SP	Pillow type (stainless steel series)
PP	Stamped steel pillow type
F	Square four-bolt flange type
FL	Oval two-bolt flange type
FA	Adjustable oval two-bolt flange type
FB	Three-bolt flange type
FC	Round flange cartridge type
FCF	Round flange cartridge type
FS	Square four-bolt cartridge flange type
FL	Oval two-bolt flange type (clean series)
TFD-H4	Three-bolt flang type (Ductile cast iron)
SF-H1	Square four-bolt flange type (stainless steel series)
SFL-H1	Oval two-bolt flange type (stainless steel series)
SFL	Oval two-bolt flange type (stainless steel series)
PF	Stamped steel plate round three-bolt flange type
PFL	Stamped steel plate oval two-bolt flange type
VF	Square four-bolt flange type (thermoplastic series)
VFL	Oval two-bolt flange type (thermoplastic series)
T	Take-up type
ST-H1	Take-up type (stainless steel series)
TH	Section steel frame take-up type
TL	Light channel steel frame take-up type
TU	Channel steel frame take-up type
PTH	Steel plate frame take-up type
NPTH	Steel plate frame take-up type
C	Cartridge type
HA	Hanger type

Table 10.3 Diameter series code

Diameter series code	Details
0	Small size light duty
2	Normal duty
X	Medium duty
3	Heavy duty

Table 10.4 Bore dia. code

Bore dia. code	Details
8	Nominal bearing bore dia. 8 mm
00	Nominal bearing bore dia. 10 mm
01	Nominal bearing bore dia. 12 mm
02	Nominal bearing bore dia. 15 mm
03	Nominal bearing bore dia. 17 mm
04 and above	(Bore dia. code) × 5 = Nominal bearing bore dia. (mm)
01–8	– (bore dia. code) /16 = nominal bearing bore dia. (inch) (in this case, 8/16 = 1/2 inch = 12.7 mm) As for the bore dia. inch series bearing.

Table 10.5 Fitting code

Fitting code	Details
J	Tolerance class of spherical bore of the housing is J7 (not shown where the spherical bore diameter exceeds 120 mm)
H	Tolerance class of spherical bore of the housing is H7
K	Tolerance class of spherical bore of the housing is K7

Table 10.6 Accessory code

Accessory code	Details
C[1)]	Cover, open type
D[1)]	Cover, closed type
FC	Cast iron cover, open type
FD	Cast iron cover, closed type
L3	Triple-lip seal type

Note [1)] Standard specifications of codes C and D are as shown below.
201–218, X05–X17.....Steel plate cover
X18–X20, 305–328.....Cast iron cover

Table 10.7 Bearing special code

Item	Bearing special code	Details
Grease	D1	SH44M
	D2	SH33M
	D9	Demnum L-200
Set Screw	G4	Cone point
	G6	Capped full dog point
	G7	With patch nylon
	G23	Bullet Point
Seal	K2	Silicone rubber
	K3	Non-contact type
Sealing Device	P3	Without seal, slinger
	P4	Without seal
Others	S3	Air handling series Internal clearance and bore accuracy are specially controlled
	S5	For blower (seal: K3, inner clearance and bearing accuracy are specially controlled)
	S6	Stainless steel bearing
	S7	Plated bearing (for corrosion-resistance)

Table 10.8 Housing special code

Item	Housing special code	Details
Grease Fitting Thread Bore dia.	A1	PT1/8 tube thread
	A2	PF1/8 tube thread
	A3	PT1/4 tube thread
	A4	PF1/4 tube thread
	A5	1/8NPT tube thread
Grease Fitting Thread Bore Position	B1	Right
	B2	Left
	B3	45°
	B5	30°
	B7	Both right and left
Machining	E1	Machined for stamped cover
	E3	Cast iron cover mounting groove (diameter series 2, X, 3)
	E4	Non-lubricating type
Housing material	H1	Stainless steel cast steel model (SCS13)
	H4	Ductile iron (FCD450-10)
	H5	Rolled steel for general purpose (SS400)
	H9	Stainless steel cast steel model (SCS14)
	SC	Carbon steel cast steel model (SC450)
Grease Fitting	N1	B type (67.5°)
	N2	C type (90°)
Surface treatment	Z5	Nickel plated housing

11 Accuracy and internal clearance

Accuracy of a ball bearing unit is specified in JIS B 1558 (ball bearings for ball bearing units) and JIS B 1559 (housings for ball bearing units). FYH produces products conforming to these standards.

11.1 Accuracy of bearings

Table 11.1 to **Table 11.4** shows the accuracy of a ball bearings for ball bearing units.

Ball bearings for blowers (special code: S3, S5) are produced with greater accuracy than standard models (see **Table 11.3**).

Table 11.6 shows the tolerance limitations of inner rings for cylindrical bore bearings.

Table 11.2 Tolerances and tolerance values of outer rings of ball bearings inserts

Unit: μm

Nominal bearing outer dia. D (mm)		Variation of tolerance of average outer dia. Δ_{Dm}		Radial runout of outer ring K_{ea}
Over	Incl.	Max.	Min.	Max.
18	**30**	0	– 9	15
30	**50**	0	–11	20
50	**80**	0	–13	25
80	**120**	0	–15	35
120	**150**	0	–18	40
150	**180**	0	–25	45
180	**250**	0	–30	50
250	**315**	0	–35	60

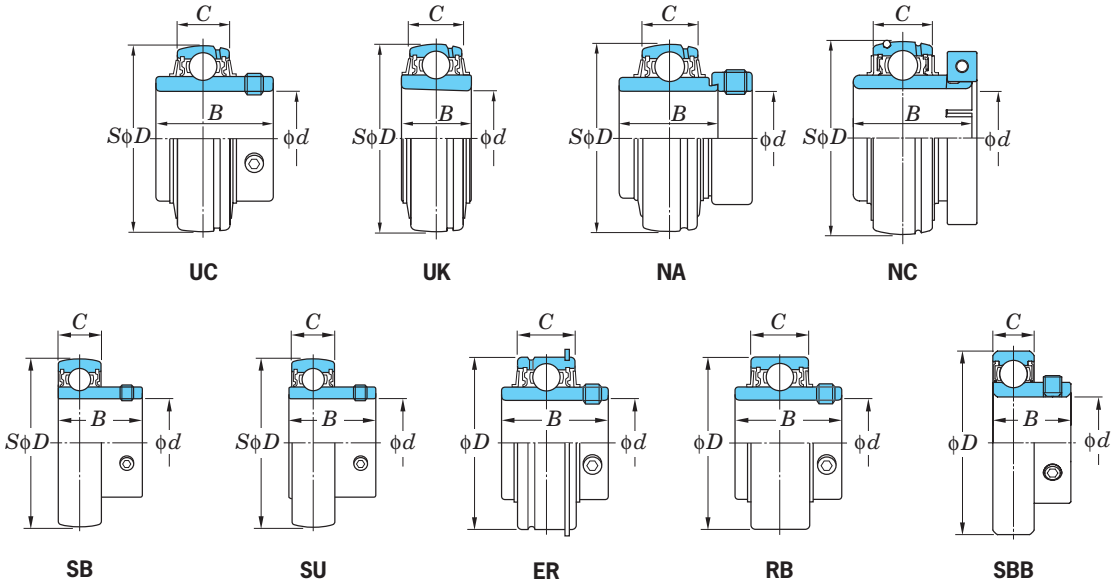

Table 11.1 Tolerances and tolerance values of inner rings of ball bearings for ball bearing units

Unit: μm

Nominal bearing bore dia. d (mm)		Variation of tolerance of average bore dia. in plane Δ_{dmp}		Unequal bore dia. in plane V_{dp}	Variation of tolerance of eccentricity on eccentric surface of inner ring and eccentric locking collar Δ_{Hs}		Variation of tolerance of inner ring width Δ_{Bs}		Radial runout of inner ring K_{ia}
Over	Incl.	Max.	Min.	Max.	Max.	Min.	Max.	Min.	Max.
–	**10**	+15	0	10	+100	–100	0	–120	10
10	**18**	+15	0	10	+100	–100	0	–120	15
18	**31.75**	+18	0	12	+100	–100	0	–120	18
31.75	**50.8**	+21	0	14	+100	–100	0	–120	20
50.8	**80**	+24	0	16	+100	–100	0	–150	25
80	**120**	+28	0	19	+100	–100	0	–200	30
120	**180**	+33	0	22	+100	–100	0	–250	35

Table 11.3 Tolerances and tolerance values of inner rings of ball bearing units for blowers (S5)

Unit: μm

Nominal bearing bore dia. d (mm)		Variation of tolerance of average bore dia. in plane Δ_{dmp}		Unequal average bore dia. in plane V_{dp}	Radial runout of inner ring K_{ia}
Over	Incl.	Max.	Min.	Max.	Max.
10	**18**	+13	0	6	7
18	**31.75**	+13	0	6	8
31.75	**50.8**	+13	0	10	10
50.8	**80**	+15	0	10	10
80	**120**	+18	0	14	13
120	**180**	+23	0	14	18

Table 11.5 Tolerances and tolerance values of inner rings of SC ball bearings



SC

Unit: μm

Nominal bearing bore dia. d (mm)		Variation of tolerance of average bore dia. in plane Δ_{dmp}		Unequal average bore dia. in plane V_{dp}	Radial runout of inner ring K_{ia}
Over	Incl.	Max.	Min.	Max.	Max.
10	**18**	0	– 8	6	7
18	**31.75**	0	–10	6	8
31.75	**50.8**	0	–12	10	10

Table 11.4 Variation of tolerances and tolerance values of tapered bore on bearing with tapered bore

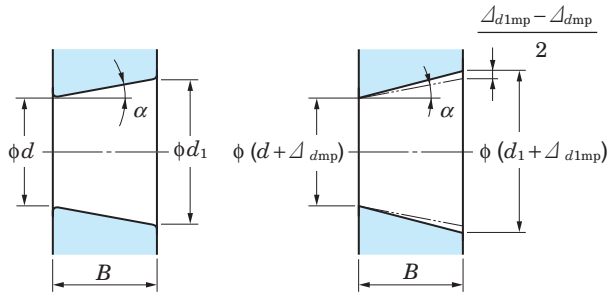

Theoretical tapered bore

Tapered bore with variation of tolerance of average bore dia. in plane

Unit: μm

Nominal bearing bore dia. d, mm		Δ_{dmp}		$\Delta_{d1mp} - \Delta_{dmp}$		V_{dp} [1)]
Over	Incl.	Max.	Min.	Max.	Min.	Max.
18	**30**	+33	0	+21	0	13
30	**50**	+39	0	+25	0	16
50	**80**	+46	0	+30	0	19
80	**120**	+54	0	+35	0	22
120	**180**	+63	0	+40	0	40

Note [1)] To be applied to all the radial planes of tapered bore

Remarks 1. Applicable range
Applicable to tapered bore of inner ring of tapered bore radial bearing that standard value of taper ratio is 1/12.

2. Amount code

d_1: Standard diameter at theoretical large end of tapered bore

Standard diameter $d_1 = d + \frac{1}{12} B$

Δ_{dmp}: Variation of tolerance of average bore diameter in plane at theoretical small end of tapered bore

Δ_{d1mp}: Variation of tolerance of average bore diameter in plane at theoretical large end of tapered bore

V_{dp}: Unequal bore diameter in plane

B: Nominal inner ring width

α: 1/2 of nominal taper angle of tapered bore

α = 2° 23' 9.4"
= 2.385 94°
= 0.041 643 rad

Table 11.6 Tolerance limitations for radius dimensions for the inner ring of cylindrical bore bearings

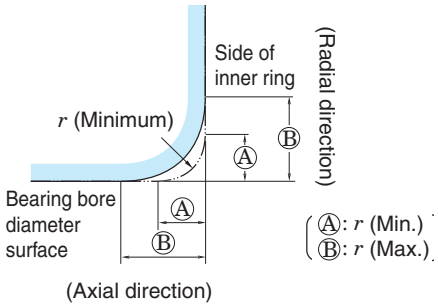

Unit: mm

r (Min.)	r (Max.)	
	Radial direction	Axial direction
0.6	1	2
1	1.5	3
1.1	2	3.5
1.5	2.3	4
2	3	4.5
2.1	4	6.5
2.5	3.8	6
3	5	8
4	6.5	9

Remark Though accurate profile of chamfered surface is not specified, the profile on the axial plane should not exceed the virtual arc of radius r (minimum) that contacts with the side of inner ring and the bearing bore diameter surface.

11.2 Accuracy of housings

This section details the tolerance specifications of the inner diameter of the spherical bore of FYH housings. These values determine how tight or how loose the bearing fits inside the housing.

Table 11.7 shows the tolerance of the diameter of the spherical bore of housings.

Standard tolerance for mounted units, between the outer diameter of the bearing and the inner diameter of the housing, is a class J7 intermediate fit.

A class H7 tolerance allows greater clearance for applications where minor shaft alignment constantly occurs or in environments where higher temperatures can cause thermal expansion. An anti-rotation pin on the outer ring of the bearing is supplied with these units to prevent the outer ring of the bearing from spinning inside the housing.

A class K7 tolerance allows less clearance and is recommended to prevent the outer ring of the bearing from rotating inside the housing.

Fig. 11.1 shows examples of housing dimensions relative to installation position with tolerance values.

Table 11.7 Allowance of spherical bore diameter of housings



Unit: μm

Nominal dia. of spherical bore D_a (mm)		Tolerance class H7		Tolerance class J7		Tolerance class K7	
		Variation of tolerance of spherical bore dia. Δ_{Dam}		Variation of tolerance of spherical bore dia. Δ_{Dam}		Variation of tolerance of spherical bore dia. Δ_{Dam}	
Over	Incl.	Max.	Min.	Max.	Min.	Max.	Min.
18	**30**	+21	0	+12	− 9	+ 6	−15
30	**50**	+25	0	+14	−11	+ 7	−18
50	**80**	+30	0	+18	−12	+ 9	−21
80	**120**	+35	0	+22	−13	+10	−25
120	**180**	+40	0	+26	−14	+12	−28
180	**250**	+46	0	+30	−16	+13	−33
250	**315**	+52	0	+36	−16	+16	−36

Remark FYH selects J, H, or K depending on the applications.

Fig. 11.1 Dimensions relative to installation of housings with tolerances and tolerance values (representative example)

Pillow type housings

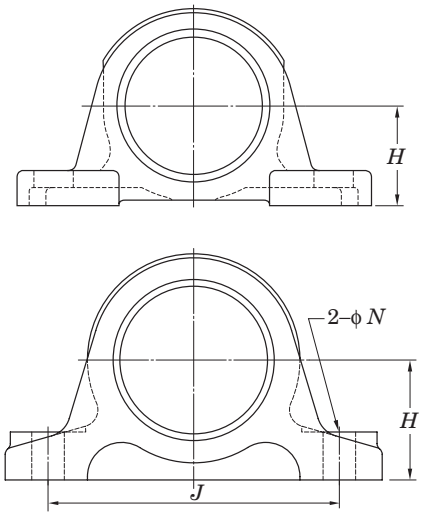

Take-up type housings

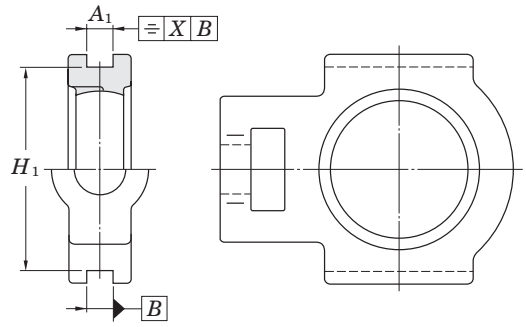

Frame for take-up type units

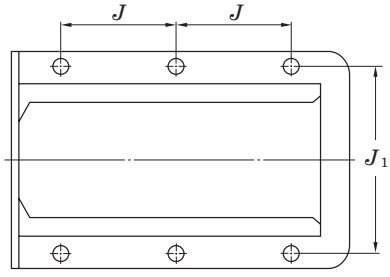

Flange type housings

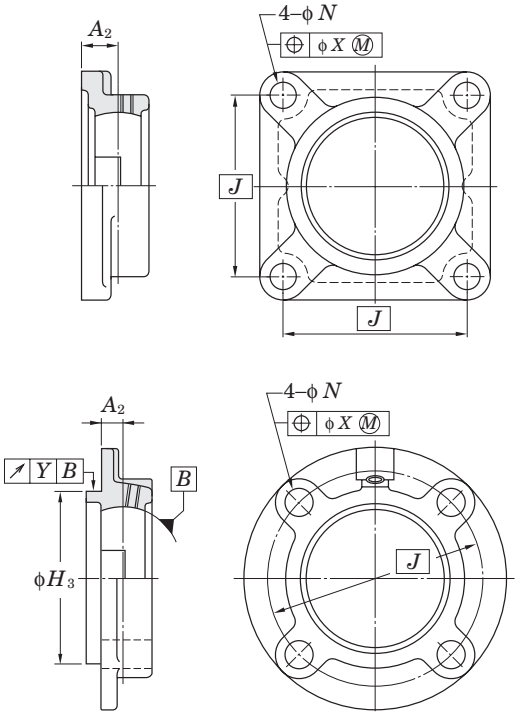

Cartridge type housings

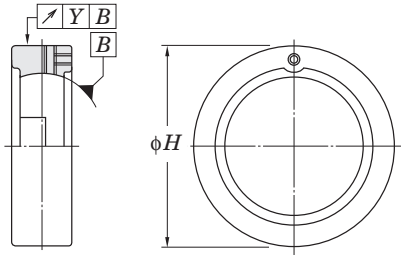

Remark Respective tolerances and tolerance values for housings are shown in dimensional tables.

Table 11.8 shows ordinary dimensional tolerance of cut or cast portions not specified in this catalog.

Table 11.8 Ordinary dimensional tolerance not specified respectively

Item	Standard code	Class
Cutting	JIS B 0405	Medium
Casting of cast iron	JIS B 0403	Ordinary
Casting of cast steel	JIS B 0403	Ordinary

11.3 Internal bearing clearance

Internal bearing clearance is defined as the allowable space between the bearing balls and the raceways. The degree of internal clearance, referred to as "operation clearance", greatly influences operational life of the bearing as well as characteristics of heat, noise, and vibration.

If the clearance is exceptionally tight between the shaft and the inner ring of the bearing then expansion of the inner ring must be taken into consideration and the correct ball clearance should be selected. Transmission heat from the shaft is also a factor to consider when determining the correct amount of ball clearance (see **"7 Operating temperature and bearing specifications"**).

Table 11.9 shows the internal clearance applicable to specific operating conditions and **Table 11.10** shows the available options for internal clearance.

Table 11.9 Internal clearance applicable to specific operating conditions

Type	Applicable internal clearance	
	Bearing with cylindrical bore	Bearing with tapered bore
Standard type	CN	C3
NC	C2	–
Stainless steel type	C3	–
Heat resistant type (special code: D1K2)	C4	C5
Heat resistant type (special code: D9K2)	C4	C5
Cold resistant type (special code: D2K2)	CN	C3
High speed type (special code: K3)	CN	C3
For blower (special code: S3, S5)	C2	C3

Remark For bearings with special codes, as those indicated above, the clearance is implied and not indicated in the part number.

Table 11.10 Available options for internal clearance

Unit: μm

Nominal bearing bore dia. d (mm)		Internal clearance											
		C2		CN		GN		C3		C4		C5	
Over	Incl.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
6	**10**	0	7	2	13	–	–	8	23	14	29	20	37
10	**18**	0	9	3	18	10	25	11	25	18	33	25	45
18	**24**	0	10	5	20	12	28	13	28	20	36	28	48
24	**30**	1	11	5	20	12	28	13	28	23	41	30	53
30	**40**	1	11	6	20	13	33	15	33	28	46	40	64
40	**50**	1	11	6	23	14	36	18	36	30	51	45	73
50	**65**	1	15	8	28	18	43	23	43	38	61	55	90
65	**80**	1	15	10	30	20	51	25	51	46	71	65	105
80	**100**	1	18	12	36	24	58	30	58	53	84	75	120
100	**120**	2	20	15	41	28	66	36	66	61	97	90	140
120	**140**	2	23	18	48	33	81	41	81	71	114	105	160

Remarks 1. Radial internal clearance in this table conforms to JIS B 1558 (ball bearing inserts).
2. Increase in radial internal clearance generated by measured load conforms to the table below. Smaller correction of C2 clearance is applicable to the minimum clearance, while larger correction is applicable to the maximum clearance.

Unit: μm

Nominal bearing bore dia. d (mm)		Measured load	Correction of clearance				
Over	Incl.	N	C2	CN	GN, C3	C4	C5
2.5	**18**	24.5	3 – 4	4	4		
18	**50**	49	4 – 5	5	6		
50	**280**	147	6 – 8	8	9		

12 Materials

12.1 Bearing material

Ball bearing inserts are comprised of inner and outer rings, balls, and steel ball cages all of which are made from the highest quality of bearing steel.

These bearings possess the following features.

(1) High elastic limit to resist strong opposing force
(2) High rolling fatigue strength to allow for heavy loads
(3) Superior hardness
(4) Superior wear resistance
(5) Superior toughness against impact and shock loads
(6) Superior precision of dimensional tolerances

High carbon chrome bearing steel is utilized for the bearing components as specified in JIS (Japanese Industrial Standards).

To increase reliability and reduce contamination within the material, a vacuum degassing process is executed to reduce non-metallic elements and any oxygen in the steel.

After the bearing is assembled it is heat tempered and quenched until the hardness reaches 60HRC.

Table 12.1 shows the chemical components of high carbon chrome bearing steel. Stainless steel bearing inserts (suffix: S6) utilize superior corrosion resistant JIS certified stainless steel.

Riveted steel ball cages are made of JIS certified cold rolled steel which is shown in **Table 12.2**.

12.2 Housing material

FYH housings are made primarily of gray cast iron, cast carbon steel, and stamped steel. Gray cast iron is the most popular choice for mounted units because of its optimal characteristics of vibration absorption, high strength, and excellent heat dissipation.

Table 12.3 shows the mechanical properties of gray cast iron (FC200).

Nodular graphite cast iron, or ductile iron, (FCD450-10 of JIS G 5502) provides a good combination of rigidity and fracture resistance, and it is suitable where heavy vibration or impact forces are present.

Cast carbon steel (SC450) is also available for the ultimate in durability in extremely difficult operating environments. Cast carbon steel housings provide the highest degree of strength and rupture resistance.

Housings for units within the Clean Series are available in die-cast zinc alloy as well as stainless steel. Housing material for stamped steel units consists of thick gauge cold rolled sheet steel and steel strip.

Table 12.4 to **12.9** show the mechanical properties of these housing materials.

Table 12.1 Chemical components of high carbon chrome bearing steel (JIS G 4805)

Code	Chemical components (%)						
	C	Si	Mn	P	S	Cr	Mo
SUJ 2	0.95–1.10	0.15–0.35	0.50 or less	0.025 or less	0.025 or less	1.30–1.60	–
SUJ 3	0.95–1.10	0.40–0.70	0.90–1.15	0.025 or less	0.025 or less	0.90–1.20	–

Table 12.2 Chemical components of cold rolled steel and steel strip (SPCC) (JIS G 3141)

Code	Chemical components (%)						
	C	Si	Mn	P	S	Ni	Cr
SPCC	0.15 or less	–	0.60 or less	0.100 or less	0.050 or less	–	–
SPCD	0.12 or less	–	0.50 or less	0.040 or less	0.040 or less	–	–

Table 12.3 Mechanical properties of gray cast iron (FC200)

Type code	Tensile strength N/mm²	Hardness HB
FC200	200 or more	223 or less

Table 12.4 Mechanical properties of carbon steel cast steel products (SC450)

Type code	Yielding point N/mm²	Tensile strength N/mm²	Elongation %	Reduction %
SC450	225 or more	450 or more	19 or more	30 or more

Table 12.5 Mechanical properties of cast carbon steel products (JIS G 3101)

Type code	Yielding point or bearing force N/mm²			Tensile strength N/mm²	Thickness of steel mm	Tensile test piece	Elongation %	Bending property		
	Thickness of steel mm							Bending angle	Inside dia.	Test piece
	incl. 16	Over 16 incl. 40	Over 40							
SS400	245 or more	235 or more	215 or more	400–510	Over 5, 16 max.	No.1A	17 or more	180°	1.5 times of thickness	No.1
					Over 16, 40 max.	No.1A	21 or more			
					Over 40	No.4	23 or more			

Table 12.6 Mechanical properties of zinc alloy die-cast (ZDC02) (JIS H 5301) (Reference)

Code	Tensile strength N/mm²	Elongation %	Impact N · m/cm²	Hardness HB
ZDC2	285	10	140	82

Table 12.7 Mechanical properties of stainless cast steel products (SCS 13 , SCS 14) (JIS G 5121)

Type code	Bearing force N/mm²	Tensile strength N/mm²	Elongation %	Hardness HB
SCS 13	185 or more	440 or more	30 or more	183 or less
SCS 14	185 or more	440 or more	28 or more	183 or less

Correspondence standards
SCS 13: ISO GX5CrNi 19 9 , ASTM CF-8 (AISI 304)
SCS 14: ISO GX5CrNiMo 19 11 2 , ASTM CF-8M (AISI 316)

Table 12.8 Mechanical properties of cold rolled sheet steel and steel strip (SPCC) (JIS G 3141)

Type code	Tensile strength N/mm²	Elongation %
SPCC	270 or more	34 or more
SPCD	270 or more	36 or more

Table 12.9 Mechanical properties of ductile cast iron (FCD450-10) (JIS G 5502)

Type code	Tensile strength N/mm²	Elongation %
FCD	450 or more	10 or more

12.3 Materials of parts and accessories

Table 12.10 shows materials of parts and accessories of a ball bearing unit.

Table 12.10 Materials of parts and accessories of ball bearing units

Designations	Materials	Code	Standard code
Seal (standard type)	Nitrile rubber	NBR	–
Seal (heat resistant, cold resistant)	Silicone rubber	VMQ	–
Slinger (flinger)	Cold rolled steel plate and steel strip	SPCC	JIS G 3141
Stainless steel slinger (flinger)	Cold rolled stainless steel plate and steel strip	SUS304-CP, SUS304-CS	JIS G 4305
Steel plate cover	Cold rolled steel plate and steel strip	SPCD	JIS G 3141
Stainless steel plate cover	Cold rolled stainless steel plate and steel strip	SUS304-CP, SUS304-CS	JIS G 4305
Cast iron cover	Gray cast iron products	FC200	JIS G 5501
Hexagon socket set screw	Chrome molybdenum steel	SCM435	JIS G 4105
Stainless steel hexagon socket set screw	Stainless bar steel	SUS304	JIS G 4303
Adapter sleeve for bearing	Mechanical structural carbon steel	S25C	JIS G 4051
Lock nut for bearing	Mechanical structural carbon steel	S25C	JIS G 4051
Washer for bearing	Cold rolled steel plate and steel strip	SPCC	JIS G 3141
Eccentric locking collar	Mechanical structural carbon steel	S17C	JIS G 4051
Grease fitting	Copper and copper alloy rod	SUM24L	JIS G 4804

13 Performance

13.1 Bearing friction torque

Bearing friction torque is the conglomeration of the rolling friction between the balls with the inner and outer rings, the sliding friction between the balls and the cage, the agitating resistance of lubricants, and the friction resistance of the seals.

The specific amount of friction torque is influenced by the particular bearing model, dimensions, bearing load, rotating speed, and lubricating conditions.

Bearings with triple-lip seals and open cover seals will have greater friction torque and overall greater friction resistance.

Friction torque for bearings can be found by the formulas below.

$$M = M_p + M_k \quad \text{(13.1)}$$

$$M_p = \mu \cdot P \cdot \frac{d}{2} \quad \text{(13.2)}$$

Whereas,

M: Friction torque of bearing, mN · m

M_p: Friction torque of sections changed by load, mN · m

M_k: Friction torque of sections changed by rotating speed, mN · m

μ: Friction coefficient (0.0015 to 0.002)

P: Load applied to bearings, N

d: Nominal bearing bore dia., mm

Note that the agitating resistance of lubricants and the friction resistance of the seals are difficult to calculate since the resistance fluctuates with speed.

Fig. 13.1 shows the result of measurement of friction torque of the typical ball bearing unit.

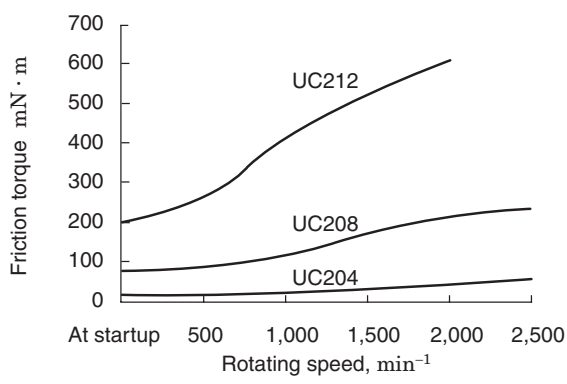

Fig. 13.1 Example of measurement result of ball bearing units

13.2 Bearing temperature increase

The increase in temperature of the bearing is represented as heat energy created from friction torque in the bearing during operation. The temperature of the bearing during operation increases in proportion to the amount of friction torque, and friction torque increases in proportion to the increase in bearing load.

The increase in temperature of the bearing depends on the heating value generated by friction in the bearing and the amount of heat discharged from the bearing and housing in which it is mounted. Therefore, the temperature level of the bearing is influenced by the environmental conditions of the location in which the bearing unit is installed (quality of heat radiation environment).

The operating temperature of the bearing unit increases gradually after startup of operation and reaches the maximum level after one or two hours if no abnormalities occur. Then it decreases slightly and enters a steady state (see **Fig. 13.2**).

If the operating conditions are not changed, bearing temperature will remain virtually constant, and measurement of the temperature and assumption of the bearing status are enabled.

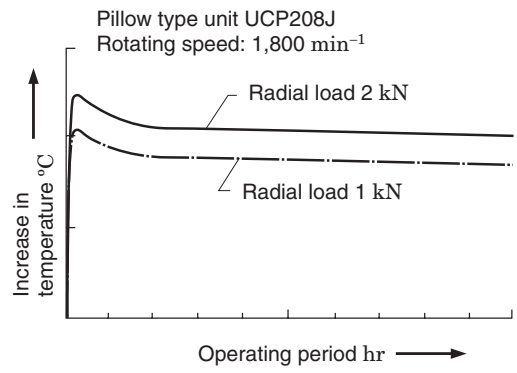

Fig. 13.2 Example of temperature measurement during operation of pillow type units

Increase in temperature during operation of the bearing depends on the type of seal used in the bearing as well as friction torque.

Increase in temperature of triple-lip bearings (suffix code: L3) is greater than that of the standard single lip model, and that of the non-contact seal (suffix code: K3, S5) is lower than the standard single lip model. Bearings for blowers and other high-speed applications are equipped with non-contact seals, with grease or oil, for high-speed operation as well as reduction of heat, vibration, and noise.

13.3 Dustproof and waterproof performance

FYH executes various tests to check dustproof and waterproof performance of different models of bearings. Representative results are shown below.

13.3.1 Dust sprinkle rotating test (dust resistance performance)

In this test, dust is sprinkled directly on the bearing as it is operating in a rotating drum machine. Performance and dust resistance for various sealing mechanisms are judged based on this test.

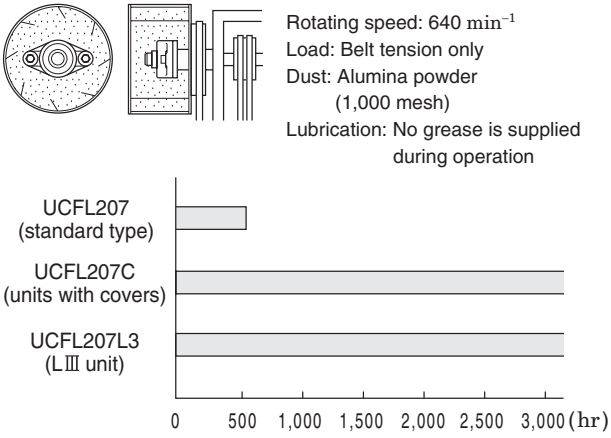

Fig. 13.3 Example result of dust sprinkle rotating test (dust proof performance)

The standard single-lip bearing exhibited abnormal noise after about 500 hours of operation, and ingress of dust was found.

On the other hand, no abnormality was found in either the triple-lip bearing (suffix code: L3) or the covered unit (suffix code: C) even after 3,000 hours of operation, and therefore superior dustproof performance was established.

13.3.2 Dust immersion rotating test (dustproof performance)

In this test, units are completely buried in dust with impellers installed on the shaft to further stir and circulate the dust. This test is executed under the most severe conditions encountered by mounted bearing units.

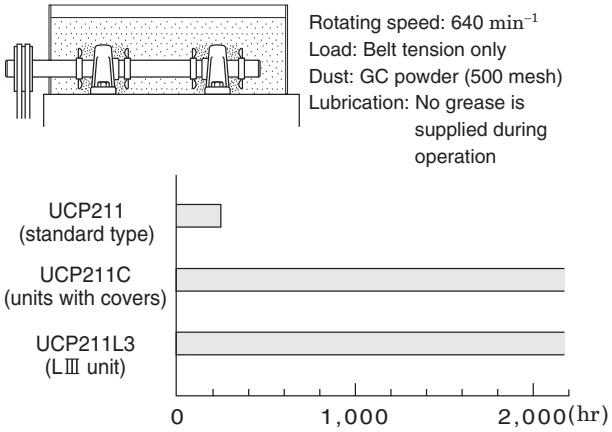

Fig. 13.4 Example result of dust immersion rotating test (dustproof performance)

The standard single-lip bearing exhibited abnormal noise after about 200 hours of operation, and ingress of dust was found.

On the other hand, no abnormality was found in either the triple-lip bearing (suffix code: L3) or the covered unit (suffix code: C) even after 2,000 hours of operation, and therefore superior dustproof performance was established.

13.3.3 Waterproof test

In this test, water is splashed directly onto the units by impellers installed on the shaft.

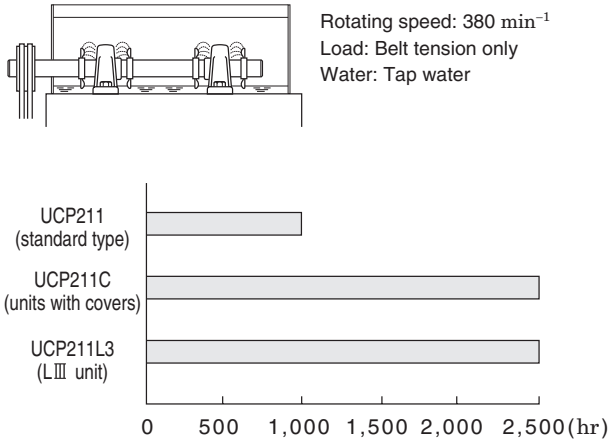

Fig. 13.5 Example result of waterproof performance test

The standard single-lip bearing exhibited rust on the balls and surface of the raceways (inner and outer rings) after about 1,000 hours of operation.

On the other hand, no rust was found in either the triple-lip bearing (suffix code: L3) or the covered unit (suffix code: C) after 2,500 hours of operation.

14 Handling

One of the predominate features of FYH Bearing Units is the simplicity of handling and installation. It is of the utmost importance that these units are handled and installed correctly to ensure reliable performance.

14.1 Installation

14.1.1 Installation of setscrew units

When installing setscrew units, it is important to tighten the setscrews to the shaft with the specified torque.

If the unit is mounted in an environment where it is exposed to impact or vibration, or if the shaft is rotated bi-directionally, or if rotation is started and stopped frequently and repeatedly, then grind or drill the surface of the shaft where it is contacted by the setscrew in order to create a flat seat (**Fig. 14.1**) or drilled seat (**Fig. 14.2**). This will significantly improve the tightening effect of the setscrews.



Fig. 14.1 Flat seat provided for shaft
(for improvement in set screw tightening effect)



Fig. 14.2 Drilled seat provided for shaft
(for improvement in set screw tightening effect)
For use with Cone Point setscrews

If the unit is exposed to great load or excessive vibration, another option is to use a shouldered shaft and tighten the inner ring of the bearing with a shaft nut. (**Fig. 14.3**)

For dimensions of the shouldered shaft, see **"9 Design of shaft and base"**.

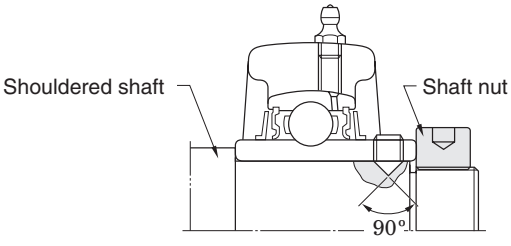

Fig. 14.3 Example of installation with a shouldered shaft and shaft nut

FYH Bearings are available with a variety of set screw options including **Double Point** and **Bullet Point** set screws which provide a secure fit to the shaft. Additional styles of setscrews are also available to meet a range of purposes and operating conditions (see **Table 14.1**).

Table 14.1 Set screws of ball bearings for units

Designations (code)	Details
Bullet Point 	The tip of the FYH Bullet Point setscrew has a ball shape, and it is designed to firmly grip the shaft by expanding its threads outward against the threads of the inner ring of the bearing as it is tightened. When shock or vibration are problems, the Bullet Point setscrew can remain affixed to the shaft longer than other set screw styles including double point, ball point, or others.
Double Point Double Point with Locking finish (**G7**)	The cone point at the center of the screw, combined with the round point at the outer edge, provide excellent shaft contact and greatly reduced fitting error. This style is also available with a nylon film fused to the thread surface to prevent the screw from loosening during operation (**G7**).
	Prevent looseness with elastic force of nylon film fused to the thread surface.
Cone Point (**G4**) 	The cone point setscrew has a 90º angle and fits a drilled cone seat in the shaft. It allows correct positioning on the shaft and prevents shaft movement in an axial direction.
Capped Full Dog Point (**G6**) 	The capped full dog point setscrew fits into the keyed groove in the shaft and allows for expansion and contraction of the shaft. It tightens to the inner ring of the bearing (not the shaft) to allow the shaft to float within the bore of the bearing.

Contact FYH for additional set screw styles.

Shown below are installation procedures for bearing units with setscrews.

(1) Inspect the unit to ensure that the rigidity of the base,

flatness of the mounting surface, and tolerance of the shaft meet the required standards. Check the shaft for bends, burrs, and other flaws.

(2) Make sure that the set screws are retracted far enough so that they do not contact the shaft as the bearing is installed.

(3) Fit the bearing unit onto the shaft and slide it to the specified position. In order to secure a tight fit, press-fit the bearing unit to the shaft with a press, cold-fit by cooling the shaft, or shrink-fit the bearing unit by warming it with an air bath (100 ℃ or less). Avoid striking the bearing with a hammer to press-fit the bearing to the shaft.

(4) Align the bearing unit to the specified position on the base and affix it with washers and bolts. (**Fig. 14.4**). Use a torque wrench to tighten the bolts to the housing to the specified torque setting. For mounting bolt torque specifications, see **Appendix table 2** in the back of the catalog.

Fig. 14.4 Installation of setscrew units

(5) Tighten both of the setscrews on the inner ring to the specified torque setting (**Fig. 14.5**). For setscrew torque specifications, see **Appendix table 3** in the back of the catalog.

Fig. 14.5 Tightening of set screws

(6) Turn the shaft by hand and tighten the setscrews of all other bearings on the same shaft to the specified torque setting.

(7) Finally, turn the shaft by hand and make sure that it rotates without any problems.

14.1.2 Installation of adapter style units

Adapter units, comprised of an adapter sleeve, locknut, and washer, can be installed into environments where they are exposed to excessive vibration and impact.

It is of great importance that these units are properly mounted. If the locknut is not properly tightened, the sleeve may be loose which could lead to slippage and wear on the shaft or bearing. Conversely, if the locknut is over-tightened, the inner ring of the bearing can expand and reduce internal ball clearance which could cause excessive heat and premature failure.

Installation procedures for adapter style bearings are shown below.

(1) Inspect the unit to ensure that the rigidity of the base, flatness of the mounting surface, and tolerance of the shaft meet the required standards. Check the shaft for bends, burrs, and other flaws.

(2) Slide the adapter sleeve onto the shaft where the bearing unit will be installed.

If the sleeve is too tight, place a screwdriver in the slotted portion of the sleeve and expand the slot to open the sleeve.

(3) Slide the bearing unit over the shaft and onto the adapter sleeve, then place a cylindrical reinforcing ring against the inner ring of the front side of the bearing. Seat the adapter sleeve by lightly tapping all around the backside of the sleeve (**Fig. 14.6**).

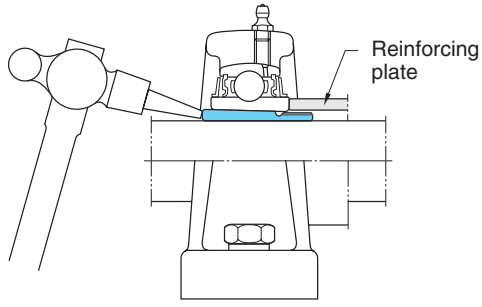

Fig. 14.6 Fitting adapter sleeve to bearing with tapered bore

(4) Attach the lock washer so that the tab fits into the slot in the sleeve, and, making sure the tapered side is facing the bearing, tighten the locknut on the sleeve by hand.

(5) Align the bearing unit to the specified position on the base and affix it with washers, and bolts. Use a torque wrench to tighten the bolts to the housing to the specified torque setting. For mounting bolt torque specifications, see **Appendix table 2** in the back of the catalog.

(6) Use a torque wrench to tighten the locknut to the correct specification (**Fig. 14.7**). For locknut torque specifications, see **Appendix table 4** in the back of the catalog.

Fig. 14.7 Tightening locknut

(7A) For pillow block housings, loosen the mounting bolts and adjust the unit axially while rotating the shaft by hand. Then re-tighten the mounting bolts to the correct specification.
(7B) For flange block housings, the position of the unit must be in the correct axial position in relation to the shaft, so take extra care to properly align them before completing installation.
(8) Bend one of the tabs on the washer so that it fits into one of the slots on the locknut (**Fig. 14.8**).

Fig. 14.8 Bending claw of washer
(Locking locknut)

(9) Finally, turn the shaft by hand and make sure that it rotates without any problems.

14.1.3 Installation of units with eccentric locking collars

Eccentric locking collar bearings provide another option for shaft locking. Since the rotating force of the shaft increases the tightening force of the eccentric ring to the shaft, this style of bearing allows a secure grip to the shaft.

Since the rotating force of the shaft increases the tightening force of the eccentric ring to the shaft, the unit with eccentric locking collar allows secure fixing of the bearing (**Fig. 14.9**).

Fig. 14.9 Ball bearing units with eccentric locking collar

Installation procedures for eccentric locking collar style bearings are shown below.
(1) Inspect the unit to ensure that the rigidity of the base, flatness of the mounting surface, and tolerance of the shaft meet the required standards. Check the shaft for bends, burrs, and other flaws.
(2) Slide the bearing unit onto the shaft, and place it at the specified mounting position.
(3) Align the bearing unit to the specified position on the base and affix it with washers, and bolts. (**Fig. 14.4**). Use a torque wrench to tighten the bolts to the housing to the specified torque setting. For mounting bolt torque specifications, see **Appendix table 2** in the back of this catalog.
(4A) Fit the eccentric section of the inner ring of the bearing to the eccentric recessed section of the eccentric locking collar, and rotate the collar in the direction of shaft rotation. Then, tighten the setscrew on the eccentric locking collar to the specified torque setting (**Fig. 14.10**).

Fig. 14.10 Installing eccentric locking collar

(4B) The NU-LOC collar is tightened by a hexagon head bolt to a specified torque setting in order to apply the correct amount of force to the inner ring o the bearing. (**Fig. 14.11**)

Regarding tightening torque for set screws or hexagon head bolts, see **Appendix Table 3** in the back of this catalog.

Fig 14.11 Installation of NU-LOC units

(5) Rotate the shaft by hand and then install the next eccentric locking collar unit to the shaft.
(6) Finally, turn the shaft by hand and make sure that it rotates without any problems.

14.1.4 Installing units with covers

Covers for ball bearing units are available in two types, steel plate and cast iron. Install both the covers at last after installation of the bearing and housing is complete.

Procedures for installation of the ball bearing units with covers are shown below.

(1) Apply grease all around the seal lip of the cover, and pack the internal space of the cover with grease (approximately 1/3 to 1/2 of the space capacity) (**Fig. 14.12**).

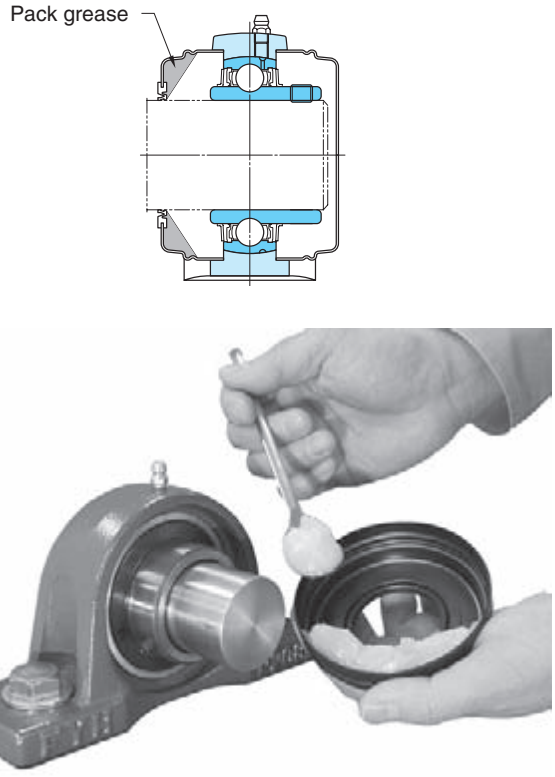

Fig. 14.12 Packing grease in internal space of seal lip of covers

(2) Make sure that the bearing unit is securely fixed to the shaft and mounting base.
(3) Slide the cover over the shaft to the grove in the housing and lightly press it into place.
(4A) For stamped steel covers, use a plastic mallet to prevent deformation, and evenly tap all around the periphery of the cover to install it to the housing (**Fig. 14.13**).

To remove the stamped steel cover, put a screwdriver into the groove on the periphery of the cover and slightly pry it.

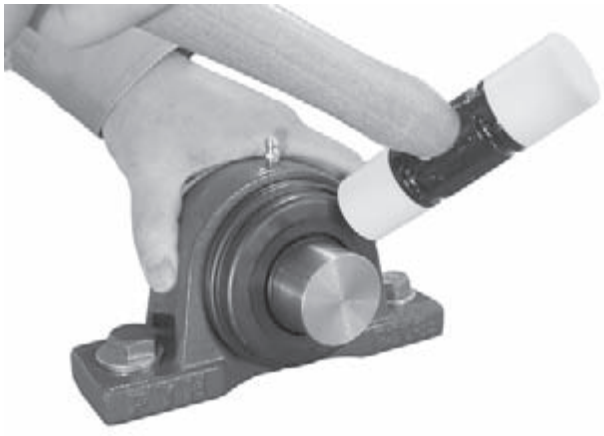

Fig. 14.13 Installing steel plate covers

(4B) When installing a cast iron cover, fit the cover to the cover groove of the housing, and affix it with the supplied bolts.
For the tightening torque of the cast iron cover mounting bolts, see the **Appendix table 2** at the end of this catalog.
(5) Install another cover to the housing in a similar manner.
(6) Check for abnormality of the installed cover.
(7) Finally, turn the shaft by hand, and check for abnormality in the bearing.

14.2 Test run inspection

After installation of the ball bearing unit is complete, execute the test run inspection to ensure that it was done properly.

The test run inspection should be executed by following the procedures below.

(1) Turn the shaft by hand and make sure that the bearing rotates smoothly.
If there is any resistance, vibration, excessive rotational torque, or uneven rotation, the bearing is judged to be faulty.
(2) Execute a powered run with no load and at low speed, and check for abnormal noise and vibration.
(3) Execute a powered run under normal operating conditions and check for abnormal noise, vibration, and temperature increase.

Table 14.2 shows the main faults that may occur during the test run inspection of the ball bearing unit and causes.

Table 14.2 Main causes of bearing failure during test runs and their causes

Faults	Causes
Excessive torque, uneven rotating torque	(1) Faulty installation, causes preload on bearing (2) Inappropriate handling or installation, leading to interference of seal with slinger (3) Excessive tightening of locknut (adapter) causing too small internal clearance of bearing
Abnormal noise, abnormal vibration	(1) Improper tightening of set screws or of mounting bolts (2) Excessively large internal clearance of bearings (3) Bent shaft, or shouldered shaft may be machined eccentrically (4) Shaft tolerance chosen improperly (5) Mounting base not rigid or flat
Abnormal temperature increase	(1) Too small internal clearance of bearing (2) Faulty installation, causes preload on bearing (3) Load too great (4) Allowable rotational speed exceeded (5) Mounting base not rigid or flat (6) Inappropriate handling or installation, leading to interference of seal with slinger

14.3 Periodic inspection

FYH Ball Bearing Units do not need to be inspected as frequently as lower quality bearings. However, it is good practice to set up an inspection schedule for even these high quality bearings.

Since a ball bearing unit cannot be disassembled for inspection of the internal status of components, the external appearance of the bearing must be inspected to give tell-tale signs of the status and expected life of the bearing. The following characteristics must be checked per the inspection schedule that is established for a particular application.

(1) Overall appearance
(2) Loose set screws or mounting bolts
(3) Noise from vibration
(4) Temperature of the bearing housing or the inner ring
(5) Grease supply interval and quantity of grease injected into the bearing (either too much or too little grease can be detrimental to the life of the bearing)

Table 14.3 shows the main faults that are usually found during periodic inspections and their causes.

If any fault is found in a ball bearing unit during an inspection, then immediate action must be taken to correct the situation and prevent deterioration of the bearing components. If serious damage has already occurred to the bearing unit, then the bearing unit must be replaced immediately to prevent damage to other machine components.

Table 14.3 Main faults found during periodic inspection and their causes

Faults	Causes
Excessive torque	(1) Degraded grease (2) Interference of seal with slinger due to excessive supply of grease (3) Deformation of slinger causing interference with seal (4) High load due to shaft expansion
Abnormal noise, abnormal vibration	(1) Improper tightening of set screws or of mounting bolts (2) Wear on inner ring of bearing or shaft due to creep or fretting (3) Ingress of foreign matter (dirt) into bearing (4) Damage to cage or ball surfaces due to rolling fatigue (5) Indentation on raceway surface or ball surface due to excessive load (6) Warped or bent shaft
Abnormal temperature increase	(1) Degraded grease (2) Interference of seal with slinger due to excessive supply of grease (3) Deformation of slinger causing interference with seal (4) Looseness of setscrew, eccentric locking collar or adapter lock nut for tapered bore bearings (5) Load due to shaft expansion (6) Damage to cage or ball surfaces due to rolling fatigue

14.4 Supply of grease

FYH Ball Bearing units are supplied with high quality grease and seals. Therefore, under clean operating conditions, light loads, low speeds, and low temperatures the bearing may be used with no further lubrication.

However, under harsher operating conditions and environments, the grease will deteriorate much more rapidly.

This would include environments exposed to dust, moisture, or higher operating temperatures.

In such cases, a re-greasing schedule must be established to prevent premature failure of the bearing. The life of the bearing can be greatly extended by proper attention to the re-greasing schedule and by supplying the proper amount of grease. Please note that too much grease can be detrimental as well as too little grease.

14.4.1 Grease life and supply intervals

The grease life of a bearing unit can be found using **Formula (4.7)** in page 27.

The re-greasing schedule should be set at 1/4 to 1/3 of the grease life found by the calculation shown above; however this may be adjusted for particularly demanding environments or conditions.

In addition, some environments may be unusually dirty or wet, and these conditions may be exacerbated by higher temperatures. Under such harsh conditions, a more frequent re-greasing schedule will extend the life of the bearing.

Under normal operating conditions, adhere to the guidelines outlined in **Table 14.4**.

14.4.2 Amount of grease

The amount of grease initially supplied in a new FYH Ball Bearing Unit is approximately 30 to 35% of the internal space capacity of the bearing. If the bearing is over greased, the agitation of the grease causes internal friction and heating of the bearing. The first sign of failure will be excessive grease finding its way to the outside of the bearing. DO NOT exceed the initial greasing amount.

Table 14.5 shows the recommended amount of grease to be used for re-greasing FYH bearings.

In a severely dusty or wet environments, the amount of grease may be as much as doubled if operating speeds are low.

Note:

1. **Table 14.5** applies to UK units as well.
2. For greasing triple-lip (L3) type bearings, use 1 1/2 times the amount of grease recommended in the table.
3. Values shown in the table are applicable to standard grease (specific gravity: 0.9 g/ml). If a compatible grease of another specific gravity is used, then the proper conversion must be made to insure that the recommended volume is put into the bearing.

Table 14.4 Grease schedule of ball bearing units

Operating temperature, ℃		Grease Intervals			Bearing used	Grease supplied
Over	Incl.	Substantially clean	Excessive dust	Excessive dust and moisture		
	50	(3 months)	(2 months)	(1 month)	(Low temperature	Shell Alvania
		not necessary	1 year	4 months	D2K2)[1]	RL2,
50	**70**	1 year	4 months	1 month	Standard bearing	Gold No.3,
70	**100**	6 months	2 months	2 weeks		or equivalent
100	**120**	2 months	2 weeks	5 days	High temperature	SH44M
120	**150**	2 weeks	5 days	2 days	D1K2	
150	**180**	1 week	2 days	1 day		

Note [1] Greasing intervals in parentheses are applicable to low temperature grease (D2K2).

Remark Greasing intervals shown in this table are applicable to a unit operated for 8 to 10 hours per day. If the time of operation is greater than this range, then a more frequent greasing interval must be specified. For example, if the unit is operated 16 to 20 hours per day, then the greasing interval must be twice as frequent.

Table 14.5 Amount of recommended grease for ball bearing units

Bore dia. code	Greasing amount, g		
	Diameter Series[1)]		
	UC200	UCX00	UC300
01	0.7		
02	0.7		
03	0.7		
04	0.7		
05	0.8	1.3	1.8
06	1.3	1.8	2.5
07	1.8	2.3	3.4
08	2.3	2.8	4.6
09	2.8	3.2	6.3
10	3.2	4.3	8.1
11	4.3	5.5	11
12	5.5	6.8	14
13	6.8	7.7	17
14	7.7	9	21
15	9	11	25
16	11	14	29
17	14	17	34
18	17	21	40
19	–	–	47
20	–	29	61
21	–	–	69
22	–	–	84
24	–	–	98
26	–	–	126
28	–	–	151

The basic bearing size number consists of the duty code (2, X, or 3) followed by the ring size code (07, 10, 24, etc.)

14.4.3 Types of grease supplied

Many different types of grease are available for use in ball bearings. However, if a non-compatible grease is used, particularly a non-lithium based grease, then performance may be drastically reduced.

Only use the grease recommended in **Table 2.3** (page 19) to assure optimum performance of your bearings.

If another grease is used in an emergency situation, for instance, please assure that this grease is compatible, with a lithium base, at the minimum.

14.4.4 Relubricating the unit at the specified interval

Note **Fig. 14.14** which shows the grease fitting, grease groove and grease holes for relubrication of the unit.

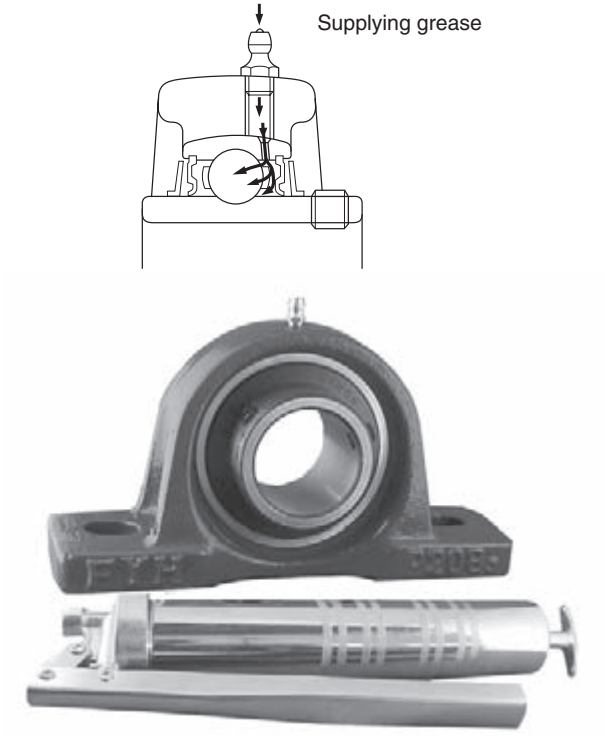

Fig. 14.14 Supplying grease to ball bearing units

(1) Clean the grease fitting and the area around it to prevent dirt and foreign material from entering the unit.
(2) Clean the grease gun and pack clean grease.
(3) Grease the unit with the recommended amount of grease.

When lubricating the ball bearing unit, slowly turn the shaft with your hand. This allows the fresh grease to be uniformly distributed inside the unit.

If it is difficult to access the standard straight type grease fitting with a grease gun, 45° and 90° angled fittings are available as an option. See the images below of these grease fittings. Contact FYH for more information.

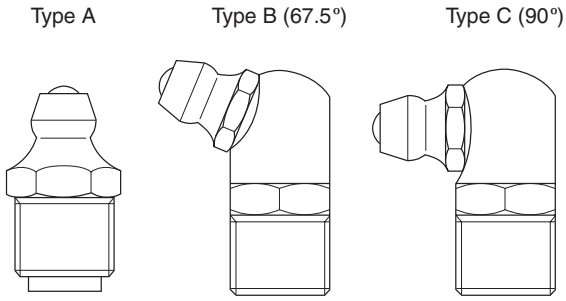

Fig. 14.15 Types of grease fittings for ball bearing units

When using a centralized automatic lubrication system, with ball bearings, it is important to use softer grease than normal. The grease should be specified with a "worked penetration number" between 300 and 380. This is NLGI grade "0" or "1". Piping from the lubricating system must be sized so that the specified volume of grease is supplied.

Piping must be connected to the threaded hole on the ball bearing unit. This is either 1/4-28 tapered threads for units up to and including 210 ring size, or 1/8 PT (BSPT) for ball bearing units with a 211 ring size and larger. If the piping size used is larger than the threaded hole in the ball bearing unit, then the appropriate reducing coupling (or street elbow) must be used to fit the threaded hole.

Fig. 14.16 shows the body of a pipe reducer.

When using an automatic centralized lubrication system, it is imperative to assure that the correct volume of grease is supplied to each individual bearing as specified in **Table 14.5**. The total amount of grease is a multiple of the number of bearings being supplied by the central lubrication system.

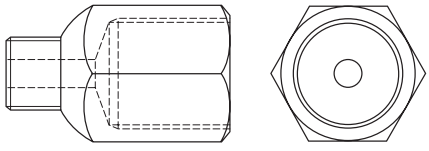

Fig. 14.16 Reducing coupling for centralized lubrication systems

For details of grease fittings and reducing couplings, see **"16 Parts and accessories"**in the back of the catalog.

14.5 Replacing bearings

If a bearing insert needs to be replaced, it is not always necessary to replace the housing if the housing is intact.

After carefully inspecting the housing to ensure that it is not damaged, simply insert a new bearing into the old housing.

Replacement procedures for a bearing insert are listed below.

(1) Remove the complete bearing unit from the shaft and mounting base.
(2) Screw in the set screws so that the head of each set screw does not protrude outside the outer diameter of the inner ring. Otherwise, the head of the set screw may damage the bearing seat inside the housing.
(3) Use a bar or pipe to rotate the bearing 90° until the bearing is horizontal.
(4) Remove the bearing insert from the housing via the loading slot in the back of the housing.

Reverse the above procedure to put in a new bearing insert. Ensure that the set screws are screwed in before proceeding with the replacement.

15 Dimensional tables for ball bearing units

15 Dimensional tables for ball bearing units (contents)

1 Pillow type units

Pillow type units

UCP (d 12 ~ 140) 72
NAP (d 12 ~ 75) 78
NAPK (d 12 ~ 75) 80
NCP (d 20 ~ 60) 82
UKP (d_1 20 ~ 125) 84
UCP-sc (d 25 ~ 140) 90
UKP-sc (d_1 20 ~ 125) 94

Thick pillow type units

UCIP (d 40 ~ 140) 98
UKIP (d_1 35 ~ 125) 100

Tapped-base pillow type units

UCPA (d 12 ~ 50) 102
UCPAN (d 20 ~ 35) 104
NCPA (d 20 ~ 50) 106
NCPAN (d 20 ~ 35) 108

High centerheight pillow type units

UCPH (d 12 ~ 50) 110

Lightweight pillow type units

BLP, ALP (d 12 ~ 40) 112

Lightweight (die-cast) pillow type units

UP (d 10 ~ 30) 114

Corrosion resistant series stainless steel pillow type units

UCSP-H1S6 (d 12 ~ 60) 116

Corrosion resistant series stainless steel tapped-base pillow type units

UCSPA-H1S6 (d 12 ~ 40) 118

Corrosion resistant series stainless steel pillow type units

USP-S6 (d 10 ~ 30) 120

Corrosion resistant series plastic pillow type units

UCVP-S6 (d 20 ~ 50) 122
UCVP-ES7 (d 20 ~ 50) 124

Steel plate pillow type units

SBPP, SAPP (d 12 ~ 30) 126

2 Square four-bolt flange type units

Square four-bolt flange type units

UCF (d 12 ~ 140) 128
UCF-E (d 12 ~ 85) 134
NANF (d 12 ~ 60) 138
NCF (d 20 ~ 60) 140
NCF-E (d 20 ~ 60) 142
UKF (d_1 20 ~ 125) 144

Square four-bolt flange cartridge type units

UCFS (d 25 ~ 140) 150
UKFS (d_1 20 ~ 125) 152

Corrosion resistant series stainless steel square four-bolt flange type units

UCSF-H1S6 (d 20 ~ 60) 154
UCSF-EH1S6 (d 20 ~ 60) 156

Corrosion resistant series plastic square four-bolt flange type units

UCVF-S6 (d 20 ~ 40) 158
UCVF-ES7 (d 20 ~ 40) 160

3 Oval flange type units

Oval two-bolt flange type units

UCFL (d 12 ~ 130) 162
UCFL-E (d 12 ~ 85) 168
NANFL (d 12 ~ 55) 172
NCFL (d 20 ~ 60) 174
NCFL-E (d 20 ~ 60) 176
UKFL (d_1 20 ~ 115) 178

Adjustable oval two-bolt flange type units

UCFA (d 12 ~ 55) 182

Three-bolt flange type units

UCFB (d 12 ~ 50) 184

Lightweight oval two-bolt flange type units

BLF, ALF (d 12 ~ 35) 186

Lightweight oval three-bolt flange type units

SATFD-FP9 (d 12 ~ 35) 188

Lightweight (die-cast) oval two-bolt flange type units

UFL (d 8 ~ 30) 190

Corrosion resistant series stainless steel oval two-bolt flange type units

UCSFL-H1S6 (d 12 ~ 50) 192
UCSFL-EH1S6 (d 12 ~ 50) 194
USFL-S6 (d 10 ~ 30) 196

Corrosion resistant series plastic oval two-bolt flange type units

UCVFL-S6 (d 20 ~ 40) 198
UCVFL-ES7 (d 20 ~ 40) 200

4 Round flange cartridge type units

UCFC (d 12 ~ 100) 202
UCFCX-E (d 25 ~ 100) 206
UCFCF (d 25 ~ 55) 208
NCFC (d 20 ~ 60) 210
UKFC (d_1 20 ~ 90) 212

5 Stamped steel plate flange type units

Stamped steel plate round three-bolt flange type units

SBPF, SAPF (d 12 ~ 35) 216

Stamped steel plate oval two-bolt flange type units

SBPFL, SAPFL (d 12 ~ 35) 218

6 Take-up type units

Take-up type units

UCT (d 12 ~ 140) 220
UCT-E (d 12 ~ 85) 226
NAT-E (d 12 ~ 75) 230
NCT (d 20 ~ 60) 232
NCT-E (d 20 ~ 60) 234
UKT (d_1 20 ~ 125) 236

Corrosion resistant series stainless steel take-up type units

UCST-H1S6 (d 20 ~ 50) 242
UCST-EH1S6 (d 20 ~ 50) 244

Section steel frame take-up type units

UCTH (d 12 ~ 65) 246

Channel steel frame take-up type units

UCTL (d 20 ~ 45) 248
UCTU (d 40 ~ 90) 250

Steel plate frame take-up type units

SBPTH (d 12 ~ 25) 254
SBNPTH (d 12 ~ 25) 256

7 Other units

Cartridge type units

UCC (d 12 ~ 140) 258
UKC (d_1 20 ~ 125) 262

Hanger type units

UCHA (d 12 ~ 75) 264

8 Ball bearing inserts

Cylindrical bore (with set screws)

UC, SB, SU (d 8 ~ 140) 266

Stainless steel series, Cylindrical bore (with set screws)

UC-S6, SU-S6 (d 10 ~ 60) 272

Cylindrical bore (with eccentric locking collar)

SA, SA-F, NA (d 12 ~ 75) 274

Cylindrical bore (with concentric locking collar)

NC2 (d 20 ~ 60) 280
ERC (d 20 ~ 60) 282

Tapered bore (with adapter)

UK (d_1 20 ~ 125) 284

Cylindrical bore (with set screws), Cylindrical O. D.

ER, RB (d 12 ~ 60) 290

Cylindrical bore (with eccentric locking collar) Cylindrical O. D.

SAA, SBB (d 12 ~ 55) 292

Cylindrical bore

SC (d 17 ~ 40) 294

9 Bearing adapters

H300X, H2300X (d_1 20 ~ 125) 296

UCP
Cylindrical bore (with set screws)
d 12 ~ (45) mm

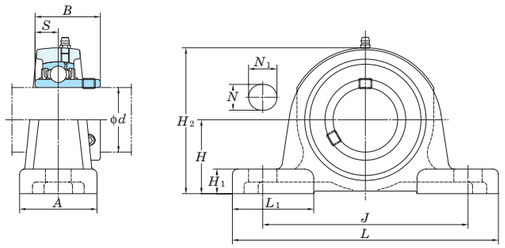

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P203~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P204JE3 and P205JE3 (housing with cast iron cover) are shown below.



P204JE3 H_{2c} = 70 mm
P205JE3 H_{2c} = 77 mm

Shaft Dia. mm d	Shaft Dia. inch d	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Unit No. One Side Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Unit No. One Side Closed Type	Dimension mm / inch A_c	Mass kg
12														UCP201		UC201	0.63				UCP201C	UCP201CD	44 / 1 23/32	0.63	–	–	– / –	–
	1/2													UCP201-8		UC201-8	0.63				–	–	– / –	–	–	–	– / –	–
15		1 3/16	5	1 1/2	3 3/4	1/2	23/32	15/32	2 3/8	1 1/2	1.220	0.500	3/8	UCP202	P203	UC202	0.61	12.8	6.65	13.2	UCP202C	UCP202CD	44 / 1 23/32	0.61	–	–	– / –	–
		30.2	127	38	95	13	18	12	60	38	31	12.7	M10	UCP202-10		UC202-10	0.61				–	–	– / –	–	–	–	– / –	–
	5/8																											
17														UCP203		UC203	0.60				UCP203C	UCP203CD	44 / 1 23/32	0.60	–	–	– / –	–
20	3/4	1 5/16	5	1 1/2	3 3/4	1/2	23/32	1/2	2 17/32	1 1/2	1.220	0.500	3/8	UCP204-12	P204	UC204-12	0.66	12.8	6.65	13.2	–	–	– / –	–	–	–	– / –	–
		33.3	127	38	95	13	18	13	64	38	31	12.7	M10	UCP204		UC204	0.66				UCP204C	UCP204CD	44 / 1 23/32	0.66	UCP204FC	UCP204FCD	62 / 2 7/16	0.96
25	7/8													UCP205-14	P205	UC205-14	0.80	14.0	7.85	13.9	–	–	– / –	–	–	–	– / –	–
	15/16	1 7/16	5 1/2	1 1/2	4 1/8	1/2	23/32	1/2	2 25/32	1 11/16	1.343	0.563	3/8	UCP205-15		UC205-15	0.80				–	–	– / –	–	–	–	– / –	–
		36.5	140	38	105	13	18	13	71	43	34.1	14.3	M10	UCP205		UC205	0.80				UCP205C	UCP205CD	48 / 1 7/8	0.80	UCP205FC	UCP205FCD	66 / 2 19/32	1.2
	1													UCP205-16		UC205-16	0.80				–	–	– / –	–	–	–	– / –	–
		1 3/4	6 1/4	2	4 11/16	21/32	31/32	5/8	3 3/8	1 27/32	1.500	0.626	1/2	UCPX05	PX05	UCX05	1.5	19.5	11.3	13.9	UCPX05C	UCPX05CD	52 / 2 1/16	1.5	–	–	– / –	–
	1	44.4	159	51	119	17	25	16	86	47	38.1	15.9	M14	UCPX05-16		UCX05-16	1.5				–	–	– / –	–	–	–	– / –	–
		1 49/64	6 7/8	1 3/4	5 3/16	21/32	25/32	5/8	3 11/32	2 5/32	1.496	0.591	1/2	UCP305	P305	UC305	1.7	21.2	10.9	12.6	–	–	– / –	–	UCP305C	UCP305CD	76 / 3	2.3
	1	45	175	45	132	17	20	16	85	55	38	15	M14	UCP305-16		UC305-16	1.7				–	–	– / –	–	–	–	– / –	–
30	1 1/8													UCP206-18	P206	UC206-18	1.3	19.5	11.3	13.9	–	–	– / –	–	–	–	– / –	–
		1 11/16	6 1/2	1 7/8	4 3/4	21/32	13/16	19/32	3 5/16	2 3/32	1.500	0.626	1/2	UCP206		UC206	1.3				UCP206C	UCP206CD	52 / 2 1/16	1.3	UCP206FC	UCP206FCD	70 / 2 3/4	1.8
	1 3/16	42.9	165	48	121	17	21	15	84	53	38.1	15.9	M14	UCP206-19		UC206-19	1.3				–	–	– / –	–	–	–	– / –	–
	1 1/4													UCP206-20		UC206-20	1.3				–	–	– / –	–	–	–	– / –	–
		1 7/8	6 7/8	2 1/4	5	21/32	31/32	21/32	3 21/32	2 5/32	1.689	0.689	1/2	UCPX06	PX06	UCX06	2.1	25.7	15.4	13.9	UCPX06C	UCPX06CD	59 / 2 5/16	2.1	–	–	– / –	–
	1 3/16	47.6	175	57	127	17	25	17	93	55	42.9	17.5	M14	UCPX06-19		UCX06-19	2.1				–	–	– / –	–	–	–	– / –	–
	1 1/4													UCPX06-20		UCX06-20	2.1				–	–	– / –	–	–	–	– / –	–
	–	1 31/32	7 3/32	1 31/32	5 1/2	21/32	25/32	21/32	3 3/4	2 3/32	1.693	0.669	1/2	UCP306	P306	UC306	2.2	26.7	15.0	13.3	–	–	– / –	–	UCP306C	UCP306CD	82 / 3 7/32	2.8
35	1 1/4													UCP207-20	P207	UC207-20	1.6	25.7	15.4	13.9	–	–	– / –	–	–	–	– / –	–
	1 5/16													UCP207-21		UC207-21	1.6				–	–	– / –	–	–	–	– / –	–
	1 3/8	1 7/8	6 9/16	1 7/8	5	21/32	13/16	5/8	3 21/32	2	1.689	0.689	1/2	UCP207-22		UC207-22	1.6				–	–	– / –	–	–	–	– / –	–
		47.6	167	48	127	17	21	16	93	51	42.9	17.5	M14	UCP207		UC207	1.6				UCP207C	UCP207CD	59 / 2 5/16	1.6	UCP207FC	UCP207FCD	78 / 3 1/16	2.3
	1 7/16													UCP207-23		UC207-23	1.6				–	–	– / –	–	–	–	– / –	–
	1 3/8													UCPX07-22	PX07	UCX07-22	2.7	29.1	17.8	14.0	–	–	– / –	–	–	–	– / –	–
		2 1/8	8	2 1/4	5 11/16	21/32	1 3/16	3/4	4 1/8	2 17/32	1.937	0.748	1/2	UCPX07		UCX07	2.7				UCPX07C	UCPX07CD	68 / 2 11/16	2.7	–	–	– / –	–
	1 7/16	54	203	57	144	17	30	19	105	64	49.2	19	M14	UCPX07-23		UCX07-23	2.7				–	–	– / –	–	–	–	– / –	–
	–	2 13/64	8 9/32	2 7/32	6 5/16	21/32	31/32	3/4	4 7/32	2 9/16	1.890	0.748	1/2	UCP307	P307	UC307	3.0	33.4	19.3	13.2	–	–	– / –	–	UCP307C	UCP307CD	88 / 3 15/32	3.8
40	1 1/2													UCP208-24	P208	UC208-24	2.0	29.1	17.8	14.0	–	–	– / –	–	–	–	– / –	–
	1 9/16	1 15/16	7 1/4	2 1/8	5 13/32	21/32	13/16	21/32	3 27/32	2 1/4	1.937	0.748	1/2	UCP208-25		UC208-25	2.0				–	–	– / –	–	–	–	– / –	–
		49.2	184	54	137	17	21	17	98	57	49.2	19	M14	UCP208		UC208	2.0				UCP208C	UCP208CD	68 / 2 11/16	2.0	UCP208FC	UCP208FCD	86 / 3 3/8	2.8
	1 1/2	2 5/16	8 3/4	2 5/8	6 1/8	25/32	1 1/4	13/16	4 1/2	2 25/32	1.937	0.748	5/8	UCPX08-24	PX08	UCX08-24	3.5	34.1	21.3	14.0	–	–	– / –	–	–	–	– / –	–
		58.7	222	67	156	20	32	21	114	71	49.2	19	M16	UCPX08		UCX08	3.5				UCPX08C	UCPX08CD	68 / 2 11/16	3.5	–	–	– / –	–
	1 1/2	2 23/64	8 21/32	2 3/8	6 11/16	21/32	1 1/16	3/4	4 21/32	2 9/16	2.047	0.748	1/2	UCP308-24	P308	UC308-24	3.8	40.7	24.0	13.2	–	–	– / –	–	–	–	– / –	–
		60	220	60	170	17	27	19	118	65	52	19	M14	UCP308		UC308	3.8				–	–	– / –	–	UCP308C	UCP308CD	96 / 3 25/32	4.8
45	1 5/8													UCP209-26	P209	UC209-26	2.2	34.1	21.3	14.0	–	–	– / –	–	–	–	– / –	–
	1 11/16	2 1/8	7 15/32	2 1/8	5 3/4	21/32	13/16	21/32	4 3/16	2 3/8	1.937	0.748	1/2	UCP209-27		UC209-27	2.2				–	–	– / –	–	–	–	– / –	–
	1 3/4	54	190	54	146	17	21	17	106	60	49.2	19	M14	UCP209-28		UC209-28	2.2				–	–	– / –	–	–	–	– / –	–
														UCP209		UC209	2.2				UCP209C	UCP209CD	68 / 2 11/16	2.2	UCP209FC	UCP209FCD	88 / 3 15/32	3.0
	1 3/4	2 5/16	8 3/4	2 5/8	6 1/8	25/32	1 5/16	13/16	4 9/16	2 25/32	2.031	0.748	5/8	UCPX09-28	PX09	UCX09-28	3.7	35.1	23.3	14.4	–	–	– / –	–	–	–	– / –	–
		58.7	222	67	156	20	33	21	116	71	51.6	19	M16	UCPX09		UCX09	3.7				UCPX09C	UCPX09CD	73 / 2 7/8	3.7	–	–	– / –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCP206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Representative examples of the forms of housing are indicated.
6. Housings of nodular graphite cast iron are also available.

UCP
Cylindrical bore (with set screws)
d (45) ~ (75) mm

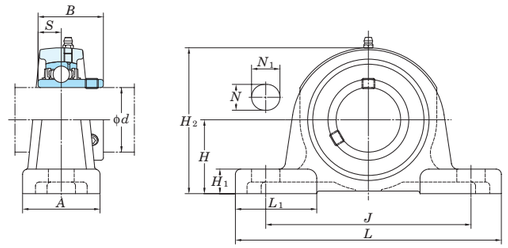





Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P203~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P204JE3 and P205JE3 (housing with cast iron cover) are shown below.



P204JE3 H_{2c} = 70 mm
P205JE3 H_{2c} = 77 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c	Mass kg
45	1 3/4	2 41/64	9 21/32	2 5/8	7 15/32	25/32	1 3/16	13/16	5 3/16	2 15/16	2.244	0.866	5/8	UCP309-28	P309	UC309-28	4.9	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		67	245	67	190	20	30	21	132	75	57	22	M16	UCP309		UC309	4.9				–	–	– –	–	UCP309C	UCP309CD	102 4 1/32	6.2
50	1 7/8													UCP210-30	P210	UC210-30	2.9	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
	1 15/16	2 1/4	8 1/8	2 3/8	6 1/4	25/32	7/8	3/4	4 7/16	2 15/32	2.031	0.748	5/8	UCP210-31		UC210-31	2.9				–	–	– –	–	–	–	– –	–
		57.2	206	60	159	20	22	19	113	63	51.6	19	M16	UCP210		UC210	2.9				UCP210C	UCP210CD	73 2 7/8	2.9	UCP210FC	UCP210FCD	97 3 13/16	3.9
	2													UCP210-32		UC210-32	2.9				–	–	– –	–	–	–	– –	–
	1 15/16	2 1/2	9 1/2	2 7/8	6 23/32	25/32	1 13/32	7/8	4 31/32	3	2.189	0.874	5/8	UCPX10-31	PX10	UCX10-31	4.6	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		63.5	241	73	171	20	36	22	126	76	55.6	22.2	M16	UCPX10		UCX10	4.6				UCPX10C	UCPX10CD	75 2 15/16	4.6	–	–	– –	–
	2													UCPX10-32		UCX10-32	4.6				–	–	– –	–	–	–	– –	–
	–	2 61/64	10 13/16	2 15/16	8 11/32	25/32	1 3/8	15/16	5 13/16	3 15/32	2.402	0.866	5/8	UCP310	P310	UC310	6.6	62.0	38.3	13.2	–	–	– –	–	UCP310C	UCP310CD	110 4 11/32	8.2
		75	275	75	212	20	35	24	148	88	61	22	M16															
55	2													UCP211-32	P211	UC211-32	3.6	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
	2 1/8	2 1/2	8 5/8	2 3/8	6 23/32	25/32	7/8	3/4	4 29/32	2 3/4	2.189	0.874	5/8	UCP211-34		UC211-34	3.6				–	–	– –	–	–	–	– –	–
		63.5	219	60	171	20	22	19	125	70	55.6	22.2	M16	UCP211		UC211	3.6				UCP211C	UCP211CD	75 2 15/16	3.6	UCP211FC	UCP211FCD	99 3 29/32	4.8
	2 3/16													UCP211-35		UC211-35	3.6				–	–	– –	–	–	–	– –	–
	2 3/4	2 3/4	10 1/4	3 1/8	7 1/4	31/32	1 13/32	1 3/32	5 15/32	3 9/32	2.563	1.000	3/4	UCPX11	PX11	UCX11	6.5	52.4	36.2	14.4	UCPX11C	UCPX11CD	88 3 15/32	6.5	–	–	– –	–
	2 3/16	69.8	260	79	184	25	36	28	139	83	65.1	25.4	M20	UCPX11-35		UCX11-35	6.5				–	–	– –	–	–	–	– –	–
	2 1/4													UCPX11-36		UCX11-36	6.5				–	–	– –	–	–	–	– –	–
	2	3 5/32	12 7/32	3 5/32	9 9/32	25/32	1 1/2	1 1/16	6 7/32	3 17/32	2.598	0.984	5/8	UCP311-32	P311	UC311-32	7.9	71.6	45.0	13.2	–	–	– –	–	–	–	– –	–
		80	310	80	236	20	38	27	158	90	66	25	M16	UCP311		UC311	7.9				–	–	– –	–	UCP311C	UCP311CD	114 4 1/2	9.7
	2 3/16													UCP311-35		UC311-35	7.9				–	–	– –	–	–	–	– –	–
60	2 1/4													UCP212-36	P212	UC212-36	4.9	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		2 3/4	9 1/2	2 3/4	7 1/4	25/32	31/32	7/8	5 7/16	3	2.563	1.000	5/8	UCP212		UC212	4.9				UCP212C	UCP212CD	88 3 15/32	4.9	UCP212FC	UCP212FCD	114 4 1/2	6.4
	2 3/8	69.8	241	70	184	20	25	22	138	76	65.1	25.4	M16	UCP212-38		UC212-38	4.9				–	–	– –	–	–	–	– –	–
	2 7/16													UCP212-39		UC212-39	4.9				–	–	– –	–	–	–	– –	–
		3	11 1/4	3 1/4	8	31/32	1 9/16	1 3/32	5 31/32	3 15/32	2.563	1.000	3/4	UCPX12	PX12	UCX12	7.7	57.2	40.1	14.4	UCPX12C	UCPX12CD	88 3 15/32	7.7	–	–	– –	–
	2 7/16	76.2	286	83	203	25	40	28	152	88	65.1	25.4	M20	UCPX12-39		UCX12-39	7.7				–	–	– –	–	–	–	– –	–
		3 11/32	13	3 11/32	9 27/32	31/32	1 1/2	1 5/32	6 9/16	4 1/16	2.795	1.024	3/4	UCP312	P312	UC312	9.5	81.9	52.2	13.2	–	–	– –	–	UCP312C	UCP312CD	124 4 7/8	11.8
	2 7/16	85	330	85	250	25	38	29	167	103	71	26	M20	UCP312-39		UC312-39	9.5				–	–	– –	–	–	–	– –	–
65	2 1/2	3	10 7/16	2 3/4	8	31/32	1 3/16	31/32	5 29/32	3 1/16	2.563	1.000	3/4	UCP213-40	P213	UC213-40	5.9	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		76.2	265	70	203	25	30	25	150	78	65.1	25.4	M20	UCP213		UC213	5.9				UCP213C	UCP213CD	88 3 15/32	5.9	UCP213FC	UCP213FCD	114 4 1/2	7.6
	2 1/2	3	11 1/4	3 1/4	8	31/32	1 9/16	1 3/32	6 3/32	3 15/32	2.937	1.189	3/4	UCPX13-40	PX13	UCX13-40	8.1	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		76.2	286	83	203	25	40	28	155	88	74.6	30.2	M20	UCPX13		UCX13	8.1				UCPX13C	UCPX13CD	98 3 27/32	8.1	–	–	– –	–
	2 1/2	3 35/64	13 3/8	3 17/32	10 1/4	31/32	1 1/2	1 1/4	6 15/16	4 11/32	2.953	1.181	3/4	UCP313-40	P313	UC313-40	10.7	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		90	340	90	260	25	38	32	176	110	75	30	M20	UCP313		UC313	10.7				–	–	– –	–	UCP313C	UCP313CD	122 4 13/16	12.8
70	2 3/4	3 1/8	10 15/32	2 27/32	8 9/32	31/32	1 3/16	1 3/32	6 5/32	3 1/16	2.937	1.189	3/4	UCP214-44	P214	UC214-44	6.8	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		79.4	266	72	210	25	30	28	156	78	74.6	30.2	M20	UCP214		UC214	6.8				UCP214C	UCP214CD	98 3 27/32	6.8	UCP214FC	UCP214FCD	124 4 7/8	8.7
	2 3/4	3 1/2	13	3 1/2	9	1 1/16	1 31/32	1 1/4	6 23/32	3 27/32	3.063	1.331	7/8	UCPX14-44	PX14	UCX14-44	10.2	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		88.9	330	89	229	27	50	32	171	98	77.8	33.3	M22	UCPX14		UCX14	10.2				UCPX14C	UCPX14CD	98 3 27/32	10.2	–	–	– –	–
	2 3/4	3 47/64	14 3/16	3 17/32	11 1/32	1 1/16	1 9/16	1 3/8	7 5/16	4 11/32	3.071	1.299	7/8	UCP314-44	P314	UC314-44	12.4	104	68.2	13.2	–	–	– –	–	–	–	– –	–
		95	360	90	280	27	40	35	186	110	78	33	M22	UCP314		UC314	12.4				–	–	– –	–	UCP314C	UCP314CD	124 4 7/8	14.7
75	2 15/16													UCP215-47	P215	UC215-47	7.4	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		3 1/4	10 13/16	2 29/32	8 17/32	31/32	1 3/16	1 3/32	6 3/8	3 5/32	3.063	1.311	3/4	UCP215		UC215	7.4				UCP215C	UCP215CD	98 3 27/32	7.4	UCP215FC	UCP215FCD	124 4 7/8	9.3
	3	82.6	275	74	217	25	30	28	162	80	77.8	33.3	M20	UCP215-48		UC215-48	7.4				–	–	– –	–	–	–	– –	–
	2 15/16													UCPX15-47	PX15	UCX15-47	10.8	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		3 1/2	13	3 1/2	9	1 1/16	1 31/32	1 1/4	6 7/8	3 29/32	3.252	1.311	7/8	UCPX15		UCX15	10.8				UCPX15C	UCPX15CD	108 4 1/4	10.8	–	–	– –	–
	3	88.9	330	89	229	27	50	32	175	99	82.6	33.3	M22	UCPX15-48		UCX15-48	10.8				–	–	– –	–	–	–	– –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCP206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Representative examples of the forms of housing are indicated.
6. Housings of nodular graphite cast iron are also available.

UCP
Cylindrical bore (with set screws)
d (75) ~ 140 mm

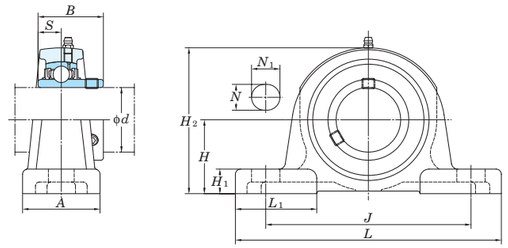

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P203~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P204JE3 and P205JE3 (housing with cast iron cover) are shown below.



P204JE3 H_{2c} = 70 mm
P205JE3 H_{2c} = 77 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c	Mass kg
75	2 15/16	3 15/16	14 31/32	3 15/16	11 13/32	1 1/16	1 9/16	1 3/8	7 25/32	4 7/32	3.228	1.260	7/8	UCP315-47	P315	UC315-47	14.8				–	–	– –	–	–	–	– –	–
		100	380	100	290	27	40	35	198	107	82	32	M22	UCP315		UC315	14.8	113	77.2	13.2	–	–	– –	–	UCP315C	UCP315CD	134 5 9/32	17.3
	3													UCP315-48		UC315-48	14.8				–	–	– –	–	–	–	– –	–
80	3 1/8	3 1/2	11 1/2	3 1/16	9 1/8	31/32	1 3/8	1 1/4	6 27/32	3 3/8	3.252	1.311	3/4	UCP216-50	P216	UC216-50	9.0				–	–	– –	–	–	–	– –	–
		88.9	292	78	232	25	35	32	174	86	82.6	33.3	M20	UCP216		UC216	9.0	72.7	53.0	14.6	UCP216C	UCP216CD	108 4 1/4	9.0	UCP216FC	UCP216FCD	138 5 7/16	11.4
	–	4	15	4	11 1/8	1 1/16	2 9/32	1 11/32	7 11/16	4 9/16	3.374	1.343	7/8	UCPX16	PX16	UCX16	15.3	84.0	61.9	14.5	UCPX16C	UCPX16CD	112 4 13/32	15.3	–	–	– –	–
		101.6	381	102	283	27	58	34	195	116	85.7	34.1	M22															
	–	4 11/64	15 3/4	4 11/32	11 13/16	1 1/16	1 9/16	1 3/8	8 7/32	4 23/32	3.386	1.339	7/8	UCP316	P316	UC316	18.5	123	86.7	13.3	–	–	– –	–	UCP316C	UCP316CD	138 5 7/16	21.4
		106	400	110	300	27	40	35	209	120	86	34	M22															
85	3 1/4	3 3/4	12 7/32	3 9/32	9 23/32	31/32	1 9/16	1 1/4	7 9/32	3 17/32	3.374	1.343	3/4	UCP217-52	P217	UC217-52	10.8				–	–	– –	–	–	–	– –	–
		95.2	310	83	247	25	40	32	185	90	85.7	34.1	M20	UCP217		UC217	10.8	84.0	61.9	14.5	UCP217C	UCP217CD	112 4 13/32	10.8	UCP217FC	UCP217FCD	142 5 19/32	13.5
	3 7/16	4	15	4	11 1/8	1 1/16	2 3/8	1 11/32	7 7/8	4 9/16	3.780	1.563	7/8	UCPX17	PX17	UCX17	16.1				UCPX17C	UCPX17CD	122 4 13/16	16.1	–	–	– –	–
		101.6	381	102	283	27	60	34	200	116	96	39.7	M22	UCPX17-55		UCX17-55	16.1	96.1	71.5	14.5	–	–	– –	–	–	–	– –	–
	–	4 13/32	16 17/32	4 11/32	12 19/32	1 5/16	1 25/32	1 9/16	8 21/32	4 23/32	3.780	1.575	1	UCP317	P317	UC317	20.3	133	96.8	13.3	–	–	– –	–	UCP317C	UCP317CD	146 5 3/4	23.6
		112	420	110	320	33	45	40	220	120	96	40	M27															
90	3 1/2	4	12 7/8	3 15/32	10 5/16	1 1/16	1 25/32	1 11/32	7 25/32	4 3/32	3.780	1.563	7/8	UCP218-56	P218	UC218-56	13.9				–	–	– –	–	–	–	– –	–
		101.6	327	88	262	27	45	34	198	104	96	39.7	M22	UCP218		UC218	13.9	96.1	71.5	14.5	UCP218C	UCP218CD	122 4 13/16	13.9	UCP218FC	UCP218FCD	152 6	17.0
	–	4	15	4 3/8	11 1/8	1 1/16	2 3/8	1 1/2	8 1/32	4 9/16	4.094	1.689	7/8	UCPX18	PX18	UCX18	19.1	109	81.9	14.4	–	–	– –	–	UCPX18C	UCPX18C	158 6 7/32	22.5
		101.6	381	111	283	27	60	38	204	116	104	42.9	M22															
	3 1/2	4 41/64	16 15/16	4 11/32	13	1 5/16	1 25/32	1 9/16	9 7/32	4 23/32	3.780	1.575	1	UCP318-56	P318	UC318-56	22.8				–	–	– –	–	–	–	– –	–
		118	430	110	330	33	45	40	234	120	96	40	M27	UCP318		UC318	22.8	143	107	13.3	–	–	– –	–	UCP318C	UCP318CD	150 5 29/32	26.6
95	–	4 59/64	18 1/2	4 23/32	14 3/16	1 13/32	1 31/32	1 13/16	9 3/4	4 29/32	4.055	1.614	1 1/8	UCP319	P319	UC319	29.0	153	119	13.3	–	–	– –	–	UCP319C	UCP319CD	162 6 3/8	33.3
		125	470	120	360	36	50	46	248	125	103	41	M30															
100	3 15/16	5	17	4 3/4	13 1/4	1 5/16	2 9/16	1 25/32	9 21/32	4 31/32	4.626	1.937	1	UCPX20	PX20	UCX20	30.4				–	–	– –	–	UCPX20C	UCPX20CD	186 7 5/16	34.9
		127	432	121	337	33	65	45	245	126	117.5	49.2	M27	UCPX20-63		UCX20-63	30.4	133	105	14.4	–	–	– –	–	–	–	– –	–
	4													UCPX20-64		UCX20-64	30.4				–	–	– –	–	–	–	– –	–
	3 15/16	5 33/64	19 9/32	4 23/32	14 31/32	1 13/32	1 31/32	1 13/16	10 3/4	5 1/2	4.252	1.654	1 1/8	UCP320	P320	UC320	35.1				–	–	– –	–	UCP320C	UCP320CD	174 6 27/32	40.7
		140	490	120	380	36	50	46	273	140	108	42	M30	UCP320-63		UC320-63	35.1	173	141	13.2	–	–	– –	–	–	–	– –	–
	4													UCP320-64		UC320-64	35.1				–	–	– –	–	–	–	– –	–
105	–	5 33/64	19 9/32	4 23/32	14 31/32	1 13/32	1 31/32	1 13/16	10 15/16	5 1/2	4.409	1.732	1 1/8	UCP321	P321	UC321	37.6	184	153	13.2	–	–	– –	–	UCP321C	UCP321CD	178 7	43.6
		140	490	120	380	36	50	46	278	140	112	44	M30															
110	–	5 29/32	20 15/32	5 1/2	15 3/4	1 9/16	2 5/32	1 31/32	11 21/32	5 29/32	4.606	1.811	1 1/4	UCP322	P322	UC322	44.0	205	180	13.2	–	–	– –	–	UCP322C	UCP322CD	188 7 13/32	50.8
		150	520	140	400	40	55	50	296	150	117	46	M33															
120	–	6 19/64	22 7/16	5 1/2	17 23/32	1 9/16	2 5/32	1 31/32	12 7/16	6 5/16	4.961	2.008	1 1/4	UCP324	P324	UC324	55.4	207	185	13.5	–	–	– –	–	UCP324C	UCP324CD	196 7 23/32	64.9
		160	570	140	450	40	55	50	316	160	126	51	M33															
130	–	7 3/32	23 5/8	5 1/2	18 29/32	1 9/16	2 5/32	1 31/32	13 21/32	7 11/16	5.315	2.126	1 1/4	UCP326	P326	UC326	72.1	229	214	13.6	–	–	– –	–	UCP326C	UCP326CD	214 8 7/16	84.2
		180	600	140	480	40	55	50	355	195	135	54	M33															
140	–	7 7/8	24 13/32	5 1/2	19 11/16	1 9/16	2 5/32	2 3/8	15 15/32	7 9/32	5.709	2.323	1 1/4	UCP328	P328	UC328	92.5	253	246	13.6	–	–	– –	–	UCP328C	UCP328CD	222 8 3/4	108
		200	620	140	500	40	55	60	393	185	145	59	M33															

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCP206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Representative examples of the forms of housing are indicated.
6. Housings of nodular graphite cast iron are also available.

FYH

NAP
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 75 mm

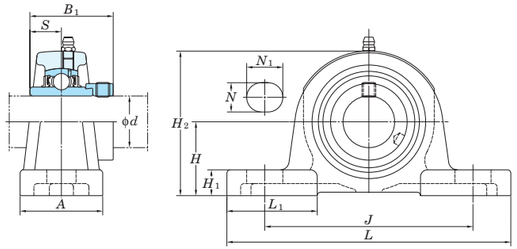

Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
P203~P210	±0.15
P211~P215	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B_1	S	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12														NAP201		NA201				0.71
	1/2	1 3/16	5	1 1/2	3 3/4	1/2	23/32	15/32	2 3/8	1 1/2	1.720	0.673	3/8	NAP201-8		NA201-8				
15		30.2	127	38	95	13	18	12	60	38	43.7	17.1	M10	NAP202	P203	NA202	12.8	6.65	13.2	0.69
	5/8													NAP202-10		NA202-10				
17														NAP203		NA203				0.66
20	3/4	1 5/16	5	1 1/2	3 3/4	1/2	23/32	1/2	2 17/32	1 1/2	1.720	0.673	3/8	NAP204-12	P204	NA204-12	12.8	6.65	13.2	0.73
		33.3	127	38	95	13	18	13	64	38	43.7	17.1	M10	NAP204		NA204				
25	7/8													NAP205-14		NA205-14				
	15/16	1 7/16	5 1/2	1 1/2	4 1/8	1/2	23/32	1/2	2 25/32	1 11/16	1.748	0.689	3/8	NAP205-15	P205	NA205-15	14.0	7.85	13.9	0.87
		36.5	140	38	105	13	18	13	71	43	44.4	17.5	M10	NAP205		NA205				
	1													NAP205-16		NA205-16				
30	1 1/8													NAP206-18		NA206-18				
		1 11/16	6 1/2	1 7/8	4 3/4	21/32	13/16	19/32	3 5/16	2 3/32	1.906	0.720	1/2	NAP206	P206	NA206	19.5	11.3	13.9	1.4
	1 3/16	42.9	165	48	121	17	21	15	84	53	48.4	18.3	M14	NAP206-19		NA206-19				
	1 1/4													NAP206-20		NA206-20				
35	1 1/4													NAP207-20		NA207-20				
	1 5/16													NAP207-21		NA207-21				
	1 3/8	1 7/8	6 9/16	1 7/8	5	21/32	13/16	5/8	3 21/32	2	2.012	0.740	1/2	NAP207-22	P207	NA207-22	25.7	15.4	13.9	1.8
		47.6	167	48	127	17	21	16	93	51	51.1	18.8	M14	NAP207		NA207				
	1 7/16													NAP207-23		NA207-23				
40	1 1/2													NAP208-24		NA208-24				
	1 9/16	1 15/16	7 1/4	2 1/8	5 13/32	21/32	13/16	21/32	3 27/32	2 1/4	2.217	0.843	1/2	NAP208-25	P208	NA208-25	29.1	17.8	14.0	2.1
		49.2	184	54	137	17	21	17	98	57	56.3	21.4	M14	NAP208		NA208				
45	1 5/8													NAP209-26		NA209-26				
	1 11/16	2 1/8	7 15/32	2 1/8	5 3/4	21/32	13/16	21/32	4 3/16	2 3/8	2.217	0.843	1/2	NAP209-27	P209	NA209-27	34.1	21.3	14.0	2.4
	1 3/4	54	190	54	146	17	21	17	106	60	56.3	21.4	M14	NAP209-28		NA209-28				
														NAP209		NA209				
50	1 7/8													NAP210-30		NA210-30				
	1 15/16	2 1/4	8 1/8	2 3/8	6 1/4	25/32	7/8	3/4	4 7/16	2 15/32	2.469	0.969	5/8	NAP210-31	P210	NA210-31	35.1	23.3	14.4	3.1
		57.2	206	60	159	20	22	19	113	63	62.7	24.6	M16	NAP210		NA210				
	2													NAP210-32		NA210-32				
55	2													NAP211-32		NA211-32				
	2 1/8	2 1/2	8 5/8	2 3/8	6 23/32	25/32	7/8	3/4	4 29/32	2 3/4	2.811	1.094	5/8	NAP211-34	P211	NA211-34	43.4	29.4	14.4	3.9
		63.5	219	60	171	20	22	19	125	70	71.4	27.8	M16	NAP211		NA211				
	2 3/16													NAP211-35		NA211-35				
60	2 1/4													NAP212-36		NA212-36				
		2 3/4	9 1/2	2 3/4	7 1/4	25/32	31/32	7/8	5 7/16	3	3.063	1.220	5/8	NAP212	P212	NA212	52.4	36.2	14.4	5.2
	2 3/8	69.8	241	70	184	20	25	22	138	76	77.8	31	M16	NAP212-38		NA212-38				
	2 7/16													NAP212-39		NA212-39				
65	2 1/2	3	10 7/16	2 3/4	8	31/32	1 3/16	31/32	5 29/32	3 1/16	3.374	1.343	3/4	NAP213-40	P213	NA213-40	57.2	40.1	14.4	6.5
		76.2	265	70	203	25	30	25	150	78	85.7	34.1	M20	NAP213		NA213				
70	2 3/4	3 1/8	10 15/32	2 27/32	8 9/32	31/32	1 3/16	1 3/32	6 5/32	3 1/16	3.374	1.343	3/4	NAP214-44	P214	NA214-44	62.2	44.1	14.5	7.7
		79.4	266	72	210	25	30	28	156	78	85.7	34.1	M20	NAP214		NA214				
75	2 15/16	3 1/4	10 13/16	2 29/32	8 17/32	31/32	1 3/16	1 3/32	6 3/8	3 5/32	3.626	1.469	3/4	NAP215-47	P215	NA215-47	67.4	48.3	14.5	7.9
		82.6	275	74	217	25	30	28	162	80	92.1	37.3	M20	NAP215		NA215				

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~215
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : NAP206JL3, NA206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Representative examples of the forms of housing are indicated.
6. Housings of nodular graphite cast iron are also available.

FYH

NAPK
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 75 mm





Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
PK204~PK210	±0.15
PK211~PK215	±0.2

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm d	H	L	A	J	N	N_1	H_1	H_2	L_1	B_1	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12															NAPK201		NA201					
	1/2														NAPK201-8		NA201-8					
15		1 1/4	5 1/4	1 5/8	3 27/32	7/16	9/16	9/16	2 15/32	1 25/32	1.72	0.673	3/8	NAPK202	PK204	NA202		12.8	6.65	13.2	0.82
	5/8	31.8	133	41	98	11	14	14	63	45	43.7	17.1		NAPK202-10		NA202-10					
17														NAPK203		NA203					
	3/4													NAPK204-12		NA204-12					
20														NAPK204		NA204					
	7/8													NAPK205-14		NA205-14					
25	15/16	1 5/16	5 1/2	1 23/32	4 1/8	7/16	9/16	5/8	2 11/16	1 25/32	1.748	0.689	3/8	NAPK205-15	PK205	NA205-15		14.0	7.85	13.9	1
	1	33.3	140	44	105	11	14	16	68	45	44.4	17.5		NAPK205		NA205					
														NAPK205-16		NA205-16					
	1 1/8													NAPK206-18		NA206-18					
30		1 9/16	6 5/16	1 7/8	4 3/4	9/16	3/4	21/32	3 5/32	1 25/32	1.906	0.72	1/2	NAPK206	PK206	NA206		19.5	11.3	13.9	1.4
	1 3/16	39.7	160	48	121	14	19	17	80	45	48.4	18.3		NAPK206-19		NA206-19					
	1 1/4													NAPK206-20		NA206-20					
	1 1/4													NAPK207-20		NA207-20					
	1 5/16													NAPK207-21		NA207-21					
35	1 3/8	1 13/16	6 9/16	1 7/8	5	9/16	3/4	3/4	3 5/8	1 25/32	2.012	0.74	1/2	NAPK207-22	PK207	NA207-22		25.7	15.4	13.9	2
		46	167	48	127	14	19	19	92	45	51.1	18.8		NAPK207		NA207					
	1 7/16													NAPK207-23		NA207-23					
40	1 1/2	1 15/16	7 1/8	2 1/8	5 3/8	9/16	1 1/32	3/4	3 15/16	1 31/32	2.217	0.843	1/2	NAPK208-24	PK208	NA208-24		29.1	17.8	14.0	2.5
	1 9/16	49.2	181	54	136.5	14	26.3	19	100	50	56.3	21.4		NAPK208-25		NA208-25					
														NAPK208		NA208					
45	1 5/8	2 1/16	7 15/32	2 1/8	5 7/8	9/16	1 1/8	25/32	4 3/16	2 1/16	2.217	0.843	1/2	NAPK209-26	PK209	NA209-26		34.1	21.3	14.0	2.7
	1 11/16	52.4	190	54	149.2	14	28.6	20	106	52	56.3	21.4		NAPK209-27		NA209-27					
	1 3/4													NAPK209-28		NA209-28					
														NAPK209		NA209					
50	1 7/8	2 3/16	8	2 1/4	6 1/4	9/16	3/4	7/8	4 13/32	25/32	2.469	0.969	1/2	NAPK210-30	PK210	NA210-30		35.1	23.3	14.4	3.2
	1 15/16	55.6	203	57	159	14	19	22	112	55	62.7	24.6		NAPK210-31		NA210-31					
														NAPK210		NA210					
	2													NAPK210-32		NA210-32					
	2	2 7/16	9 1/8	2 3/8	7 1/8	23/32	15/16	31/32	4 7/8	2 19/32	2.811	1.094	5/8	NAPK211-32	PK211	NA211-32		43.4	29.4	14.4	4.6
55	2 1/8	61.9	232	60	181	18	24	25	124	66	71.4	27.8		NAPK211-34		NA211-34					
														NAPK211		NA211					
	2 3/16													NAPK211-35		NA211-35					
	2 1/4													NAPK212-36		NA212-36					
60		2 11/16	9 1/2	2 17/32	7 17/32	23/32	15/16	13/32	5 11/32	2 9/16	3.063	1.22	5/8	NAPK212	PK212	NA212		52.4	36.2	14.4	5.2
	2 3/8	68.3	241	64	191	18	24	28	136	65	77.8	31		NAPK212-38		NA212-38					
	2 7/16													NAPK212-39		NA212-39					
75	2 15/16	3 5/16	11 31/32	3 7/32	9 1/2	7/8	1/4	1 1/2	6 1/2	3 7/16	3.626	1.469	3/4	NAPK215-47	PK215	NA215-47		67.4	48.3	14.5	9.6
		84.1	304	82	241	22	32	38	165	87	92.1	37.3		NAPK215		NA215					

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~215
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.
5. Housings of nodular graphite cast iron are also available.

FYH

NCP
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

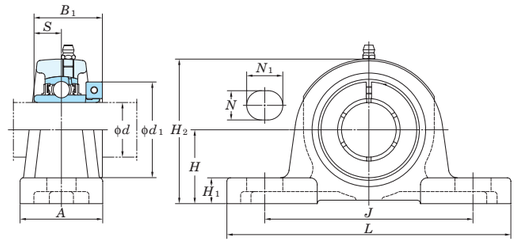

Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
P204~P210	±0.15
P211~P212	±0.2

Shaft Dia. mm / inch d		Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B_1	S	d_1	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	1 5/16 33.3	5 127	1 1/2 38	3 3/4 95	1/2 13	23/32 18	1/2 13	2 17/32 64	1 1/2 38	1 9/32 32.5	0.500 12.7	1 3/4 44.5	3/8 M10	**NCP204-12** **NCP204**	P204	NC204-12 NC204		12.8	6.65	13.2	0.8
25	7/8 15/16 1	1 7/16 36.5	5 1/2 140	1 1/2 38	4 1/8 105	1/2 13	23/32 18	1/2 13	2 25/32 71	1 11/16 43	1 7/16 36.5	0.563 14.3	1 15/16 49.2	3/8 M10	**NCP205-14** **NCP205-15** **NCP205** **NCP205-16**	P205	NC205-14 NC205-15 NC205 NC205-16		14.0	7.85	13.9	1.0
30	1 1/8 1 3/16 1 1/4	1 11/16 42.9	6 1/2 165	1 7/8 48	4 3/4 121	21/32 17	13/16 21	19/32 15	3 5/16 84	2 3/32 53	1 9/16 39.7	0.626 15.9	2 3/16 55.6	1/2 M14	**NCP206-18** **NCP206** **NCP206-19** **NCP206-20**	P206	NC206-18 NC206 NC206-19 NC206-20		19.5	11.3	13.9	1.5
35	1 1/4	1 7/8 47.6	6 9/16 167	1 7/8 48	5 127	21/32 17	13/16 21	5/8 16	3 21/32 93	2 51	1 3/4 44.5	0.689 17.5	2 7/16 61.9	1/2 M14	**NCP207-20**	P207	NC207-20		25.7	15.4	13.9	1.9
	1 3/8 1 7/16	1 7/8 47.6	6 9/16 167	1 7/8 48	5 127	21/32 17	13/16 21	5/8 16	3 21/32 93	2 51	1 3/4 44.5	0.689 17.5	2 9/16 65.1	1/2 M14	**NCP207-22** **NCP207** **NCP207-23**	P207	NC207-22 NC207 NC207-23		25.7	15.4	13.9	1.9
40	1 1/2	1 15/16 49.2	7 1/4 184	2 1/8 54	5 13/32 137	21/32 17	13/16 21	21/32 17	3 27/32 98	2 1/4 57	2 50.8	0.748 19	2 11/16 68.3	1/2 M14	**NCP208-24** **NCP208**	P208	NC208-24 NC208		29.1	17.8	14.0	2.4
45	1 5/8	2 1/8 54	7 15/32 190	2 1/8 54	5 3/4 146	21/32 17	13/16 21	21/32 17	4 3/16 106	2 3/8 60	2 50.8	0.748 19	2 13/16 71.4	1/2 M14	**NCP209-26**	P209	NC209-26		34.1	21.3	14.0	2.6
	1 11/16 1 3/4	2 1/8 54	7 15/32 190	2 1/8 54	5 3/4 146	21/32 17	13/16 21	21/32 17	4 3/16 106	2 3/8 60	2 50.8	0.748 19	2 15/16 74.6	1/2 M14	**NCP209-27** **NCP209-28** **NCP209**	P209	NC209-27 NC209-28 NC209		34.1	21.3	14.0	2.6
50	1 15/16 2	2 1/4 57.2	8 1/8 206	2 3/8 60	6 1/4 159	25/32 20	7/8 22	3/4 19	4 7/16 113	2 15/32 63	2 3/32 53.1	0.748 19	3 3/8 85.7	5/8 M16	**NCP210-31** **NCP210** **NCP210-32**	P210	NC210-31 NC210 NC210-32		35.1	23.3	14.4	3.5
55	2	2 1/2 63.5	8 5/8 219	2 3/8 60	6 23/32 171	25/32 20	7/8 22	3/4 19	4 29/32 125	2 3/4 70	2 1/4 57.1	0.874 22.2	3 1/2 88.9	5/8 M16	**NCP211-32**	P211	NC211-32		43.4	29.4	14.4	4.0
	2 3/16	2 1/2 63.5	8 5/8 219	2 3/8 60	6 23/32 171	25/32 20	7/8 22	3/4 19	4 29/32 125	2 3/4 70	2 1/4 57.1	0.874 22.2	3 5/8 92.1	5/8 M16	**NCP211** **NCP211-35**	P211	NC211 NC211-35		43.4	29.4	14.4	4.0
60	2 1/4	2 3/4 69.8	9 1/2 241	2 3/4 70	7 1/4 184	25/32 20	31/32 25	7/8 22	5 7/16 138	3 76	2 5/8 66.7	1.000 25.4	4 1/16 103.2	5/8 M16	**NCP212-36**	P212	NC212-36		52.4	36.2	14.4	5.6
	2 3/8 2 7/16	2 3/4 69.8	9 1/2 241	2 3/4 70	7 1/4 184	25/32 20	31/32 25	7/8 22	5 7/16 138	3 76	2 5/8 66.7	1.000 25.4	4 1/8 104.8	5/8 M16	**NCP212** **NCP212-39**	P212	NC212 NC212-39		52.4	36.2	14.4	5.6

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

UKP
Tapered bore (with adapter)
d_1 20 ~ (50) mm

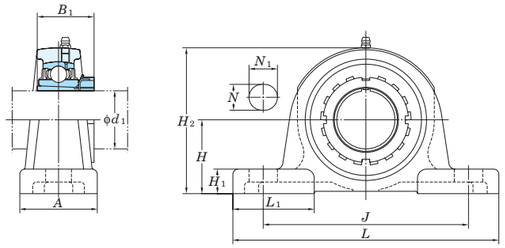

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P205~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P205JE3 (housing with cast iron cover) are shown below.



P205JE3 H_{2c} = 77 mm

Shaft Dia. d_1 mm	Shaft Dia. d_1 inch	Dimensions H	L	A	J	N	N_1	H_1	H_2	L_1	B_1 1)	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension A_c	Mass kg
20	3/4	1 7/16	5 1/2	1 1/2	4 1/8	1/2	23/32	1/2	2 25/32	1 11/16	1 5/32(1 3/8)	3/8	UKP205	P205	UK205	HE305X(HE2305X)	0.84	14.0	7.85	13.9	–	–	–	–	–	–	–	–
		36.5	140	38	105	13	18	13	71	43	29(35)	M10				H305X(H2305X)	0.84				UKP205C	UKP205CD	48	1 7/8	0.84	UKP205FC	UKP205FCD	66	2 19/32	1.3
	3/4	1 3/4	6 1/4	2	4 11/16	21/32	31/32	5/8	3 3/8	1 27/32	1 3/8	1/2	UKPX05	PX05	UKX05	HE2305X	1.5	19.5	11.3	13.9	–	–	–	–	–	–	–	–
		44.4	159	51	119	17	25	16	86	47	35	M14				H2305X	1.5				UKPX05C	UKPX05CD	52	2 1/16	1.5	–	–	–	–	–
	3/4	1 49/64	6 7/8	1 3/4	5 3/16	21/32	25/32	5/8	3 11/32	2 5/32	1 3/8	1/2	UKP305	P305	UK305	HE2305X	1.7	21.2	10.9	12.6	–	–	–	–	–	–	–	–
		45	175	45	132	17	20	16	85	55	35	M14				H2305X	1.7				–	–	–	–	UKP305C	UKP305CD	76	3	2.3
25		1 11/16	6 1/2	1 7/8	4 3/4	21/32	13/16	19/32	3 5/16	2 3/32	1 7/32(1 1/2)	1/2	UKP206	P206	UK206	H306X(H2306X)	1.4	19.5	11.3	13.9	UKP206C	UKP206CD	52	2 1/16	1.4	UKP206FC	UKP206FCD	70	2 3/4	1.9
	1	42.9	165	48	121	17	21	15	84	53	31(38)	M14				HE306X(HE2306X)	1.4				–	–	–	–	–	–	–	–	–
		1 7/8	6 7/8	2 1/4	5	21/32	31/32	21/32	3 21/32	2 5/32	1 1/2	1/2	UKPX06	PX06	UKX06	H2306X	2.1	25.7	15.4	13.9	UKPX06C	UKPX06CD	59	2 5/16	2.1	–	–	–	–	–
	1	47.6	175	57	127	17	25	17	93	55	38	M14				HE2306X	2.1				–	–	–	–	–	–	–	–	–
		1 31/32	7 3/32	1 31/32	5 1/2	21/32	25/32	21/32	3 3/4	2 3/32	1 1/2	1/2	UKP306	P306	UK306	H2306X	2.3	26.7	15.0	13.3	–	–	–	–	UKP306C	UKP306CD	82	3 7/32	2.9
	1	50	180	50	140	17	20	17	95	53	38	M14				HE2306X	2.3				–	–	–	–	–	–	–	–
30	1 1/8	1 7/8	6 9/16	1 7/8	5	21/32	13/16	5/8	3 21/32	2	1 3/8(1 11/16)	1/2	UKP207	P207	UK207	HS307X(HS2307X)	1.7	25.7	15.4	13.9	–	–	–	–	–	–	–	–
		47.6	167	48	127	17	21	16	93	51	35(43)	M14				H307X(H2307X)	1.7				UKP207C	UKP207CD	59	2 5/16	1.7	UKP207FC	UKP207FCD	78	3 1/16	2.5
	1 1/8	2 1/8	8	2 1/4	5 11/16	21/32	1 3/16	3/4	4 1/8	2 17/32	1 11/16	1/2	UKPX07	PX07	UKX07	HS2307X	2.7	29.1	17.8	14.0	–	–	–	–	–	–	–	–
		54	203	57	144	17	30	19	105	64	43	M14				H2307X	2.7				UKPX07C	UKPX07CD	68	2 11/16	2.7	–	–	–	–	–
	1 1/8	2 13/64	8 9/32	2 7/32	6 5/16	21/32	31/32	3/4	4 7/32	2 9/16	1 11/16	1/2	UKP307	P307	UK307	HS2307X	3.0	33.4	19.3	13.2	–	–	–	–	–	–	–	–
		56	210	56	160	17	25	19	107	65	43	M14				H2307X	3.0				–	–	–	–	UKP307C	UKP307CD	88	3 15/32	3.9
35	1 1/4	1 15/16	7 1/4	2 1/8	5 13/32	21/32	13/16	21/32	3 27/32	2 1/4	1 13/32(1 13/16)	1/2	UKP208	P208	UK208	HE308X(HE2308X)	2.0	29.1	17.8	14.0	–	–	–	–	–	–	–	–
	1 3/8	49.2	184	54	137	17	21	17	98	57	36(46)	M14				HS308X(HS2308X)	2.0				–	–	–	–	–	–	–	–
																H308X(H2308X)	2.0				UKP208C	UKP208CD	68	2 11/16	2.0	UKP208FC	UKP208FCD	86	3 3/8	2.9
	1 1/4	2 5/16	8 3/4	2 5/8	6 1/8	25/32	1 1/4	13/16	4 1/2	2 25/32	1 13/16	5/8	UKPX08	PX08	UKX08	HE2308X	3.5	34.1	21.3	14.0	–	–	–	–	–	–	–	–
	1 3/8	58.7	222	67	156	20	32	21	114	71	46	M16				HS2308X	3.5				–	–	–	–	–	–	–	–
																H2308X	3.5				UKPX08C	UKPX08CD	68	2 11/16	3.5	–	–	–	–	–
	1 1/4	2 23/64	8 21/32	2 3/8	6 11/16	21/32	1 1/16	3/4	4 21/32	2 9/16	1 13/16	1/2	UKP308	P308	UK308	HE2308X	3.8	40.7	24.0	13.2	–	–	–	–	–	–	–	–
	1 3/8	60	220	60	170	17	27	19	118	65	46	M14				HS2308X	3.8				–	–	–	–	–	–	–	–
																H2308X	3.8				–	–	–	–	UKP308C	UKP308CD	96	3 25/32	5.2
40	1 1/2	2 1/8	7 15/32	2 1/8	5 3/4	21/32	13/16	21/32	4 3/16	2 3/8	1 17/32(1 31/32)	1/2	UKP209	P209	UK209	HE309X(HE2309X)	2.3	34.1	21.3	14.0	–	–	–	–	–	–	–	–
		54	190	54	146	17	21	17	106	60	39(50)	M14				H309X(H2309X)	2.3				UKP209C	UKP209CD	68	2 11/16	2.3	UKP209FC	UKP209FCD	88	3 15/32	3.2
	1 1/2	2 5/16	8 3/4	2 5/8	6 1/8	25/32	1 5/16	13/16	4 9/16	2 25/32	1 31/32	5/8	UKPX09	PX09	UKX09	HE2309X	3.7	35.1	23.3	14.4	–	–	–	–	–	–	–	–
		58.7	222	67	156	20	33	21	116	71	50	M16				H2309X	3.7				UKPX09C	UKPX09CD	73	2 7/8	3.7	–	–	–	–	–
	1 1/2	2 41/64	9 21/32	2 5/8	7 15/32	25/32	1 3/16	13/16	5 3/16	2 15/16	1 31/32	5/8	UKP309	P309	UK309	HE2309X	5.0	48.9	29.5	13.3	–	–	–	–	–	–	–	–
		67	245	67	190	20	30	21	132	75	50	M16				H2309X	5.0				–	–	–	–	UKP309C	UKP309CD	102	4 1/32	6.3
45	1 3/4	2 1/4	8 1/8	2 3/8	6 1/4	25/32	7/8	3/4	4 7/16	2 15/32	1 21/32(2 5/32)	5/8	UKP210	P210	UK210	HE310X(HE2310X)	3.0	35.1	23.3	14.4	–	–	–	–	–	–	–	–
		57.2	206	60	159	20	22	19	113	63	42(55)	M16				H310X(H2310X)	3.0				UKP210C	UKP210CD	73	2 7/8	3.0	UKP210FC	UKP210FCD	97	3 13/16	4.1
	1 3/4	2 1/2	9 1/2	2 7/8	6 23/32	25/32	1 13/32	7/8	4 31/32	3	2 5/32	5/8	UKPX10	PX10	UKX10	HE2310X	4.6	43.4	29.4	14.4	–	–	–	–	–	–	–	–
		63.5	241	73	171	20	36	22	126	76	55	M16				H2310X	4.6				UKPX10C	UKPX10CD	75	2 15/16	4.6	–	–	–	–	–
	1 3/4	2 61/64	10 13/16	2 15/16	8 11/32	25/32	1 3/8	15/16	5 13/16	3 15/32	2 5/32	5/8	UKP310	P310	UK310	HE2310X	6.7	62.0	38.3	13.2	–	–	–	–	–	–	–	–
		75	275	75	212	20	35	24	148	88	55	M16				H2310X	6.7				–	–	–	–	UKP310C	UKP310CD	110	4 11/32	8.4
50	1 7/8	2 1/2	8 5/8	2 3/8	6 23/32	25/32	7/8	3/4	4 29/32	2 3/4	1 25/32(2 5/16)	5/8	UKP211	P211	UK211	HS311X(HS2311X)	3.7	43.4	29.4	14.4	–	–	–	–	–	–	–	–
		63.5	219	60	171	20	22	19	125	70	45(59)	M16				H311X(H2311X)	3.7				UKP211C	UKP211CD	75	2 15/16	3.7	UKP211FC	UKP211FCD	99	3 29/32	5.0
	2															HE311X(HE2311X)	3.7				–	–	–	–	–	–	–	–
	1 7/8	2 3/4	10 1/4	3 1/8	7 1/4	31/32	1 13/32	1 3/32	5 15/32	3 9/32	2 5/16	3/4	UKPX11	PX11	UKX11	HS2311X	6.2	52.4	36.2	14.4	–	–	–	–	–	–	–	–
		69.8	260	79	184	25	36	28	139	83	59	M20				H2311X	6.2				UKPX11C	UKPX11CD	88	3 15/32	6.2	–	–	–	–	–
	2															HE2311X	6.2				–	–	–	–	–	–	–	–

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKP206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Representative examples of the forms of housing are indicated.

7. Housings of nodular graphite cast iron are also available.

UKP
Tapered bore (with adapter)
d_1 (50) ~ (90) mm

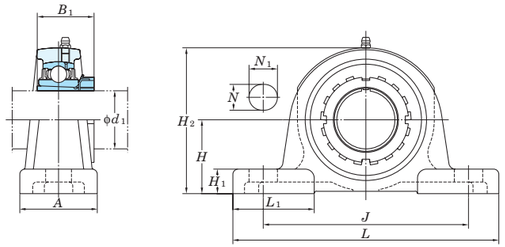

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P205~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P205JE3 (housing with cast iron cover) are shown below.



P205JE3 H_{2c} = 77 mm

Shaft Dia. d_1 mm	Shaft Dia. d_1 inch	Dimensions H	L	A	J	N	N_1	H_1	H_2	L_1	B_1 1)	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension A_c	Mass kg
50	1 7/8	3 5/32	12 7/32	3 5/32	9 9/32	25/32	1 1/2	1 1/16	6 7/32	3 17/32	2 5/16	5/8	UKP311	P311	UK311	HS2311X	8.1				–	–	– –	–	–	–	– –	–
		80	310	80	236	20	38	27	158	90	59	M16				H2311X	8.1	71.6	45.0	13.2	–	–	– –	–	UKP311C	UKP311CD	114 4 1/2	10.0
	2															HE2311X	8.1				–	–	– –	–	–	–	– –	–
55	2 1/8	2 3/4	9 1/2	2 3/4	7 1/4	25/32	31/32	7/8	5 7/16	3	1 27/32(2 7/16)	5/8	UKP212	P212	UK212	HS312X(HS2312X)	4.8	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		69.8	241	70	184	20	25	22	138	76	47(62)	M16				H312X(H2313X)	4.8				UKP212C	UKP212CD	88 3 15/32	4.8	UKP212FC	UKP212FCD	114 4 1/2	6.3
	2 1/8	3	11 1/4	3 1/4	8	31/32	1 9/16	1 3/32	5 31/32	3 15/32	2 7/16	3/4	UKPX12	PX12	UKX12	HS2312X	7.5	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		76.2	286	83	203	25	40	28	152	88	62	M20				H2312X	7.5				UKPX12C	UKPX12CD	88 3 15/32	7.5	–	–	– –	–
	2 1/8	3 11/32	13	3 11/32	9 27/32	31/32	1 1/2	1 5/32	6 9/16	4 1/16	2 7/16	3/4	UKP312	P312	UK312	HS2312X	9.4	81.9	52.2	13.2	–	–	– –	–	–	–	– –	–
		85	330	85	250	25	38	29	167	103	62	M20				H2312X	9.4				–	–	– –	–	UKP312C	UKP312CD	124 4 7/8	11.8
60	2 1/4	3	10 7/16	2 3/4	8	31/32	1 3/16	31/32	5 29/32	3 1/16	1 31/32(2 9/16)	3/4	UKP213	P213	UK213	HE313X(HE2313X)	5.8	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		76.2	265	70	203	25	30	25	150	78	50(65)	M20				H313X(H2313X)	5.8				UKP213C	UKP213CD	88 3 15/32	5.8	UKP213FC	UKP213FCD	114 4 1/2	7.5
	2 3/8															HS313X(HS2313X)	5.8				–	–	– –	–	–	–	– –	–
	2 1/4	3	11 1/4	3 1/4	8	31/32	1 9/16	1 3/32	6 3/32	3 15/32	2 9/16	3/4	UKPX13	PX13	UKX13	HE2313X	7.8	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		76.2	286	83	203	25	40	28	155	88	65	M20				H2313X	7.8				UKPX13C	UKPX13CD	98 3 27/32	7.8	–	–	– –	–
	2 3/8															HS2313X	7.8				–	–	– –	–	–	–	– –	–
	2 1/4	3 35/64	13 3/8	3 17/32	10 1/4	31/32	1 1/2	1 1/4	6 15/16	4 11/32	2 9/16	3/4	UKP313	P313	UK313	HE2313X	10.8	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		90	340	90	260	25	38	32	176	110	65	M20				H2313X	10.8				–	–	– –	–	UKP313C	UKP313CD	122 4 13/16	13.2
	2 3/8															HS2313X	10.8				–	–	– –	–	–	–	– –	–
65	2 1/2	3 1/4	10 13/16	2 29/32	8 17/32	31/32	1 3/16	1 3/32	6 3/8	3 5/32	2 5/32(2 7/8)	3/4	UKP215	P215	UK215	HE315X(HE2315X)	7.5	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		82.6	275	74	217	25	30	28	162	80	55(73)	M20				H315X(H2315X)	7.5				UKP215C	UKP215CD	98 3 27/32	7.5	UKP215FC	UKP215FCD	124 4 7/8	9.5
	2 1/2	3 1/2	13	3 1/2	9	1 1/16	1 31/32	1 1/4	6 7/8	3 29/32	2 7/8	7/8	UKPX15	PX15	UKX15	HE2315X	10.5	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		88.9	330	89	229	27	50	32	175	99	73	M22				H2315X	10.5				UKPX15C	UKPX15CD	108 4 1/4	10.5	–	–	– –	–
	2 1/2	3 15/16	14 31/32	3 15/16	11 13/32	1 1/16	1 9/16	1 3/8	7 25/32	4 7/32	2 7/8	7/8	UKP315	P315	UK315	HE2315X	14.9	113	77.2	13.2	–	–	– –	–	–	–	– –	–
		100	380	100	290	27	40	35	198	107	73	M22				H2315X	14.9				–	–	– –	–	UKP315C	UKP315CD	134 5 9/32	17.7
70	2 3/4	3 1/2	11 1/2	3 1/16	9 1/8	31/32	1 3/8	1 1/4	6 27/32	3 3/8	2 5/16(3 1/16)	3/4	UKP216	P216	UK216	HE316X(HE2316X)	9.2	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		88.9	292	78	232	25	35	32	174	86	59(78)	M20				H316X(H2316X)	9.2				UKP216C	UKP216CD	108 4 1/4	9.2	UKP216FC	UKP216FCD	138 5 7/16	11.7
	2 3/4	4	15	4	11 1/8	1 1/16	2 9/32	1 11/32	7 11/16	4 9/16	3 1/16	7/8	UKPX16	PX16	UKX16	HE2316X	15.4	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		101.6	381	102	283	27	58	34	195	116	78	M22				H2316X	15.4				UKPX16C	UKPX16CD	112 4 13/32	15.4	–	–	– –	–
	2 3/4	4 11/64	15 3/4	4 11/32	11 13/16	1 1/16	1 9/16	1 3/8	8 7/32	4 23/32	3 1/16	7/8	UKP316	P316	UK316	HE2316X	18.6	123	86.7	13.3	–	–	– –	–	–	–	– –	–
		106	400	110	300	27	40	35	209	120	78	M22				H2316X	18.6				–	–	– –	–	UKP316C	UKP316CD	138 5 7/16	21.7
75	3	3 3/4	12 7/32	3 9/32	9 23/32	31/32	1 9/16	1 1/4	7 9/32	3 17/32	2 15/32(3 7/32)	3/4	UKP217	P217	UK217	H317X(H2317X)	11.0	84.0	61.9	14.5	UKP217C	UKP217CD	112 4 13/32	11.0	UKP217FC	UKP217FCD	142 5 19/32	13.8
		95.2	310	83	247	25	40	32	185	90	63(82)	M20				HE317X(HE2317X)	11.0				–	–	– –	–	–	–	– –	–
	3	4	15	4	11 1/8	1 1/16	2 3/8	1 11/32	7 7/8	4 9/16	3 7/32	7/8	UKPX17	PX17	UKX17	H2317X	15.8	96.1	71.5	14.5	UKPX17C	UKPX17CD	122 4 13/16	15.8	–	–	– –	–
		101.6	381	102	283	27	60	34	200	116	82	M22				HE2317X	15.8				–	–	– –	–	–	–	– –	–
	3	4 13/32	16 17/32	4 11/32	12 19/32	1 5/16	1 25/32	1 9/16	8 21/32	4 23/32	3 7/32	1	UKP317	P317	UK317	H2317X	20.2	133	96.8	13.3	–	–	– –	–	UKP317C	UKP317CD	146 5 3/4	23.7
		112	420	110	320	33	45	40	220	120	82	M27				HE2317X	20.2				–	–	– –	–	–	–	– –	–
80	–	4	12 7/8	3 15/32	10 5/16	1 1/16	1 25/32	1 11/32	7 25/32	4 3/32	2 9/16(3 3/8)	7/8	UKP218	P218	UK218	H318X(H2318X)	13.8	96.1	71.5	14.5	UKP218C	UKP218CD	122 4 13/16	13.8	UKP218FC	UKP218FCD	152 6	18.8
		101.6	327	88	262	27	45	34	198	104	65(86)	M22																
	–	4	15	4 3/8	11 1/8	1 1/16	2 3/8	1 1/2	8 1/32	4 9/16	3 3/8	7/8	UKPX18	PX18	UKX18	H2318X	18.6	109	81.9	14.4	–	–	– –	–	UKPX18C	UKPX18CD	158 6 7/32	22.4
		101.6	381	111	283	27	60	38	204	116	86	M22																
	–	4 41/64	16 15/16	4 11/32	13	1 5/16	1 25/32	1 9/16	9 7/32	4 23/32	3 3/8	1	UKP318	P318	UK318	H2318X	22.8	143	107	13.3	–	–	– –	–	UKP318C	UKP318CD	150 5 29/32	27.0
		118	430	110	330	33	45	40	234	120	86	M27																
85	3 1/4	4 59/64	18 1/2	4 23/32	14 3/16	1 13/32	1 31/32	1 13/16	9 3/4	4 29/32	3 17/32	1 1/8	UKP319	P319	UK319	HE2319X	29.3	153	119	13.3	–	–	– –	–	–	–	– –	–
		125	470	120	360	36	50	46	248	125	90	M30				H2319X	29.3				–	–	– –	–	UKP319C	UKP319CD	162 6 3/8	34.0
90	3 1/2	5	17	4 3/4	13 1/4	1 5/16	2 9/16	1 25/32	9 21/32	4 31/32	3 13/16	1	UKPX20	PX20	UKX20	HE2320X	29.3	133	105	14.4	–	–	– –	–	–	–	– –	–
		127	432	121	337	33	65	45	245	126	97	M27				H2320X	29.3				–	–	– –	–	UKPX20C	UKPX20CD	186 7 5/16	34.3

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKP206J + H306X, UK206 + H306X)
4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.
6. Representative examples of the forms of housing are indicated.
7. Housings of nodular graphite cast iron are also available.

UKP
Tapered bore (with adapter)
d_1 (90) ~ 125 mm

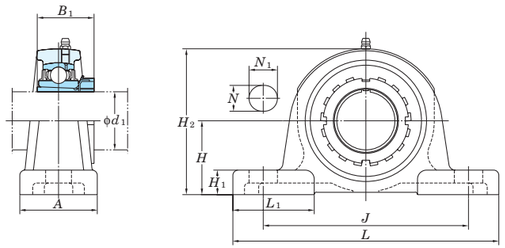

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.			Δ_{Hs}
P205~P210	PX05~PX10	P305~P310	±0.15
P211~P218	PX11~PX18	P311~P318	±0.2
	PX20	P319~P328	±0.3

Forms and dimensions of H_{2c} of P205JE3 (housing with cast iron cover) are shown below.



P205JE3 H_{2c} = 77 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm										Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter[1] No.	Mass kg	Basic Load Ratings kN		Factor	With Pressed Steel Cover Unit No.		Dimension mm / inch		Mass	With Cast Iron Cover Unit No.		Dimension mm / inch		Mass
d_1		H	L	A	J	N	N_1	H_1	H_2	L_1	B_1[1]							C_r	C_{0r}	f_0	Open Type	One Side Closed Type			kg	Open Type	One Side Closed Type			kg
90	3 1/2	5 33/64	19 9/32	4 23/32	14 31/32	1 13/32	1 31/32	1 13/16	10 3/4	5 1/2	3 13/16	1 1/8	UKP320	P320	UK320	HE2320X	34.8	173	141	13.2	–	–	–	–	–	–	–	–	–	–
		140	490	120	380	36	50	46	273	140	97	M30				H2320X	34.8				–	–	–	–	–	UKP320C	UKP320CD	174	6 27/32	41.0
100	4	5 29/32	20 15/32	5 1/2	15 3/4	1 9/16	2 5/32	1 31/32	11 21/32	5 29/32	4 1/8	1 1/4	UKP322	P322	UK322	H2322X	43.9	205	180	13.2	–	–	–	–	–	UKP322C	UKP322CD	188	7 13/32	50.8
		150	520	140	400	40	55	50	296	150	105	M33				HE2322X	43.9				–	–	–	–	–	–	–	–	–	–
110	–	6 19/64	22 7/16	5 1/2	17 23/32	1 9/16	2 5/32	1 31/32	12 7/16	6 5/16	4 13/32	1 1/4	UKP324	P324	UK324	H2324	55.7	207	185	13.5	–	–	–	–	–	UKP324C	UKP324CD	196	7 23/32	66.0
115	4 1/2	7 3/32	23 5/8	5 1/2	18 29/32	1 9/16	2 5/32	1 31/32	13 21/32	7 11/16	4 3/4	1 1/4	UKP326	P326	UK326	HE2326	71.9	229	214	13.6	–	–	–	–	–	–	–	–	–	–
		180	600	140	480	40	55	50	355	195	121	M33				H2326	71.9				–	–	–	–	–	UKP326C	UKP326CD	214	8 7/16	85.2
125	–	7 7/8	24 13/32	5 1/2	19 11/16	1 9/16	2 5/32	2 3/8	15 15/32	7 9/32	5 5/32	1 1/4	UKP328	P328	UK328	H2328	92.5	253	246	13.6	–	–	–	–	–	UKP328C	UKP328CD	222	8 3/4	109
		200	620	140	500	40	55	60	393	185	131	M33																		

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKP206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Representative examples of the forms of housing are indicated.

7. Housings of nodular graphite cast iron are also available.

UCP-SC
Cylindrical bore (with set screws), cast steel housing
d 25 ~ 70 mm





With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.		Δ_{Hs}
P205SC~P210SC	P310SC	±0.15
P211SC~P218SC	P311SC~P318SC	±0.2
	P319SC~P328SC	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c		Mass kg
25	7/8													UCP205-14SC	P205SC	UC205-14	0.90	14.0	7.85	13.9	–	–	–	–	–
	15/16	1 7/16	5 1/2	1 1/2	4 1/8	1/2	23/32	5/8	2 25/32	1 11/16	1.343	0.563	3/8	UCP205-15SC		UC205-15	0.90				–	–	–	–	–
		36.5	140	38	105	13	18	16	71	43	34.1	14.3	M10	UCP205SC		UC205	0.90				–	–	–	–	–
	1													UCP205-16SC		UC205-16	0.90				–	–	–	–	–
30	1 1/8													UCP206-18SC	P206SC	UC206-18	1.5	19.5	11.3	13.9	–	–	–	–	–
		1 11/16	6 1/2	1 7/8	4 3/4	21/32	13/16	23/32	3 3/8	2 3/32	1.500	0.626	1/2	UCP206SC		UC206	1.5				UCP206SCFC	UCP206SCFCD	70	2 3/4	2.0
	1 3/16	42.9	165	48	121	17	21	18	86	53	38.1	15.9	M14	UCP206-19SC		UC206-19	1.5				–	–	–	–	–
	1 1/4													UCP206-20SC		UC206-20	1.5				–	–	–	–	–
35	1 1/4													UCP207-20SC	P207SC	UC207-20	1.9	25.7	15.4	13.9	–	–	–	–	–
	1 5/16													UCP207-21SC		UC207-21	1.9				–	–	–	–	–
	1 3/8	1 7/8	6 9/16	1 7/8	5	21/32	13/16	3/4	3 25/32	2	1.689	0.689	1/2	UCP207-22SC		UC207-22	1.9				–	–	–	–	–
		47.6	167	48	127	17	21	19	96	51	42.9	17.5	M14	UCP207SC		UC207	1.9				UCP207SCFC	UCP207SCFCD	78	3 1/16	2.6
	1 7/16													UCP207-23SC		UC207-23	1.9				–	–	–	–	–
40	1 1/2													UCP208-24SC	P208SC	UC208-24	2.3	29.1	17.8	14.0	–	–	–	–	–
	1 9/16	1 15/16	7 1/4	2 1/8	5 13/32	21/32	13/16	3/4	3 15/16	2 1/4	1.937	0.748	1/2	UCP208-25SC		UC208-25	2.3				–	–	–	–	–
		49.2	184	54	137	17	21	19	100	57	49.2	19	M14	UCP208SC		UC208	2.3				UCP208SCFC	UCP208SCFCD	86	3 3/8	3.1
45	1 5/8													UCP209-26SC	P209SC	UC209-26	2.5	34.1	21.3	14.0	–	–	–	–	–
	1 11/16	2 1/8	7 15/32	2 1/8	5 3/4	21/32	13/16	25/32	4 1/4	2 3/8	1.937	0.748	1/2	UCP209-27SC		UC209-27	2.5				–	–	–	–	–
	1 3/4	54	190	54	146	17	21	20	108	60	49.2	19	M14	UCP209-28SC		UC209-28	2.5				–	–	–	–	–
														UCP209SC		UC209	2.5				UCP209SCFC	UCP209SCFCD	88	3 15/32	3.3
50	1 7/8													UCP210-30SC	P210SC	UC210-30	3.2	35.1	23.3	14.4	–	–	–	–	–
	1 15/16	2 1/4	8 1/8	2 3/8	6 1/4	25/32	7/8	7/8	4 17/32	2 15/32	2.031	0.748	5/8	UCP210-31SC		UC210-31	3.2				–	–	–	–	–
		57.2	206	60	159	20	22	22	115	63	51.6	19	M16	UCP210SC		UC210	3.2				UCP210SCFC	UCP210SCFCD	97	3 13/16	4.2
	2													UCP210-32SC		UC210-32	3.2				–	–	–	–	–
	–	2 61/64	10 13/16	2 15/16	8 11/32	25/32	1 3/8	1 1/16	5 13/16	3 15/32	2.402	0.866	5/8	UCP310SC	P310SC	UC310	9.2	62.0	38.3	13.2	UCP310SCC	UCP310SCCD	110	4 11/32	10.8
55	2													UCP211-32SC	P211SC	UC211-32	4.0	43.4	29.4	14.4	–	–	–	–	–
	2 1/8	2 1/2	8 5/8	2 3/8	6 23/32	25/32	7/8	15/16	5	2 3/4	2.189	0.874	5/8	UCP211-34SC		UC211-34	4.0				–	–	–	–	–
		63.5	219	60	171	20	22	24	127	70	55.6	22.2	M16	UCP211SC		UC211	4.0				UCP211SCFC	UCP211SCFCD	99	3 29/32	5.2
	2 3/16													UCP211-35SC		UC211-35	4.0				–	–	–	–	–
	2	3 5/32	12 7/32	3 5/32	9 9/32	25/32	1 1/2	1 3/16	6 7/32	3 17/32	2.598	0.984	5/8	UCP311-32SC	P311SC	UC311-32	10.9	71.6	45.0	13.2	–	–	–	–	–
		80	310	80	236	20	38	30	158	90	66	25	M16	UCP311SC		UC311	10.9				UCP311SCC	UCP311SCCD	114	4 1/2	12.7
60	2 1/4													UCP212-36SC	P212SC	UC212-36	5.2	52.4	36.2	14.4	–	–	–	–	–
		2 3/4	9 1/2	2 3/4	7 1/4	25/32	31/32	31/32	5 15/32	3	2.563	1.000	5/8	UCP212SC		UC212	5.2				UCP212SCFC	UCP212SCFCD	114	4 1/2	6.7
	2 3/8	69.8	241	70	184	20	25	25	139	76	65.1	25.4	M16	UCP212-38SC		UC212-38	5.2				–	–	–	–	–
	2 7/16													UCP212-39SC		UC212-39	5.2				–	–	–	–	–
		3 11/32	13	3 11/32	9 27/32	31/32	1 1/2	1 1/4	6 5/8	4 1/16	2.795	1.024	3/4	UCP312SC	P312SC	UC312	12.6	81.9	52.2	13.2	UCP312SCC	UCP312SCCD	124	4 7/8	14.9
	2 7/16	85	330	85	250	25	38	32	168	103	71	26	M20	UCP312-39SC		UC312-39	12.6				–	–	–	–	–
65	2 1/2													UCP213-40SC	P213SC	UC213-40	6.4	57.2	40.1	14.4	–	–	–	–	–
		3	10 7/16	2 3/4	8	31/32	1 3/16	1 3/32	5 15/16	3 1/16	2.563	1.000	3/4	UCP213SC		UC213	6.4				UCP213SCFC	UCP213SCFCD	114	4 1/2	8.1
	2 1/2	3 35/64	13 3/8	3 17/32	10 1/4	31/32	1 1/2	1 3/8	7	4 11/32	2.953	1.181	3/4	UCP313-40SC	P313SC	UC313-40	14.2	92.7	59.9	13.2	–	–	–	–	–
		90	340	90	260	25	38	35	178	110	75	30	M20	UCP313SC		UC313	14.2				UCP313SCC	UCP313SCCD	122	4 13/16	16.3
70	2 3/4													UCP214-44SC	P214SC	UC214-44	7.1	62.2	44.1	14.5	–	–	–	–	–
		3 1/8	10 15/32	2 27/32	8 9/32	31/32	1 3/16	1 3/32	6 3/16	3 1/16	2.937	1.189	3/4	UCP214SC		UC214	7.1				UCP214SCFC	UCP214SCFCD	124	4 7/8	9.0
	2 3/4	3 47/64	14 3/16	3 17/32	11 1/32	1 1/16	1 9/16	1 1/2	7 13/32	4 11/32	3.071	1.299	7/8	UCP314-44SC	P314SC	UC314-44	14.9	104	68.2	13.2	–	–	–	–	–
		95	360	90	280	27	40	38	188	110	78	33	M22	UCP314SC		UC314	14.9				UCP314SCC	UCP314SCCD	124	4 7/8	17.2

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 205~210
A-R1/8 ..... 211~218, 310~328
3. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UCP206JSCL3, UC206L3)
4. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit.

UCP-SC
Cylindrical bore (with set screws), cast steel housing
d 75 ~ 140 mm





With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.		Δ_{Hs}
P205SC~P210SC	P310SC	±0.15
P211SC~P218SC	P311SC~P318SC	±0.2
	P319SC~P328SC	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c	Mass kg
75	2 15/16	3 1/4	10 13/16	2 29/32	8 17/32	31/32	1 3/16	1 5/32	6 15/32	3 5/32	3.063	1.311	3/4	UCP215-47SC	P215SC	UC215-47	7.7	67.4	48.3	14.5	–	–	– –	–
		82.6	275	74	217	25	30	29	164	80	77.8	33.3	M20	UCP215SC		UC215	7.7				UCP215SCFC	UCP215SCFCD	124 4 7/8	9.6
	3													UCP215-48SC		UC215-48	7.7				–	–	– –	–
	2 15/16	3 15/16	14 31/32	3 15/16	11 13/32	1 1/16	1 9/16	1 1/2	7 7/8	4 7/32	3.228	1.260	7/8	UCP315-47SC	P315SC	UC315-47	20.7	113	77.2	13.2	–	–	– –	–
		100	380	100	290	27	40	38	200	107	82	32	M22	UCP315SC		UC315	20.7				UCP315SCC	UCP315SCCD	134 5 9/32	23.2
	3													UCP315-48SC		UC315-48	20.7				–	–	– –	–
80	3 1/8	3 1/2	11 1/2	3 1/16	9 1/8	31/32	1 3/8	1 7/32	6 15/16	3 3/8	3.252	1.311	3/4	UCP216-50SC	P216SC	UC216-50	9.3	72.7	53.0	14.6	–	–	– –	–
		88.9	292	78	232	25	35	31	176	86	82.6	33.3	M20	UCP216SC		UC216	9.3				UCP216SCFC	UCP216SCFCD	138 5 7/16	11.7
	–	4 11/64	15 3/4	4 11/32	11 13/16	1 1/16	1 9/16	1 1/2	8 5/16	4 23/32	3.386	1.339	7/8	UCP316SC	P316SC	UC316	24.2	123	86.7	13.3	UCP316SCC	UCP316SCCD	138 5 7/16	27.1
		106	400	110	300	27	40	38	211	120	86	34	M22											
85	3 1/4	3 3/4	12 7/32	3 9/32	9 23/32	31/32	1 9/16	1 5/16	7 13/32	3 17/32	3.374	1.343	3/4	UCP217-52SC	P217SC	UC217-52	11.7	84.0	61.9	14.5	–	–	– –	–
		95.2	310	83	247	25	40	33	188	90	85.7	34.1	M20	UCP217SC		UC217	11.7				UCP217SCFC	UCP217SCFCD	142 5 19/32	14.4
	–	4 13/32	16 17/32	4 11/32	12 19/32	1 5/16	1 25/32	1 25/32	8 3/4	4 23/32	3.780	1.575	1	UCP317SC	P317SC	UC317	28.4	133	96.8	13.3	UCP317SCC	UCP317SCCD	146 5 3/4	31.7
		112	420	110	320	33	45	45	222	120	96	40	M27											
90	3 1/2	4	12 7/8	3 15/32	10 5/16	1 1/16	1 25/32	1 3/8	7 7/8	4 3/32	3.780	1.563	7/8	UCP218-56SC	P218SC	UC218-56	13.5	96.1	71.5	14.5	–	–	– –	–
		101.6	327	88	262	27	45	35	200	104	96	39.7	M22	UCP218SC		UC218	13.5				UCP218SCFC	UCP218SCFCD	152 6	16.6
	3 1/2	4 41/64	16 15/16	4 11/32	13	1 5/16	1 25/32	1 25/32	9 7/32	4 23/32	3.780	1.575	1	UCP318-56SC	P318SC	UC318-56	30.9	143	107	13.3	–	–	– –	–
		118	430	110	330	33	45	45	234	120	96	40	M27	UCP318SC		UC318	30.9				UCP318SCC	UCP318SCCD	150 5 29/32	34.7
95	–	4 59/64	18 1/2	4 23/32	14 3/16	1 13/32	1 31/32	2	9 3/4	4 29/32	4.055	1.614	1 1/8	UCP319SC	P319SC	UC319	37.9	153	119	13.3	UCP319SCC	UCP319SCCD	162 6 3/8	42.2
		125	470	120	360	36	50	51	248	125	103	41	M30											
100	3 15/16	5 33/64	19 9/32	4 23/32	14 31/32	1 13/32	1 31/32	2	10 3/4	5 1/2	4.252	1.654	1 1/8	UCP320SC	P320SC	UC320	45.2	173	141	13.2	UCP320SCC	UCP320SCCD	174 6 27/32	50.8
		140	490	120	380	36	50	51	273	140	108	42	M30	UCP320-63SC		UC320-63	45.2				–	–	– –	–
	4													UCP320-64SC		UC320-64	45.2				–	–	– –	–
110	–	5 29/32	20 15/32	5 1/2	15 3/4	1 9/16	2 5/32	2 1/4	11 21/32	5 29/32	4.606	1.811	1 1/4	UCP322SC	P322SC	UC322	53.1	205	180	13.2	UCP322SCC	UCP322SCCD	188 7 13/32	59.9
		150	520	140	400	40	55	57	296	150	117	46	M33											
120	–	6 19/64	22 7/16	5 1/2	17 23/32	1 9/16	2 5/32	2 1/4	12 7/16	6 5/16	4.961	2.008	1 1/4	UCP324SC	P324SC	UC324	69.0	207	185	13.5	UCP324SCC	UCP324SCCD	196 7 23/32	78.5
		160	570	140	450	40	55	57	316	160	126	51	M33											
130	–	7 3/32	23 5/8	5 1/2	18 29/32	1 9/16	2 5/32	2 1/4	13 21/32	7 11/16	5.315	2.126	1 1/4	UCP326SC	P326SC	UC326	85.6	229	214	13.6	UCP326SCC	UCP326SCCD	214 8 7/16	97.7
		180	600	140	480	40	55	57	355	195	135	54	M33											
140	–	7 7/8	24 13/32	5 1/2	19 11/16	1 9/16	2 5/32	2 3/4	15 15/32	7 9/32	5.709	2.323	1 1/4	UCP328SC	P328SC	UC328	114	253	246	13.6	UCP328SCC	UCP328SCCD	222 8 3/4	129
		200	620	140	500	40	55	70	393	185	145	59	M33											

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 205~210
A-R1/8 ..... 211~218, 310~328
3. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UCP206JSCL3, UC206L3)
4. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit.

FYH

UKP-SC
Tapered bore (with adapter), cast steel housing
d_1 20 ~ (80) mm







With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.		Δ_{Hs}
P205SC~P210SC	P310SC	±0.15
P211SC~P218SC	P311SC~P318SC	±0.2
	P319SC~P328SC	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	B_1 1)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c		Mass kg
20	3/4	1 7/16	5 1/2	1 1/2	4 1/8	1/2	23/32	5/8	2 25/32	1 11/16	1 5/32(1 3/8)	3/8	UKP205SC	P205SC	UK205	HE305X(HE2305X)	1.0	14.0	7.85	13.9	–	–	–	–	–
		36.5	140	38	105	13	18	16	71	43	29(35)	M10				H305X(H2305X)	1.0				–	–	–	–	–
25		1 11/16	6 1/2	1 7/8	4 3/4	21/32	13/16	23/32	3 3/8	2 3/32	1 7/32(1 1/2)	1/2	UKP206SC	P206SC	UK206	H306X(H2306X)	1.6	19.5	11.3	13.9	UKP206SCFC	UKP206SCFCD	70	2 3/4	2.1
	1	42.9	165	48	121	17	21	18	86	53	31(38)	M14				H306X(H2306X)	1.6				–	–	–	–	–
30	1 1/8	1 7/8	6 9/16	1 7/8	5	21/32	13/16	3/4	3 25/32	2	1 3/8(1 11/16)	1/2	UKP207SC	P207SC	UK207	HS307X(HS2307X)	2.1	25.7	15.4	13.9	–	–	–	–	–
		47.6	167	48	127	17	21	19	96	51	35(43)	M14				H307X(H2307X)	2.1				UKP207SCFC	UKP207SCFCD	78	3 1/16	2.8
35	1 1/4	1 15/16	7 1/4	2 1/8	5 13/32	21/32	13/16	3/4	3 15/16	2 1/4	1 13/32(1 13/16)	1/2	UKP208SC	P208SC	UK208	HE308X(HE2308X)	2.4	29.1	17.8	14.0	–	–	–	–	–
	1 3/8	49.2	184	54	137	17	21	19	100	57	36(46)	M14				HS308X(HS2308X)	2.4				–	–	–	–	–
																H308X(H2308X)	2.4				UKP208SCFC	UKP208SCFCD	86	3 3/8	3.2
40	1 1/2	2 1/8	7 15/32	2 1/8	5 3/4	21/32	13/16	25/32	4 1/4	2 3/8	1 17/32(1 31/32)	1/2	UKP209SC	P209SC	UK209	H309X(HE2309X)	2.7	34.1	21.3	14.0	–	–	–	–	–
		54	190	54	146	17	21	20	108	60	39(50)	M14				H309X(H2309X)	2.7				UKP209SCFC	UKP209SCFCD	88	3 15/32	3.5
45	1 3/4	2 1/4	8 1/8	2 3/8	6 1/4	25/32	7/8	7/8	4 17/32	2 15/32	1 21/32(2 5/32)	5/8	UKP210SC	P210SC	UK210	HE310X(HE2310X)	3.3	35.1	23.3	14.4	–	–	–	–	–
		57.2	206	60	159	20	22	22	115	63	42(55)	M16				H310X(H2310X)	3.3				UKP210SCFC	UKP210SCFCD	97	3 13/16	4.3
	1 3/4	2 61/64	10 13/16	2 15/16	8 11/32	25/32	1 3/8	1 1/16	5 13/16	3 15/32	2 5/32	5/8	UKP310SC	P310SC	UK310	HE2310X	9.3	62.0	38.3	13.2	–	–	–	–	–
		75	275	75	212	20	35	27	148	88	55	M16				H2310X	9.3				UKP310SCC	UKP310SCCD	110	4 11/32	11.0
50	1 7/8	2 1/2	8 5/8	2 3/8	6 23/32	25/32	7/8	15/16	5	2 3/4	1 25/32(2 5/16)	5/8	UKP211SC	P211SC	UK211	HS311X(HS2311X)	4.2	43.4	29.4	14.4	–	–	–	–	–
	2	63.5	219	60	171	20	22	24	127	70	45(59)	M16				H311X(H2311X)	4.2				UKP211SCFC	UKP211SCFCD	99	3 29/32	5.4
																HE311X(HE2311X)	4.2				–	–	–	–	–
	1 7/8	3 5/32	12 7/32	3 5/32	9 9/32	25/32	1 1/2	1 3/16	6 7/32	3 17/32	2 5/16	5/8	UKP311SC	P311SC	UK311	HS2311X	11.2	71.6	45.0	13.2	–	–	–	–	–
	2	80	310	80	236	20	38	30	158	90	59	M16				H2311X	11.2				UKP311SCC	UKP311SCCD	114	4 1/2	13.1
																HE2311X	11.2				–	–	–	–	–
55	2 1/8	2 3/4	9 1/2	2 3/4	7 1/4	25/32	31/32	31/32	5 15/32	3	1 27/32(2 7/16)	5/8	UKP212SC	P212SC	UK212	HS312X(HS2312X)	5.1	52.4	36.2	14.4	–	–	–	–	–
		69.8	241	70	184	20	25	25	139	76	47(62)	M16				H312X(H2313X)	5.1				UKP212SCFC	UKP212SCFCD	114	4 1/2	6.6
	2 1/8	3 11/32	13	3 11/32	9 27/32	31/32	1 1/2	1 1/4	6 5/8	4 1/16	2 7/16	3/4	UKP312SC	P312SC	UK312	HS2312X	12.5	81.9	52.2	13.2	–	–	–	–	–
		85	330	85	250	25	38	32	168	103	62	M20				H2312X	12.5				UKP312SCC	UKP312SCCD	124	4 7/8	14.9
60	2 1/4	3	10 7/16	2 3/4	8	31/32	1 3/16	1 3/32	5 15/16	3 1/16	1 31/32(2 9/16)	3/4	UKP213SC	P213SC	UK213	HE313X(HE2313X)	6.3	57.2	40.1	14.4	–	–	–	–	–
		76.2	265	70	203	25	30	28	151	78	50(65)	M20				H313X(H2313X)	6.3				UKP213SCFC	UKP213SCFCD	114	4 1/2	8.0
	2 3/8															HS313X(HS2313X)	6.3				–	–	–	–	–
	2 1/4	3 35/64	13 3/8	3 17/32	10 1/4	31/32	1 1/2	1 3/8	7	4 11/32	2 9/16	3/4	UKP313SC	P313SC	UK313	HE2313X	14.3	92.7	59.9	13.2	–	–	–	–	–
		90	340	90	260	25	38	35	178	110	65	M20				H2313X	14.3				UKP313SCC	UKP313SCCD	122	4 13/16	16.5
	2 3/8															HS2313X	14.3				–	–	–	–	–
65	2 1/2	3 1/4	10 13/16	2 29/32	8 17/32	31/32	1 3/16	1 5/32	6 15/32	3 5/32	2 5/32(2 7/8)	3/4	UKP215SC	P215SC	UK215	HE315X(HE2315X)	7.9	67.4	48.3	14.5	–	–	–	–	–
		82.6	275	74	217	25	30	29	164	80	55(73)	M20				H315X(H2315X)	7.9				UKP215SCFC	UKP215SCFCD	124	4 7/8	9.8
	2 1/2	3 15/16	14 31/32	3 15/16	11 13/32	1 1/16	1 9/16	1 1/2	7 7/8	4 7/32	2 7/8	7/8	UKP315SC	P315SC	UK315	HE2315X	20.9	113	77.2	13.2	–	–	–	–	–
		100	380	100	290	27	40	38	200	107	73	M22				H2315X	20.9				UKP315SCC	UKP315SCCD	134	5 9/32	23.7
70	2 3/4	3 1/2	11 1/2	3 1/16	9 1/8	31/32	1 3/8	1 7/32	6 15/16	3 3/8	2 5/16(3 1/16)	3/4	UKP216SC	P216SC	UK216	HE316X(HE2316X)	9.6	72.7	53.0	14.6	–	–	–	–	–
		88.9	292	78	232	25	35	31	176	86	59(78)	M20				H316X(H2316X)	9.6				UKP216SCFC	UKP216SCFCD	138	5 7/16	12.0
	2 3/4	4 11/64	15 3/4	4 11/32	11 13/16	1 1/16	1 9/16	1 1/2	8 5/16	4 23/32	3 1/16	7/8	UKP316SC	P316SC	UK316	HE2316X	24.2	123	86.7	13.3	–	–	–	–	–
		106	400	110	300	27	40	38	211	120	78	M22				H2316X	24.2				UKP316SCC	UKP316SCCD	138	5 7/16	27.3
75	3	3 3/4	12 7/32	3 9/32	9 23/32	31/32	1 9/16	1 5/16	7 13/16	3 17/32	2 15/32(3 7/32)	3/4	UKP217SC	P217SC	UK217	H317X(H2317X)	12.0	84.0	61.9	14.5	UKP217SCFC	UKP217SCFCD	142	5 19/32	14.7
		95.2	310	83	247	25	40	33	188	90	63(82)	M20				HE317X(HE2317X)	12.0				–	–	–	–	–
	3	4 13/32	16 17/32	4 11/32	12 19/32	1 5/16	1 25/32	1 25/32	8 3/4	4 23/32	3 7/32	1	UKP317SC	P317SC	UK317	H2317X	28.3	133	96.8	13.3	UKP317SCC	UKP317SCCD	146	5 3/4	31.8
		112	420	110	320	33	45	45	222	120	82	M27				HE2317X	28.3				–	–	–	–	–
80	–	4	12 7/8	3 15/32	10 5/16	1 1/16	1 25/32	1 3/8	7 7/8	4 3/32	2 9/16(3 3/8)	7/8	UKP218SC	P218SC	UK218	H318X(H2318X)	15.3	96.1	71.5	14.5	UKP218SCFC	UKP218SCFCD	152	6	18.4
		101.6	327	88	262	27	45	35	200	104	65(86)	M22													

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210
A-R1/8.....211~218, 310~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKP206JSC + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKP206JSCL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

UKP-SC
Tapered bore (with adapter), cast steel housing
d_1 (80) ~ 125 mm







With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs})

Unit: mm

Housing No.		Δ_{Hs}
P205SC~P210SC	P310SC	±0.15
P211SC~P218SC	P311SC~P318SC	±0.2
	P319SC~P328SC	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm										Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.		Adapter[1] No.	Mass kg	Basic Load Ratings kN		Factor	With Cast Iron Cover Unit No.		Dimension mm / inch		Mass kg
d_1		H	L	A	J	N	N_1	H_1	H_2	L_1	B_1[1]								C_r	C_{0r}	f_0	Open Type	One Side Closed Type	A_c		
80	–	4 41/64 118	16 15/16 430	4 11/32 110	13 330	1 5/16 33	1 25/32 45	1 25/32 45	9 7/32 234	4 23/32 120	3 3/8 86	1 M27	UKP318SC	P318SC	UK318		H2318X	31.0	143	107	13.3	UKP318SCC	UKP318SCCD	150	5 29/32	35.2
85	3 1/4	4 59/64 125	18 1/2 470	4 23/32 120	14 3/16 360	1 13/32 36	1 31/32 50	2 51	9 3/4 248	4 29/32 125	3 17/32 90	1 1/8 M30	UKP319SC	P319SC	UK319		HE2319X H2319X	38.2 38.2	153	119	13.3	– UKP319SCC	– UKP319SCCD	– 162	– 6 3/8	– 42.9
90	3 1/2	5 33/64 140	19 9/32 490	4 23/32 120	14 31/32 380	1 13/32 36	1 31/32 50	2 51	10 3/4 273	5 1/2 140	3 13/16 97	1 1/8 M30	UKP320SC	P320SC	UK320		HE2320X H2320X	44.9 44.9	173	141	13.2	– UKP320SCC	– UKP320SCCD	– 174	– 6 27/32	– 51.1
100	4	5 29/32 150	20 15/32 520	5 1/2 140	15 3/4 400	1 9/16 40	2 5/32 55	2 1/4 57	11 21/32 296	5 29/32 150	4 1/8 105	1 1/4 M33	UKP322SC	P322SC	UK322		H2322X HE2322X	53.0 53.0	205	180	13.2	UKP322SCC –	UKP322SCCD –	188 –	7 13/32 –	59.9 –
110	–	6 19/64 160	22 7/16 570	5 1/2 140	17 23/32 450	1 9/16 40	2 5/32 55	2 1/4 57	12 7/16 316	6 5/16 160	4 13/32 112	1 1/4 M33	UKP324SC	P324SC	UK324		H2324	69.3	207	185	13.5	UKP324SCC	UKP324SCCD	196	7 23/32	79.6
115	4 1/2	7 3/32 180	23 5/8 600	5 1/2 140	18 29/32 480	1 9/16 40	2 5/32 55	2 1/4 57	13 21/32 355	7 11/16 195	4 3/4 121	1 1/4 M33	UKP326SC	P326SC	UK326		HE2326 H2326	85.4 85.4	229	214	13.6	– UKP326SCC	– UKP326SCCD	– 214	– 8 7/16	– 98.7
125	–	7 7/8 200	24 13/32 620	5 1/2 140	19 11/16 500	1 9/16 40	2 5/32 55	2 3/4 70	15 15/32 393	7 9/32 185	5 5/32 131	1 1/4 M33	UKP328SC	P328SC	UK328		H2328	114	253	246	13.6	UKP328SCC	UKP328SCCD	222	8 3/4	131

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210
A-R1/8.....211~218, 310~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKP206JSC + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKP206JSCL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

UCIP
Cylindrical bore (with set screws)
d 40 ~ 140 mm





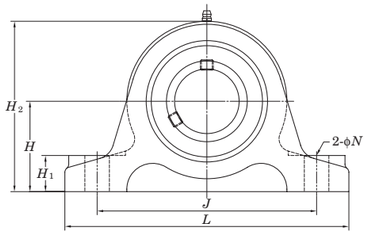

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.		Δ_{Hs}	Δ_{Js}
IP208~IP210		±0.15	±0.5
IP211~IP213	IP313~IP318	±0.2	±0.7
	IP319~IP328	±0.3	

Shaft Dia. mm / inch d		Dimensions inch / mm H	L	A	J	N	H_1	H_2	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c	Mass kg
40	1 1/2	2 23/64	7 7/8	2 3/8	5 29/32	3/4	31/32	4 17/32	1.937	0.748	5/8	UCIP208-24	IP208	UC208-24	3.4	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
	1 9/16	60	200	60	150	19	25	115	49.2	19	M16	UCIP208-25		UC208-25	3.4				–	–	– –	–	–	–	– –	–
												UCIP208		UC208	3.4				UCIP208C	UCIP208CD	68 2 11/16	3.4	UCIP208FC	UCIP208FCD	86 3 3/8	4.2
45	1 5/8	2 3/4	8 9/32	2 3/8	6 19/64	3/4	31/32	5 1/32	1.937	0.748	5/8	UCIP209-26	IP209	UC209-26	3.9	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
	1 11/16	70	210	60	160	19	25	128	49.2	19	M16	UCIP209-27		UC209-27	3.9				–	–	– –	–	–	–	– –	–
	1 3/4											UCIP209-28		UC209-28	3.9				–	–	– –	–	–	–	– –	–
												UCIP209		UC209	3.9				UCIP209C	UCIP209CD	68 2 11/16	3.9	UCIP209FC	UCIP209FCD	88 3 15/32	4.7
50	1 7/8	2 3/4	8 21/32	2 3/8	6 11/16	3/4	1 3/32	5 3/16	2.031	0.748	5/8	UCIP210-30	IP210	UC210-30	4.8	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
	1 15/16	70	220	60	170	19	28	132	51.6	19	M16	UCIP210-31		UC210-31	4.8				–	–	– –	–	–	–	– –	–
												UCIP210		UC210	4.8				UCIP210C	UCIP210CD	73 2 7/8	4.8	UCIP210FC	UCIP210FCD	97 3 13/16	5.8
	2											UCIP210-32		UC210-32	4.8				–	–	– –	–	–	–	– –	–
55	2	3 5/32	9 1/16	2 3/8	7 3/32	3/4	1 3/32	5 13/16	2.189	0.874	5/8	UCIP211-32	IP211	UC211-32	5.3	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
	2 1/8	80	230	60	180	19	28	148	55.6	22.2	M16	UCIP211-34		UC211-34	5.3				–	–	– –	–	–	–	– –	–
												UCIP211		UC211	5.3				UCIP211C	UCIP211CD	75 2 15/16	5.3	UCIP211FC	UCIP211FCD	99 3 29/32	6.3
	2 3/16											UCIP211-35		UC211-35	5.3				–	–	– –	–	–	–	– –	–
60	2 1/4	3 5/32	10 1/4	2 3/4	7 7/8	7/8	1 3/16	6 3/32	2.563	1.000	3/4	UCIP212-36	IP212	UC212-36	7.2	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
	2 3/8	80	260	70	200	22	30	155	65.1	25.4	M20	UCIP212		UC212	7.2				UCIP212C	UCIP212CD	88 3 15/32	7.2	UCIP212FC	UCIP212FCD	114 4 1/2	8.7
												UCIP212-38		UC212-38	7.2				–	–	– –	–	–	–	– –	–
	2 7/16											UCIP212-39		UC212-39	7.2				–	–	– –	–	–	–	– –	–
65	2 1/2	3 35/64	11 1/32	2 3/4	8 21/32	7/8	1 3/16	6 25/32	2.563	1.000	3/4	UCIP213-40	IP213	UC213-40	8.8	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		90	280	70	220	22	30	172	65.1	25.4	M20	UCIP213		UC213	8.8				UCIP213C	UCIP213CD	88 3 15/32	8.8	UCIP213FC	UCIP213FCD	114 4 1/2	10.5
	2 1/2	4 21/64	12 7/32	2 3/4	9 27/32	7/8	1 3/16	8 3/16	2.953	1.181	3/4	UCIP313-40	IP313	UC313-40	13.4	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		110	310	70	250	22	30	208	75	30	M20	UCIP313		UC313	13.4				–	–	– –	–	UCIP313C	UCIP313CD	122 4 13/16	15.5
70	2 3/4	4 21/64	13	2 15/16	10 5/8	31/32	1 3/8	8 15/32	3.071	1.299	7/8	UCIP314-44	IP314	UC314-44	15.3	104	68.2	13.2	–	–	– –	–	–	–	– –	–
		110	330	75	270	25	35	215	78	33	M22	UCIP314		UC314	15.3				–	–	– –	–	UCIP314C	UCIP314CD	124 4 7/8	17.6
75	2 15/16	4 23/32	13 3/8	2 15/16	11 1/32	31/32	1 3/8	9 1/16	3.228	1.260	7/8	UCIP315-47	IP315	UC315-47	17.6	113	77.2	13.2	–	–	– –	–	–	–	– –	–
		120	340	75	280	25	35	230	82	32	M22	UCIP315		UC315	17.6				–	–	– –	–	UCIP315C	UCIP315CD	134 5 9/32	20.1
	3											UCIP315-48		UC315-48	17.6				–	–	– –	–	–	–	– –	–
80	–	4 23/32	13 25/32	3 11/32	11 27/64	31/32	1 9/16	9 1/4	3.386	1.339	7/8	UCIP316	IP316	UC316	20.3	123	86.7	13.3	–	–	– –	–	UCIP316C	UCIP316CD	138 5 7/16	23.2
		120	350	85	290	25	40	235	86	34	M22															
85	–	5 1/8	14 9/16	3 11/32	12 13/64	31/32	1 9/16	10 1/32	3.780	1.575	7/8	UCIP317	IP317	UC317	25.9	133	96.8	13.3	–	–	– –	–	UCIP317C	UCIP317CD	146 5 3/4	29.2
		130	370	85	310	25	40	255	96	40	M22															
90	3 1/2	5 1/8	15 3/4	3 11/32	13	1 5/32	1 25/32	10 1/4	3.780	1.575	1	UCIP318-56	IP318	UC318-56	28.6	143	107	13.3	–	–	– –	–	–	–	– –	–
		130	400	85	330	29	45	260	96	40	M27	UCIP318		UC318	28.6				–	–	– –	–	UCIP318C	UCIP318CD	150 5 29/32	32.4
95	–	5 29/32	16 5/32	3 11/32	13 25/64	1 5/32	1 25/32	11 7/32	4.055	1.614	1	UCIP319	IP319	UC319	31.7	153	119	13.3	–	–	– –	–	UCIP319C	UCIP319CD	162 6 3/8	36.0
		150	410	85	340	29	45	285	103	41	M27															
100	3 15/16	5 29/32	16 15/16	3 11/32	14 11/64	1 5/32	1 25/32	11 5/8	4.252	1.654	1	UCIP320	IP320	UC320	36.9	173	141	13.2	–	–	– –	–	UCIP320C	UCIP320CD	174 6 27/32	42.5
		150	430	85	360	29	45	295	108	42	M27	UCIP320-63		UC320-63	36.9				–	–	– –	–	–	–	– –	–
	4											UCIP320-64		UC320-64	36.9				–	–	– –	–	–	–	– –	–
110	–	6 11/16	19 9/32	3 15/16	16 9/64	1 1/4	1 31/32	13 3/16	4.606	1.811	1 1/8	UCIP322	IP322	UC322	52.4	205	180	13.2	–	–	– –	–	UCIP322C	UCIP322CD	188 7 13/32	59.2
		170	490	100	410	32	50	335	117	46	M30															
120	–	6 11/16	20 3/32	3 15/16	16 59/64	1 1/4	1 31/32	13 19/32	4.961	2.008	1 1/8	UCIP324	IP324	UC324	58.7	207	185	13.5	–	–	– –	–	UCIP324C	UCIP324CD	196 7 23/32	68.2
		170	510	100	430	32	50	345	126	51	M30															
130	–	7 7/8	21 21/32	4 11/32	18 1/2	1 1/4	1 31/32	15 11/32	5.315	2.126	1 1/8	UCIP326	IP326	UC326	76.2	229	214	13.6	–	–	– –	–	UCIP326C	UCIP326CD	214 8 7/16	88.3
		200	550	110	470	32	50	390	135	54	M30															
140	–	7 7/8	23 7/32	4 11/32	19 11/16	1 3/8	2 5/32	15 3/4	5.709	2.323	1 1/4	UCIP328	IP328	UC328	87.0	253	246	13.6	–	–	– –	–	UCIP328C	UCIP328CD	222 8 3/4	102
		200	590	110	500	35	55	400	145	59	M33															

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 208~210
A-R1/8 ..... 211~213, 313~328
3. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing.
(Example of Part No. : UCIP208JL3, UC208L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UKIP
Tapered bore (with adapter)
d_1 35 ~ 125 mm



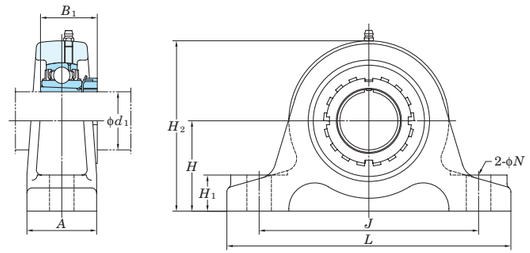

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.		Δ_{Hs}	Δ_{Js}
IP208~IP210		±0.15	±0.5
IP211~IP213	IP313~IP318	±0.2	±0.7
	IP319~IP328	±0.3	

Shaft Dia. mm inch d_1		Dimensions inch / mm H	L	A	J	N	H_1	H_2	B_1 1)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_c	Mass kg
35	1 1/4	2 23/64	7 7/8	2 3/8	5 29/32	3/4	31/32	4 17/32	1 13/32(1 13/16)	5/8	UKIP208	IP208	UK208	HE308X(HE2308X)	3.5	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
	1 3/8	60	200	60	150	19	25	115	36(46)	M16				HS308X(HS2308X)	3.5				–	–	– –	–	–	–	– –	–
														H308X(H2308X)	3.5				UKIP208C	UKIP208CD	68 2 11/16	3.5	UKIP208FC	UKIP208FCD	86 3 3/8	4.4
40	1 1/2	2 3/4	8 9/32	2 3/8	6 19/64	3/4	31/32	5 1/32	1 17/32(1 31/32)	5/8	UKIP209	IP209	UK209	HE309X(HE2309X)	4.0	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		70	210	60	160	19	25	128	39(50)	M16				H309X(H2309X)	4.0				UKIP209C	UKIP209CD	68 2 11/16	4.0	UKIP209FC	UKIP209FCD	88 3 15/32	4.9
45	1 3/4	2 3/4	8 21/32	2 3/8	6 11/16	3/4	1 3/32	5 3/16	1 21/32(2 5/32)	5/8	UKIP210	IP210	UK210	HE310X(HE2310X)	4.8	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		70	220	60	170	19	28	132	42(55)	M16				H310X(H2310X)	4.8				UKIP210C	UKIP210CD	73 2 7/8	4.8	UKIP210FC	UKIP210FCD	97 3 13/16	5.8
50	1 7/8	3 5/32	9 1/16	2 3/8	7 3/32	3/4	1 3/32	5 13/16	1 25/32(2 5/16)	5/8	UKIP211	IP211	UK211	HS311X(HS2311X)	5.3	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		80	230	60	180	19	28	148	45(59)	M16				H311X(H2311X)	5.3				UKIP211C	UKIP211CD	75 2 15/16	5.3	UKIP211FC	UKIP211FCD	99 3 29/32	5.9
	2													HE311X(HE2311X)	5.3				–	–	– –	–	–	–	– –	–
55	2 1/8	3 5/32	10 1/4	2 3/4	7 7/8	7/8	1 3/16	6 3/32	1 27/32(2 7/16)	3/4	UKIP212	IP212	UK212	HS312X(HS2312X)	7.1	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		80	260	70	200	22	30	155	47(62)	M20				H312X(H2313X)	7.1				UKIP212C	UKIP212CD	88 3 15/32	7.1	UKIP212FC	UKIP212FCD	114 4 1/2	8.6
60	2 1/4	3 35/64	11 1/32	2 3/4	8 21/32	7/8	1 3/16	6 25/32	1 31/32(2 9/16)	3/4	UKIP213	IP213	UK213	HE313X(HE2313X)	8.7	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		90	280	70	220	22	30	172	50(65)	M20				H313X(H2313X)	8.7				UKIP213C	UKIP213CD	88 3 15/32	8.7	UKIP213FC	UKIP213FCD	114 4 1/2	10.4
	2 3/8													HS313X(HS2313X)	8.7				–	–	– –	–	–	–	– –	–
	2 1/4	4 21/64	12 7/32	2 3/4	9 27/32	7/8	1 3/16	8 3/16	2 9/16	3/4	UKIP313	IP313	UK313	HE2313X	13.5	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		110	310	70	250	22	30	208	65	M20				H2313X	13.5				–	–	– –	–	UKIP313C	UKIP313CD	122 4 13/16	15.7
	2 3/8													HS2313X	13.5				–	–	– –	–	–	–	– –	–
65	2 1/2	4 23/32	13 3/8	2 15/16	11 1/32	31/32	1 3/8	9 1/16	2 7/8	7/8	UKIP315	IP315	UK315	HE2315X	17.7	113	77.2	13.2	–	–	– –	–	–	–	– –	–
		120	340	75	280	25	35	230	73	M22				H2315X	17.7				–	–	– –	–	UKIP315C	UKIP315CD	134 5 9/32	20.5
70	2 3/4	4 23/32	13 25/32	3 11/32	11 27/64	31/32	1 9/16	9 1/4	3 1/16	7/8	UKIP316	IP316	UK316	HE2316X	20.4	123	86.7	13.3	–	–	– –	–	–	–	– –	–
		120	350	85	290	25	40	235	78	M22				H2316X	20.4				–	–	– –	–	UKIP316C	UKIP316CD	138 5 7/16	23.5
75		5 1/8	14 9/16	3 11/32	12 13/64	31/32	1 9/16	10 1/32	3 7/32	7/8	UKIP317	IP317	UK317	H2317X	25.7	133	96.8	13.3	–	–	– –	–	UKIP317C	UKIP317CD	146 5 3/4	29.2
	3	130	370	85	310	25	40	255	82	M22				HE2317X	25.7				–	–	– –	–	–	–	– –	–
80	–	5 1/8	15 3/4	3 11/32	13	1 5/32	1 25/32	10 1/4	3 3/8	1	UKIP318	IP318	UK318	H2318X	28.7	143	107	13.3	–	–	– –	–	UKIP318C	UKIP318CD	150 5 29/32	32.9
		130	400	85	330	29	45	260	86	M27																
85	3 1/4	5 29/32	16 5/32	3 11/32	13 25/64	1 5/32	1 25/32	11 7/32	3 17/32	1	UKIP319	IP319	UK319	HE2319X	32.0	153	119	13.3	–	–	– –	–	–	–	– –	–
		150	410	85	340	29	45	285	90	M27				H2319X	32.0				–	–	– –	–	UKIP319C	UKIP319CD	162 6 3/8	36.7
90	3 1/2	5 29/32	16 15/16	3 11/32	14 11/64	1 5/32	1 25/32	11 5/8	3 13/16	1	UKIP320	IP320	UK320	HE2320X	36.6	173	141	13.2	–	–	– –	–	–	–	– –	–
		150	430	85	360	29	45	295	97	M27				H2320X	36.6				–	–	– –	–	UKIP320C	UKIP320CD	174 6 27/32	42.8
100		6 11/16	19 9/32	3 15/16	16 9/64	1 1/4	1 31/32	13 3/16	4 1/8	1 1/8	UKIP322	IP322	UK322	H2322X	52.2	205	180	13.2	–	–	– –	–	UKIP322C	UKIP322CD	188 7 13/32	59.1
	4	170	490	100	410	32	50	335	105	M30				HE2322X	52.2				–	–	– –	–	–	–	– –	–
110	–	6 11/16	20 3/32	3 15/16	16 59/64	1 1/4	1 31/32	13 19/32	4 13/32	1 1/8	UKIP324	IP324	UK324	H2324	59.0	207	185	13.5	–	–	– –	–	UKIP324C	UKIP324CD	196 7 23/32	69.3
		170	510	100	430	32	50	345	112	M30																
115	4 1/2	7 7/8	21 21/32	4 11/32	18 1/2	1 1/4	1 31/32	15 11/32	4 3/4	1 1/8	UKIP326	IP326	UK326	HE2326	76.0	229	214	13.6	–	–	– –	–	–	–	– –	–
		200	550	110	470	32	50	390	121	M30				H2326	76.0				–	–	– –	–	UKIP326C	UKIP326CD	214 8 7/16	89.3
125	–	7 7/8	23 7/32	4 11/32	19 11/16	1 3/8	2 5/32	15 3/4	4 5/32	1 1/4	UKIP328	IP328	UK328	H2328	87.0	253	246	13.6	–	–	– –	–	UKIP328C	UKIP328CD	222 8 3/4	104
		200	590	110	500	35	55	400	131	M33																

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....208~210
A-R1/8.....211~213, 313~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKIP208J + H308X, UK208 + H308X)

4. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing. (Example of Part No. : UKIP208JL3 + H2308X, UK208L3 + H2308X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UCPA
Cylindrical bore (with set screws)
d 12 ~ 50 mm





Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
PA204~PA210	±0.15	±0.5

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm										Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN		Factor	Mass
d		H	L	A	J	N	H_2	H_3	L_1	B	S					C_r	C_{0r}	f_0	kg
12												**UCPA201**	PA204	UC201		12.8	6.65	13.2	0.64
	1/2											**UCPA201-8**		UC201-8					
15		1 3/16	3	1 9/16	2 3/64		2 3/8	1/2	1 1/16	1.220	0.500	**UCPA202**		UC202					0.62
	5/8	30.2	76	40	52	M10×1.5	60	13	27	31	12.7	**UCPA202-10**		UC202-10					
17												**UCPA203**		UC203					0.61
	3/4											**UCPA204-12**		UC204-12					
20												**UCPA204**		UC204					0.59
	7/8											**UCPA205-14**	PA205	UC205-14		14.0	7.85	13.9	0.83
25	15/16	1 7/16	3 5/16	1 25/32	2 13/64		2 25/32	1/2	1 3/16	1.343	0.563	**UCPA205-15**		UC205-15					
		36.5	84	45	56	M10×1.5	71	13	30	34.1	14.3	**UCPA205**		UC205					
	1											**UCPA205-16**		UC205-16					
	1 1/8											**UCPA206-18**	PA206	UC206-18		19.5	11.3	13.9	1.2
30		1 11/16	3 11/16	1 31/32	2 19/32		3 5/16	23/32	1 13/32	1.500	0.626	**UCPA206**		UC206					
	1 3/16	42.9	94	50	66	M14×2	84	18	36	38.1	15.9	**UCPA206-19**		UC206-19					
	1 1/4											**UCPA206-20**		UC206-20					
	1 1/4											**UCPA207-20**	PA207	UC207-20		25.7	15.4	13.9	1.7
	1 5/16											**UCPA207-21**		UC207-21					
35	1 3/8	1 7/8	3 11/32	2 5/32	3 5/32		3 21/32	25/32	1 5/8	1.689	0.689	**UCPA207-22**		UC207-22					
		47.6	110	55	80	M14×2	93	20	41	42.9	17.5	**UCPA207**		UC207					
	1 7/16											**UCPA207-23**		UC207-23					
	1 1/2											**UCPA208-24**	PA208	UC208-24		29.1	17.8	14.0	2.0
40	1 9/16	1 15/16	4 9/16	2 9/32	3 5/16		3 15/16	25/32	1 5/8	1.937	0.748	**UCPA208-25**		UC208-25					
		49.2	116	58	84	M14×2	100	20	41	49.2	19	**UCPA208**		UC208					
	1 5/8											**UCPA209-26**	PA209	UC209-26		34.1	21.3	14.0	2.2
45	1 11/16	2 9/64	4 23/32	2 3/8	3 35/64		4 3/16	31/32	1 21/32	1.937	0.748	**UCPA209-27**		UC209-27					
	1 3/4	54.2	120	60	90	M14×2	106	25	42	49.2	19	**UCPA209-28**		UC209-28					
												UCPA209		UC209					
	1 7/8											**UCPA210-30**	PA210	UC210-30		35.1	23.3	14.4	2.8
50	1 15/16	2 1/4	5 1/8	2 17/32	3 45/64		4 7/16	31/32	1 27/32	2.031	0.748	**UCPA210-31**		UC210-31					
		57.2	130	64	94	M16×2	113	25	47	51.6	19	**UCPA210**		UC210					
	2											**UCPA210-32**		UC210-32					

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNF.
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows Part No. of unit or bearing. (Example of Part No. : UCPA206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKPA205J + H305X, UK205 + H305X)
6. Housings of nodular graphite cast iron are also available.

UCPAN
Cylindrical bore (with set screws)
d 20 ~ 35 mm





Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
PAN204~PAN207	±0.15	±0.5

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	H_2	H_3	L_1	B	S	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	1 5/16 33.3	2 9/16 65	1 1/4 32	2 50.8	3/8-16UNC	2 17/32 64	1/2 12.7	7/8 22	1.220 31	0.500 12.7	UCPAN204-12 UCPAN204	PAN204	UC204-12 UC204		12.8	6.65	13.2	0.55
25	7/8 15/16 1	1 7/16 36.5	2 3/4 70	1 13/32 36	2 50.8	3/8-16UNC	2 3/4 70	1/2 13	15/16 24	1.343 34.1	0.563 14.3	UCPAN205-14 UCPAN205-15 UCPAN205 UCPAN205-16	PAN205	UC205-14 UC205-15 UC205 UC205-16		14.0	7.85	13.9	0.65
30	1 1/8 1 3/16 1 1/4	1 11/16 42.9	3 27/32 98	1 1/2 38	3 76.2	7/16-14UNC	3 7/32 82	5/8 16	1 11/32 34	1.500 38.1	0.626 15.9	UCPAN206-18 UCPAN206 UCPAN206-19 UCPAN206-20	PAN206	UC206-18 UC206 UC206-19 UC206-20		19.5	11.3	13.9	1.3
35	1 1/4 1 5/16 1 3/8 1 7/16	1 7/8 47.6	4 11/32 110	1 7/8 48	3 1/4 82.6	1/2-13UNC	3 21/32 93	3/4 19	1 3/32 28	1.689 42.9	0.689 17.5	UCPAN207-20 UCPAN207-21 UCPAN207-22 UCPAN207 UCPAN207-23	PAN207	UC207-20 UC207-21 UC207-22 UC207 UC207-23		25.7	15.4	13.9	1.8

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNF.
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows Part No. of unit or bearing. (Example of Part No. : UCPAN206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKPAN205J + H305X, UK205 + H305X)
6. Housings of nodular graphite cast iron are also available.

FYH

NCPA
Cylindrical bore
(with concentric locking collar)
d 20 ~ 50 mm

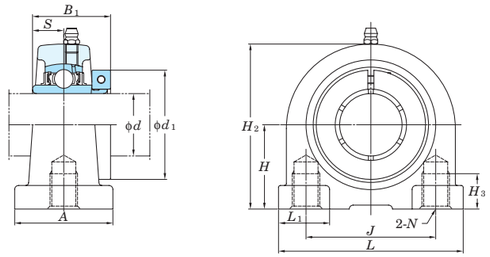

Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
PA204~PA210	±0.15	±0.5

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	H_2	H_3	L_1	B_1	S	d_1	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	1 3/16 30.2	3 76	1 9/16 40	2 3/64 52	M10×1.5	2 3/8 60	1/2 13	1 1/16 27	1 9/32 32.5	0.500 12.7	1 3/4 44.5	**NCPA204-12** **NCPA204**	PA204	NC204-12 NC204		12.8	6.65	13.2	0.73
25	7/8 15/16 1	1 7/16 36.5	3 5/16 84	1 25/32 45	2 13/64 56	M10×1.5	2 25/32 71	1/2 13	1 3/16 30	1 7/16 36.5	0.563 14.3	1 15/16 49.2	**NCPA205-14** **NCPA205-15** **NCPA205** **NCPA205-16**	PA205	NC205-14 NC205-15 NC205 NC205-16		14.0	7.85	13.9	1.0
30	1 1/8 1 3/16 1 1/4	1 11/16 42.9	3 11/16 94	1 31/32 50	2 19/32 66	M14×2	3 5/16 84	23/32 18	1 13/32 36	1 9/16 39.7	0.626 15.9	2 3/16 55.6	**NCPA206-18** **NCPA206** **NCPA206-19** **NCPA206-20**	PA206	NC206-18 NC206 NC206-19 NC206-20		19.5	11.3	13.9	1.4
35	1 1/4	1 7/8 47.6	3 11/32 110	2 5/32 55	3 5/32 80	M14×2	3 21/32 93	25/32 20	1 5/8 41	1 3/4 44.5	0.689 17.5	2 7/16 61.9	**NCPA207-20**	PA207	NC207-20		25.7	15.4	13.9	2.0
	1 3/8 1 7/16	1 7/8 47.6	3 11/32 110	2 5/32 55	3 5/32 80	M14×2	3 21/32 93	25/32 20	1 5/8 41	1 3/4 44.5	0.689 17.5	2 9/16 65.1	**NCPA207-22** **NCPA207** **NCPA207-23**	PA207	NC207-22 NC207 NC207-23		25.7	15.4	13.9	2.0
40	1 1/2	1 15/16 49.2	4 9/16 116	2 9/32 58	3 5/16 84	M14×2	3 15/16 100	25/32 20	1 5/8 41	2 50.8	0.748 19	2 11/16 68.3	**NCPA208-24** **NCPA208**	PA208	NC208-24 NC208		29.1	17.8	14.0	2.4
45	1 5/8	2 9/64 54.2	4 23/32 120	2 3/8 60	3 35/64 90	M14×2	4 3/16 106	31/32 25	1 21/32 42	2 50.8	0.748 19	2 13/16 71.4	**NCPA209-26**	PA209	NC209-26		34.1	21.3	14.0	2.6
	1 11/16 1 3/4	2 9/64 54.2	4 23/32 120	2 3/8 60	3 35/64 90	M14×2	4 3/16 106	31/32 25	1 21/32 42	2 50.8	0.748 19	2 15/16 74.6	**NCPA209-27** **NCPA209-28** **NCPA209**	PA209	NC209-27 NC209-28 NC209		34.1	21.3	14.0	2.6
50	1 15/16 2	2 1/4 57.2	5 1/8 130	2 17/32 64	3 45/64 94	M16×2	4 7/16 113	31/32 25	1 27/32 47	2 3/32 53.1	0.748 19	3 3/8 85.7	**NCPA210-31** **NCPA210** **NCPA210-32**	PA210	NC210-31 NC210 NC210-32		35.1	23.3	14.4	3.4

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNF.
3. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

FYH

NCPAN
Cylindrical bore
(with concentric locking collar)
d 20 ~ 35 mm

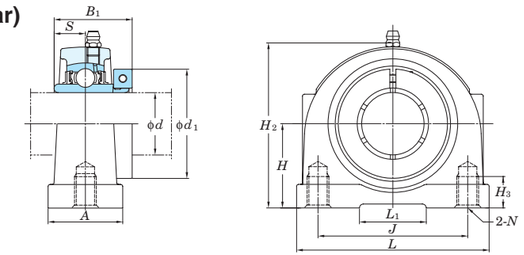

Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
PAN204~PAN207	±0.15	±0.5

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	H_2	H_3	L_1	B_1	S	d_1	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	1 5/16 33.3	2 9/16 65	1 1/4 32	2 50.8	3/8-16UNC	2 17/32 64	1/2 12.7	7/8 22	1 9/32 32.5	0.500 12.7	1 3/4 44.5	**NCPAN204-12** **NCPAN204**	PAN204	NC204-12 NC204		12.8	6.65	13.2	0.7
25	7/8 15/16 1	1 7/16 36.5	2 3/4 70	1 13/32 36	2 50.8	3/8-16UNC	2 3/4 70	1/2 13	15/16 24	1 7/16 36.5	0.563 14.3	1 15/16 49.2	**NCPAN205-14** **NCPAN205-15** **NCPAN205** **NCPAN205-16**	PAN205	NC205-14 NC205-15 NC205 NC205-16		14.0	7.85	13.9	0.85
30	1 1/8 1 3/16 1 1/4	1 11/16 42.9	3 27/32 98	1 1/2 38	3 76.2	7/16-14UNC	3 7/32 82	5/8 16	1 11/32 34	1 9/16 39.7	0.626 15.9	2 3/16 55.6	**NCPAN206-18** **NCPAN206** **NCPAN206-19** **NCPAN206-20**	PAN206	NC206-18 NC206 NC206-19 NC206-20		19.5	11.3	13.9	1.5
35	1 1/4	1 7/8 47.6	4 11/32 110	1 7/8 48	3 1/4 82.6	1/2-13UNC	3 21/32 93	3/4 19	1 3/32 28	1 3/4 44.5	0.689 17.5	2 7/16 61.9	**NCPAN207-20**	PAN207	NC207-20		25.7	15.4	13.9	2.1
	1 3/8 1 7/16	1 7/8 47.6	4 11/32 110	1 7/8 48	3 1/4 82.6	1/2-13UNC	3 21/32 93	3/4 19	1 3/32 28	1 3/4 44.5	0.689 17.5	2 9/16 65.1	**NCPAN207-22** **NCPAN207** **NCPAN207-23**	PAN207	NC207-22 NC207 NC207-23		25.7	15.4	13.9	2.1

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNF.
3. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCPH
Cylindrical bore (with set screws)
d 12 ~ 50 mm

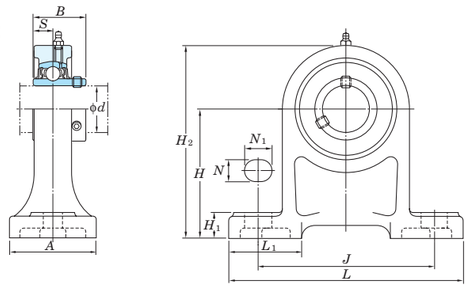

Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
PH204~PH210	±0.15

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm											Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN		Factor	Mass
d		H	L	A	J	N	N_1	H_1	H_2	L_1	B	S						C_r	C_{0r}	f_0	kg
12														**UCPH201**	PH204	UC201					0.96
	1/2													**UCPH201-8**		UC201-8					
15		2 3/4	5	1 9/16	3 3/4	1/2	3/4	19/32	3 21/32	1 13/16	1.220	0.500	3/8	**UCPH202**		UC202					0.94
	5/8	70	127	40	95	13	19	15	101	46	31	12.7	M10	**UCPH202-10**		UC202-10		12.8	6.65	13.2	
17														**UCPH203**		UC203					0.93
	3/4													**UCPH204-12**		UC204-12					
20														**UCPH204**		UC204					0.91
	7/8													**UCPH205-14**	PH205	UC205-14					
25	15/16	3 5/32	5 1/2	1 31/32	4 1/8	1/2	3/4	5/8	3 1/2	1 15/16	1.343	0.563	3/8	**UCPH205-15**		UC205-15		14.0	7.85	13.9	1.2
		80	140	50	105	13	19	16	114	49	34.1	14.3	M10	**UCPH205**		UC205					
	1													**UCPH205-16**		UC205-16					
	1 1/8													**UCPH206-18**	PH206	UC206-18					
30		3 35/64	6 1/2	1 31/32	4 3/4	21/32	13/16	23/32	5 1/8	1 7/32	1.500	0.626	1/2	**UCPH206**		UC206		19.5	11.3	13.9	1.6
	1 3/16	90	165	50	121	17	21	18	130	56	38.1	15.9	M14	**UCPH206-19**		UC206-19					
	1 1/4													**UCPH206-20**		UC206-20					
	1 1/4													**UCPH207-20**	PH207	UC207-20					
	1 5/16													**UCPH207-21**		UC207-21					
35	1 3/8	3 47/64	6 9/16	2 3/8	5	21/32	13/16	23/32	5 1/2	1 1/8	1.689	0.689	1/2	**UCPH207-22**		UC207-22		25.7	15.4	13.9	2.0
		95	167	60	127	17	21	18	140	54	42.9	17.5	M14	**UCPH207**		UC207					
	1 7/16													**UCPH207-23**		UC207-23					
	1 1/2													**UCPH208-24**	PH208	UC208-24					
40	1 9/16	3 15/16	7 1/4	2 3/4	5 13/32	21/32	13/16	25/32	5 29/32	2 1/4	1.937	0.748	1/2	**UCPH208-25**		UC208-25		29.1	17.8	14.0	2.7
		100	184	70	137	17	21	20	150	57	49.2	19	M14	**UCPH208**		UC208					
	1 5/8													**UCPH209-26**	PH209	UC209-26					
45	1 11/16	4 9/64	7 15/32	2 3/4	5 3/4	21/32	13/16	25/32	6 7/32	2 9/32	1.937	0.748	1/2	**UCPH209-27**		UC209-27		34.1	21.3	14.0	3.0
	1 3/4	105	190	70	146	17	21	20	158	58	49.2	19	M14	**UCPH209-28**		UC209-28					
														UCPH209		UC209					
	1 7/8													**UCPH210-30**	PH210	UC210-30					
50	1 15/16	4 21/64	8 1/8	2 3/4	6 1/4	25/32	7/8	7/8	6 1/2	2 9/16	2.031	0.748	5/8	**UCPH210-31**		UC210-31		35.1	23.3	14.4	3.5
		110	206	70	159	20	22	22	165	65	51.6	19	M16	**UCPH210**		UC210					
	2													**UCPH210-32**		UC210-32					

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNF.
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows Part No. of unit or bearing. (Example of Part No. : UCPH206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKPH205J + H305X, UK205 + H305X)

FYH

BLP
Cylindrical bore
(with set screw locking)
ALP
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 40 mm

BLP ALP

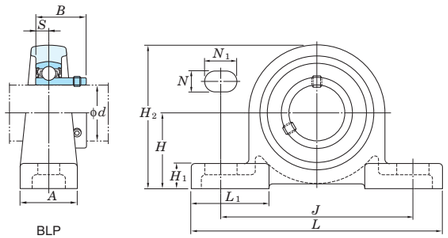

BLP



ALP

Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
LP203~LP208	±0.15

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	L_1	S	BLP B	ALP B_1	Bolt Size inch / mm	Unit No.	Bearing No.	Unit No.	Bearing No.	Housing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg BLP	ALP
12															BLP201	SB201	ALP201	SA201						
	1/2	1 3/16	4 1/2	31/32	3 7/16	7/16	5/8	15/32	2 1/4	1 3/8	0.236	0.866	1.122	3/8	BLP201-8	SB201-8	ALP201-8	SA201-8						
15		30.2	114	25	87	11	16	12	57	35	6	22	28.5	M10	BLP202	SB202	ALP202	SA202	LP203	9.55	4.80	13.2	0.36	0.39
	5/8														BLP202-10	SB202-10	ALP202-10	SA202-10						
17															BLP203	SB203	ALP203	SA203						
20	3/4	1 5/16	4 29/32	1 1/16	3 13/16	7/16	5/8	1/2	2 9/16	1 1/2	0.276	0.984	1.161	3/8	BLP204-12	SB204-12	ALP204-12	SA204-12	LP204	12.8	6.65	13.2	0.51	0.51
		33.3	125	27	97	11	16	13	65	38	7	25	29.5	M10	BLP204	SB204	ALP204	SA204						
25	7/8														BLP205-14	SB205-14	ALP205-14	SA205-14						
	15/16	1 7/16	5 1/8	1 5/32	3 15/16	7/16	5/8	1/2	2 25/32	1 17/32	0.295	1.063	1.201	3/8	BLP205-15	SB205-15	ALP205-15	SA205-15	LP205	14.0	7.85	13.9	0.57	0.61
		36.5	130	29	100	11	16	13	71	39	7.5	27	30.5	M10	BLP205	SB205	ALP205	SA205						
	1														BLP205-16	SB205-16	ALP205-16	SA205-16						
30	1 1/8														BLP206-18	SB206-18	ALP206-18	SA206-18						
		1 11/16	6 5/32	1 5/16	4 23/32	9/16	13/16	9/16	3 9/32	1 27/32	0.315	1.181	1.335	1/2	BLP206	SB206	ALP206	SA206	LP206	19.5	11.3	13.9	0.69	0.72
	1 3/16	42.9	156	33	120	14	21	14	83	47	8	30	33.9	M12	BLP206-19	SB206-19	ALP206-19	SA206-19						
	1 1/4														BLP206-20	SB206-20	ALP206-20	SA206-20						
35	1 1/4														BLP207-20	SB207-20	ALP207-20	SA207-20						
	1 5/16																ALP207-21	SA207-21						
	1 3/8	1 7/8	6 1/2	1 3/8	5	9/16	13/16	5/8	3 21/32	1 31/32	0.335	1.260	1.437	1/2	BLP207-22	SB207-22	ALP207-22	SA207-22	LP207	25.7	15.4	13.9	0.94	1.0
		47.6	165	35	127	14	21	16	93	50	8.5	32	36.5	M12	BLP207	SB207	ALP207	SA207						
	1 7/16														BLP207-23	SB207-23	ALP207-23	SA207-23						
40	1 1/2														BLP208-24	SB208-24	ALP208-24	SA208-24						
	1 9/16	2	7 1/4	1 15/32	5 1/2	9/16	7/8	23/32	4 1/32	2 5/32	0.354	1.339	1.595	1/2			ALP208-25	SA208-25	LP208	29.1	17.8	14.0	1.8	1.9
		50.8	184	37	140	14	22	18	102	55	9	34	40.5	M12	BLP208	SB208	ALP208	SA208						

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Allowable load to housing in radial direction is approximately half of basic load rating of bearing, C_r (when safety factor is 4).
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UP
Cylindrical bore (with set screws)
d 10 ~ 30 mm



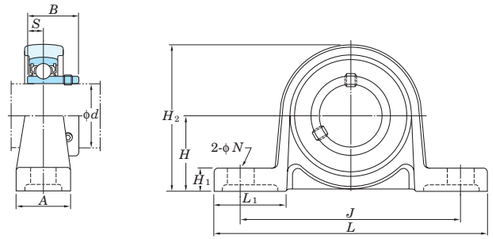

With Through Type Cover



With One Side Sealed Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
P000~P006	±0.15	±0.3

Shaft Dia. mm	Dimensions inch / mm										Bolt Size inch	Standard Unit No.	Housing No.	Bearing No.	Mass	Basic Load Ratings kN		Factor	With Rubber Coated Cover Unit No.		Dimension mm inch	Mass
d	H	L	A	J	N	H_1	H_2	L_1	B	S	mm				kg	C_r	C_{0r}	f_0	Open Type	One Side Closed Type	A_s	kg
10	45/64 18	2 5/8 67	5/8 16	2 3/32 53	9/32 7	1/4 6	1 3/8 35	23/32 18	0.591 15	0.197 5	1/4 M6	UP000	P000	SU000	0.070	4.55	1.95	12.3	UP000C	UP000CD	29 1 5/32	0.07
12	3/4 19	2 25/32 71	5/8 16	2 13/64 56	9/32 7	1/4 6	1 1/2 38	3/4 19	0.591 15	0.197 5	1/4 M6	UP001	P001	SU001	0.090	5.10	2.40	13.2	UP001C	UP001CD	29 1 5/32	0.09
15	55/64 22	3 5/32 80	5/8 16	2 31/64 63	9/32 7	9/32 7	1 11/16 43	13/16 21	0.650 16.5	0.217 5.5	1/4 M6	UP002	P002	SU002	0.11	5.60	2.85	13.9	UP002C	UP002CD	31 1 7/32	0.11
17	15/16 24	3 11/32 85	23/32 18	2 41/64 67	9/32 7	9/32 7	1 27/32 47	13/16 21	0.689 17.5	0.236 6	1/4 M6	UP003	P003	SU003	0.15	6.00	3.25	14.4	UP003C	UP003CD	33 1 5/16	0.15
20	1 7/64 28	3 15/16 100	25/32 20	3 5/32 80	13/32 10	11/32 9	2 5/32 55	31/32 25	0.827 21	0.276 7	5/16 M8	UP004	P004	SU004	0.23	9.40	5.05	13.9	UP004C	UP004CD	38 1 1/2	0.23
25	1 17/64 32	4 13/32 112	25/32 20	3 35/64 90	13/32 10	13/32 10	2 7/16 62	1 3/32 28	0.866 22	0.276 7	5/16 M8	UP005	P005	SU005	0.28	10.1	5.85	14.5	UP005C	UP005CD	40 1 9/16	0.28
30	1 27/64 36	5 3/16 132	1 1/32 26	4 11/64 106	1/2 13	7/16 11	2 3/4 70	1 11/32 34	0.965 24.5	0.295 7.5	3/8 M10	UP006	P006	SU006	0.42	13.2	8.25	14.7	UP006C	UP006CD	44 1 23/32	0.42

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCSP-H1S6
Cylindrical bore (with set screws)
d 12 ~ 60 mm





With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
SP203H1~SP210H1	±0.15
SP211H1~SP212H1	±0.2

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions H	L	A	J	N	N_1	H_1	H_2	L_1	B	S	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings C_r kN	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s mm	inch	Mass kg
12														UCSP201XH1S6		UC201XS6					–	–	–	–	–
	1/2													UCSP201-8XH1S6		UC201-8XS6					–	–	–	–	–
15		1 3/16	5	1 3/16	3 3/4	1/2	23/32	7/16	2 7/32	1 21/32	1.079	0.453	3/8	UCSP202XH1S6	SP203H1	UC202XS6	0.47	8.15	3.85	13.2	–	–	–	–	–
		30.2	127	30	95	13	18	11	56	42	27.4	11.5	M10	UCSP202-10XH1S6		UC202-10XS6					–	–	–	–	–
	5/8													UCSP203XH1S6		UC203XS6					–	–	–	–	–
17																									
20	3/4	1 5/16	5	1 3/16	3 3/4	1/2	23/32	7/16	2 15/32	1 21/32	1.220	0.500	3/8	UCSP204-12H1S6	SP204H1	UC204-12S6	0.6	10.9	5.35	13.2	UCSP204H1CS6	UCSP204H1CDS6	45	1 25/32	0.6
		33.3	127	30	95	13	18	11	63	42	31	12.7	M10	UCSP204H1S6		UC204S6									
25	7/8													UCSP205-14H1S6	SP205H1	UC205-14S6	0.7	11.9	6.3	13.9	–	–	–	–	–
	15/16	1 7/16	5 1/2	1 3/16	4 1/8	1/2	3/4	15/32	2 23/32	1 13/16	1.343	0.563	3/8	UCSP205-15H1S6		UC205-15S6					–	–	–	–	–
		36.5	140	30	105	13	19	12	69	46	34.1	14.3	M10	UCSP205H1S6		UC205S6					UCSP205H1CS6	UCSP205H1CDS6	49	1 15/16	0.7
	1													UCSP205-16H1S6		UC205-16S6					–	–	–	–	–
30	1 1/8													UCSP206-18H1S6	SP206H1	UC206-18S6	1.1	16.5	9.05	13.9	–	–	–	–	–
		1 11/16	6 1/2	1 13/32	4 3/4	21/32	13/16	1/2	3 3/16	2 1/8	1.500	0.626	1/2	UCSP206H1S6		UC206S6					UCSP206H1CS6	UCSP206H1CDS6	53	2 3/32	1.1
	1 3/16	42.9	165	36	121	17	21	13	81	54	38.1	15.9	M14	UCSP206-19H1S6		UC206-19S6					–	–	–	–	–
	1 1/4													UCSP206-20H1S6		UC206-20S6					–	–	–	–	–
35	1 1/4													UCSP207-20H1S6	SP207H1	UC207-20S6	1.4	21.8	12.3	13.9	–	–	–	–	–
	1 5/16													UCSP207-21H1S6		UC207-21S6					–	–	–	–	–
	1 3/8	1 7/8	6 9/16	1 1/2	5	21/32	13/16	9/16	3 19/32	2	1.689	0.689	1/2	UCSP207-22H1S6		UC207-22S6					–	–	–	–	–
		47.6	167	38	127	17	21	14	91	51	42.9	17.5	M14	UCSP207H1S6		UC207S6					UCSP207H1CS6	UCSP207H1CDS6	60	2 3/8	1.4
	1 7/16													UCSP207-23H1S6		UC207-23S6					–	–	–	–	–
40	1 1/2													UCSP208-24H1S6	SP208H1	UC208-24S6	1.7	24.8	14.3	14.0	–	–	–	–	–
	1 9/16	1 15/16	7 1/4	1 9/16	5 13/32	21/32	13/16	9/16	3 13/16	2 3/8	1.937	0.748	1/2	UCSP208-25H1S6		UC208-25S6					–	–	–	–	–
		49.2	184	40	137	17	21	14	97	60	49.2	19	M14	UCSP208H1S6		UC208S6					UCSP208H1CS6	UCSP208H1CDS6	69	2 23/32	1.7
45	1 5/8													UCSP209-26H1S6	SP209H1	UC209-26S6	2	27.8	16.2	14.0	–	–	–	–	–
	1 11/16	2 1/8	7 15/32	1 9/16	5 3/4	21/32	13/16	19/32	4 3/32	2 13/32	1.937	0.748	1/2	UCSP209-27H1S6		UC209-27S6					–	–	–	–	–
	1 3/4	54	190	40	146	17	21	15	104	61	49.2	19	M14	UCSP209-28H1S6		UC209-28S6					–	–	–	–	–
														UCSP209H1S6		UC209S6					UCSP209H1CS6	UCSP209H1CDS6	69	2 23/32	2.0
50	1 7/8													UCSP210-30H1S6	SP210H1	UC210-30S6	2.5	29.8	18.6	14.4	–	–	–	–	–
	1 15/16	2 1/4	8 1/8	1 25/32	6 1/4	25/32	7/8	5/8	4 3/8	2 9/16	2.031	0.748	5/8	UCSP210-31H1S6		UC210-31S6					–	–	–	–	–
		57.2	206	45	159	20	22	16	111	65	51.6	19	M16	UCSP210H1S6		UC210S6					UCSP210H1CS6	UCSP210H1CDS6	74	2 29/32	2.5
	2													UCSP210-32H1S6		UC210-32S6									
55	2													UCSP211-32H1S6	SP211H1	UC211-32S6	3.4	36.8	23.5	14.4	–	–	–	–	–
	2 1/8	2 1/2	8 5/8	1 7/8	6 23/32	25/32	7/8	5/8	4 29/32	2 3/4	2.189	0.874	5/8	UCSP211-34H1S6		UC211-34S6					–	–	–	–	–
		63.5	219	48	171	20	22	16	125	70	55.6	22.2	M16	UCSP211H1S6		UC211S6					UCSP211H1CS6	UCSP211H1CDS6	75	2 15/16	3.4
	2 3/16													UCSP211-35H1S6		UC211-35S6					–	–	–	–	–
60	2 1/4													UCSP212-36H1S6	SP212H1	UC212-36S6	4.5	44.5	29	14.4	–	–	–	–	–
		2 3/4	9 1/2	2 5/32	7 1/4	25/32	31/32	7/8	5 7/16	3	2.563	1.000	5/8	UCSP212H1S6		UC212S6					UCSP212H1CS6	UCSP212H1CDS6	88	3 15/32	4.5
	2 3/8	69.8	241	55	184	20	25	17	138	76	65.1	25.4	M16	UCSP212-38H1S6		UC212-38S6					–	–	–	–	–
	2 7/16													UCSP212-39H1S6		UC212-39S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is are shown below.
A-1/4-28UNFN12 .....201X~210
A-R1/8N12 .....211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCSPA-H1S6
Cylindrical bore (with set screws)
d 12 ~ 40 mm





With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
SPA203H1~SPA208H1	±0.15	±0.5

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions H	L	A	J	N	H_1	H_2	L_1	B	S	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s mm	inch	Mass kg
12												UCSPA201XH1S6		UC201XS6					–	–	–	–	–
	1/2											UCSPA201-8XH1S6		UC201-8XS6					–	–	–	–	–
15		1 3/16	3	1 3/16	2 3/64		13/32	2 1/4	7/8	1.079	0.453	UCSPA202XH1S6	SPA203H1	UC202XS6	0.43	8.15	3.85	13.2	–	–	–	–	–
		30.2	76	30	52	M10×1.5	10	57	22	27.4	11.5	UCSPA202-10XH1S6		UC202-10XS6					–	–	–	–	–
	5/8																						
17												UCSPA203XH1S6		UC203XS6					–	–	–	–	–
20	3/4	1 3/16	3	1 3/16	2 3/64		13/32	2 3/8	7/8	1.220	0.500	UCSPA204-12H1S6	SPA204H1	UC204-12S6	0.47	10.9	5.35	13.2	–	–	–	–	–
		30.2	76	30	52	M10×1.5	10	60	22	31	12.7	UCSPA204H1S6		UC204S6					UCSPA204H1CS6	UCSPA204H1CDS6	45	1 25/32	0.46
25	7/8											UCSPA205-14H1S6		UC205-14S6					–	–	–	–	–
	15/16	1 7/16	3 5/16	1 3/16	2 13/64		15/32	2 23/32	15/16	1.343	0.563	UCSPA205-15H1S6	SPA205H1	UC205-15S6	0.63	11.9	6.3	13.9	–	–	–	–	–
		36.5	84	30	56	M10×1.5	12	69	24	34.1	14.3	UCSPA205H1S6		UC205S6					UCSPA205H1CS6	UCSPA205H1CDS6	49	1 15/16	0.63
	1											UCSPA205-16H1S6		UC205-16S6					–	–	–	–	–
30	1 1/8											UCSPA206-18H1S6		UC206-18S6					–	–	–	–	–
		1 11/16	3 11/16	1 13/32	2 19/32		15/32	3 3/16	1 3/32	1.500	0.626	UCSPA206H1S6	SPA206H1	UC206S6	0.91	16.5	9.05	13.9	UCSPA206H1CS6	UCSPA206H1CDS6	53	2 3/32	0.91
	1 3/16	42.9	94	36	66	M14×2	12	81	28	38.1	15.9	UCSPA206-19H1S6		UC206-19S6					–	–	–	–	–
	1 1/4											UCSPA206-20H1S6		UC206-20S6					–	–	–	–	–
35	1 1/4											UCSPA207-20H1S6		UC207-20S6					–	–	–	–	–
	1 5/16											UCSPA207-21H1S6		UC207-21S6					–	–	–	–	–
	1 3/8	1 7/8	3 11/32	1 1/2	3 5/32		1/2	3 19/32	1 3/16	1.689	0.689	UCSPA207-22H1S6	SPA207H1	UC207-22S6	1.3	21.8	12.3	13.9	–	–	–	–	–
		47.6	110	38	80	M14×2	13	91	30	42.9	17.5	UCSPA207H1S6		UC207S6					UCSPA207H1CS6	UCSPA207H1CDS6	60	2 3/8	1.3
	1 7/16											UCSPA207-23H1S6		UC207-23S6					–	–	–	–	–
40	1 1/2											UCSPA208-24H1S6		UC208-24S6					–	–	–	–	–
	1 9/16	1 15/16	4 9/16	1 9/16	3 5/16		1/2	3 13/16	1 1/4	1.937	0.748	UCSPA208-25H1S6	SPA208H1	UC208-25S6	1.6	24.8	14.3	14.0	–	–	–	–	–
		49.2	116	40	84	M14×2	13	97	32	49.2	19	UCSPA208H1S6		UC208S6					UCSPA208H1CS6	UCSPA208H1CDS6	69	2 23/32	1.5

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

USP-S6
Cylindrical bore (with set screws)
d 10 ~ 30 mm



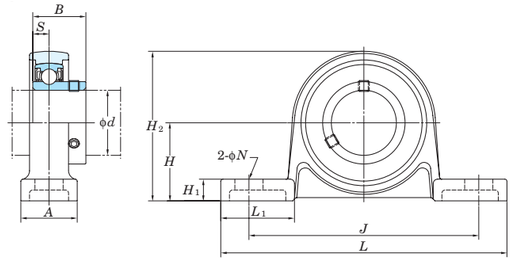

With Through Type Cover



With One Side Sealed Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{Hs}	Δ_{Js}
SP000~SP006	±0.15	±0.3

Shaft Dia. mm	Dimensions inch / mm										Bolt Size inch	Standard Unit No.	Housing No.	Bearing No.		Mass	Basic Load Ratings kN		Factor	With Rubber Coated Cover Unit No.		Dimension mm inch	Mass
																				Open Type	One Side Closed Type	A_s	
d	H	L	A	J	N	H_1	H_2	L_1	B	S	mm					kg	C_r	C_{0r}	f_0				kg
10	45/64 18	2 5/8 67	5/8 16	2 3/32 53	9/32 7	3/16 5	1 3/8 35	23/32 18	0.591 15	0.197 5	1/4 M6	**USP000S6**	SP000	SU000S6		0.076	3.9	1.55	12.3	USP000CS6	USP000CDS6	29 1 5/32	0.08
12	3/4 19	2 25/32 71	5/8 16	2 7/32 56	9/32 7	3/16 5	1 15/32 37	23/32 18.5	0.591 15	0.197 5	1/4 M6	**USP001S6**	SP001	SU001S6		0.08	4.3	1.9	13.2	USP001CS6	USP001CDS6	29 1 5/32	0.08
15	55/64 22	3 9/32 80	5/8 16	2 15/32 63	9/32 7	1/4 6	1 11/16 42.5	13/16 20.5	0.650 16.5	0.217 5.5	1/4 M6	**USP002S6**	SP002	SU002S6		0.11	4.7	2.25	13.9	USP002CS6	USP002CDS6	31 1 7/32	0.11
17	15/16 24	3 11/32 85	23/32 18	2 5/8 67	9/32 7	1/4 6	1 13/16 46	13/16 21	0.689 17.5	0.236 6	1/4 M6	**USP003S6**	SP003	SU003S6		0.14	5.1	2.6	14.4	USP003CS6	USP003CDS6	33 1 5/16	0.14
20	1 7/64 28	3 15/16 100	25/32 20	3 5/32 80	13/32 10	5/16 8	2 5/32 54.5	31/32 25	0.827 21	0.276 7	5/16 M8	**USP004S6**	SP004	SU004S6		0.23	7.9	4	13.9	USP004CS6	USP004CDS6	38 1 1/2	0.23
25	1 17/64 32	4 13/32 112	25/32 20	3 17/32 90	13/32 10	11/32 9	2 13/32 61	1 3/32 27.5	0.866 22	0.276 7	5/16 M8	**USP005S6**	SP005	SU005S6		0.28	8.5	4.65	14.5	USP005CS6	USP005CDS6	40 1 9/16	0.28
30	1 27/64 36	5 3/16 132	1 1/32 26	4 3/16 106	1/2 13	13/32 10	2 23/32 69	1 11/32 34	0.965 24.5	0.295 7.5	3/8 M10	**USP006S6**	SP006	SU006S6		0.43	11.2	6.5	14.7	USP006CS6	USP006CDS6	44 1 23/32	0.43

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCVP-S6
Cylindrical bore (with set screws)
d 20 ~ 50 mm







Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
VP204~VP208	±0.15

Shaft Dia. mm inch d		Dimensions inch / mm H	L	A	J	N	N_1	H_1	H_2	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_s	Mass kg
20	3/4	1 5/16 33.3	5 127	1 1/2 38	3 3/4 95	7/16 11	9/16 14	9/16 14.2	2 19/32 65.5	1.220 31	0.500 12.7	3/8 M10	**UCVP204-12S6** **UCVP204S6**	VP204	UC204-12S6 UC204S6	0.29	10.9	5.35	13.2	UCVP204-12CS6 UCVP204CS6	UCVP204-12CDS6 UCVP204CDS6	63 2 15/32	0.31
25	7/8 15/16 1	1 7/16 36.5	5 17/32 140.5	1 1/2 38	4 1/8 105	7/16 11	9/16 14	5/8 16	2 25/32 71	1.343 34.1	0.563 14.3	3/8 M10	**UCVP205-14S6** **UCVP205-15S6** **UCVP205S6** **UCVP205-16S6**	VP205	UC205-14S6 UC205-15S6 UC205S6 UC205-16S6	0.41	11.9	6.3	13.9	UCVP205-14CS6 UCVP205-15CS6 UCVP205CS6 UCVP205-16CS6	UCVP205-14CDS6 UCVP205-15CDS6 UCVP205CDS6 UCVP205-16CDS6	68 2 11/16	0.43
30	1 1/8 1 3/16 1 1/4	1 11/16 42.9	6 13/32 163	1 13/16 46	4 11/16 119	9/16 14	23/32 18	11/16 17.8	3 5/16 84	1.500 38.1	0.626 15.9	1/2 M12	**UCVP206-18S6** **UCVP206S6** **UCVP206-19S6** **UCVP206-20S6**	VP206	UC206-18S6 UC206S6 UC206-19S6 UC206-20S6	0.6	16.5	9.05	13.9	UCVP206-18CS6 UCVP206CS6 UCVP206-19CS6 UCVP206-20CS6	UCVP206-18CDS6 UCVP206CDS6 UCVP206-19CDS6 UCVP206-20CDS6	79 3 1/8	0.63
35	1 1/4 1 5/16 1 3/8 1 7/16	1 7/8 47.6	6 5/8 168	1 7/8 48	5 127	9/16 14	23/32 18	23/32 18	3 23/32 94.5	1.689 42.9	0.689 17.5	1/2 M12	**UCVP207-20S6** **UCVP207-21S6** **UCVP207-22S6** **UCVP207S6** **UCVP207-23S6**	VP207	UC207-20S6 UC207-21S6 UC207-22S6 UC207S6 UC207-23S6	0.84	21.8	12.3	13.9	UCVP207-20CS6 UCVP207-21CS6 UCVP207-22CS6 UCVP207CS6 UCVP207-23CS6	UCVP207-20CDS6 UCVP207-21CDS6 UCVP207-22CDS6 UCVP207CDS6 UCVP207-23CDS6	85 3 11/32	0.89
40	1 1/2 1 9/16	1 15/16 49.2	7 1/4 184	2 1/8 54	5 13/32 137	9/16 14	23/32 18	25/32 19.5	3 31/32 101	1.937 49.2	0.748 19	1/2 M12	**UCVP208-24S6** **UCVP208-25S6** **UCVP208S6**	VP208	UC208-24S6 UC208-25S6 UC208S6	1.1	24.8	14.3	14.0	UCVP208-24CS6 UCVP208-25CS6 UCVP208CS6	UCVP208-24CDS6 UCVP208-25CDS6 UCVP208CDS6	96 3 25/32	1.10
45	1 5/8 1 11/16 1 3/4	2 1/8 54	7 9/16 192	2 1/8 54	5 3/4 146	21/32 17	25/32 20	29/32 23	4 3/16 106	1.937 49.2	0.748 19	5/8 M14	**UCVP209-26S6** **UCVP209-27S6** **UCVP209-28S6** **UCVP209S6**	VP209	UC209-26S6 UC209-27S6 UC209-28S6 UC209S6	1.2	27.8	16.2	14.0	UCVP209-26CS6 UCVP209-27CS6 UCVP209-28CS6 UCVP209CS6	UCVP209-26CDS6 UCVP209-27CDS6 UCVP209-28CDS6 UCVP209CDS6	107 4 7/32	1.26
50	1 7/8 1 15/16 2	2 1/4 57.2	8 1/8 206	2 3/8 60	6 1/4 159	21/32 17	25/32 20	29/32 23	4 1/2 114	2.031 51.6	0.748 19	5/8 M14	**UCVP210-30S6** **UCVP210-31S6** **UCVP210S6** **UCVP210-32S6**	VP210	UC210-30S6 UC210-31S6 UC210S6 UC210-32S6	1.4	29.8	18.6	14.4	UCVP210-30CS6 UCVP210-31CS6 UCVP210CS6 UCVP210-32CS6	UCVP210-30CDS6 UCVP210-31CDS6 UCVP210CDS6 UCVP210-32CDS6	120 4 23/32	1.46

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCVP-ES7
Cylindrical bore (with set screws)
d 20 ~ 50 mm







Variations of tolerance of distance from mounting bottom to center of spherical bore (ΔH_s)

Unit: mm

Housing No.	ΔH_s
VP204E~VP208E	±0.15

Shaft Dia. mm inch d	Dimensions inch mm H	L	A	J	N	N_1	H_1	H_2	B	S	Bolt Size inch mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_s	Mass kg
20	3/4	1 5/16	5	1 1/2	3 3/4	7/16	9/16	9/16	2 19/32	1.220	3/8	UCVP204-12ES7	VP204E	UC204-12S7	0.29	12.8	6.65	13.2	UCVP204-12ECS7	UCVP204-12ECDS7	63	0.31
		33.3	127	38	95	11	14	14.2	65.5	31	12.7	M10	UCVP204ES7	UC204S7					UCVP204ECS7	UCVP204ECDS7	2 15/32	
25	7/8	1 7/16	5 17/32	1 1/2	4 1/8	7/16	9/16	5/8	2 25/32	1.343	3/8	UCVP205-14ES7	VP205E	UC205-14S7	0.41	14.0	7.85	13.9	UCVP205-14ECS7	UCVP205-14ECDS7	68	0.43
	15/16	36.5	140.5	38	105	11	14	16	71	34.1	14.3	M10	UCVP205ES7	UC205S7					UCVP205ECS7	UCVP205ECDS7	2 11/16	
	1												UCVP205-16ES7	UC205-16S7					UCVP205-16ECS7	UCVP205-16ECDS7		
30	1 1/8	1 11/16	6 13/32	1 13/16	4 11/16	9/16	23/32	11/16	3 5/16	1.500	1/2	UCVP206-18ES7	VP206E	UC206-18S7	0.6	19.5	11.3	13.9	UCVP206-18ECS7	UCVP206-18ECDS7	79	0.63
	1 3/16	42.9	163	46	119	14	18	17.8	84	38.1	15.9	M12	UCVP206ES7	UC206S7					UCVP206ECS7	UCVP206CDS7	3 1/8	
	1 1/4												UCVP206-19ES7	UC206-19S7					UCVP206-19ECS7	UCVP206-19ECDS7		
													UCVP206-20ES7	UC206-20S7					UCVP206-20ECS7	UCVP206-20ECDS7		
35	1 1/4	1 7/8	6 5/8	1 7/8	5	9/16	23/32	23/32	3 23/32	1.689	1/2	UCVP207-20ES7	VP207E	UC207-20S7	0.84	25.7	15.4	13.9	UCVP207-20ECS7	UCVP207-20ECDS7	85	0.89
	1 5/16	47.6	168	48	127	14	18	18	94.5	42.9	17.5	M12	UCVP207-21ES7	UC207-21S7					UCVP207-21ECS7	UCVP207-21ECDS7	3 11/32	
	1 3/8												UCVP207-22ES7	UC207-22S7					UCVP207-22ECS7	UCVP207-22ECDS7		
													UCVP207ES7	UC207S7					UCVP207ECS7	UCVP207ECDS7		
	1 7/16												UCVP207-23ES7	UC207-23S7					UCVP207-23ECS7	UCVP207-23ECDS7		
40	1 1/2	1 15/16	7 1/4	2 1/8	5 13/32	9/16	23/32	25/32	3 31/32	1.937	1/2	UCVP208-24ES7	VP208E	UC208-24S7	1.1	29.1	17.8	14.0	UCVP208-24ECS7	UCVP208-24ECDS7	96	1.10
	1 9/16	49.2	184	54	137	14	18	19.5	101	49.2	19	M12	UCVP208-25ES7	UC208-25S7					UCVP208-25ECS7	UCVP208-25ECDS7	3 25/32	
													UCVP208ES7	UC208S7					UCVP208ECS7	UCVP208ECDS7		
45	1 5/8	2 1/8	7 9/16	2 1/8	5 3/4	21/32	25/32	29/32	4 3/16	1.937	5/8	UCVP209-26ES7	VP209E	UC209-26S7	1.2	34.1	21.3	14.0	UCVP209-26ECS7	UCVP209-26ECDS7	107	1.26
	1 11/16	54	192	54	146	17	20	23	106	49.2	19	M14	UCVP209-27ES7	UC209-27S7					UCVP209-27ECS7	UCVP209-27ECDS7	4 7/32	
	1 3/4												UCVP209-28ES7	UC209-28S7					UCVP209-28ECS7	UCVP209-28ECDS7		
													UCVP209ES7	UC209S7					UCVP209ECS7	UCVP209ECDS7		
50	1 7/8	2 1/4	8 1/8	2 3/8	6 1/4	21/32	25/32	29/32	4 1/2	2.031	5/8	UCVP210-30ES7	VP210E	UC210-30S7	1.4	35.1	23.3	14.4	UCVP210-30ECS7	UCVP210-30ECDS7	120	1.46
	1 15/16	57.2	206	60	159	17	20	23	114	51.6	19	M14	UCVP210-31ES7	UC210-31S7					UCVP210-31ECS7	UCVP210-31ECDS7	4 23/32	
	2												UCVP210ES7	UC210S7					UCVP210ECS7	UCVP210ECDS7		
													UCVP210-32ES7	UC210-32S7					UCVP210-32ECS7	UCVP210-32ECDS7		

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

FYH

SBPP
Cylindrical bore
(with set screw locking)
SAPP
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 30 mm

SBPP

SAPP



SBPP





SAPP

Variations of tolerance of distance between centers of bolt holes (Δ_{Js}) and variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Js}	Δ_{Ns}
PP203~PP206	±0.4	±0.5

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm H	L	A	J	N	H_1	H_2	S	SBPP B	SAPP B_1	Bolt Size inch / mm	Unit No.	Bearing No.	Unit No.	Bearing No.	Housing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg SBPP	SAPP
12													**SBPP201**	SB201	**SAPP201**	SA201						
	1/2	7/8	3 3/8	31/32	2 43/64	3/8	1/8	1 23/32	0.236	0.866	1.122	5/16	**SBPP201-8**	SB201-8	**SAPP201-8**	SA201-8						
15		22.2	86	25	68	9.5	3.2	43.8	6	22	28.5	M8	**SBPP202**	SB202	**SAPP202**	SA202	PP203	9.55	4.80	13.2	0.16	0.19
	5/8												**SBPP202-10**	SB202-10	**SAPP202-10**	SA202-10						
17													**SBPP203**	SB203	**SAPP203**	SA203						
20	3/4	1	3 27/32	1 1/4	2 63/64	3/8	1/8	2	0.276	0.984	1.161	5/16	**SBPP204-12**	SB204-12	**SAPP204-12**	SA204-12	PP204	12.8	6.65	13.2	0.23	0.23
		25.4	98	32	76	9.5	3.2	50.5	7	25	29.5	M8	**SBPP204**	SB204	**SAPP204**	SA204						
	7/8												**SBPP205-14**	SB205-14	**SAPP205-14**	SA205-14						
25	15/16	1 1/8	4 1/4	1 1/4	3 25/64	29/64	5/32	2 7/32	0.295	1.063	1.201	3/8	**SBPP205-15**	SB205-15	**SAPP205-15**	SA205-15	PP205	14.0	7.85	13.9	0.28	0.32
		28.6	108	32	86	11.5	4	56.6	7.5	27	30.5	M10	**SBPP205**	SB205	**SAPP205**	SA205						
	1												**SBPP205-16**	SB205-16	**SAPP205-16**	SA205-16						
	1 1/8												**SBPP206-18**	SB206-18	**SAPP206-18**	SA206-18						
30		1 5/16	4 19/32	1 1/2	3 3/4	29/64	5/32	2 5/8	0.315	1.181	1.335	3/8	**SBPP206**	SB206	**SAPP206**	SA206	PP206	19.5	11.3	13.9	0.47	0.50
	1 3/16	33.3	117	38	95	11.5	4	66.3	8	30	33.9	M10	**SBPP206-19**	SB206-19	**SAPP206-19**	SA206-19						
	1 1/4												**SBPP206-20**	SB206-20	**SAPP206-20**	SA206-20						

Remark For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCF
Cylindrical bore (with set screws)
d 12 ~ (45) mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F204~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F204~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
12												UCF201		UC201	0.64				UCF201C	UCF201D	37 / 1 15/32	0.64	–	–	– / –	–
	1/2											UCF201-8		UC201-8	0.64				–	–	– / –	–	–	–	– / –	–
15		3 3/8	1	2 33/64	15/32	7/16	19/32	1 5/16	1.220	0.500	3/8	UCF202		UC202	0.62				UCF202C	UCF202D	37 / 1 15/32	0.62	–	–	– / –	–
	5/8	86	25.5	64	12	11	15	33.3	31	12.7	M10	UCF202-10	F204	UC202-10	0.62	12.8	6.65	13.2	–	–	– / –	–	–	–	– / –	–
17												UCF203		UC203	0.61				UCF203C	UCF203D	37 / 1 15/32	0.61	–	–	– / –	–
	3/4											UCF204-12		UC204-12	0.61				–	–	– / –	–	–	–	– / –	–
20												UCF204		UC204	0.59				UCF204C	UCF204D	37 / 1 15/32	0.59	UCF204FC	UCF204FD	46 / 1 13/16	0.74
	7/8											UCF205-14		UC205-14	0.83				–	–	– / –	–	–	–	– / –	–
	15/16	3 3/4	1 1/16	2 3/4	15/32	1/2	5/8	1 13/32	1.343	0.563	3/8	UCF205-15	F205	UC205-15	0.83	14.0	7.85	13.9	–	–	– / –	–	–	–	– / –	–
		95	27	70	12	13	16	35.8	34.1	14.3	M10	UCF205		UC205	0.83				UCF205C	UCF205D	40 / 1 9/16	0.83	UCF205FC	UCF205FD	49 / 1 15/16	1.0
25	1											UCF205-16		UC205-16	0.83				–	–	– / –	–	–	–	– / –	–
		4 1/4	1 3/16	3 17/64	15/32	1/2	45/64	1 19/32	1.500	0.626	3/8	UCFX05	FX05	UCX05	1.2	19.5	11.3	13.9	UCFX05C	UCFX05D	44 / 1 23/32	1.2	–	–	– / –	–
	1	108	30	83	12	13	18	40.2	38.1	15.9	M10	UCFX05-16		UCX05-16	1.2				–	–	– / –	–	–	–	– / –	–
		4 11/32	1 5/32	3 5/32	5/8	1/2	5/8	1 17/32	1.496	0.591	1/2	UCF305	F305	UC305	1.3	21.2	10.9	12.6	–	–	– / –	–	UCF305C	UCF305D	54 / 2 1/8	1.6
	1	110	29	80	16	13	16	39	38	15	M14	UCF305-16		UC305-16	1.3				–	–	– / –	–	–	–	– / –	–
	1 1/8											UCF206-18		UC206-18	1.1				–	–	– / –	–	–	–	– / –	–
		4 1/4	1 7/32	3 17/64	15/32	1/2	45/64	1 19/32	1.500	0.626	3/8	UCF206	F206	UC206	1.1	19.5	11.3	13.9	UCF206C	UCF206D	44 / 1 23/32	1.1	UCF206FC	UCF206FD	53 / 2 3/32	1.4
	1 3/16	108	31	83	12	13	18	40.2	38.1	15.9	M10	UCF206-19		UC206-19	1.1				–	–	– / –	–	–	–	– / –	–
30	1 1/4											UCF206-20		UC206-20	1.1				–	–	– / –	–	–	–	– / –	–
		4 19/32	1 11/32	3 5/8	5/8	9/16	3/4	1 3/4	1.689	0.689	1/2	UCFX06		UCX06	1.6				UCFX06C	UCFX06D	49 / 1 15/16	1.6	–	–	– / –	–
	1 3/16	117	34	92	16	14	19	44.4	42.9	17.5	M14	UCFX06-19	FX06	UCX06-19	1.6	25.7	15.4	13.9	–	–	– / –	–	–	–	– / –	–
	1 1/4											UCFX06-20		UCX06-20	1.6				–	–	– / –	–	–	–	– / –	–
	–	4 29/32	1 1/4	3 47/64	5/8	19/32	45/64	1 23/32	1.693	0.669	1/2	UCF306	F306	UC306	1.9	26.7	15.0	13.3	–	–	– / –	–	UCF306C	UCF306D	59 / 2 5/16	2.2
	1 1/4											UCF207-20		UC207-20	1.5				–	–	– / –	–	–	–	– / –	–
	1 5/16											UCF207-21		UC207-21	1.5				–	–	– / –	–	–	–	– / –	–
	1 3/8	4 19/32	1 11/32	3 5/8	35/64	19/32	3/4	1 3/4	1.689	0.689	7/16	UCF207-22	F207	UC207-22	1.5	25.7	15.4	13.9	–	–	– / –	–	–	–	– / –	–
		117	34	92	14	15	19	44.4	42.9	17.5	M12	UCF207		UC207	1.5				UCF207C	UCF207D	49 / 1 15/16	1.5	UCF207FC	UCF207FD	58 / 2 9/32	1.9
35	1 7/16											UCF207-23		UC207-23	1.5				–	–	– / –	–	–	–	– / –	–
	1 3/8											UCFX07-22		UCX07-22	2.0				–	–	– / –	–	–	–	– / –	–
		5 1/8	1 1/2	4 1/64	5/8	9/16	53/64	2 1/32	1.937	0.748	1/2	UCFX07	FX07	UCX07	2.0	29.1	17.8	14.0	UCFX07C	UCFX07D	55 / 2 5/32	2.0	–	–	– / –	–
	1 7/16	130	38	102	16	14	21	51.2	49.2	19	M14	UCFX07-23		UCX07-23	2.0				–	–	– / –	–	–	–	– / –	–
	–	5 5/16	1 13/32	3 15/16	3/4	5/8	25/32	1 15/16	1.890	0.748	5/8	UCF307	F307	UC307	2.3	33.4	19.3	13.2	–	–	– / –	–	UCF307C	UCF307D	64 / 2 17/32	2.7
	1 1/2											UCF208-24		UC208-24	1.9				–	–	– / –	–	–	–	– / –	–
	1 9/16	5 1/8	1 13/32	4 1/64	5/8	19/32	53/64	2 1/32	1.937	0.748	1/2	UCF208-25	F208	UC208-25	1.9	29.1	17.8	14.0	–	–	– / –	–	–	–	– / –	–
		130	36	102	16	15	21	51.2	49.2	19	M14	UCF208		UC208	1.9				UCF208C	UCF208D	55 / 2 5/32	1.9	UCF208FC	UCF208FD	64 / 2 17/32	2.3
40	1 1/2	5 13/32	1 9/16	4 9/64	3/4	9/16	55/64	2 1/16	1.937	0.748	5/8	UCFX08-24	FX08	UCX08-24	2.4	34.1	21.3	14.0	–	–	– / –	–	–	–	– / –	–
		137	40	105	19	14	22	52.2	49.2	19	M16	UCFX08		UCX08	2.4				UCFX08C	UCFX08D	56 / 2 7/32	2.4	–	–	– / –	–
	1 1/2	5 29/32	1 9/16	4 13/32	3/4	21/32	29/32	2 7/32	2.047	0.748	5/8	UCF308-24	F308	UC308-24	3.1	40.7	24.0	13.2	–	–	– / –	–	–	–	– / –	–
		150	40	112	19	17	23	56	52	19	M16	UCF308		UC308	3.1				–	–	– / –	–	UCF308C	UCF308D	71 / 2 25/32	3.6
	1 5/8											UCF209-26		UC209-26	2.2				–	–	– / –	–	–	–	– / –	–
	1 11/16	5 13/32	1 1/2	4 9/64	5/8	5/8	55/64	2 1/16	1.937	0.748	1/2	UCF209-27	F209	UC209-27	2.2	34.1	21.3	14.0	–	–	– / –	–	–	–	– / –	–
45	1 3/4	137	38	105	16	16	22	52.2	49.2	19	M14	UCF209-28		UC209-28	2.2				–	–	– / –	–	–	–	– / –	–
												UCF209		UC209	2.2				UCF209C	UCF209D	56 / 2 7/32	2.2	UCF209FC	UCF209FD	66 / 2 19/32	2.6
	1 3/4	5 5/8	1 9/16	4 3/8	3/4	9/16	29/32	2 3/16	2.031	0.748	5/8	UCFX09-28	FX09	UCX09-28	2.7	35.1	23.3	14.4	–	–	– / –	–	–	–	– / –	–
		143	40	111	19	14	23	55.6	51.6	19	M16	UCFX09		UCX09	2.7				UCFX09C	UCFX09D	60 / 2 3/8	2.7	–	–	– / –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCF206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCF
Cylindrical bore (with set screws)
d (45) ~ (75) mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F204~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F204~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
45	1 3/4	6 5/16	1 23/32	4 59/64	3/4	23/32	63/64	2 3/8	2.244	0.866	5/8	UCF309-28	F309	UC309-28	4.0	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		160	44	125	19	18	25	60	57	22	M16	UCF309		UC309	4.0				–	–	– –	–	UCF309C	UCF309D	76 3	4.6
50	1 7/8											UCF210-30	F210	UC210-30	2.5	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
	1 15/16	5 5/8	1 9/16	4 3/8	5/8	5/8	55/64	2 5/32	2.031	0.748	1/2	UCF210-31		UC210-31	2.5				–	–	– –	–	–	–	– –	–
		143	40	111	16	16	22	54.6	51.6	19	M14	UCF210		UC210	2.5				UCF210C	UCF210D	59 2 5/16	2.5	UCF210FC	UCF210FD	70.5 2 25/32	3.0
	2											UCF210-32		UC210-32	2.5				–	–	– –	–	–	–	– –	–
	1 15/16											UCFX10-31	FX10	UCX10-31	3.7	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		6 3/8	1 23/32	5 1/8	3/4	25/32	1 1/32	2 11/32	2.189	0.874	5/8	UCFX10		UCX10	3.7				UCFX10C	UCFX10D	64 2 17/32	3.7	–	–	– –	–
	2	162	44	130	19	20	26	59.4	55.6	22.2	M16	UCFX10-32		UCX10-32	3.7				–	–	– –	–	–	–	– –	–
	–	6 7/8	1 7/8	5 13/64	29/32	3/4	1 7/64	2 5/8	2.402	0.866	3/4	UCF310	F310	UC310	5.1	62.0	38.3	13.2	–	–	– –	–	UCF310C	UCF310D	83 3 9/32	5.9
		175	48	132	23	19	28	67	61	22	M20															
55	2											UCF211-32	F211	UC211-32	3.4	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
	2 1/8	6 3/8	1 11/16	5 1/8	3/4	23/32	63/64	2 5/16	2.189	0.874	5/8	UCF211-34		UC211-34	3.4				–	–	– –	–	–	–	– –	–
		162	43	130	19	18	25	58.4	55.6	22.2	M16	UCF211		UC211	3.4				UCF211C	UCF211D	63 2 15/32	3.4	UCF211FC	UCF211FD	74.5 2 15/16	4.0
	2 3/16											UCF211-35		UC211-35	3.4				–	–	– –	–	–	–	– –	–
	2 3/16	6 7/8	1 15/16	5 5/8	3/4	25/32	1 9/64	2 23/32	2.563	1.000	5/8	UCFX11	FX11	UCX11	4.9	52.4	36.2	14.4	UCFX11C	UCFX11D	73 2 7/8	4.9	–	–	– –	–
												UCFX11-35		UCX11-35	4.9				–	–	– –	–	–	–	– –	–
	2 1/4	175	49	143	19	20	29	68.7	65.1	25.4	M16	UXPX11-36		UCX11-36	4.9				–	–	– –	–	–	–	– –	–
	2											UCF311-32	F311	UC311-32	5.6	71.6	45.0	13.2	–	–	– –	–	–	–	– –	–
		7 9/32	2 1/16	5 33/64	29/32	25/32	1 3/16	2 25/32	2.598	0.984	3/4	UCF311		UC311	5.6				–	–	– –	–	UCF311C	UCF311D	87 3 7/16	6.5
	2 3/16	185	52	140	23	20	30	71	66	25	M20	UCF311-35		UC311-35	5.6				–	–	– –	–	–	–	– –	–
60	2 1/4											UCF212-36	F212	UC212-36	4.2	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		6 7/8	1 7/8	5 5/8	3/4	23/32	1 9/64	2 23/32	2.563	1.000	5/8	UCF212		UC212	4.2				UCF212C	UCF212D	73 2 7/8	4.2	UCF212FC	UCF212FD	86 3 3/8	5.0
	2 3/8	175	48	143	19	18	29	68.7	65.1	25.4	M16	UCF212-38		UC212-38	4.2				–	–	– –	–	–	–	– –	–
	2 7/16											UCF212-39		UC212-39	4.2				–	–	– –	–	–	–	– –	–
	2 7/16	7 3/8	2 5/16	5 55/64	3/4	13/16	1 11/32	2 29/32	2.563	1.000	5/8	UCFX12	FX12	UCX12	5.7	57.2	40.1	14.4	UCFX12C	UCFX12D	78 3 1/16	5.7	–	–	– –	–
		187	59	149	19	21	34	73.7	65.1	25.4	M16	UCFX12-39		UCX12-39	5.7				–	–	– –	–	–	–	– –	–
	2 7/16	7 11/16	2 7/32	5 29/32	29/32	7/8	1 19/64	3 1/16	2.795	1.024	3/4	UCF312	F312	UC312	6.9	81.9	52.2	13.2	–	–	– –	–	UCF312C	UCF312D	95 3 3/4	8.1
		195	56	150	23	22	33	78	71	26	M20	UCF312-39		UC312-39	6.9				–	–	– –	–	–	–	– –	–
65	2 1/2	7 3/8	1 31/32	5 55/64	3/4	7/8	1 3/16	2 3/4	2.563	1.000	5/8	UCF213-40	F213	UC213-40	5.2	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		187	50	149	19	22	30	69.7	65.1	25.4	M16	UCF213		UC213	5.2				UCF213C	UCF213D	74 2 29/32	5.2	UCF213FC	UCF213FD	87 3 7/16	6.0
	2 1/2	7 3/8	2 5/16	5 55/64	3/4	13/16	1 11/32	3 3/32	2.937	1.189	5/8	UCFX13-40	FX13	UCX13-40	6.3	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		187	59	149	19	21	34	78.4	74.6	30.2	M16	UCFX13		UCX13	6.3				UCFX13C	UCFX13D	83 3 9/32	6.3	–	–	– –	–
	2 1/2	8 3/16	2 9/32	6 17/32	29/32	7/8	1 19/64	3 1/16	2.953	1.181	3/4	UCF313-40	F313	UC313-40	7.8	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		208	58	166	23	22	33	78	75	30	M20	UCF313		UC313	7.8				–	–	– –	–	UCF313C	UCF313D	94 3 11/16	8.9
70	2 3/4	7 19/32	2 1/8	5 63/64	3/4	7/8	1 7/32	2 31/32	2.937	1.189	5/8	UCF214-44	F214	UC214-44	5.9	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		193	54	152	19	22	31	75.4	74.6	30.2	M16	UCF214		UC214	5.9				UCF214C	UCF214D	80 3 5/32	5.9	UCF214FC	UCF214FD	93 3 21/32	6.8
	2 3/4	7 3/4	2 3/8	5 63/64	29/32	7/8	1 29/64	3 7/32	3.063	1.331	3/4	UCFX14-44	FX14	UCX14-44	7.0	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		197	60	152	23	22	37	81.5	77.8	33.3	M20	UCFX14		UCX14	7.0				UCFX14C	UCFX14D	86 3 3/8	7.0	–	–	– –	–
	2 3/4	8 29/32	2 13/32	7 1/64	63/64	31/32	1 27/64	3 3/16	3.071	1.299	7/8	UCF314-44	F314	UC314-44	10.1	104	68.2	13.2	–	–	– –	–	–	–	– –	–
		226	61	178	25	25	36	81	78	33	M22	UCF314		UC314	10.1				–	–	– –	–	UCF314C	UCF314D	98 3 27/32	11.2
75	2 15/16											UCF215-47	F215	UC215-47	6.4	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		7 7/8	2 7/32	6 17/64	3/4	7/8	1 11/32	3 3/32	3.063	1.311	5/8	UCF215		UC215	6.4				UCF215C	UCF215D	83 3 9/32	6.4	UCF215FC	UCF215FD	96 3 25/32	7.4
	3	200	56	159	19	22	34	78.5	77.8	33.3	M16	UCF215-48		UC215-48	6.4				–	–	– –	–	–	–	– –	–
	2 15/16											UCFX15-47	FX15	UCX15-47	8.4	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		7 3/4	2 11/16	5 63/64	29/32	15/16	1 9/16	3 17/32	3.252	1.311	3/4	UCFX15		UCX15	8.4				UCFX15C	UCFX15D	94 3 11/16	8.4	–	–	– –	–
	3	197	68	152	23	24	40	89.3	82.6	33.3	M20	UCFX15-48		UCX15-48	8.4				–	–	– –	–	–	–	– –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCF206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCF
Cylindrical bore (with set screws)
d (75) ~ 140 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F204~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F204~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
75	2 15/16	9 9/32	2 19/32	7 1/4	63/64	31/32	1 17/32	3 1/2	3.228	1.260	7/8	UCF315-47	F315	UC315-47	11.6	113	77.2	13.2	–	–	– –	–	–	–	– –	–
		236	66	184	25	25	39	89	82	32	M22	UCF315		UC315	11.6				–	–	– –	–	UCF315C	UCF315D	106 4 3/16	12.9
	3											UCF315-48		UC315-48	11.6				–	–	– –	–	–	–	– –	–
80	3 1/8	8 3/16	2 9/32	6 1/2	29/32	7/8	1 11/32	3 9/32	3.252	1.311	3/4	UCF216-50	F216	UC216-50	7.3	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		208	58	165	23	22	34	83.3	82.6	33.3	M20	UCF216		UC216	7.3				UCF216C	UCF216D	88 3 15/32	7.3	UCF216FC	UCF216FD	103 4 1/16	8.5
	–	8 7/16	2 3/4	6 47/64	29/32	15/16	1 9/16	3 19/32	3.374	1.343	3/4	UCFX16	FX16	UCX16	9.4	84.0	61.9	14.5	UCFX16C	UCFX16D	96 3 25/32	9.4	–	–	– –	–
		214	70	171	23	24	40	91.6	85.7	34.1	M20															
	–	9 27/32	2 11/16	7 23/32	1 7/32	1 1/16	1 1/2	3 17/32	3.386	1.339	1	UCF316	F316	UC316	12.8	123	86.7	13.3	–	–	– –	–	UCF316C	UCF316D	107 4 7/32	14.2
		250	68	196	31	27	38	90	86	34	M27															
85	3 1/4	8 21/32	2 15/32	6 57/64	29/32	15/16	1 13/32	3 7/16	3.374	1.343	3/4	UCF217-52	F217	UC217-52	8.9	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		220	63	175	23	24	36	87.6	85.7	34.1	M20	UCF217		UC217	8.9				UCF217C	UCF217D	92 3 5/8	8.9	UCF217FC	UCF217FD	107 4 7/32	10.3
	3 7/16	8 7/16	2 3/4	6 47/64	29/32	15/16	1 9/16	3 25/32	3.780	1.563	3/4	UCFX17	FX17	UCX17	10.8	96.1	71.5	14.5	UCFX17C	UCFX17D	101 3 31/32	10.8	–	–	– –	–
		214	70	171	23	24	40	96.3	96	39.7	M20	UCFX17-55		UCX17-55	10.8				–	–	– –	–	–	–	– –	–
	–	10 1/4	2 29/32	8 1/32	1 7/32	1 1/16	1 47/64	3 15/16	3.780	1.575	1	UCF317	F317	UC317	15.3	133	96.8	13.3	–	–	– –	–	UCF317C	UCF317D	117 4 19/32	16.9
		260	74	204	31	27	44	100	96	40	M27															
90	3 1/2	9 1/4	2 11/16	7 23/64	29/32	31/32	1 9/16	3 25/32	3.780	1.563	3/4	UCF218-56	F218	UC218-56	11.4	96.1	71.5	14.5	–	–	– –	–	–	–	– –	–
		235	68	187	23	25	40	96.3	96	39.7	M20	UCF218		UC218	11.4				UCF218C	UCF218D	101 3 31/32	11.4	UCF218FC	UCF218FD	116 4 9/16	12.9
	–	8 7/16	3	6 47/64	29/32	15/16	1 49/64	4 3/16	4.094	1.689	3/4	UCFX18	FX18	UCX18	11.9	109	81.9	14.4	–	–	– –	–	UCFX18C	UCFX18C	124 4 7/8	13.6
		214	76	171	23	24	45	106.1	104	42.9	M20															
	3 1/2	11 1/32	3	8 1/2	1 3/8	1 3/16	1 47/64	3 15/16	3.780	1.575	1 1/8	UCF318-56	F318	UC318-56	18.9	143	107	13.3	–	–	– –	–	–	–	– –	–
		280	76	216	35	30	44	100	96	40	M30	UCF318		UC318	18.9				–	–	– –	–	UCF318C	UCF318D	119 4 11/16	20.8
95	–	11 13/32	3 11/16	8 31/32	1 3/8	1 3/16	2 21/64	4 3/4	4.055	1.614	1 1/8	UCF319	F319	UC319	21.6	153	119	13.3	–	–	– –	–	UCF319C	UCF319D	140 5 1/2	23.8
		290	94	228	35	30	59	121	103	41	M30															
100	3 15/16	10 9/16	3 13/16	8 5/16	1 7/32	1 3/32	2 21/64	5	4.626	1.937	1	UCFX20	FX20	UCX20	19.4	133	105	14.4	–	–	– –	–	UCFX20C	UCFX20D	152 5 31/32	21.6
		268	97	211	31	28	59	127.3	117.5	49.2	M27	UCFX20-63		UCX20-63	19.4				–	–	– –	–	–	–	– –	–
	4											UCFX20-64		UCX20-64	19.4				–	–	– –	–	–	–	– –	–
	3 15/16	12 7/32	3 11/16	9 17/32	1 1/2	1 1/4	2 21/64	4 29/32	4.252	1.654	1 1/4	UCF320	F320	UC320	25.8	173	141	13.2	–	–	– –	–	UCF320C	UCF320D	146 5 3/4	28.6
		310	94	242	38	32	59	125	108	42	M33	UCF320-63		UC320-63	25.8				–	–	– –	–	–	–	– –	–
	4											UCF320-64		UC320-64	25.8				–	–	– –	–	–	–	– –	–
105	–	12 7/32	3 11/16	9 17/32	1 1/2	1 1/4	2 21/64	5	4.409	1.732	1 1/4	UCF321	F321	UC321	30.2	184	153	13.2	–	–	– –	–	UCF321C	UCF321D	148 5 13/16	33.2
		310	94	242	38	32	59	127	112	44	M33															
110	–	13 3/8	3 25/32	10 15/32	1 39/64	1 3/8	2 23/64	5 5/32	4.606	1.811	1 3/8	UCF322	F322	UC322	35.3	205	180	13.2	–	–	– –	–	UCF322C	UCF322D	154 6 1/16	41.7
		340	96	266	41	35	60	131	117	46	M36															
120	–	14 9/16	4 11/32	11 27/64	1 39/64	1 9/16	2 9/16	5 1/2	4.961	2.008	1 3/8	UCF324	F324	UC324	47.3	207	185	13.5	–	–	– –	–	UCF324C	UCF324D	163 6 13/32	52.1
		370	110	290	41	40	65	140	126	51	M36															
130	–	16 5/32	4 17/32	12 19/32	1 39/64	1 25/32	2 9/16	5 3/4	5.315	2.126	1 3/8	UCF326	F326	UC326	65.5	229	214	13.6	–	–	– –	–	UCF326C	UCF326D	172 6 25/32	71.6
		410	115	320	41	45	65	146	135	54	M36															
140	–	17 23/32	4 29/32	13 25/32	1 39/64	2 5/32	2 61/64	6 11/32	5.709	2.323	1 3/8	UCF328	F328	UC328	80.4	253	246	13.6	–	–	– –	–	UCF328C	UCF328D	186 7 5/16	89
		450	125	350	41	55	75	161	145	59	M36															

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10~X20, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCF206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCF-E
Cylindrical bore (with set screws)
d 12 ~ 60 mm





Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12												**UCF201E**		UC201				0.64
	1/2											**UCF201-8E**		UC201-8				
15		3 3/8	1	2 33/64	7/16	7/16	19/32	1 5/16	1.220	0.500		**UCF202E**		UC202				0.62
	5/8	86	25.5	64	11	11	15	33.3	31	12.7	3/8	**UCF202-10E**	F204E	UC202-10	12.8	6.65	13.2	
17												**UCF203E**		UC203				0.61
	3/4											**UCF204-12E**		UC204-12				
20												**UCF204E**		UC204				0.59
	1 1/8											**UCF206-18E**		UC206-18				
		4 1/4	1 7/32	3 17/64	33/64	1/2	45/64	1 19/32	1.500	0.626		**UCF206E**		UC206				
	1 3/16	108	31	83	13	13	18	40.2	38.1	15.9	7/16	**UCF206-19E**	F206E	UC206-19	19.5	11.3	13.9	1.1
30	1 1/4											**UCF206-20E**		UC206-20				
	1 3/16	4 19/32	1 11/32	3 5/8	33/64	9/16	3/4	1 3/4	1.689	0.689		**UCFX06E**		UCX06				
		117	34	92	13	14	19	44.4	42.9	17.5	7/16	**UCFX06-19E**	FX06E	UCX06-19	25.7	15.4	13.9	1.6
	1 1/4											**UCFX06-20E**		UCX06-20				
	1 1/4											**UCF207-20E**		UC207-20				
	1 5/16											**UCF207-21E**		UC207-21				
	1 3/8	4 19/32	1 11/32	3 5/8	33/64	19/32	3/4	1 3/4	1.689	0.689		**UCF207-22E**		UC207-22				
35		117	34	92	13	15	19	44.4	42.9	17.5	7/16	**UCF207E**	F207E	UC207	25.7	15.4	13.9	1.5
	1 7/16											**UCF207-23E**		UC207-23				
	1 3/8											**UCFX07-22E**		UCX07-22				
		5 1/8	1 1/2	4 1/64	33/64	9/16	53/64	2 1/32	1.937	0.748		**UCFX07E**		UCX07				
	1 7/16	130	38	102	13	14	21	51.2	49.2	19	7/16	**UCFX07-23E**	FX07E	UCX07-23	29.1	17.8	14.0	2.0
	1 1/2											**UCF208-24E**		UC208-24				
	1 9/16	5 1/8	1 13/32	4 1/64	35/64	19/32	53/64	2 1/32	1.937	0.748		**UCF208-25E**	F208E	UC208-25	29.1	17.8	14.0	1.9
40		130	36	102	14	15	21	51.2	49.2	19	1/2	**UCF208E**		UC208				
	1 1/2	5 13/32	1 9/16	4 9/64	19/32	9/16	55/64	2 1/16	1.937	0.748		**UCFX08-24E**	FX08E	UCX08-24	34.1	21.3	14.0	2.4
		137	40	105	15	14	22	52.2	49.2	19	1/2	**UCFX08E**		UCX08				
45	1 3/4	5 5/8	1 9/16	4 3/8	19/32	9/16	29/32	2 3/16	2.031	0.748		**UCFX09-28E**	FX09E	UCX09-28	35.1	23.3	14.4	2.7
		143	40	111	15	14	23	55.6	51.6	19	1/2	**UCFX09E**		UCX09				
50	1 15/16											**UCFX10-31E**		UCX10-31				
		6 3/8	1 23/32	5 1/8	21/32	25/32	1 1/32	2 11/32	2.189	0.874		**UCFX10E**	FX10E	UCX10	43.4	29.4	14.4	3.7
	2	162	44	130	16.5	20	26	59.4	55.6	22.2	9/16	**UCFX10-32E**		UCX10-32				
	2											**UCF211-32E**		UC211-32				
	2 1/8	6 3/8	1 11/16	5 1/8	43/64	23/32	63/64	2 5/16	2.189	0.874		**UCF211-34E**		UC211-34				
		162	43	130	17	18	25	58.4	55.6	22.2	5/8	**UCF211E**	F211E	UC211	43.4	29.4	14.4	3.4
55	2 3/16											**UCF211-35E**		UC211-35				
		6 7/8	1 15/16	5 5/8	21/32	25/32	1 9/64	2 23/32	2.563	1.000		**UCFX11E**		UCX11				
		175	49	143	16.5	20	29	68.7	65.1	25.4	9/16	**UCFX11-35E**	FX11E	UCX11-35	52.4	36.2	14.4	4.9
	2 1/4											**UCFX11-36E**		UCX11-36				
	2 1/4											**UCF212-36E**		UC212-36				
		6 7/8	1 7/8	5 5/8	43/64	23/32	1 9/64	2 23/32	2.563	1.000		**UCF212E**		UC212				
	2 3/8	175	48	143	17	18	29	68.7	65.1	25.4	5/8	**UCF212-38E**	F212E	UC212-38	52.4	36.2	14.4	4.2
60	2 7/16											**UCF212-39E**		UC212-39				
		7 3/8	2 5/16	5 55/64	21/32	13/16	1 11/32	2 29/32	2.563	1.000		**UCFX12E**		UCX12				
	2 7/16	187	59	149	16.5	21	34	73.7	65.1	25.4	9/16	**UCFX12-39E**	FX12E	UCX12-39	57.2	40.1	14.4	5.7

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~208, X05~X09
A-R1/8 ..... 211~217, X10~X17
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCF206EJL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.		Δ_{A2s}	X
F204E~F210E	FX05E~FX10E	±0.5	0.7
F211E~F217E	FX11E~FX17E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
F204E~F217E	FX05E~FX17E	±0.2

UCF-E
Cylindrical bore (with set screws)
d 65 ~ 85 mm





Shaft Dia. mm inch d		Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
65	2 1/2	7 3/8	1 31/32	5 55/64	43/64	7/8	1 3/16	2 3/4	2.563	1.000	5/8	**UCF213-40E**	F213E	UC213-40		57.2	40.1	14.4	5.2
		187	50	149	17	22	30	69.7	65.1	25.4		**UCF213E**		UC213					
	2 1/2	7 3/8	1 31/32	5 55/64	21/32	13/16	1 11/32	3 3/32	2.937	1.189	9/16	**UCFX13-40E**	FX13E	UCX13-40		62.2	44.1	14.5	6.3
		187	59	149	16.5	21	34	78.4	74.6	30.2		**UCFX13E**		UCX13					
70	2 3/4	7 3/4	2 3/8	5 63/64	25/32	7/8	1 29/64	3 7/32	3.063	1.331	11/16	**UCFX14-44E**	FX14E	UCX14-44		67.4	48.3	14.5	7.0
		197	60	152	20	22	37	81.5	77.8	33.3		**UCFX14E**		UCX14					
75	2 15/16	7 3/4	2 11/16	5 63/64	25/32	15/16	1 9/16	3 17/32	3.252	1.311	11/16	**UCFX15-47E**	FX15E	UCX15-47		72.7	53.0	14.6	8.4
		197	68	152	20	24	40	89.3	82.6	33.3		**UCFX15E**		UCX15					
	3											**UCFX15-48E**		UCX15-48					
80	3 1/8	8 3/16	2 9/32	6 1/2	3/4	7/8	1 11/32	3 9/32	3.252	1.311	11/16	**UCF216-50E**	F216E	UC216-50		72.7	53.0	14.6	7.3
		208	58	165	19	22	34	83.3	82.6	33.3		**UCF216E**		UC216					
	–	8 7/16	2 3/4	6 47/64	25/32	15/16	1 9/16	3 19/32	3.374	1.343	11/16	**UCFX16E**	FX16E	UCX16		84.0	61.9	14.5	9.4
		214	70	171	20	24	40	91.6	85.7	34.1									
85	3 1/4	8 21/32	2 15/32	6 57/64	3/4	15/16	1 13/32	3 7/16	3.374	1.343	11/16	**UCF217-52E**	F217E	UC217-52		84.0	61.9	14.5	8.9
		220	63	175	19	24	36	87.6	85.7	34.1		**UCF217E**		UC217					
	3 7/16	8 7/16	2 3/4	6 47/64	25/32	15/16	1 9/16	3 25/32	3.780	1.563	11/16	**UCFX17E**	FX17E	UCX17		96.1	71.5	14.5	10.8
		214	70	171	20	24	40	96.3	96	39.7		**UCFX17-55E**		UCX17-55					

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~208, X05~X09
A-R1/8 ..... 211~217, X10~X17
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCF206EJL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.		Δ_{A2s}	X
F204E~F210E	FX05E~FX10E	±0.5	0.7
F211E~F217E	FX11E~FX17E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
F204E~F217E	FX05E~FX17E	±0.2

FYH

NANF
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 60 mm





Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
NF204~NF210	±0.5	0.7
NF211~NF212	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
NF204~NF212	±0.2

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B_1	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12	1/2	3 3/8 86	1 5/32 29.5	2 33/64 64	7/16 11	19/32 15	3/4 19	1 25/32 45.6	1.720 43.7	0.673 17.1	3/8	NANF201 NANF201-8 NANF202 NANF202-10 NANF203 NANF204-12 NANF204	NF204	NA201 NA201-8 NA202 NA202-10 NA203 NA204-12 NA204		12.8	6.65	13.2	0.73
15	5/8																		
17	3/4																		
20																			
25	7/8 15/16 1	3 3/4 95	1 7/32 31	2 3/4 70	15/32 12	19/32 15	25/32 20	1 27/32 46.9	1.748 44.4	0.689 17.5	7/16	NANF205-14 NANF205-15 NANF205 NANF205-16	NF205	NA205-14 NA205-15 NA205 NA205-16		14.0	7.85	13.9	0.95
30	1 1/8 1 3/16 1 1/4	4 1/4 108	1 11/32 34	3 17/64 83	33/64 13	5/8 16	53/64 21	2 51.1	1.906 48.4	0.720 18.3	7/16	NANF206-18 NANF206 NANF206-19 NANF206-20	NF206	NA206-18 NA206 NA206-19 NA206-20		19.5	11.3	13.9	1.4
35	1 1/4 1 5/16 1 3/8 1 7/16	4 19/32 117	1 7/16 36.5	3 5/8 92	33/64 13	21/32 17	27/32 21.5	2 1/8 53.8	2.012 51.1	0.740 18.8	7/16	NANF207-20 NANF207-21 NANF207-22 NANF207 NANF207-23	NF207	NA207-20 NA207-21 NA207-22 NA207 NA207-23		25.7	15.4	13.9	1.8
40	1 1/2 1 9/16	5 1/8 130	1 17/32 39	4 1/64 102	35/64 14	21/32 17	15/16 24	2 5/16 58.9	2.217 56.3	0.843 21.4	1/2	NANF208-24 NANF208-25 NANF208	NF208	NA208-24 NA208-25 NA208		29.1	17.8	14.0	2.2
45	1 5/8 1 11/16 1 3/4	5 13/32 137	1 9/16 40	4 9/64 105	5/8 16	23/32 18	15/16 24	2 5/16 58.9	2.217 56.3	0.843 21.4	9/16	NANF209-26 NANF209-27 NANF209-28 NANF209	NF209	NA209-26 NA209-27 NA209-28 NA209		34.1	21.3	14.0	2.6
50	1 7/8 1 15/16 2	5 5/8 143	1 27/32 46.5	4 3/8 111	43/64 17	25/32 20	1 1/8 28.5	2 5/8 66.6	2.469 62.7	0.969 24.6	9/16	NANF210-30 NANF210-31 NANF210 NANF210-32	NF210	NA210-30 NA210-31 NA210 NA210-32		35.1	23.3	14.4	3.0
55	2 2 1/8 2 3/16	6 3/8 162	1 31/32 50	5 1/8 130	43/64 17	13/16 21	1 17/64 32	2 31/32 75.6	2.811 71.4	1.094 27.8	5/8	NANF211-32 NANF211-34 NANF211 NANF211-35	NF211	NA211-32 NA211-34 NA211 NA211-35		43.4	29.4	14.4	4.1
60	2 1/4 2 3/8 2 7/16	6 7/8 175	2 5/32 55	5 5/8 143	43/64 17	13/16 21	1 27/64 36	3 1/4 82.8	3.063 77.8	1.220 31	5/8	NANF212-36 NANF212 NANF212-38 NANF212-39	NF212	NA212-36 NA212 NA212-38 NA212-39		52.4	36.2	14.4	4.9

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Housings of nodular graphite cast iron are also available.

FYH

NCF
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

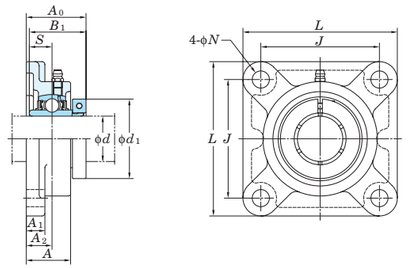

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
F204~F210	±0.5	0.7
F211~F212	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
F204~F212	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B_1	S	d_1	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	3 3/8	1	2 33/64	15/32	7/16	19/32	1 3/8	1 9/32	0.500	1 3/4	3/8	**NCF204-12**	F204	NC204-12	12.8	6.65	13.2	0.73
		86	25.5	64	12	11	15	34.8	32.5	12.7	44.5	M10	**NCF204**		NC204				
25	7/8	3 3/4	1 1/16	2 3/4	15/32	1/2	5/8	1 1/2	1 7/16	0.563	1 15/16	3/8	**NCF205-14**	F205	NC205-14	14.0	7.85	13.9	1.0
	15/16	95	27	70	12	13	16	38.2	36.5	14.3	49.2	M10	**NCF205-15**		NC205-15				
													NCF205		NC205				
	1												**NCF205-16**		NC205-16				
30	1 1/8	4 1/4	1 7/32	3 17/64	15/32	1/2	45/64	1 21/32	1 9/16	0.626	2 3/16	3/8	**NCF206-18**	F206	NC206-18	19.5	11.3	13.9	1.3
		108	31	83	12	13	18	41.8	39.7	15.9	55.6	M10	**NCF206**		NC206				
	1 3/16												**NCF206-19**		NC206-19				
	1 1/4												**NCF206-20**		NC206-20				
35	1 1/4	4 19/32	1 11/32	3 5/8	35/64	19/32	3/4	1 13/16	1 3/4	0.689	2 7/16	7/16	**NCF207-20**	F207	NC207-20	25.7	15.4	13.9	1.8
		117	34	92	14	15	19	46	44.5	17.5	61.9	M12							
	1 3/8	4 19/32	1 11/32	3 5/8	35/64	19/32	3/4	1 13/16	1 3/4	0.689	2 9/16	7/16	**NCF207-22**	F207	NC207-22	25.7	15.4	13.9	1.8
		117	34	92	14	15	19	46	44.5	17.5	65.1	M12	**NCF207**		NC207				
	1 7/16												**NCF207-23**		NC207-23				
40	1 1/2	5 1/8	1 13/32	4 1/64	5/8	19/32	53/64	2 3/32	2	0.748	2 11/16	1/2	**NCF208-24**	F208	NC208-24	29.1	17.8	14.0	2.3
		130	36	102	16	15	21	52.8	50.8	19	68.3	M14	**NCF208**		NC208				
45	1 5/8	5 13/32	1 1/2	4 9/64	5/8	5/8	55/64	2 1/8	2	0.748	2 13/16	1/2	**NCF209-26**	F209	NC209-26	34.1	21.3	14.0	2.6
		137	38	105	16	16	22	53.8	50.8	19	71.4	M14							
	1 11/16	5 13/32	1 1/2	4 9/64	5/8	5/8	55/64	2 1/8	2	0.748	2 15/16	1/2	**NCF209-27**	F209	NC209-27	34.1	21.3	14.0	2.6
	1 3/4	137	38	105	16	16	22	53.8	50.8	19	74.6	M14	**NCF209-28**		NC209-28				
													NCF209		NC209				
50	1 15/16	5 5/8	1 9/16	4 3/8	5/8	5/8	55/64	2 7/32	2 3/32	0.748	3 3/8	1/2	**NCF210-31**	F210	NC210-31	35.1	23.3	14.4	3.1
		143	40	111	16	16	22	56.1	53.1	19	85.7	M14	**NCF210**		NC210				
	2												**NCF210-32**		NC210-32				
55	2	6 3/8	1 11/16	5 1/8	3/4	23/32	63/64	2 11/32	2 1/4	0.874	3 1/2	5/8	**NCF211-32**	F211	NC211-32	43.4	29.4	14.4	3.8
		162	43	130	19	18	25	59.9	57.1	22.2	88.9	M16							
	2 3/16	6 3/8	1 11/16	5 1/8	3/4	23/32	63/64	2 11/32	2 1/4	0.874	3 5/8	5/8	**NCF211**	F211	NC211	43.4	29.4	14.4	3.8
		162	43	130	19	18	25	59.9	57.1	22.2	92.1	M16	**NCF211-35**		NC211-35				
60	2 1/4	6 7/8	1 7/8	5 5/8	3/4	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/16	5/8	**NCF212-36**	F212	NC212-36	52.4	36.2	14.4	4.9
		175	48	143	19	18	29	70.3	66.7	25.4	103.2	M16							
	2 7/16	6 7/8	1 7/8	5 5/8	3/4	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/8	5/8	**NCF212**	F212	NC212	52.4	36.2	14.4	4.9
		175	48	143	19	18	29	70.3	66.7	25.4	104.8	M16	**NCF212-39**		NC212-39				

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

NCF-E
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

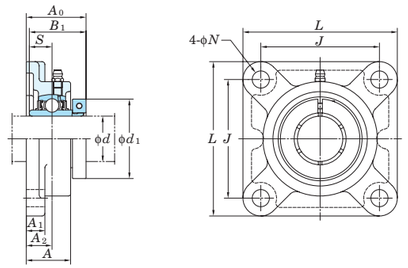

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
F204E~F208E	±0.5	0.7
F211E~F212E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
F204E~F212E	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B_1	S	d_1	Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	3 3/8 86	1 25.5	2 33/64 64	7/16 11	7/16 11	19/32 15	1 3/8 34.8	1 9/32 32.5	0.500 12.7	1 3/4 44.5	3/8	**NCF204-12E** **NCF204E**	F204E	NC204-12 NC204		12.8	6.65	13.2	0.73
25	7/8 15/16 1	Please refer to the NCF.																		
30	1 1/8 1 3/16 1 1/4	4 1/4 108	1 7/32 31	3 17/64 83	33/64 13	1/2 13	45/64 18	1 21/32 41.8	1 9/16 39.7	0.626 15.9	2 3/16 55.6	7/16	**NCF206-18E** **NCF206E** **NCF206-19E** **NCF206-20E**	F206E	NC206-18 NC206 NC206-19 NC206-20		19.5	11.3	13.9	1.3
35	1 1/4	4 19/32 117	1 11/32 34	3 5/8 92	33/64 13	19/32 15	3/4 19	1 13/16 46	1 3/4 44.5	0.689 17.5	2 7/16 61.9	7/16	**NCF207-20E**	F207E	NC207-20		25.7	15.4	13.9	1.8
	1 3/8 1 7/16	4 19/32 117	1 11/32 34	3 5/8 92	33/64 13	19/32 15	3/4 19	1 13/16 46	1 3/4 44.5	0.689 17.5	2 9/16 65.1	7/16	**NCF207-22E** **NCF207E** **NCF207-23E**	F207E	NC207-22 NC207 NC207-23		25.7	15.4	13.9	1.8
40	1 1/2	5 1/8 130	1 13/32 36	4 1/64 102	35/64 14	19/32 15	53/64 21	2 3/32 52.8	2 50.8	0.748 19	2 11/16 68.3	1/2	**NCF208-24E** **NCF208E**	F208E	NC208-24 NC208		29.1	17.8	14.0	2.3
45	1 5/8	Please refer to the NCF.																		
	1 11/16 1 3/4																			
50	1 15/16 2																			
55	2	6 3/8 162	1 11/16 43	5 1/8 130	43/64 17	23/32 18	63/64 25	2 11/32 59.9	2 1/4 57.1	0.874 22.2	3 1/2 88.9	5/8	**NCF211-32E**	F211E	NC211-32		43.4	29.4	14.4	3.8
	2 3/16	6 3/8 162	1 11/16 43	5 1/8 130	43/64 17	23/32 18	63/64 25	2 11/32 59.9	2 1/4 57.1	0.874 22.2	3 5/8 92.1	5/8	**NCF211E** **NCF211-35E**	F211E	NC211 NC211-35		43.4	29.4	14.4	3.8
60	2 1/4	6 7/8 175	1 7/8 48	5 5/8 143	43/64 17	23/32 18	1 9/64 29	2 25/32 70.3	2 5/8 66.7	1.000 25.4	4 1/16 103.2	5/8	**NCF212-36E**	F212E	NC212-36		52.4	36.2	14.4	4.9
	2 7/16	6 7/8 175	1 7/8 48	5 5/8 143	43/64 17	23/32 18	1 9/64 29	2 25/32 70.3	2 5/8 66.7	1.000 25.4	4 1/8 104.8	5/8	**NCF212E** **NCF212-39E**	F212E	NC212 NC212-39		52.4	36.2	14.4	4.9

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~208
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

UKF
Tapered bore (with adapter)
d_1 20 ~ (50) mm

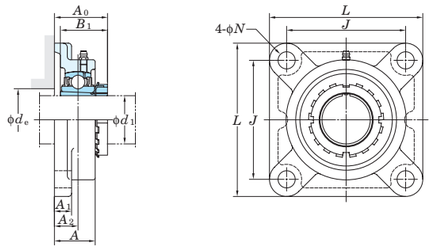

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F205~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F205~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d_1	L	A	J	N	A_1	A_2	A_0 1)	B_1 1)	d_e (min.)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
20	3/4	3 3/4	1 1/16	2 3/4	15/32	1/2	5/8	1 11/32(1 13/32)	1 5/32(1 3/8)	1 3/16	3/8	UKF205	F205	UK205	HE305X(HE2305X)	0.87	14.0	7.85	13.9	–	–	– –	–	–	–	–	–
		95	27	70	12	13	16	34.5(36)	29(35)	30	M10				H305X(H2305X)	0.87				UKF205C	UKF205D	40 1 9/16	0.87	UKF205FC	UKF205FD	49 1 15/16	1.1
	3/4	4 1/4	1 3/16	3 17/64	15/32	1/2	45/64	1 15/32	1 3/8	1 3/16	3/8	UKFX05	FX05	UKX05	HE2305X	1.2	19.5	11.3	13.9	–	–	– –	–	–	–	–	–
		108	30	83	12	13	18	37.5	35	30	M10				H2305X	1.2				UKFX05C	UKFX05D	44 1 23/32	1.2	–	–	– –	–
	3/4	4 11/32	1 5/32	3 5/32	5/8	1/2	5/8	1 15/32	1 3/8	–	1/2	UKF305	F305	UK305	HE2305X	1.4	21.2	10.9	12.6	–	–	– –	–	–	–	–	–
		110	29	80	16	13	16	37.5	35	–	M14				H2305X	1.4				–	–	– –	–	UKF305C	UKF305D	54 2 1/8	1.7
25	1	4 1/4	1 7/32	3 17/64	15/32	1/2	45/64	1 15/32(1 9/16)	1 7/32(1 1/2)	1 13/32	3/8	UKF206	F206	UK206	H306X(H2306X)	1.3	19.5	11.3	13.9	UKF206C	UKF206D	44 1 23/32	1.3	UKF206FC	UKF206FD	53 2 3/32	1.6
		108	31	83	12	13	18	37.5(39.5)	31(38)	36	M10				HE306X(HE2306X)	1.3				–	–	– –	–	–	–	– –	–
	1	4 19/32	1 11/32	3 5/8	5/8	9/16	3/4	1 9/16	1 1/2	1 13/32	1/2	UKFX06	FX06	UKX06	H2306X	1.6	25.7	15.4	13.9	UKFX06C	UKFX06D	49 1 15/16	1.6	–	–	– –	–
		117	34	92	16	14	19	40	38	36	M14				HE2306X	1.6				–	–	– –	–	–	–	– –	–
	1	4 29/32	1 1/4	3 47/64	5/8	19/32	45/64	1 5/8	1 1/2	–	1/2	UKF306	F306	UK306	H2306X	1.9	26.7	15.0	13.3	–	–	– –	–	UKF306C	UKF306D	59 2 5/16	2.2
		125	32	95	16	15	18	41	38	–	M14				HE2306X	1.9				–	–	– –	–	–	–	– –	–
30	1 1/8	4 19/32	1 11/32	3 5/8	35/64	19/32	3/4	1 5/8(1 11/16)	1 3/8(1 11/16)	1 5/8	7/16	UKF207	F207	UK207	HS307X(HS2307X)	1.6	25.7	15.4	13.9	–	–	– –	–	–	–	– –	–
		117	34	92	14	15	19	41(43)	35(43)	41	M12				H307X(H2307X)	1.6				UKF207C	UKF207D	49 1 15/16	1.6	UKF207FC	UKF207FD	58 2 9/32	2.0
	1 1/8	5 1/8	1 1/2	4 1/64	5/8	9/16	53/64	1 23/32	1 11/16	1 5/8	1/2	UKFX07	FX07	UKX07	HS2307X	2.0	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		130	38	102	16	14	21	43.5	43	41	M14				H2307X	2.0				UKFX07C	UKFX07D	55 2 5/32	2.0	–	–	– –	–
	1 1/8	5 5/16	1 13/32	3 15/16	3/4	5/8	25/32	1 25/32	1 11/16	–	5/8	UKF307	F307	UK307	HS2307X	2.3	33.4	19.3	13.2	–	–	– –	–	–	–	– –	–
		135	36	100	19	16	20	45.5	43	–	M16				H2307X	2.3				–	–	– –	–	UKF307C	UKF307D	64 2 17/32	2.8
35	1 1/4 1 3/8	5 1/8	1 13/32	4 1/64	5/8	19/32	53/64	1 3/4(1 7/8)	1 13/32(1 13/16)	1 13/16	1/2	UKF208	F208	UK208	HE308X(HE2308X)	1.9	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		130	36	102	16	15	21	44.5(48)	36(46)	46	M14				HS308X(HS2308X)	1.9				–	–	– –	–	–	–	– –	–
										–					H308X(H2308X)	1.9				UKF208C	UKF208D	55 2 5/32	1.9	UKF208FC	UKF208FD	64 2 17/32	2.3
	1 1/4 1 3/8	5 13/32	1 9/16	4 9/64	3/4	9/16	55/64	1 27/32	1 13/16	1 13/16	5/8	UKFX08	FX08	UKX08	HE2308X	2.3	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		137	40	105	19	14	22	46.5	46	46	M16				HS2308X	2.3				–	–	– –	–	–	–	– –	–
															H2308X	2.3				UKFX08C	UKFX08D	56 2 7/32	2.3	–	–	– –	–
	1 1/4 1 3/8	5 29/32	1 9/16	4 13/32	3/4	21/32	29/32	2	1 13/16	–	5/8	UKF308	F308	UK308	HE2308X	3.1	40.7	24.0	13.2	–	–	– –	–	–	–	– –	–
		150	40	112	19	17	23	50.5	46	–	M16				HS2308X	3.1				–	–	– –	–	–	–	– –	–
															H2308X	3.1				–	–	– –	–	UKF308C	UKF308D	71 2 25/32	3.6
40	1 1/2	5 13/32	1 1/2	4 9/64	5/8	5/8	55/64	1 7/8(2)	1 17/32(1 31/32)	2 1/16	1/2	UKF209	F209	UK209	HE309X(HE2309X)	2.3	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		137	38	105	16	16	22	47.5(51)	39(50)	52	M14				H309X(H2309X)	2.3				UKF209C	UKF209D	56 2 7/32	2.3	UKF209FC	UKF209FD	66 2 19/32	2.8
	1 1/2	5 5/8	1 9/16	4 3/8	3/4	9/16	29/32	1 29/32	1 31/32	2 1/16	5/8	UKFX09	FX09	UKX09	HE2309X	2.7	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		143	40	111	19	14	23	48.5	50	52	M16				H2309X	2.7				UKFX09C	UKFX09D	60 2 3/8	2.7	–	–	– –	–
	1 1/2	6 5/16	1 23/32	4 59/64	3/4	23/32	63/64	2 5/32	1 31/32	–	5/8	UKF309	F309	UK309	HE2309X	4.1	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		160	44	125	19	18	25	55	50	–	M16				H2309X	4.1				–	–	– –	–	UKF309C	UKF309D	76 3	4.7
45	1 3/4	5 5/8	1 9/16	4 3/8	5/8	5/8	55/64	1 29/32(2 1/16)	1 21/32(2 5/32)	2 9/32	1/2	UKF210	F210	UK210	HE310X(HE2310X)	2.6	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		143	40	111	16	16	22	48.5(52)	42(55)	58	M14				H310X(H2310X)	2.6				UKF210C	UKF210D	59 2 5/16	2.6	UKF210FC	UKF210FD	70.5 2 25/32	3.1
	1 3/4	6 3/8	1 23/32	5 1/8	3/4	25/32	1 1/32	2 3/32	2 5/32	2 9/32	5/8	UKFX10	FX10	UKX10	HE2310X	3.6	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		162	44	130	19	20	26	53.5	55	58	M16				H2310X	3.6				UKFX10C	UKFX10D	64 2 17/32	3.6	–	–	– –	–
	1 3/4	6 7/8	1 7/8	5 13/64	29/32	3/4	1 7/64	2 3/8	2 5/32	–	3/4	UKF310	F310	UK310	HE2310X	5.1	62.0	38.3	13.2	–	–	– –	–	–	–	– –	–
		175	48	132	23	19	28	60	55	–	M20				H2310X	5.1				–	–	– –	–	UKF310C	UKF310D	83 3 9/32	5.9
50	1 7/8 2	6 3/8	1 11/16	5 1/8	3/4	23/32	63/64	2 3/32(2 1/4)	1 25/32(2 5/16)	2 17/32	5/8	UKF211	F211	UK211	HS311X(HS2311X)	3.5	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		162	43	130	19	18	25	53(57.5)	45(59)	64	M16				H311X(H2311X)	3.5				UKF211C	UKF211D	63 2 15/32	3.5	UKF211FC	UKF211FD	74.5 2 15/16	4.1
															HE311X(HE2311X)	3.5				–	–	– –	–	–	–	– –	–
	1 7/8 2	6 7/8	1 15/16	5 5/8	3/4	25/32	1 9/64	2 9/32	2 5/16	2 17/32	5/8	UKFX11	FX11	UKX11	HS2311X	4.6	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		175	49	143	19	20	29	58	59	64	M16				H2311X	4.6				UKFX11C	UKFX11D	73 2 7/8	4.6	–	–	– –	–
															HE2311X	4.6				–	–	– –	–	–	–	– –	–

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKF206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKF206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

FYH

UKF
Tapered bore (with adapter)
d_1 (50) ~ (90) mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F205~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F205~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d_1	L	A	J	N	A_1	A_2	A_0 1)	B_1 1)	d_e (min.)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
50	1 7/8	7 9/32	2 1/16	5 33/64	29/32	25/32	1 3/16	2 17/32	2 5/16	–	3/4	UKF311	F311	UK311		HS2311X	5.9				–	–	– –	–	–	–	– –	–
		185	52	140	23	20	30	64	59	–	M20					H2311X	5.9	71.6	45.0	13.2	–	–	– –	–	UKF311C	UKF311D	87 3 7/16	6.8
	2															HE2311X	5.9				–	–	– –	–	–	–	– –	–
55	2 1/8	6 7/8	1 7/8	5 5/8	3/4	23/32	1 9/64	2 5/16(2 19/32)	1 27/32(2 7/16)	2 23/32	5/8	UKF212	F212	UK212		HS312X(HS2312X)	4.1	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		175	48	143	19	18	29	58.5(65.5)	47(62)	69	M16					H312X(H2313X)	4.1				UKF212C	UKF212D	73 2 7/8	4.1	UKF212FC	UKF212FD	86 3 3/8	4.9
	2 1/8	7 3/8	2 5/16	5 55/64	3/4	13/16	1 11/32	2 9/16	2 7/16	2 23/32	5/8	UKFX12	FX12	UKX12		HS2312X	5.5	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		187	59	149	19	21	34	65	62	69	M16					H2312X	5.5				UKFX12C	UKFX12D	78 3 1/16	5.5	–	–	– –	–
	2 1/8	7 11/16	2 7/32	5 29/32	29/32	7/8	1 19/64	2 3/4	2 7/16	–	3/4	UKF312	F312	UK312		HS2312X	6.8	81.9	52.2	13.2	–	–	– –	–	–	–	– –	–
		195	56	150	23	22	33	69.5	62	–	M20					H2312X	6.8				–	–	– –	–	UKF312C	UKF312D	95 3 3/4	8.0
60	2 1/4	7 3/8	1 31/32	5 55/64	3/4	7/8	1 3/16	2 7/16(2 21/32)	1 31/32(2 9/16)	2 29/32	5/8	UKF213	F213	UK213		HE313X(HE2313X)	5.1	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		187	50	149	19	22	30	62(67.5)	50(65)	74	M16					H313X(H2313X)	5.1				UKF213C	UKF213D	74 2 29/32	5.1	UKF213FC	UKF213FD	87 3 7/16	6.0
	2 3/8															HS313X(HS2313X)	5.1				–	–	– –	–	–	–	– –	–
	2 1/4	7 3/8	2 5/16	5 55/64	3/4	13/16	1 11/32	2 11/16	2 9/16	2 29/32	5/8	UKFX13	FX13	UKX13		HE2313X	6.0	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		187	59	149	19	21	34	68	65	74	M16					H2313X	6.0				UKFX13C	UKFX13D	83 3 9/32	6.0	–	–	– –	–
	2 3/8															HS2313X	6.0				–	–	– –	–	–	–	– –	–
	2 1/4	8 3/16	2 9/32	6 17/32	29/32	7/8	1 19/64	2 13/16	2 9/16	–	3/4	UKF313	F313	UK313		HE2313X	7.9	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		208	58	166	23	22	33	71.5	65	–	M20					H2313X	7.9				–	–	– –	–	UKF313C	UKF313D	94 3 11/16	9.0
	2 3/8															HS2313X	7.9				–	–	– –	–	–	–	– –	–
65	2 1/2	7 7/8	2 7/32	6 17/64	3/4	7/8	1 11/32	2 23/32(2 15/16)	2 5/32(2 7/8)	3 11/32	5/8	UKF215	F215	UK215		HE315X(HE2315X)	6.5	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		200	56	159	19	22	34	69(74.5)	55(73)	85	M16					H315X(H2315X)	6.5				UKF215C	UKF215D	83 3 9/32	6.5	UKF215FC	UKF215FD	96 3 25/32	7.5
	2 1/2	7 3/4	2 11/16	5 63/64	29/32	15/16	1 9/16	3	2 7/8	3 11/32	3/4	UKFX15	FX15	UKX15		HE2315X	8.1	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		197	68	152	23	24	40	76	73	85	M20					H2315X	8.1				UKFX15C	UKFX15D	94 3 11/16	8.1	–	–	– –	–
	2 1/2	9 9/32	2 19/32	7 1/4	63/64	31/32	1 17/32	3 7/32	2 7/8	–	7/8	UKF315	F315	UK315		HE2315X	11.7	113	77.2	13.2	–	–	– –	–	–	–	– –	–
		236	66	184	25	25	39	81.5	73	–	M22					H2315X	11.7				–	–	– –	–	UKF315C	UKF315D	106 4 3/16	13.1
70	2 3/4	8 3/16	2 9/32	6 1/2	29/32	7/8	1 11/32	2 27/32(3 3/32)	2 5/16(3 1/16)	3 17/32	3/4	UKF216	F216	UK216		HE316X(HE2316X)	7.6	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		208	58	165	23	22	34	72(78.5)	59(78)	90	M20					H316X(H2316X)	7.6				UKF216C	UKF216D	88 3 15/32	7.6	UKF216FC	UKF216FD	103 4 1/16	8.9
	2 3/4	8 7/16	2 3/4	6 47/64	29/32	15/16	1 9/16	3 1/8	3 1/16	3 17/32	3/4	UKFX16	FX16	UKX16		HE2316X	9.5	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		214	70	171	23	24	40	79	78	90	M20					H2316X	9.5				UKFX16C	UKFX16D	96 3 25/32	9.5	–	–	– –	–
	2 3/4	9 27/32	2 11/16	7 23/32	1 7/32	1 1/16	1 1/2	3 1/4	3 1/16	–	1	UKF316	F316	UK316		HE2316X	12.9	123	86.7	13.3	–	–	– –	–	–	–	– –	–
		250	68	196	31	27	38	82.5	78	–	M27					H2316X	12.9				–	–	– –	–	UKF316C	UKF316D	107 4 7/32	14.5
75		8 21/32	2 15/32	6 57/64	29/32	15/16	1 13/32	3(3 1/4)	2 15/32(3 7/32)	3 25/32	3/4	UKF217	F217	UK217		H317X(H2317X)	9.0	84.0	61.9	14.5	UKF217C	UKF217D	92 3 5/8	9.0	UKF217FC	UKF217FD	107 4 7/32	10.4
	3	220	63	175	23	24	36	76(82.5)	63(82)	96	M20					H317X(HE2317X)	9.0				–	–	– –	–	–	–	– –	–
		8 7/16	2 3/4	6 47/64	29/32	15/16	1 9/16	3 7/32	3 7/32	3 25/32	3/4	UKFX17	FX17	UKX17		H2317X	10.4	96.1	71.5	14.5	UKFX17C	UKFX17D	101 3 31/32	10.4	–	–	– –	–
	3	214	70	171	23	24	40	82	82	96	M20					HE2317X	10.4				–	–	– –	–	–	–	– –	–
		10 1/4	2 29/32	8 1/32	1 7/32	1 1/16	1 47/64	3 5/8	3 7/32	–	1	UKF317	F317	UK317		H2317X	15.2	133	96.8	13.3	–	–	– –	–	UKF317C	UKF317D	117 4 19/32	17.0
	3	260	74	204	31	27	44	92	82	–	M27					HE2317X	15.2				–	–	– –	–	–	–	– –	–
80	–	9 1/4	2 11/16	7 23/64	29/32	31/32	1 9/16	3 7/32(3 17/32)	2 9/16(3 3/8)	4 1/32	3/4	UKF218	F218	UK218		H318X(H2318X)	11.4	96.1	71.5	14.5	UKF218C	UKF218D	101 3 31/32	11.4	UKF218FC	UKF218FD	116 4 9/16	13.0
		235	68	187	23	25	40	82(89.5)	65(86)	102	M20																	
	–	8 7/16	3	6 47/64	29/32	15/16	1 49/64	3 15/32	3 3/8	4 1/32	3/4	UKFX18	FX18	UKX18		H2318X	11.4	109	81.9	14.4	–	–	– –	–	UKFX18C	UKFX18D	124 4 7/8	13.3
		214	76	171	23	24	45	88	86	102	M20																	
	–	11 1/32	3	8 1/2	1 3/8	1 3/16	1 47/64	3 5/8	3 3/8	–	1 1/8	UKF318	F318	UK318		H2318X	19.0	143	107	13.3	–	–	– –	–	UKF318C	UKF318D	119 4 11/16	21.1
		280	76	216	35	30	44	92	86	–	M30																	
85	3 1/4	11 13/32	3 11/16	8 31/32	1 3/8	1 3/16	2 21/64	4 3/8	3 17/32	–	1 1/8	UKF319	F319	UK319		HE2319X	21.9	153	119	13.3	–	–	– –	–	–	–	– –	–
		290	94	228	35	30	59	111	90	–	M30					H2319X	21.9				–	–	– –	–	UKF319C	UKF319D	140 5 1/2	24.3
90	3 1/2	10 9/16	3 13/16	8 5/16	1 7/32	1 3/32	2 21/64	4 3/16	3 13/16	4 13/32	1	UKFX20	FX20	UKX20		HE2320X	18.4	133	105	14.4	–	–	– –	–	–	–	– –	–
		268	97	211	31	28	59	106	97	112	M27					H2320X	18.4				–	–	– –	–	UKFX20C	UKFX20D	152 5 31/32	20.9

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKF206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKF206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UKF
Tapered bore (with adapter)
d_1 (90) ~ 125 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.			Δ_{A2s}	X
F205~F210	FX05~FX10	F305~F310	±0.5	0.7
F211~F218	FX11~FX20	F311~F328	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.			Δ_{Ns}
F205~F218	FX05~FX18	F305~F315	±0.2
	FX20	F316~F328	±0.3

Shaft Dia. mm d_1	Shaft Dia. inch d_1	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0 1)	B_1 1)	d_e (min.)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
90	3 1/2	12 7/32	3 11/16	9 17/32	1 1/2	1 1/4	2 21/64	4 7/16	3 13/16	–	1 1/4	UKF320	F320	UK320	HE2320X	25.4	173	141	13.2	–	–	– –	–	–	–	– –	–
		310	94	242	38	32	59	113	97	–	M33				H2320X	25.4				–	–	– –	–	UKF320C	UKF320D	146 5 3/4	28.5
100	3 3/8	13 3/8	3 25/32	10 15/32	1 39/64	1 3/8	2 23/64	4 23/32	4 1/8	–	1 3/8	UKF322	F322	UK322	H2322X	35.2	205	180	13.2	–	–	– –	–	UKF322C	UKF322D	154 6 1/16	38.7
	4	340	96	266	41	35	60	120	105	–	M36				HE2322X	35.2				–	–	– –	–	–	–	– –	–
110	–	14 9/16	4 11/32	11 27/64	1 39/64	1 9/16	2 9/16	5 1/8	4 13/32	–	1 3/8	UKF324	F324	UK324	H2324	47.6	207	185	13.5	–	–	– –	–	UKF324C	UKF324D	163 6 13/32	52.7
115	4 1/2	16 5/32	4 17/32	12 19/32	1 39/64	1 25/32	2 9/16	5 3/16	4 3/4	–	1 3/8	UKF326	F326	UK326	HE2326	65.3	229	214	13.6	–	–	– –	–	–	–	– –	–
		410	115	320	41	45	65	131.5	121	–	M36				H2326	65.3				–	–	– –	–	UKF326C	UKF326D	172 6 25/32	71.9
125	–	17 23/32	4 29/32	13 25/32	1 39/64	2 5/32	2 61/64	5 13/16	5 5/32	–	1 3/8	UKF328	F328	UK328	H2328	74.9	253	246	13.6	–	–	– –	–	UKF328C	UKF328D	186 7 5/16	83.5

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10~X20, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKF206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UKF206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

FYH

UCFS
Cylindrical bore (with set screws)
d 25 ~ 140 mm





With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3a}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2a}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.	Δ_{H3a}	Δ_{A2a}	X	Y
FS305	0 −0.046	±0.5	0.7	0.2
FS306~FS308	0 −0.054			
FS309~FS310	0 −0.063	±0.8	1	0.3 ~FS318 / FS319~ 0.4
FS311~FS313				
FS314~FS319	0 −0.072			
FS320~FS322	0 −0.081			
FS324~FS328	0 −0.089			

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FS305~315	±0.2
FS316~328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d	L	H_3	J	N	A_1	A_2	A_3	A_4	A_5	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c		Mass kg
25	1	4 11/32 110	3.1496 80	3 5/32 80	5/8 16	1/2 13	23/64 9	9/32 7	7/8 22	1 1/4 32	1.496 38	0.591 15	1/2 M14	**UCFS305** **UCFS305-16**	FS305	UC305 UC305-16		1.4 1.4	21.2	10.9	12.6	UCFS305C –	UCFS305D –	47 –	1 27/32 –	1.7 –
30	–	4 29/32 125	3.5433 90	3 47/64 95	5/8 16	19/32 15	25/64 10	5/16 8	15/16 24	1 13/32 36	1.693 43	0.669 17	1/2 M14	**UCFS306**	FS306	UC306		1.9	26.7	15.0	13.3	UCFS306C	UCFS306D	51	2	2.2
35	–	5 5/16 135	3.9370 100	3 15/16 100	3/4 19	5/8 16	7/16 11	23/64 9	1 1/16 27	1 9/16 40	1.890 48	0.748 19	5/8 M16	**UCFS307**	FS307	UC307		2.3	33.4	19.3	13.2	UCFS307C	UCFS307D	55	2 5/32	2.7
40	1 1/2	5 29/32 150	4.5276 115	4 13/32 112	3/4 19	21/32 17	33/64 13	25/64 10	1 3/16 30	1 13/16 46	2.047 52	0.748 19	5/8 M16	**UCFS308-24** **UCFS308**	FS308	UC308-24 UC308		3.4 3.4	40.7	24.0	13.2	– UCFS308C	– UCFS308D	– 61	– 2 13/32	– 3.9
45	1 3/4	6 5/16 160	4.9213 125	4 59/64 125	3/4 19	23/32 18	35/64 14	7/16 11	1 5/16 33	1 15/16 49	2.244 57	0.866 22	5/8 M16	**UCFS309-28** **UCFS309**	FS309	UC309-28 UC309		4.4 4.4	48.9	29.5	13.3	– UCFS309C	– UCFS309D	– 65	– 2 9/16	– 5.0
50	–	6 7/8 175	5.5118 140	5 13/64 132	29/32 23	3/4 19	5/8 16	15/32 12	1 13/32 36	2 5/32 55	2.402 61	0.866 22	3/4 M20	**UCFS310**	FS310	UC310		5.3	62.0	38.3	13.2	UCFS310C	UCFS310D	71	2 25/32	6.1
55	2 2 3/16	7 9/32 185	5.9055 150	5 33/64 140	29/32 23	25/32 20	43/64 17	33/64 13	1 17/32 39	2 9/32 58	2.598 66	0.984 25	3/4 M20	**UCFS311-32** **UCFS311** **UCFS311-35**	FS311	UC311-32 UC311 UC311-35		6.1 6.1 6.1	71.6	45.0	13.2	– UCFS311C –	– UCFS311D –	– 74 –	– 2 29/32 –	– 7.0 –
60	2 7/16	7 11/16 195	6.2992 160	5 29/32 150	29/32 23	7/8 22	3/4 19	35/64 14	1 21/32 42	2 17/32 64	2.795 71	1.024 26	3/4 M20	**UCFS312** **UCFS312-39**	FS312	UC312 UC312-39		7.4 7.4	81.9	52.2	13.2	UCFS312C –	UCFS312D –	81 –	3 3/16 –	8.6 –
65	2 1/2	8 3/16 208	6.8898 175	6 17/32 166	29/32 23	7/8 22	19/32 15	45/64 18	1 9/16 40	2 3/8 60	2.953 75	1.181 30	3/4 M20	**UCFS313-40** **UCFS313**	FS313	UC313-40 UC313		8.8 8.8	92.7	59.9	13.2	– UCFS313C	– UCFS313D	– 76	– 3	– 9.9
70	2 3/4	8 29/32 226	7.2835 185	7 1/64 178	63/64 25	31/32 25	45/64 18	45/64 18	1 11/16 43	2 15/32 63	3.071 78	1.299 33	7/8 M22	**UCFS314-44** **UCFS314**	FS314	UC314-44 UC314		11.2 11.2	104	68.2	13.2	– UCFS314C	– UCFS314D	– 80	– 3 5/32	– 12.3
75	2 15/16 3	9 9/32 236	7.8740 200	7 1/4 184	63/64 25	31/32 25	53/64 21	45/64 18	1 7/8 48	2 25/32 71	3.228 82	1.260 32	7/8 M22	**UCFS315-47** **UCFS315** **UCFS315-48**	FS315	UC315-47 UC315 UC315-48		13.7 13.7 13.7	113	77.2	13.2	– UCFS315C –	– UCFS315D –	– 88 –	– 3 15/32 –	– 15.0 –
80	–	9 27/32 250	8.2677 210	7 23/32 196	1 7/32 31	1 1/16 27	45/64 18	25/32 20	1 7/8 48	2 3/4 70	3.386 86	1.339 34	1 M27	**UCFS316**	FS316	UC316		15.1	123	86.7	13.3	UCFS316C	UCFS316D	87	3 7/16	16.5
85	–	10 1/4 260	8.6614 220	8 1/32 204	1 7/32 31	1 1/16 27	15/16 24	25/32 20	2 1/8 54	3 5/32 80	3.780 96	1.575 40	1 M27	**UCFS317**	FS317	UC317		17.3	133	96.8	13.3	UCFS317C	UCFS317D	97	3 13/16	18.9
90	3 1/2	11 1/32 280	9.4488 240	8 1/2 216	1 3/8 35	1 3/16 30	15/16 24	25/32 20	2 7/32 56	3 5/32 80	3.780 96	1.575 40	1 1/8 M30	**UCFS318-56** **UCFS318**	FS318	UC318-56 UC318		21.3 21.3	143	107	13.3	– UCFS318C	– UCFS318D	– 99	– 3 29/32	– 23.2
95	–	11 13/32 290	9.8425 250	8 31/32 228	1 3/8 35	1 3/16 30	1 17/32 39	25/32 20	2 29/32 74	3 31/32 101	4.055 103	1.614 41	1 1/8 M30	**UCFS319**	FS319	UC319		24.5	153	119	13.3	UCFS319C	UCFS319D	120	4 23/32	26.7
100	3 15/16 4	12 7/32 310	10.2362 260	9 17/32 242	1 1/2 38	1 1/4 32	1 17/32 39	25/32 20	2 29/32 74	4 1/8 105	4.252 108	1.654 42	1 1/4 M33	**UCFS320** **UCFS320-63** **UCFS320-64**	FS320	UC320 UC320-63 UC320-64		29.5 29.5 29.5	173	141	13.2	UCFS320C – –	UCFS320D – –	126 – –	4 31/32 – –	32.3 – –
105	–	12 7/32 310	10.2362 260	9 17/32 242	1 1/2 38	1 1/4 32	1 17/32 39	25/32 20	2 29/32 74	4 7/32 107	4.409 112	1.732 44	1 1/4 M33	**UCFS321**	FS321	UC321		32.7	184	153	13.2	UCFS321C	UCFS321D	128	5 1/32	35.7
110	–	13 3/8 340	11.8110 300	10 15/32 266	1 39/64 41	1 3/8 35	1 3/8 35	63/64 25	2 25/32 71	4 3/16 106	4.606 117	1.811 46	1 3/8 M36	**UCFS322**	FS322	UC322		39.0	205	180	13.2	UCFS322C	UCFS322D	129	5 3/32	42.4
120	–	14 9/16 370	12.9921 330	11 27/64 290	1 39/64 41	1 9/16 40	1 3/8 35	1 3/16 30	3 5/32 80	4 11/32 110	4.961 126	2.008 51	1 3/8 M36	**UCFS324**	FS324	UC324		50.6	207	185	13.5	UCFS324C	UCFS324D	133	5 1/4	55.4
130	–	16 5/32 410	14.1732 360	12 19/32 320	1 39/64 41	1 25/32 45	1 3/8 35	1 3/16 30	3 11/32 85	4 9/16 116	5.315 135	2.126 54	1 3/8 M36	**UCFS326**	FS326	UC326		67.7	229	214	13.6	UCFS326C	UCFS326D	142	5 29/32	73.8
140	–	17 23/32 450	15.7480 400	13 25/32 350	1 39/64 41	2 5/32 55	1 49/64 45	1 3/16 30	3 3/4 95	5 5/32 131	5.709 145	2.323 59	1 3/8 M36	**UCFS328**	FS328	UC328		94.0	253	246	13.6	UCFS328C	UCFS328D	156	6 5/32	102

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 305~308
A-R1/8 ..... 309~328
3. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing.
(Example of Part No. : UCFS307JL3, UC307L3)
4. The dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

FYH

UKFS
Tapered bore (with adapter)
d_1 20 ~ 125 mm





With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.	Δ_{H3s}	Δ_{A2s}	X	Y
FS305	0 −0.046	±0.5	0.7	0.2
FS306~FS308	0 −0.054			
FS309~FS310	0 −0.063	±0.8	1	0.3 ~FS318 / FS319~ 0.4
FS311~FS313				
FS315~FS319	0 −0.072			
FS320~FS322	0 −0.081			
FS324~FS328	0 −0.089			

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FS305~315	±0.2
FS316~328	±0.3

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d_1	L	H_3	J	N	A_1	A_2	A_3	A_4	A_5	B_1	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm A_c	inch	Mass kg
20	3/4	4 11/32	3.1496	3 5/32	5/8	1/2	23/64	9/32	7/8	1 3/16	1 3/8	1/2	UKFS305	FS305	UK305		HE2305X	1.4	21.2	10.9	12.6	–	–	–	–	–
		110	80	80	16	13	9	7	22	30.5	35	M14					H2305X	1.4				UKFS305C	UKFS305D	47	1 27/32	1.7
25	1	4 29/32	3.5433	3 47/64	5/8	19/32	25/64	5/16	15/16	1 5/16	1 1/2	1/2	UKFS306	FS306	UK306		H2306X	1.9	26.7	15.0	13.3	UKFS306C	UKFS306D	51	2	2.2
		125	90	95	16	15	10	8	24	33	38	M14					HE2306X	1.9				–	–	–	–	–
30	1 1/8	5 5/16	3.9370	3 15/16	3/4	5/8	7/16	23/64	1 1/16	1 7/16	1 11/16	5/8	UKFS307	FS307	UK307		HS2307X	2.4	33.4	19.3	13.2	–	–	–	–	–
		135	100	100	19	16	11	9	27	36.5	43	M16					H2307X	2.4				UKFS307C	UKFS307D	55	2 5/32	2.9
35	1 1/4	5 29/32	4.5276	4 13/32	3/4	21/32	33/64	25/64	1 3/16	1 19/32	1 13/16	5/8	UKFS308	FS308	UK308		HE2308X	3.4	40.7	24.0	13.2	–	–	–	–	–
	1 3/8	150	115	112	19	17	13	10	30	40.5	46	M16					HS2308X	3.4				–	–	–	–	–
																	H2308X	3.4				UKFS308C	UKFS308D	61	2 13/32	3.9
40	1 1/2	6 5/16	4.9213	4 59/64	3/4	23/32	35/64	7/16	1 5/16	1 23/32	1 31/32	5/8	UKFS309	FS309	UK309		HE2309X	4.4	48.9	29.5	13.3	–	–	–	–	–
		160	125	125	19	18	14	11	33	44	50	M16					H2309X	4.4				UKFS309C	UKFS309D	65	2 9/16	5.0
45	1 3/4	6 7/8	5.5118	5 13/64	29/32	3/4	5/8	15/32	1 13/32	1 7/8	2 5/32	3/4	UKFS310	FS310	UK310		HE2310X	5.3	62.0	38.3	13.2	–	–	–	–	–
		175	140	132	23	19	16	12	36	48	55	M20					H2310X	5.3				UKFS310C	UKFS310D	71	2 25/32	6.1
50	1 7/8	7 9/32	5.9055	5 33/64	29/32	25/32	43/64	33/64	1 17/32	2	2 5/16	3/4	UKFS311	FS311	UK311		HS2311X	6.3	71.6	45.0	13.2	–	–	–	–	–
	2	185	150	140	23	20	17	13	39	51	59	M20					H2311X	6.3				UKFS311C	UKFS311D	74	2 29/32	7.2
																	HE2311X	6.3				–	–	–	–	–
55	2 1/8	7 11/16	6.2992	5 29/32	29/32	7/8	3/4	35/64	1 21/32	2 3/16	2 7/16	3/4	UKFS312	FS312	UK312		HS2312X	7.3	81.9	52.2	13.2	–	–	–	–	–
		195	160	150	23	22	19	14	42	55.5	62	M20					H2312X	7.3				UKFS312C	UKFS312D	81	3 3/16	8.5
60	2 1/4	8 3/16	6.8898	6 17/32	29/32	7/8	19/32	45/64	1 9/16	2 3/32	2 9/16	3/4	UKFS313	FS313	UK313		HE2313X	8.9	92.7	59.9	13.2	–	–	–	–	–
		208	175	166	23	22	15	18	40	53.5	65	M20					H2313X	8.9				UKFS313C	UKFS313D	76	3	10.0
	2 3/8																HS2313X	8.9				–	–	–	–	–
65	2 1/2	9 9/32	7.8740	7 1/4	63/64	31/32	53/64	45/64	1 7/8	2 1/2	2 7/8	7/8	UKFS315	FS315	UK315		HE2315X	13.4	113	77.2	13.2	–	–	–	–	–
		236	200	184	25	25	21	18	48	63.5	73	M22					H2315X	13.4				UKFS315C	UKFS315D	88	3 15/32	14.8
70	2 3/4	9 27/32	8.2677	7 23/32	1 7/32	1 1/16	45/64	25/32	1 7/8	2 15/32	3 1/16	1	UKFS316	FS316	UK316		HE2316X	15.1	123	86.7	13.3	–	–	–	–	–
		250	210	196	31	27	18	20	48	62.5	78	M27					H2316X	15.1				UKFS316C	UKFS316D	87	3 7/16	16.7
75	3	10 1/4	8.6614	8 1/32	1 7/32	1 1/16	15/16	25/32	2 1/8	2 27/32	3 7/32	1	UKFS317	FS317	UK317		H2317X	17.1	133	96.8	13.3	UKFS317C	UKFS317D	97	3 13/16	18.9
		260	220	204	31	27	24	20	54	72	82	M27					HE2317X	17.1				–	–	–	–	–
80	–	11 1/32	9.4488	8 1/2	1 3/8	1 3/16	15/16	25/32	2 7/32	2 27/32	3 3/8	1 1/8	UKFS318	FS318	UK318		H2318X	21.4	143	107	13.3	UKFS318C	UKFS318D	99	3 29/32	23.5
		280	240	216	35	30	24	20	56	72	86	M30														
85	3 1/4	11 13/32	9.8425	8 31/32	1 3/8	1 3/16	1 17/32	25/32	2 29/32	2 19/32	3 17/32	1 1/8	UKFS319	FS319	UK319		HE2319X	24.8	153	119	13.3	–	–	–	–	–
		290	250	228	35	30	39	20	74	91	90	M30					H2319X	24.8				UKFS319C	UKFS319D	120	4 23/32	26.2
90	3 1/2	12 7/32	10.2362	9 17/32	1 1/2	1 1/4	1 17/32	25/32	2 29/32	2 21/32	3 13/16	1 1/4	UKFS320	FS320	UK320		HE2320X	29.1	173	141	13.2	–	–	–	–	–
		310	260	242	38	32	39	20	74	93	97	M33					H2320X	29.1				UKFS320C	UKFS320D	126	4 31/32	32.2
100	4	13 3/8	11.8110	10 15/32	1 39/64	1 3/8	1 3/8	63/64	2 25/32	2 3/4	4 1/8	1 3/8	UKFS322	FS322	UK322		H2322X	38.6	205	180	13.2	UKFS322C	UKFS322D	129	5 3/32	42.1
		340	300	266	41	35	35	25	71	95	105	M36					HE2322X	38.6				–	–	–	–	–
110	–	14 9/16	12.9921	11 27/64	1 39/64	1 9/16	1 3/8	1 3/16	3 5/32	3 21/32	4 13/32	1 3/8	UKFS324	FS324	UK324		H2324	50.9	207	185	13.5	UKFS324C	UKFS324D	133	5 1/4	56.0
		370	330	290	41	40	35	30	80	100.5	112	M36														
115	4 1/2	16 5/32	14.1732	12 19/32	1 39/64	1 25/32	1 3/8	1 3/16	3 11/32	4	4 3/4	1 3/8	UKFS326	FS326	UK326		HE2326	67.5	229	214	13.6	–	–	–	–	–
		410	360	320	41	45	35	30	85	101.5	121	M36					H2326	67.5				UKFS326C	UKFS326D	142	5 29/32	74.1
125	–	17 23/32	15.7480	13 25/32	1 39/64	2 5/32	1 49/64	1 3/16	3 3/4	4 5/8	5 5/32	1 3/8	UKFS328	FS328	UK328		H2328	94.0	253	246	13.6	UKFS328C	UKFS328D	156	6 5/32	102
		450	400	350	41	55	45	30	95	117.5	131	M36														

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 305~308
A-R1/8 ..... 309~328
3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKFS307J + H2307X, UK307 + H2307X)
4. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing.
(Example of Part No. : UKFS307JL3 + H2307X, UK307L3 + H2307X)
5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.
6. Housings of nodular graphite cast iron are also available.

UCSF-H1S6
Cylindrical bore (with set screws)
d 20 ~ 60 mm





With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
SF204H1~210H1	±0.5	0.7
SF211H1~212H1	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
SF204H1~212H1	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	Closed Type	Dimension mm	inch A_s	Mass kg
20	3/4	3 3/8	1 1/32	2 33/64	15/32	13/32	19/32	1 5/16	1.220	0.500	3/8	UCSF204-12H1S6	SF204H1	UC204-12S6	0.66	10.9	5.35	13.2	–	–	–	–	–
		86	26	64	12	10	15	33.3	31	12.7	M10	UCSF204H1S6		UC204S6					UCSF204H1CS6	UCSF204H1DS6	38	1 1/2	0.66
25	7/8	3 3/4	1 3/32	2 3/4	15/32	13/32	5/8	1 13/32	1.343	0.563	3/8	UCSF205-14H1S6	SF205H1	UC205-14S6	0.85	11.9	6.3	13.9	–	–	–	–	–
	15/16	95	27.5	70	12	10	16	35.8	34.1	14.3	M10	UCSF205-15H1S6		UC205-15S6					–	–	–	–	–
												UCSF205H1S6		UC205S6					UCSF205H1CS6	UCSF205H1DS6	40	1 9/16	0.85
	1											UCSF205-16H1S6		UC205-16S6					–	–	–	–	–
30	1 1/8	4 1/4	1 7/32	3 17/64	15/32	13/32	45/64	1 19/32	1.500	0.626	3/8	UCSF206-18H1S6	SF206H1	UC206-18S6	1.2	16.5	9.05	13.9	–	–	–	–	–
		108	31	83	12	10	18	40.2	38.1	15.9	M10	UCSF206H1S6		UC206S6					UCSF206H1CS6	UCSF206H1DS6	45	1 25/32	1.2
	1 3/16											UCSF206-19H1S6		UC206-19S6					–	–	–	–	–
	1 1/4											UCSF206-20H1S6		UC206-20S6					–	–	–	–	–
35	1 1/4	4 19/32	1 11/32	3 5/8	35/64	7/16	3/4	1 3/4	1.689	0.689	7/16	UCSF207-20H1S6	SF207H1	UC207-20S6	1.5	21.8	12.3	13.9	–	–	–	–	–
	1 5/16	117	34	92	14	11	19	44.4	42.9	17.5	M12	UCSF207-21H1S6		UC207-21S6					–	–	–	–	–
	1 3/8											UCSF207-22H1S6		UC207-22S6					–	–	–	–	–
												UCSF207H1S6		UC207S6					UCSF207H1CS6	UCSF207H1DS6	49	1 15/16	1.5
	1 7/16											UCSF207-23H1S6		UC207-23S6					–	–	–	–	–
40	1 1/2	5 1/8	1 13/32	4 1/64	5/8	15/32	53/64	2 1/32	1.937	0.748	1/2	UCSF208-24H1S6	SF208H1	UC208-24S6	2	24.8	14.3	14.0	–	–	–	–	–
	1 9/16	130	36	102	16	12	21	51.2	49.2	19	M14	UCSF208-25H1S6		UC208-25S6					–	–	–	–	–
												UCSF208H1S6		UC208S6					UCSF208H1CS6	UCSF208H1DS6	56	2 7/32	2.0
45	1 5/8	5 13/32	1 1/2	4 9/64	5/8	1/2	55/64	2 1/16	1.937	0.748	1/2	UCSF209-26H1S6	SF209H1	UC209-26S6	2.3	27.8	16.2	14.0	–	–	–	–	–
	1 11/16	137	38	105	16	13	22	52.2	49.2	19	M14	UCSF209-27H1S6		UC209-27S6					–	–	–	–	–
	1 3/4											UCSF209-28H1S6		UC209-28S6					–	–	–	–	–
												UCSF209H1S6		UC209S6					UCSF209H1CS6	UCSF209H1DS6	57	2 1/4	2.3
50	1 7/8	5 5/8	1 9/16	4 3/8	5/8	1/2	55/64	2 5/32	2.031	0.748	1/2	UCSF210-30H1S6	SF210H1	UC210-30S6	2.6	29.8	18.6	14.4	–	–	–	–	–
	1 15/16	143	40	111	16	13	22	54.6	51.6	19	M14	UCSF210-31H1S6		UC210-31S6					–	–	–	–	–
												UCSF210H1S6		UC210S6					UCSF210H1CS6	UCSF210H1DS6	59	2 5/16	2.6
	2											UCSF210-32H1S6		UC210-32S6					–	–	–	–	–
55	2	6 3/8	1 11/16	5 1/8	3/4	19/32	63/64	2 5/16	2.189	0.874	5/8	UCSF211-32H1S6	SF211H1	UC211-32S6	4	36.8	23.5	14.4	–	–	–	–	–
	2 1/8	162	43	130	19	15	25	58.4	55.6	22.2	M16	UCSF211-34H1S6		UC211-34S6					–	–	–	–	–
												UCSF211H1S6		UC211S6					UCSF211H1CS6	UCSF211H1DS6	63	2 15/32	4.0
	2 3/16											UCSF211-35H1S6		UC211-35S6					–	–	–	–	–
60	2 1/4	6 7/8	1 7/8	5 5/8	3/4	19/32	1 9/64	2 23/32	2.563	1.000	5/8	UCSF212-36H1S6	SF212H1	UC212-36S6	4.7	44.5	29	14.4	–	–	–	–	–
		175	48	143	19	15	29	68.7	65.1	25.4	M16	UCSF212H1S6		UC212S6					UCSF212H1CS6	UCSF212H1DS6	73	2 7/8	4.7
	2 3/8											UCSF212-38H1S6		UC212-38S6					–	–	–	–	–
	2 7/16											UCSF212-39H1S6		UC212-39S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is are shown below.
A-1/4-28UNFN12 .....204~210
A-R1/8N12 .....211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCSF-EH1S6
Cylindrical bore (with set screws)
d 20 ~ 60 mm





With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
SF204EH1~208EH1	±0.5	0.7
SF211EH1~212EH1	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
SF204EH1~212EH1	±0.2

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	Closed Type	Dimension mm	inch A_s	Mass kg
20	3/4	3 3/8	1 1/32	2 33/64	7/16	13/32	19/32	1 5/16	1.220	0.500	3/8	**UCSF204-12EH1S6**	SF204EH1	UC204-12S6	0.66	10.9	5.35	13.2	–	–	–	–	–
		86	26	64	11	10	15	33.3	31	12.7		**UCSF204EH1S6**		UC204S6					UCSF204EH1CS6	UCSF204EH1DS6	38	1 1/2	0.66
25	7/8	Please refer to the UCSF-H1S6.																					
	15/16																						
	1																						
30	1 1/8											**UCSF206-18EH1S6**	SF206EH1	UC206-18S6	1.2	16.5	9.05	13.9	–	–	–	–	–
		4 1/4	1 7/32	3 17/64	33/64	13/32	45/64	1 19/32	1.500	0.626		**UCSF206EH1S6**		UC206S6					UCSF206EH1CS6	UCSF206EH1DS6	45	1 25/32	1.2
	1 3/16	108	31	83	13	10	18	40.2	38.1	15.9	7/16	**UCSF206-19EH1S6**		UC206-19S6					–	–	–	–	–
	1 1/4											**UCSF206-20EH1S6**		UC206-20S6					–	–	–	–	–
35	1 1/4											**UCSF207-20EH1S6**	SF207EH1	UC207-20S6	1.5	21.8	12.3	13.9	–	–	–	–	–
	1 5/16											**UCSF207-21EH1S6**		UC207-21S6					–	–	–	–	–
	1 3/8	4 19/32	1 11/32	3 5/8	33/64	7/16	3/4	1 3/4	1.689	0.689		**UCSF207-22EH1S6**		UC207-22S6					–	–	–	–	–
		117	34	92	13	11	19	44.4	42.9	17.5		**UCSF207EH1S6**		UC207S6					UCSF207EH1CS6	UCSF207EH1DS6	49	1 15/16	1.5
	1 7/16											**UCSF207-23EH1S6**		UC207-23S6					–	–	–	–	–
40	1 1/2											**UCSF208-24EH1S6**	SF208EH1	UC208-24S6	2	24.8	14.3	14.0	–	–	–	–	–
	1 9/16	5 1/8	1 13/32	4 1/64	35/64	15/32	53/64	2 1/32	1.937	0.748	1/2	**UCSF208-25EH1S6**		UC208-25S6					–	–	–	–	–
		130	36	102	14	12	21	51.2	49.2	19		**UCSF208EH1S6**		UC208S6					UCSF208EH1CS6	UCSF208EH1DS6	56	2 7/32	2.0
45	1 5/8	Please refer to the UCSF-H1S6.																					
	1 11/16																						
	1 3/4																						
50	1 7/8																						
	1 15/16																						
	2																						
55	2											**UCSF211-32EH1S6**	SF211EH1	UC211-32S6	4	30.7	23.5	14.4	–	–	–	–	–
	2 1/8	6 3/8	1 11/16	5 1/8	43/64	19/32	63/64	2 5/16	2.189	0.874		**UCSF211-34EH1S6**		UC211-34S6					–	–	–	–	–
		162	43	130	17	15	25	58.4	55.6	22.2	5/8	**UCSF211EH1S6**		UC211S6					UCSF211EH1CS6	UCSF211EH1DS6	63	2 15/32	4.0
	2 3/16											**UCSF211-35EH1S6**		UC211-35S6					–	–	–	–	–
60	2 1/4											**UCSF212-36EH1S6**	SF212EH1	UC212-36S6	4.7	31.6	29	14.4	–	–	–	–	–
		6 7/8	1 7/8	5 5/8	43/64	19/32	1 9/64	2 23/32	2.563	1.000		**UCSF212EH1S6**		UC212S6					UCSF212EH1CS6	UCSF212EH1DS6	73	2 7/8	4.7
	2 3/8	175	48	143	17	15	29	68.7	65.1	25.4	5/8	**UCSF212-38EH1S6**		UC212-38S6					–	–	–	–	–
	2 7/16											**UCSF212-39EH1S6**		UC212-39S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is are shown below.
A-1/4-28UNFN12 .....204~208
A-R1/8N12 .....211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCVF-S6
Cylindrical bore (with set screws)
d 20 ~ 40 mm







Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
VF204-VF208	±0.5	0.7

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	Closed Type	Dimension mm	inch A_s	Mass kg
20	3/4	3 3/8	1 3/32	2 1/2	7/16	17/32	45/64	1 7/16	1.220	0.500	3/8	**UCVF204-12S6**	VF204	UC204-12S6	0.3	10.9	5.35	13.2	UCVF204-12CS6	UCVF204-12DS6	48	1 7/8	0.31
		86	27.8	63.5	11	13.4	18	36.3	31	12.7	M10	**UCVF204S6**		UC204S6					UCVF204CS6	UCVF204DS6			
25	7/8	3 3/4	1 1/8	2 3/4	7/16	5/8	43/64	1 7/16	1.343	0.563	3/8	**UCVF205-14S6**	VF205	UC205-14S6	0.41	11.9	6.3	13.9	UCVF205-14CS6	UCVF205-14DS6	50.7	2	0.42
	15/16	95	28.5	70	11	15.5	17	36.8	34.1	14.3	M10	**UCVF205-15S6**		UC205-15S6					UCVF205-15CS6	UCVF205-15DS6			
												UCVF205S6		UC205S6					UCVF205CS6	UCVF205DS6			
	1											**UCVF205-16S6**		UC205-16S6					UCVF205-16CS6	UCVF205-16DS6			
30	1 1/8	4 7/32	1 1/4	3 17/64	7/16	9/16	3/4	1 5/8	1.500	0.626	3/8	**UCVF206-18S6**	VF206	UC206-18S6	0.56	16.5	9.05	13.9	UCVF206-18CS6	UCVF206-18DS6	58.3	1 9/32	0.57
	1 3/16	107	31.7	83	11	14.5	19.2	41.4	38.1	15.9	M10	**UCVF206S6**		UC206S6					UCVF206CS6	UCVF206DS6			
												UCVF206-19S6		UC206-19S6					UCVF206-19CS6	UCVF206-19DS6			
	1 1/4											**UCVF206-20S6**		UC206-20S6					UCVF206-20CS6	UCVF206-20DS6			
35	1 1/4	4 21/32	1 11/32	3 5/8	33/64	5/8	27/32	1 27/32	1.689	0.689	1/2	**UCVF207-20S6**	VF207	UC207-20S6	0.83	21.8	12.3	13.9	UCVF207-20CS6	UCVF207-20DS6	63.7	2 1/2	0.85
	1 5/16	118	34.5	92	13	15.5	21.5	46.9	42.9	17.5	M12	**UCVF207-21S6**		UC207-21S6					UCVF207-21CS6	UCVF207-21DS6			
	1 3/8											**UCVF207-22S6**		UC207-22S6					UCVF207-22CS6	UCVF207-22DS6			
												UCVF207S6		UC207S6					UCVF207CS6	UCVF207DS6			
	1 7/16											**UCVF207-23S6**		UC207-23S6					UCVF207-23CS6	UCVF207-23DS6			
40	1 1/2	5 1/8	1 7/16	4 1/64	35/64	21/32	29/32	2 3/32	1.937	0.748	1/2	**UCVF208-24S6**	VF208	UC208-24S6	1.08	24.8	14.3	14.0	UCVF208-24CS6	UCVF208-24DS6	70.7	2 25/32	1.11
	1 9/16	130	36.5	102	14	17	23	53.2	49.2	19	M12	**UCVF208-25S6**		UC208-25S6					UCVF208-25CS6	UCVF208-25DS6			
												UCVF208S6		UC208S6					UCVF208CS6	UCVF208DS6			

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCVF-ES7
Cylindrical bore (with set screws)
d 20 ~ 40 mm







Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
VF204E–VF208E	±0.5	0.7

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings C_r kN	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	Closed Type	Dimension A_s mm	inch	Mass kg
		inch / mm									inch / mm												
20	3/4	3 3/8	1 3/32	2 1/2	7/16	17/32	45/64	1 7/16	1.220	0.500	3/8	**UCVF204-12ES7**	VF204E	UC204-12S7	0.3	12.8	6.65	13.2	UCVF204-12ECS7	UCVF204-12EDS7	48	1 7/8	0.31
		86	27.8	63.5	11	13.4	18	36.3	31	12.7	M8	**UCVF204ES7**		UC204S7					UCVF204ECS7	UCVF204EDS7			
25	7/8	3 3/4	1 1/8	2 3/4	33/64	5/8	43/64	1 7/16	1.343	0.563	7/16	**UCVF205-14ES7**	VF205E	UC205-14S7	0.41	14.0	7.85	13.9	UCVF205-14ECS7	UCVF205-14EDS7	50.7	2	0.42
	15/16	95	28.5	70	13	15.5	17	36.8	34.1	14.3	M10	**UCVF205-15ES7**		UC205-15S7					UCVF205-15ECS7	UCVF205-15EDS7			
												UCVF205ES7		UC205S7					UCVF205ECS7	UCVF205EDS7			
	1											**UCVF205-16ES7**		UC205-16S7					UCVF205-16ECS7	UCVF205-16EDS7			
30	1 1/8	4 7/32	1 1/4	3 17/64	33/64	9/16	3/4	1 5/8	1.500	0.626	7/16	**UCVF206-18ES7**	VF206E	UC206-18S7	0.56	19.5	11.3	13.9	UCVF206-18ECS7	UCVF206-18EDS7	58.5	1 5/16	0.57
	1 3/16	107	31.7	83	13	14.5	19.2	41.4	38.1	15.9	M10	**UCVF206ES7**		UC206S7					UCVF206ECS7	UCVF206EDS7			
												UCVF206-19ES7		UC206-19S7					UCVF206-19ECS7	UCVF206-19EDS7			
	1 1/4											**UCVF206-20ES7**		UC206-20S7					UCVF206-20ECS7	UCVF206-20EDS7			
35	1 1/4	4 21/32	1 11/32	3 5/8	35/64	5/8	27/32	1 27/32	1.689	0.689	1/2	**UCVF207-20ES7**	VF207E	UC207-20S7	0.83	25.7	15.4	13.9	UCVF207-20ECS7	UCVF207-20EDS7	63.7	2 1/2	0.85
	1 5/16	118	34.5	92	14	15.5	21.5	46.9	42.9	17.5	M12	**UCVF207-21ES7**		UC207-21S7					UCVF207-21ECS7	UCVF207-21EDS7			
	1 3/8											**UCVF207-22ES7**		UC207-22S7					UCVF207-22ECS7	UCVF207-22EDS7			
												UCVF207ES7		UC207S7					UCVF207ECS7	UCVF207EDS7			
	1 7/16											**UCVF207-23ES7**		UC207-23S7					UCVF207-23ECS7	UCVF207-23EDS7			
40	1 1/2	5 1/8	1 7/16	4 1/64	35/64	21/32	29/32	2 3/32	1.937	0.748	1/2	**UCVF208-24ES7**	VF208E	UC208-24S7	1.08	29.1	17.8	14.0	UCVF208-24ECS7	UCVF208-24EDS7	70.7	2 25/32	1.11
	1 9/16	130	36.5	102	14	17	23	53.2	49.2	19	M12	**UCVF208-25ES7**		UC208-25S7					UCVF208-25ECS7	UCVF208-25EDS7			
												UCVF208ES7		UC208S7					UCVF208ECS7	UCVF208EDS7			

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCFL
Cylindrical bore (with set screws)
d 12 ~ (45) mm

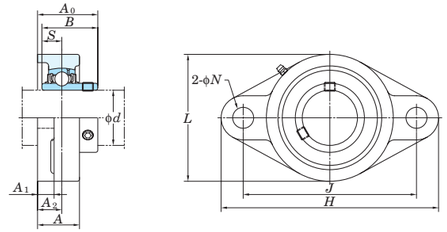

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X) Unit: mm

Housing No.			Δ_{A2s}	X
FL204~FL210	FLX05~FLX10	FL305~FL310	±0.5	0.7
FL211~FL218		FL311~FL326	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns}) Unit: mm

Housing No.			Δ_{Ns}
FL204~FL218	FLX05~FLX10	FL305~FL311	±0.2
		FL312~FL326	±0.3

Forms and dimensions of L_c of FL204JE3 and FL205JE3 (housing with cast iron cover) are shown below.



FL204JE3 L_c = 65 mm
FL205JE3 L_c = 73 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch (mm)										Bolt Size inch (mm)	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm (inch) A_s		Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm (inch) A_c		Mass kg
d		H	L	A	J	N	A_1	A_2	A_0	B	S																		
12													UCFL201		UC201	0.50				UCFL201C	UCFL201D	37	1 15/32	0.50	–	–	–	–	–
	1/2												UCFL201-8		UC201-8	0.50				–	–	–	–	–	–	–	–	–	–
15		4 7/16	2 3/8	1	3 35/64	15/32	7/16	19/32	1 5/16	1.220	0.500	3/8	UCFL202		UC202	0.48				UCFL202C	UCFL202D	37	1 15/32	0.48	–	–	–	–	–
	5/8	113	60	25.5	90	12	11	15	33.3	31	12.7	M10	UCFL202-10	FL204	UC202-10	0.48	12.8	6.65	13.2	–	–	–	–	–	–	–	–	–	–
17													UCFL203		UC203	0.47				UCFL203C	UCFL203D	37	1 15/32	0.47	–	–	–	–	–
	3/4												UCFL204-12		UC204-12	0.47				–	–	–	–	–	–	–	–	–	–
20													UCFL204		UC204	0.45				UCFL204C	UCFL204D	37	1 15/32	0.45	UCFL204FC	UCFL204FD	46	1 13/16	0.6
	7/8												UCFL205-14		UC205-14	0.64				–	–	–	–	–	–	–	–	–	–
	15/16	5 1/8	2 11/16	1 1/16	3 57/64	5/8	1/2	5/8	1 13/32	1.343	0.563	1/2	UCFL205-15	FL205	UC205-15	0.64	14.0	7.85	13.9	–	–	–	–	–	–	–	–	–	–
		130	68	27	99	16	13	16	35.8	34.1	14.3	M14	UCFL205		UC205	0.64				UCFL205C	UCFL205D	40	1 9/16	0.64	UCFL205FC	UCFL205FD	49	1 15/16	0.83
25	1												UCFL205-16		UC205-16	0.64				–	–	–	–	–	–	–	–	–	–
		5 9/16	3 9/32	1 3/16	4 39/64	15/32	1/2	45/64	1 19/32	1.500	0.626	3/8	UCFLX05	FLX05	UCX05	1.1	19.5	11.3	13.9	UCFLX05C	UCFLX05D	44	1 23/32	1.1	–	–	–	–	–
	1	141	83	30	117	12	13	18	40.2	38.1	15.9	M10	UCFLX05-16		UCX05-16	1.1				–	–	–	–	–	–	–	–	–	–
		5 29/32	3 5/32	1 5/32	4 29/64	3/4	1/2	5/8	1 17/32	1.496	0.591	5/8	UCFL305	FL305	UC305	1.1	21.2	10.9	12.6	–	–	–	–	–	UCFL305C	UCFL305D	54	2 1/8	1.4
	1	150	80	29	113	19	13	16	39	38	15	M16	UCFL305-16		UC305-16	1.1				–	–	–	–	–	–	–	–	–	–
30	1 1/8												UCFL206-18		UC206-18	0.93				–	–	–		–	–	–	–	–	–
		5 13/16	3 5/32	1 7/32	4 39/64	5/8	1/2	45/64	1 19/32	1.500	0.626	1/2	UCFL206	FL206	UC206	0.93	19.5	11.3	13.9	UCFL206C	UCFL206D	44	1 23/32	0.93	UCFL206FC	UCFL206FD	53	2 3/32	1.2
	1 3/16	148	80	31	117	16	13	18	40.2	38.1	15.9	M14	UCFL206-19		UC206-19	0.93				–	–	–	–	–	–	–	–	–	–
	1 1/4												UCFL206-20		UC206-20	0.93				–	–	–	–	–	–	–	–	–	–
		6 5/32	3 3/4	1 11/32	5 1/8	5/8	9/16	3/4	1 3/4	1.689	0.689	1/2	UCFLX06	FLX06	UCX06	1.5	25.7	15.4	13.9	UCFLX06C	UCFLX06D	49	1 15/16	1.5	–	–	–	–	–
	1 3/16	156	95	34	130	16	14	19	44.4	42.9	17.5	M14	UCFLX06-19		UCX06-19	1.5				–	–	–	–	–	–	–	–	–	–
	1 1/4												UCFLX06-20		UCX06-20	1.5				–	–	–	–	–	–	–	–	–	–
	–	7 3/32	3 17/32	1 1/4	5 9/32	29/32	19/32	45/64	1 23/32	1.693	0.669	3/4	UCFL306	FL306	UC306	1.5	26.7	15.0	13.3	–	–	–	–	–	UCFL306C	UCFL306D	59	2 5/16	1.8
35	1 1/4												UCFL207-20		UC207-20	1.2				–	–	–	–	–	–	–	–	–	–
	1 5/16												UCFL207-21		UC207-21	1.2				–	–	–	–	–	–	–	–	–	–
	1 3/8	6 11/32	3 17/32	1 11/32	5 1/8	5/8	9/16	3/4	1 3/4	1.689	0.689	1/2	UCFL207-22	FL207	UC207-22	1.2	25.7	15.4	13.9	–	–	–	–	–	–	–	–	–	–
		161	90	34	130	16	14	19	44.4	42.9	17.5	M14	UCFL207		UC207	1.2				UCFL207C	UCFL207D	49	1 15/16	1.2	UCFL207FC	UCFL207FD	58	2 9/32	1.6
	1 7/16												UCFL207-23		UC207-23	1.2				–	–	–	–	–	–	–	–	–	–
	1 3/8												UCFLX07-22		UCX07-22	1.9				–	–	–	–	–	–	–	–	–	–
		6 23/32	4 1/8	1 1/2	5 43/64	5/8	9/16	53/64	2 1/32	1.937	0.748	1/2	UCFLX07	FLX07	UCX07	1.9	29.1	17.8	14.0	UCFLX07C	UCFLX07D	55	2 5/32	1.9	–	–	–	–	–
	1 7/16	171	105	38	144	16	14	21	51.2	49.2	19	M14	UCFLX07-23		UCX07-23	1.9				–	–	–	–	–	–	–	–	–	–
	–	7 9/32	3 15/16	1 13/32	5 35/64	29/32	5/8	25/32	1 15/16	1.890	0.748	3/4	UCFL307	FL307	UC307	1.8	33.4	19.3	13.2	–	–	–	–	–	UCFL307C	UCFL307D	64	2 17/32	2.2
40	1 1/2												UCFL208-24		UC208-24	1.6				–	–	–	–	–	–	–	–	–	–
	1 9/16	6 7/8	3 15/16	1 13/32	5 43/64	5/8	9/16	53/64	2 1/32	1.937	0.748	1/2	UCFL208-25	FL208	UC208-25	1.6	29.1	17.8	14.0	–	–	–	–	–	–	–	–	–	–
		175	100	36	144	16	14	21	51.2	49.2	19	M14	UCFL208		UC208	1.6				UCFL208C	UCFL208D	55	2 5/32	1.6	UCFL208FC	UCFL208FD	64	2 17/32	2.0
	1 1/2	7 1/16	4 3/8	1 9/16	5 53/64	5/8	9/16	55/64	2 1/16	1.937	0.748	1/2	UCFLX08-24	FLX08	UCX08-24	2.1	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
		179	111	40	148	16	14	22	52.2	49.2	19	M14	UCFLX08		UCX08	2.1				UCFLX08C	UCFLX08D	56	2 7/32	2.1	–	–	–	–	–
	1 1/2	7 7/8	4 13/32	1 9/16	6 7/32	29/32	21/32	29/32	2 7/32	2.047	0.748	3/4	UCFL308-24	FL308	UC308-24	2.5	40.7	24.0	13.2	–	–	–	–	–	–	–	–	–	–
		200	112	40	158	23	17	23	56	52	19	M20	UCFL308		UC308	2.5				–	–	–	–	–	UCFL308C	UCFL308D	71	2 25/32	3.0
45	1 5/8												UCFL209-26		UC209-26	1.9				–	–	–	–	–	–	–	–	–	–
	1 11/16	7 13/32	4 1/4	1 1/2	5 53/64	3/4	19/32	55/64	2 1/16	1.937	0.748	5/8	UCFL209-27	FL209	UC209-27	1.9	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
	1 3/4	188	108	38	148	19	15	22	52.2	49.2	19	M16	UCFL209-28		UC209-28	1.9				–	–	–	–	–	–	–	–	–	–
													UCFL209		UC209	1.9				UCFL209C	UCFL209D	56	2 7/32	1.9	UCFL209FC	UCFL209FD	66	2 19/32	2.3
	1 3/4	7 7/16	4 9/16	1 9/16	6 3/16	5/8	9/16	29/32	2 3/16	2.031	0.748	1/2	UCFLX09-28	FLX09	UCX09-28	2.4	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
		189	116	40	157	16	14	23	55.6	51.6	19	M14	UCFLX09		UCX09	2.4				UCFLX09C	UCFLX09D	60	2 3/8	2.4	–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10, 309~326
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFL206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFL
Cylindrical bore (with set screws)
d (45) ~ (90) mm

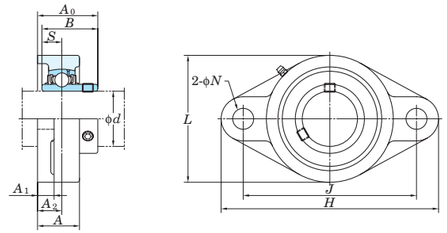

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X) Unit: mm

Housing No.			Δ_{A2s}	X
FL204~FL210	FLX05~FLX10	FL305~FL310	±0.5	0.7
FL211~FL218		FL311~FL326	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns}) Unit: mm

Housing No.			Δ_{Ns}
FL204~FL218	FLX05~FLX10	FL305~FL311	±0.2
		FL312~FL326	±0.3

Forms and dimensions of L_c of FL204JE3 and FL205JE3 (housing with cast iron cover) are shown below.



FL204JE3 L_c = 65 mm
FL205JE3 L_c = 73 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
45	1 3/4	9 1/16	4 29/32	1 23/32	6 31/32	63/64	23/32	63/64	2 3/8	2.244	0.866	7/8	UCFL309-28	FL309	UC309-28	3.5	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		230	125	44	177	25	18	25	60	57	22	M22	UCFL309		UC309	3.5				–	–	– –	–	UCFL309C	UCFL309D	76 3	4.1
50	1 7/8												UCFL210-30	FL210	UC210-30	2.2				–	–	– –	–	–	–	– –	–
	1 15/16	7 3/4	4 17/32	1 9/16	6 3/16	3/4	19/32	55/64	2 5/32	2.031	0.748	5/8	UCFL210-31		UC210-31	2.2	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		197	115	40	157	19	15	22	54.6	51.6	19	M16	UCFL210		UC210	2.2				UCFL210C	UCFL210D	59 2 5/16	2.2	UCFL210FC	UCFL210FD	70.5 2 25/32	2.7
	2												UCFL210-32		UC210-32	2.2				–	–	– –	–	–	–	– –	–
	1 15/16												UCFLX10-31	FLX10	UCX10-31	3.8				–	–	– –	–	–	–	– –	–
		8 1/2	5 1/4	1 23/32	7 1/4	3/4	25/32	1 1/32	2 11/32	2.189	0.874	5/8	UCFLX10		UCX10	3.8	43.4	29.4	14.4	UCFLX10C	UCFLX10D	64 2 17/32	3.8	–	–	– –	–
	2	216	133	44	184	19	20	26	59.4	55.6	22.2	M16	UCFLX10-32		UCX10-32	3.8				–	–	– –	–	–	–	– –	–
	–	9 7/16	5 1/2	1 7/8	7 23/64	63/64	3/4	1 7/64	2 5/8	2.402	0.866	7/8	UCFL310	FL310	UC310	4.4	62.0	38.3	13.2	–	–	– –	–	UCFL310C	UCFL310D	83 3 9/32	5.2
		240	140	48	187	25	19	28	67	61	22	M22															
55	2												UCFL211-32	FL211	UC211-32	3.3				–	–	– –	–	–	–	– –	–
	2 1/8	8 13/16	5 1/8	1 11/16	7 1/4	3/4	23/32	63/64	2 5/16	2.189	0.874	5/8	UCFL211-34		UC211-34	3.3	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		224	130	43	184	19	18	25	58.4	55.6	22.2	M16	UCFL211		UC211	3.3				UCFL211C	UCFL211D	63 2 15/32	3.3	UCFL211FC	UCFL211FD	74.5 2 15/16	3.9
	2 3/16												UCFL211-35		UC211-35	3.3				–	–	– –	–	–	–	– –	–
	2												UCFL311-32	FL311	UC311-32	5.3				–	–	– –	–	–	–	– –	–
		9 27/32	5 29/32	2 1/16	7 51/64	63/64	25/32	1 3/16	2 25/32	2.598	0.984	7/8	UCFL311		UC311	5.3	71.6	45.0	13.2	–	–	– –	–	UCFL311C	UCFL311D	87 3 7/16	6.2
	2 3/16	250	150	52	198	25	20	30	71	66	25	M22	UCFL311-35		UC311-35	5.3				–	–	– –	–	–	–	– –	–
60	2 1/4												UCFL212-36	FL212	UC212-36	4.2				–	–	– –	–	–	–	– –	–
		9 27/32	5 1/2	1 7/8	7 61/64	29/32	23/32	1 9/64	2 23/32	2.563	1.000	3/4	UCFL212		UC212	4.2	52.4	36.2	14.4	UCFL212C	UCFL212D	73 2 7/8	4.2	UCFL212FC	UCFL212FD	86 3 3/8	5.0
	2 3/8	250	140	48	202	23	18	29	68.7	65.1	25.4	M20	UCFL212-38		UC212-38	4.2				–	–	– –	–	–	–	– –	–
	2 7/16												UCFL212-39		UC212-39	4.2				–	–	– –	–	–	–	– –	–
		10 5/8	6 5/16	2 7/32	8 11/32	1 7/32	7/8	1 19/64	3 1/16	2.795	1.024	1	UCFL312	FL312	UC312	6.5	81.9	52.2	13.2	–	–	– –	–	UCFL312C	UCFL312D	95 3 3/4	7.7
	2 7/16	270	160	56	212	31	22	33	78	71	26	M27	UCFL312-39		UC312-39	6.5				–	–	– –	–	–	–	– –	–
65	2 1/2	10 5/32	6 3/32	1 31/32	8 17/64	29/32	25/32	1 3/16	2 3/4	2.563	1.000	3/4	UCFL213-40	FL213	UC213-40	5.1	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		258	155	50	210	23	20	30	69.7	65.1	25.4	M20	UCFL213		UC213	5.1				UCFL213C	UCFL213D	74 2 29/32	5.1	UCFL213FC	UCFL213FD	87 3 7/16	5.9
	2 1/2	11 5/8	6 7/8	2 9/32	9 29/64	1 7/32	31/32	1 19/64	3 1/16	2.953	1.181	1	UCFL313-40	FL313	UC313-40	8.5	92.7	59.9	13.2	–	–	– –	–	–	–	– –	–
		295	175	58	240	31	25	33	78	75	30	M27	UCFL313		UC313	8.5				–	–	– –	–	UCFL313C	UCFL313D	94 3 11/16	9.6
70	2 3/4	10 7/16	6 5/16	2 1/8	8 1/2	29/32	25/32	1 7/32	2 31/32	2.937	1.189	3/4	UCFL214-44	FL214	UC214-44	5.7	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		265	160	54	216	23	20	31	75.4	74.6	30.2	M20	UCFL214		UC214	5.7				UCFL214C	UCFL214D	80 3 5/32	5.7	UCFL214FC	UCFL214FD	93 3 21/32	6.6
	2 3/4	12 13/32	7 9/32	2 13/32	9 27/32	1 3/8	1 3/32	1 27/64	3 3/16	3.071	1.299	1 1/8	UCFL314-44	FL314	UC314-44	9.7	104	68.2	13.2	–	–	– –	–	–	–	– –	–
		315	185	61	250	35	28	36	81	78	33	M30	UCFL314		UC314	9.7				–	–	– –	–	UCFL314C	UCFL314D	98 3 27/32	10.8
75	2 15/16												UCFL215-47	FL215	UC215-47	6.4				–	–	– –	–	–	–	– –	–
		10 13/16	6 1/2	2 7/32	8 55/64	29/32	25/32	1 11/32	3 3/32	3.063	1.311	3/4	UCFL215		UC215	6.4	67.4	48.3	14.5	UCFL215C	UCFL215D	83 3 9/32	6.4	UCFL215FC	UCFL215FD	96 3 25/32	7.4
	3	275	165	56	225	23	20	34	78.5	77.8	33.3	M20	UCFL215-48		UC215-48	6.4				–	–	– –	–	–	–	– –	–
	2 15/16												UCFL315-47	FL315	UC315-47	11.3				–	–	– –	–	–	–	– –	–
		12 19/32	7 11/16	2 19/32	10 15/64	1 3/8	1 3/16	1 17/32	3 1/2	3.228	1.260	1 1/8	UCFL315		UC315	11.3	113	77.2	13.2	–	–	– –	–	UCFL315C	UCFL315D	106 4 3/16	12.6
	3	320	195	66	260	35	30	39	89	82	32	M30	UCFL315-48		UC315-48	11.3				–	–	– –	–	–	–	– –	–
80	3 1/8	11 13/32	7 3/32	2 9/32	9 11/64	63/64	25/32	1 11/32	3 9/32	3.252	1.311	7/8	UCFL216-50	FL216	UC216-50	7.8	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		290	180	58	233	25	20	34	83.3	82.6	33.3	M22	UCFL216		UC216	7.8				UCFL216C	UCFL216D	88 3 15/32	7.8	UCFL216FC	UCFL216FD	103 4 1/16	9.0
	–	13 31/32	8 9/32	2 11/16	11 7/32	1 1/2	1 1/4	1 1/2	3 17/32	3.386	1.339	1 1/4	UCFL316	FL316	UC316	14.4	123	86.7	13.3	–	–	– –	–	UCFL316C	UCFL316D	107 4 7/32	15.8
		355	210	68	285	38	32	38	90	86	34	M33															
85	3 1/4	12	7 15/32	2 15/32	9 49/64	63/64	7/8	1 27/64	3 7/16	3.374	1.343	7/8	UCFL217-52	FL217	UC217-52	9.8	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		305	190	63	248	25	22	36	87.6	85.7	34.1	M22	UCFL217		UC217	9.8				UCFL217C	UCFL217D	92 3 5/8	9.8	UCFL217FC	UCFL217FD	107 4 7/32	11.2
	–	14 9/16	8 21/32	2 29/32	11 13/16	1 1/2	1 1/4	1 47/64	3 15/16	3.780	1.575	1 1/4	UCFL317	FL317	UC317	16.0	133	96.8	13.3	–	–	– –	–	UCFL317C	UCFL317D	117 4 19/32	17.6
		370	220	74	300	38	32	44	100	96	40	M33															
90	3 1/2	12 19/32	8 1/16	2 11/16	10 7/16	63/64	29/32	1 37/64	3 25/32	3.780	1.563	7/8	UCFL218-56	FL218	UC218-56	12.3	96.1	71.5	14.5	–	–	– –	–	–	–	– –	–
		320	205	68	265	25	23	40	96.3	96	39.7	M22	UCFL218		UC218	12.3				UCFL218C	UCFL218D	101 3 31/32	12.3	UCFL218FC	UCFL218FD	116 4 9/16	13.8

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10, 309~326
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFL206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFL
Cylindrical bore (with set screws)
d (90) ~ 130 mm

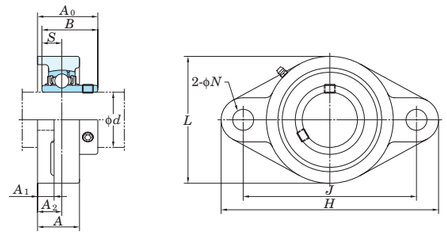

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X) Unit: mm

Housing No.			Δ_{A2s}	X
FL204~FL210	FLX05~FLX10	FL305~FL310	±0.5	0.7
FL211~FL218		FL311~FL326	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns}) Unit: mm

Housing No.			Δ_{Ns}
FL204~FL218	FLX05~FLX10	FL305~FL311	±0.2
		FL312~FL326	±0.3

Forms and dimensions of L_c of FL204JE3 and FL205JE3 (housing with cast iron cover) are shown below.



FL204JE3 L_c = 65 mm
FL205JE3 L_c = 73 mm

Shaft Dia. mm d	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
90	3 1/2	15 5/32	9 1/4	3	12 13/32	1 1/2	1 13/32	1 47/64	3 15/16	3.780	1.575	1 1/4	UCFL318-56	FL318	UC318-56	19.0	143	107	13.3	–	–	– –	–	–	–	– –	–
		385	235	76	315	38	36	44	100	96	40	M33	UCFL318		UC318	19.0				–	–	– –	–	UCFL318C	UCFL318D	119 4 11/16	20.9
95	–	15 15/16	9 27/32	3 11/16	13	1 39/64	1 9/16	2 21/64	4 3/4	4.055	1.614	1 3/8	UCFL319	FL319	UC319	24.6	153	119	13.3	–	–	– –	–	UCFL319C	UCFL319D	140 5 1/2	26.8
		405	250	94	330	41	40	59	121	103	41	M36															
100	3 15/16	17 5/16	10 5/8	3 11/16	14 11/64	1 47/64	1 9/16	2 21/64	4 29/32	4.252	1.654	1 1/2	UCFL320	FL320	UC320	29.4	173	141	13.2	–	–	– –	–	UCFL320C	UCFL320D	146 5 3/4	32.2
		440	270	94	360	44	40	59	125	108	42	M39	UCFL320-63		UC320-63	29.4				–	–	– –	–	–	–	– –	–
	4												UCFL320-64		UC320-64	29.4				–	–	– –	–	–	–	– –	–
110	–	18 1/2	11 13/16	3 25/32	15 23/64	1 47/64	1 21/32	2 23/64	5 5/32	4.606	1.811	1 1/2	UCFL322	FL322	UC322	36.2	205	180	13.2	–	–	– –	–	UCFL322C	UCFL322D	154 6 1/16	39.6
		470	300	96	390	44	42	60	131	117	46	M39															
120	–	20 15/32	13	4 11/32	16 59/64	1 27/32	1 7/8	2 9/16	5 1/2	4.961	2.008	1 5/8	UCFL324	FL324	UC324	51.6	207	185	13.5	–	–	– –	–	UCFL324C	UCFL324D	163 6 13/32	56.4
		520	330	110	430	47	48	65	140	126	51	M42															
130	–	21 21/32	14 3/16	4 17/32	18 7/64	1 27/32	1 31/32	2 9/16	5 3/4	5.315	2.126	1 5/8	UCFL326	FL326	UC326	61.6	229	214	13.6	–	–	– –	–	UCFL326C	UCFL326D	172 6 25/32	67.7
		550	360	115	460	47	50	65	146	135	54	M42															

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09, 305~308
A-R1/8 ..... 211~218, X10, 309~326
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFL206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFL-E
Cylindrical bore (with set screws)
d 12 ~ 75 mm

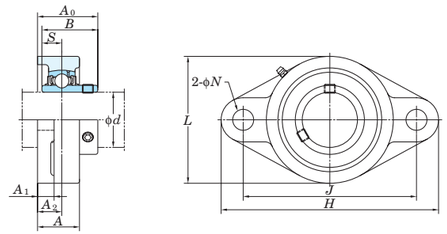

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
FL203E~FL210E	±0.5	0.7
FL211E~FL217E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FL203E~FL217E	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12													UCFL201E		UC201				0.42
	1/2	3 27/32	2 7/32	1	3	25/64	7/16	19/32	1 5/16	1.220	0.500		UCFL201-8E		UC201-8				
15		98	56	25.5	76.2	10	11	15	33.3	31	12.7	5/16	UCFL202E	FL203E	UC202	12.8	6.65	13.2	0.4
	5/8												UCFL202-10E		UC202-10				
17													UCFL203E		UC203				0.39
20	3/4	4 7/16	2 3/8	1	3 17/32	25/64	7/16	19/32	1 5/16	1.220	0.500	5/16	UCFL204-12E	FL204E	UC204-12	12.8	6.65	13.2	0.48
		113	60	25.5	89.7	10	11	15	33.3	31	12.7		UCFL204E		UC204				
	7/8												UCFL205-14E		UC205-14				
25	15/16	5 1/8	2 11/16	1 1/16	3 57/64	15/32	1/2	5/8	1 13/32	1.343	0.563	3/8	UCFL205-15E	FL205E	UC205-15	14.0	7.85	13.9	0.64
		130	68	27	98.8	12	13	16	35.8	34.1	14.3		UCFL205E		UC205				
	1												UCFL205-16E		UC205-16				
	1 1/8												UCFL206-18E		UC206-18				
30		5 13/16	3 5/32	1 7/32	4 19/32	15/32	1/2	45/64	1 19/32	1.500	0.626	3/8	UCFL206E	FL206E	UC206	19.5	11.3	13.9	0.93
	1 3/16	148	80	31	116.7	12	13	18	40.2	38.1	15.9		UCFL206-19E		UC206-19				
	1 1/4												UCFL206-20E		UC206-20				
	1 1/4												UCFL207-20E		UC207-20				
	1 5/16												UCFL207-21E		UC207-21				
35	1 3/8	6 11/32	3 17/32	1 11/32	5 1/8	33/64	9/16	3/4	1 3/4	1.689	0.689	7/16	UCFL207-22E	FL207E	UC207-22	25.7	15.4	13.9	1.2
		161	90	34	130.2	13	14	19	44.4	42.9	17.5		UCFL207E		UC207				
	1 7/16												UCFL207-23E		UC207-23				
	1 1/2												UCFL208-24E		UC208-24				
40	1 9/16	6 7/8	3 15/16	1 13/32	5 21/32	33/64	9/16	53/64	2 1/32	1.937	0.748	7/16	UCFL208-25E	FL208E	UC208-25	29.1	17.8	14.0	1.6
		175	100	36	143.7	13	14	21	51.2	49.2	19		UCFL208E		UC208				
	1 5/8												UCFL209-26E		UC209-26				
45	1 11/16	7 13/32	4 1/4	1 1/2	5 27/32	19/32	19/32	55/64	2 1/16	1.937	0.748	1/2	UCFL209-27E	FL209E	UC209-27	34.1	21.3	14.0	1.9
	1 3/4	188	108	38	148.4	15	15	22	52.2	49.2	19		UCFL209-28E		UC209-28				
													UCFL209E		UC209				
	1 7/8												UCFL210-30E		UC210-30				
50	1 15/16	7 3/4	4 17/32	1 9/16	6 3/16	19/32	19/32	55/64	2 5/32	2.031	0.748	1/2	UCFL210-31E	FL210E	UC210-31	35.1	23.3	14.4	2.2
		197	115	40	157	15	15	22	54.6	51.6	19		UCFL210E		UC210				
	2												UCFL210-32E		UC210-32				
	2												UCFL211-32E		UC211-32				
55	2 1/8	8 13/16	5 1/8	1 11/16	7 1/4	21/32	23/32	63/64	2 5/16	2.189	0.874	9/16	UCFL211-34E	FL211E	UC211-34	43.4	29.4	14.4	3.3
		224	130	43	184	16.5	18	25	58.4	55.6	22.2		UCFL211E		UC211				
	2 3/16												UCFL211-35E		UC211-35				
	2 1/4												UCFL212-36E		UC212-36				
60		9 27/32	5 1/2	1 7/8	7 61/64	21/32	23/32	1 9/64	2 23/32	2.563	1.000	9/16	UCFL212E	FL212E	UC212	52.4	36.2	14.4	4.2
	2 3/8	250	140	48	202	16.5	18	29	68.7	65.1	25.4		UCFL212-38E		UC212-38				
	2 7/16												UCFL212-39E		UC212-39				
65	2 1/2	10 5/32	6 3/32	1 31/32	8 17/64	21/32	25/32	1 3/16	2 3/4	2.563	1.000	9/16	UCFL213-40E	FL213E	UC213-40	57.2	40.1	14.4	5.2
		258	155	50	210	16.5	20	30	69.7	65.1	25.4		UCFL213E		UC213				
70	2 3/4	10 7/16	6 5/16	2 1/8	8 1/2	21/32	29/32	1 7/32	2 31/32	2.937	1.189	9/16	UCFL214-44E	FL214E	UC214-44	62.2	44.1	14.5	5.7
		265	160	54	216	16.5	20	31	75.4	74.6	30.2		UCFL214E		UC214				
	2 15/16												UCFL215-47E		UC215-47				
75		10 13/16	6 1/2	2 7/32	8 55/64	3/4	25/32	1 11/32	3 3/32	3.063	1.311	11/16	UCFL215E	FL215E	UC215	67.4	48.3	14.5	6.4
	3	275	165	56	225	19	20	34	78.5	77.8	33.3		UCFL215-48E		UC215-48				

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~217
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFL206EJL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFL-E
Cylindrical bore (with set screws)
d 80 ~ 85 mm





Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
FL203E~FL210E	±0.5	0.7
FL211E~FL217E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FL203E~FL217E	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm										Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN		Factor	Mass
d		H	L	A	J	N	A_1	A_2	A_0	B	S						C_r	C_{0r}	f_0	kg
80	3 1/8	11 13/32 290	7 3/32 180	2 9/32 58	9 11/64 233	3/4 19	25/32 20	1 11/32 34	3 9/32 83.3	3.252 82.6	1.311 33.3	11/16	**UCFL216-50E** **UCFL216E**	FL216E	UC216-50 UC216		72.7	53.0	14.6	7.8
85	3 1/4	12 305	7 15/32 190	2 15/32 63	9 49/64 248	3/4 19	7/8 22	1 27/64 36	3 7/16 87.6	3.374 85.7	1.343 34.1	11/16	**UCFL217-52E** **UCFL217E**	FL217E	UC217-52 UC217		84.0	61.9	14.5	9.8

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~217
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFL206EJL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

NANFL
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 55 mm

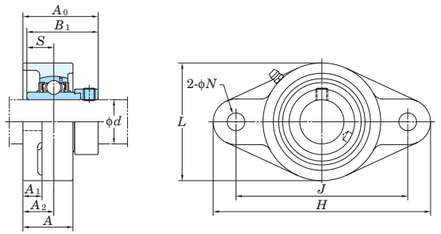

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
NFL204~NFL210	±0.5	0.7
NFL211	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
NFL204~NFL211	±0.2

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B_1	S	Bolt Size inch	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12													NANFL201		NA201				
	1/2												NANFL201-8		NA201-8				
15													NANFL202		NA202				
	5/8	4 7/16	2 3/8	1 5/32	3 17/32	25/64	7/16	3/4	1 25/32	1.720	0.673	5/16	NANFL202-10	NFL204	NA202-10	12.8	6.65	13.2	0.59
		113	60	29.5	89.7	10	11	19	45.6	43.7	17.1								
17													NANFL203		NA203				
	3/4												NANFL204-12		NA204-12				
20													NANFL204		NA204				
	7/8												NANFL205-14		NA205-14				
25	15/16	5 1/8	2 11/16	1 7/32	3 57/64	15/32	1/2	25/32	1 27/32	1.748	0.689	3/8	NANFL205-15	NFL205	NA205-15	14.0	7.85	13.9	0.9
		130	68	31	98.8	12	13	20	46.9	44.4	17.5		NANFL205		NA205				
	1												NANFL205-16		NA205-16				
	1 1/8												NANFL206-18		NA206-18				
30		5 13/16	3 5/32	1 11/32	4 19/32	15/32	1/2	53/64	2	1.906	0.720	3/8	NANFL206	NFL206	NA206	19.5	11.3	13.9	1.1
	1 3/16	148	80	34	116.7	12	13	21	51.1	48.4	18.3		NANFL206-19		NA206-19				
	1 1/4												NANFL206-20		NA206-20				
	1 1/4												NANFL207-20		NA207-20				
	1 5/16												NANFL207-21		NA207-21				
35	1 3/8	6 11/32	3 17/32	1 7/16	5 1/8	33/64	9/16	27/32	2 1/8	2.012	0.740	7/16	NANFL207-22	NFL207	NA207-22	25.7	15.4	13.9	1.6
		161	90	36.5	130.2	13	14	21.5	53.8	51.1	18.8		NANFL207		NA207				
	1 7/16												NANFL207-23		NA207-23				
40	1 1/2	6 7/8	3 15/16	1 17/32	5 21/32	33/64	9/16	15/16	2 5/16	2.217	0.843	7/16	NANFL208-24	NFL208	NA208-24	29.1	17.8	14.0	2.0
	1 9/16	175	100	39	143.7	13	14	24	58.9	56.3	21.4		NANFL208-25		NA208-25				
													NANFL208		NA208				
45	1 5/8												NANFL209-26		NA209-26				
	1 11/16	7 13/32	4 1/4	1 9/16	5 27/32	19/32	9/16	15/16	2 5/16	2.217	0.843	1/2	NANFL209-27	NFL209	NA209-27	34.1	21.3	14.0	2.3
	1 3/4	188	108	40	148.4	15	14	24	58.9	56.3	21.4		NANFL209-28		NA209-28				
													NANFL209		NA209				
50	1 7/8												NANFL210-30		NA210-30				
	1 15/16	7 3/4	4 17/32	1 27/32	6 3/16	19/32	9/16	1 1/8	2 5/8	2.469	0.969	1/2	NANFL210-31	NFL210	NA210-31	35.1	23.3	14.4	2.7
		197	115	46.5	157	15	14	28.5	66.6	62.7	24.6		NANFL210		NA210				
	2												NANFL210-32		NA210-32				
55	2												NANFL211-32		NA211-32				
	2 1/8	8 13/16	5 1/8	1 31/32	7 1/4	21/32	25/32	1 17/64	2 31/32	2.811	1.094	9/16	NANFL211-34	NFL211	NA211-34	43.4	29.4	14.4	4.1
		224	130	50	184	16.5	20	32	75.6	71.4	27.8		NANFL211		NA211				
	2 3/16												NANFL211-35		NA211-35				

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 211
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Housings of nodular graphite cast iron are also available.

FYH

NCFL
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

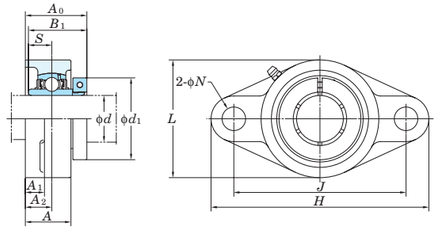

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
FL204~FL210	±0.5	0.7
FL211~FL212	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FL204~FL212	±0.2

Shaft Dia. mm / inch d	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B_1	S	d_1	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	4 7/16	2 3/8	1	3 35/64	15/32	7/16	19/32	1 3/8	1 9/32	0.500	1 3/4	3/8	NCFL204-12	FL204	NC204-12	12.8	6.65	13.2	0.62
		113	60	25.5	90	12	11	15	34.8	32.5	12.7	44.5	M10	NCFL204		NC204				
25	7/8	5 1/8	2 11/16	1 1/16	3 57/64	5/8	1/2	5/8	1 1/2	1 7/16	0.563	1 15/16	1/2	NCFL205-14	FL205	NC205-14	14.0	7.85	13.9	0.84
	15/16	130	68	27	99	16	13	16	38.2	36.5	14.3	49.2	M14	NCFL205-15		NC205-15				
														NCFL205		NC205				
	1													NCFL205-16		NC205-16				
30	1 1/8	5 13/16	3 5/32	1 7/32	4 39/64	5/8	1/2	45/64	1 21/32	1 9/16	0.626	2 3/16	1/2	NCFL206-18	FL206	NC206-18	19.5	11.3	13.9	1.1
	1 3/16	148	80	31	117	16	13	18	41.8	39.7	15.9	55.6	M14	NCFL206		NC206				
														NCFL206-19		NC206-19				
	1 1/4													NCFL206-20		NC206-20				
35	1 1/4	6 11/32	3 17/32	1 11/32	5 1/8	5/8	9/16	3/4	1 13/16	1 3/4	0.689	2 7/16	1/2	NCFL207-20	FL207	NC207-20	25.7	15.4	13.9	1.5
		161	90	34	130	16	14	19	46	44.5	17.5	61.9	M14							
	1 3/8	6 11/32	3 17/32	1 11/32	5 1/8	5/8	9/16	3/4	1 13/16	1 3/4	0.689	2 9/16	1/2	NCFL207-22	FL207	NC207-22	25.7	15.4	13.9	1.5
		161	90	34	130	16	14	19	46	44.5	17.5	65.1	M14	NCFL207		NC207				
	1 7/16													NCFL207-23		NC207-23				
40	1 1/2	6 7/8	3 15/16	1 13/32	5 43/64	5/8	9/16	53/64	2 3/32	2	0.748	2 11/16	1/2	NCFL208-24	FL208	NC208-24	29.1	17.8	14.0	2.0
		175	100	36	144	16	14	21	52.8	50.8	19	68.3	M14	NCFL208		NC208				
45	1 5/8	7 13/32	4 1/4	1 1/2	5 53/64	3/4	19/32	55/64	2 1/8	2	0.748	2 13/16	5/8	NCFL209-26	FL209	NC209-26	34.1	21.3	14.0	2.3
		188	108	38	148	19	15	22	53.8	50.8	19	71.4	M16							
	1 11/16	7 13/32	4 1/4	1 1/2	5 53/64	3/4	19/32	55/64	2 1/8	2	0.748	2 15/16	5/8	NCFL209-27	FL209	NC209-27	34.1	21.3	14.0	2.3
	1 3/4	188	108	38	148	19	15	22	53.8	50.8	19	74.6	M16	NCFL209-28		NC209-28				
														NCFL209		NC209				
50	1 15/16	7 3/4	4 17/32	1 9/16	6 3/16	3/4	19/32	55/64	2 7/32	2 3/32	0.748	3 3/8	5/8	NCFL210-31	FL210	NC210-31	35.1	23.3	14.4	2.8
		197	115	40	157	19	15	22	56.1	53.1	19	85.7	M16	NCFL210		NC210				
	2													NCFL210-32		NC210-32				
55	2	8 13/16	5 1/8	1 11/16	7 1/4	3/4	23/32	63/64	2 11/32	2 1/4	0.874	3 1/2	5/8	NCFL211-32	FL211	NC211-32	43.4	29.4	14.4	3.7
		224	130	43	184	19	18	25	59.9	57.1	22.2	88.9	M16							
	2 3/16	8 13/16	5 1/8	1 11/16	7 1/4	3/4	23/32	63/64	2 11/32	2 1/4	0.874	3 5/8	5/8	NCFL211	FL211	NC211	43.4	29.4	14.4	3.7
		224	130	43	184	19	18	25	59.9	57.1	22.2	92.1	M16	NCFL211-35		NC211-35				
60	2 1/4	9 27/32	5 1/2	1 7/8	7 61/64	29/32	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/16	3/4	NCFL212-36	FL212	NC212-36	52.4	36.2	14.4	4.9
		250	140	48	202	23	18	29	70.3	66.7	25.4	103.2	M20							
	2 7/16	9 27/32	5 1/2	1 7/8	7 61/64	29/32	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/8	3/4	NCFL212	FL212	NC212	52.4	36.2	14.4	4.9
		250	140	48	202	23	18	29	70.3	66.7	25.4	104.8	M20	NCFL212-39		NC212-39				

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

FYH

NCFL-E
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

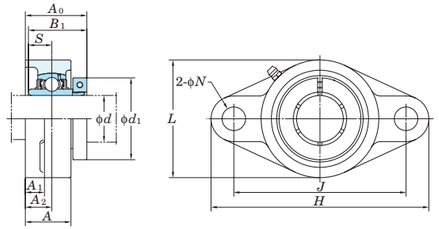

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
FL204E~FL210E	±0.5	0.7
FL211E~FL212E	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FL204E~FL212E	±0.2

Shaft Dia. mm inch d		Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B_1	S	d_1	Bolt Size inch	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	4 7/16	2 3/8	1	3 17/32	25/64	7/16	19/32	1 3/8	1 9/32	0.500	1 3/4	5/16	**NCFL204-12E**	FL204E	NC204-12		12.8	6.65	13.2	0.62
		113	60	25.5	89.7	10	11	15	34.8	32.5	12.7	44.5		**NCFL204E**		NC204					
25	7/8	5 1/8	2 11/16	1 1/16	3 57/64	15/32	1/2	5/8	1 1/2	1 7/16	0.563	1 15/16	3/8	**NCFL205-14E**	FL205E	NC205-14		14.0	7.85	13.9	0.84
	15/16	130	68	27	98.8	12	13	16	38.2	36.5	14.3	49.2		**NCFL205-15E**		NC205-15					
														NCFL205E		NC205					
	1													**NCFL205-16E**		NC205-16					
30	1 1/8	5 13/16	3 5/32	1 7/32	4 19/32	15/32	1/2	45/64	1 21/32	1 9/16	0.626	2 3/16	3/8	**NCFL206-18E**	FL206E	NC206-18		19.5	11.3	13.9	1.1
		148	80	31	116.7	12	13	18	41.8	39.7	15.9	55.6		**NCFL206E**		NC206					
	1 3/16													**NCFL206-19E**		NC206-19					
	1 1/4													**NCFL206-20E**		NC206-20					
35	1 1/4	6 11/32	3 17/32	1 11/32	5 1/8	33/64	9/16	3/4	1 13/16	1 3/4	0.689	2 7/16	7/16	**NCFL207-20E**	FL207E	NC207-20		25.7	15.4	13.9	1.5
		161	90	34	130.2	13	14	19	46	44.5	17.5	61.9									
	1 3/8	6 11/32	3 17/32	1 11/32	5 1/8	33/64	9/16	3/4	1 13/16	1 3/4	0.689	2 9/16	7/16	**NCFL207-22E**	FL207E	NC207-22		25.7	15.4	13.9	1.5
		161	90	34	130.2	13	14	19	46	44.5	17.5	65.1		**NCFL207E**		NC207					
	1 7/16													**NCFL207-23E**		NC207-23					
40	1 1/2	6 7/8	3 15/16	1 13/32	5 21/32	33/64	9/16	53/64	2 3/32	2	0.748	2 11/16	7/16	**NCFL208-24E**	FL208E	NC208-24		29.1	17.8	14.0	2.0
		175	100	36	143.7	13	14	21	52.8	50.8	19	68.3		**NCFL208E**		NC208					
45	1 5/8	7 13/32	4 1/4	1 1/2	5 27/32	19/32	19/32	55/64	2 1/8	2	0.748	2 13/16	1/2	**NCFL209-26E**	FL209E	NC209-26		34.1	21.3	14.0	2.3
		188	108	38	148.4	15	15	22	53.8	50.8	19	71.4									
	1 11/16	7 13/32	4 1/4	1 1/2	5 27/32	19/32	19/32	55/64	2 1/8	2	0.748	2 15/16	1/2	**NCFL209-27E**	FL209E	NC209-27		34.1	21.3	14.0	2.3
	1 3/4	188	108	38	148.4	15	15	22	53.8	50.8	19	74.6		**NCFL209-28E**		NC209-28					
														NCFL209E		NC209					
50	1 15/16	7 3/4	4 17/32	1 9/16	6 3/16	19/32	19/32	55/64	2 7/32	2 3/32	0.748	3 3/8	1/2	**NCFL210-31E**	FL210E	NC210-31		35.1	23.3	14.4	2.8
		197	115	40	157	15	15	22	56.1	53.1	19	85.7		**NCFL210E**		NC210					
	2													**NCFL210-32E**		NC210-32					
55	2	8 13/16	5 1/8	1 11/16	7 1/4	21/32	23/32	63/64	2 11/32	2 1/4	0.874	3 1/2	9/16	**NCFL211-32E**	FL211E	NC211-32		43.4	29.4	14.4	3.7
		224	130	43	184	16.5	18	25	59.9	57.1	22.2	88.9									
	2 3/16	8 13/16	5 1/8	1 11/16	7 1/4	21/32	23/32	63/64	2 11/32	2 1/4	0.874	3 5/8	9/16	**NCFL211E**	FL211E	NC211		43.4	29.4	14.4	3.7
		224	130	43	184	16.5	18	25	59.9	57.1	22.2	92.1		**NCFL211-35E**		NC211-35					
60	2 1/4	9 27/32	5 1/2	1 7/8	7 61/64	21/32	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/16	9/16	**NCFL212-36E**	FL212E	NC212-36		52.4	36.2	14.4	4.9
		250	140	48	202	16.5	18	29	70.3	66.7	25.4	103.2									
	2 7/16	9 27/32	5 1/2	1 7/8	7 61/64	21/32	23/32	1 9/64	2 25/32	2 5/8	1.000	4 1/8	9/16	**NCFL212E**	FL212E	NC212		52.4	36.2	14.4	4.9
		250	140	48	202	16.5	18	29	70.3	66.7	25.4	104.8		**NCFL212-39E**		NC212-39					

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

UKFL
Tapered bore (with adapter)
d_1 20 ~ 50 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X) Unit: mm

Housing No.			Δ_{A2s}	X
FL205~FL210	FLX05~FLX10	FL305~FL310	±0.5	0.7
FL211~FL218		FL311~FL326	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns}) Unit: mm

Housing No.			Δ_{Ns}
FL205~FL218	FLX05~FLX10	FL305~FL311	±0.2
		FL312~FL326	±0.3

Forms and dimensions of L_c of FL205JE3 (housing with cast iron cover) are shown below.



FL205JE3 L_c = 73 mm

Shaft Dia. d_1 mm	Shaft Dia. d_1 inch	Dimensions H	L	A	J	N	A_1	A_2	A_0 1)	B_1 1)	d_e (min.)	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass	Basic Load Ratings C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension A_s	Mass	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension A_c	Mass
		inch / mm										inch / mm					kg	kN					mm / inch	kg			mm / inch	kg
20	3/4	5 1/8	2 11/16	1 1/16	3 57/64	5/8	1/2	5/8	1 11/32(1 13/32)	1 5/32(1 3/8)	1 3/16	1/2	UKFL205	FL205	UK205	HE305X(HE2305X)	0.68	14.0	7.85	13.9	–	–	– –	–	–	–	– –	–
		130	68	27	99	16	13	16	34.5(36)	29(35)	30	M14				H305X(H2305X)	0.68				UKFL205C	UKFL205D	40 1 9/16	0.68	UKFL205FC	UKFL205FD	49 1 15/16	0.89
	3/4	5 9/16	3 9/32	1 3/16	4 39/64	15/32	1/2	45/64	1 15/32	1 3/8	1 3/16	3/8	UKFLX05	FLX05	UKX05	HE2305X	1.0	19.5	11.3	13.9	–	–	– –	–	–	–	– –	–
		141	83	30	117	12	13	18	37.5	35	30	M10				H2305X	1.0				UKFLX05C	UKFLX05D	44 1 23/32	1.0	–	–	– –	–
	3/4	5 29/32	3 5/32	1 5/32	4 29/64	3/4	1/2	5/8	1 15/32	1 3/8	–	5/8	UKFL305	FL305	UK305	HE2305X	1.1	21.2	10.9	12.6	–	–	– –	–	–	–	– –	–
		150	80	29	113	19	13	16	37.5	35	–	M16				H2305X	1.1				–	–	– –	–	UKFL305C	UKFL305D	54 2 1/8	1.4
25		5 13/16	3 5/32	1 7/32	4 39/64	5/8	1/2	45/64	1 15/32(1 9/16)	1 7/32(1 1/2)	1 13/32	3/8	UKFL206	FL206	UK206	H306X(H2306X)	0.97	19.5	11.3	13.9	UKFL206C	UKFL206D	44 1 23/32	0.97	UKFL206FC	UKFL206FD	53 2 3/32	1.2
	1	148	80	31	117	16	13	18	37.5(39.5)	31(38)	36	M14				HE306X(HE2306X)	0.97				–	–	– –	–	–	–	– –	–
		6 5/32	3 3/4	1 11/32	5 1/8	5/8	9/16	3/4	1 9/16	1 1/2	1 13/32	3/8	UKFLX06	FLX06	UKX06	H2306X	1.5	25.7	15.4	13.9	UKFLX06C	UKFLX06D	49 1 15/16	1.5	–	–	– –	–
	1	156	95	34	130	16	14	19	40	38	36	M14				HE2306X	1.5				–	–	– –	–	–	–	– –	–
		7 3/32	3 17/32	1 1/4	5 9/32	29/32	19/32	45/64	1 5/8	1 1/2	–	3/4	UKFL306	FL306	UK306	H2306X	1.5	26.7	15.0	13.3	–	–	– –	–	UKFL306C	UKFL306D	59 2 5/16	1.8
	1	180	90	32	134	23	15	18	41	38	–	M20				HE2306X	1.5				–	–	– –	–	–	–	– –	–
30	1 1/8	6 11/32	3 17/32	1 11/32	5 1/8	5/8	9/16	3/4	1 5/8(1 11/16)	1 3/8(1 11/16)	1 5/8	3/8	UKFL207	FL207	UK207	HS307X(HS2307X)	1.3	25.7	15.4	13.9	–	–	– –	–	–	–	– –	–
		161	90	34	130	16	14	19	41(43)	35(43)	41	M14				H307X(H2307X)	1.3				UKFL207C	UKFL207D	49 1 15/16	1.3	UKFL207FC	UKFL207FD	58 2 9/32	1.7
	1 1/8	6 23/32	4 1/8	1 1/2	5 43/64	5/8	9/16	53/64	1 23/32	1 11/16	1 5/8	3/8	UKFLX07	FLX07	UKX07	HS2307X	1.8	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		171	105	38	144	16	14	21	43.5	43	41	M14				H2307X	1.8				UKFLX07C	UKFLX07D	55 2 5/32	1.8	–	–	– –	–
	1 1/8	7 9/32	3 15/16	1 13/32	5 35/64	29/32	5/8	25/32	1 25/32	1 11/16	–	3/4	UKFL307	FL307	UK307	HS2307X	1.9	33.4	19.3	13.2	–	–	– –	–	–	–	– –	–
		185	100	36	141	23	16	20	45.5	43	–	M20				H2307X	1.9				–	–	– –	–	UKFL307C	UKFL307D	64 2 17/32	2.4
35	1 1/4	6 7/8	3 15/16	1 13/32	5 43/64	5/8	9/16	53/64	1 3/4(1 7/8)	1 13/32(1 13/16)	1 13/16	3/8	UKFL208	FL208	UK208	HE308X(HE2308X)	1.6	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
	1 3/8	175	100	36	144	16	14	21	44.5(48)	36(46)	46	M14				HS308X(HS2308X)	1.6				–	–	– –	–	–	–	– –	–
																H308X(H2308X)	1.6				UKFL208C	UKFL208D	55 2 5/32	1.6	UKFL208FC	UKFL208FD	64 2 17/32	2.0
	1 1/4	7 1/16	4 3/8	1 9/16	5 53/64	5/8	9/16	55/64	1 27/32	1 13/16	1 13/16	3/8	UKFLX08	FLX08	UKX08	HE2308X	2.1	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
	1 3/8	179	111	40	148	16	14	22	46.5	46	46	M14				HS2308X	2.1				–	–	– –	–	–	–	– –	–
																H2308X	2.1				UKFLX08C	UKFLX08D	56 2 7/32	2.1	–	–	– –	–
	1 1/4	7 7/8	4 13/32	1 9/16	6 7/32	29/32	21/32	29/32	2	1 13/16	–	3/4	UKFL308	FL308	UK308	HE2308X	2.5	40.7	24.0	13.2	–	–	– –	–	–	–	– –	–
	1 3/8	200	112	40	158	23	17	23	50.5	46	–	M20				HS2308X	2.5				–	–	– –	–	–	–	– –	–
																H2308X	2.5				–	–	– –	–	UKFL308C	UKFL308D	71 2 25/32	3.0
40	1 1/2	7 13/32	4 1/4	1 1/2	5 53/64	3/4	19/32	55/64	1 7/8(2)	1 17/32(1 31/32)	2 1/16	5/8	UKFL209	FL209	UK209	HE309X(HE2309X)	2.0	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		188	108	38	148	19	15	22	47.5(51)	39(50)	52	M16				H309X(H2309X)	2.0				UKFL209C	UKFL209D	56 2 7/32	2.0	UKFL209FC	UKFL209FD	66 2 19/32	2.5
	1 1/2	7 7/16	4 9/16	1 9/16	6 3/16	5/8	9/16	29/32	1 29/32	1 31/32	2 1/16	3/8	UKFLX09	FLX09	UKX09	HE2309X	2.5	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		189	116	40	157	16	14	23	48.5	50	52	M14				H2309X	2.5				UKFLX09C	UKFLX09D	60 2 3/8	2.5	–	–	– –	–
	1 1/2	9 1/16	4 29/32	1 23/32	6 31/32	63/64	23/32	63/64	2 5/32	1 31/32	–	7/8	UKFL309	FL309	UK309	HE2309X	3.6	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		230	125	44	177	25	18	25	55	50	–	M22				H2309X	3.6				–	–	– –	–	UKFL309C	UKFL309D	76 3	4.2
45	1 3/4	7 3/4	4 17/32	1 9/16	6 3/16	3/4	19/32	55/64	1 29/32(2 1/16)	1 21/32(2 5/32)	2 9/32	5/8	UKFL210	FL210	UK210	HE310X(HE2310X)	2.3	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		197	115	40	157	19	15	22	48.5(52)	42(55)	58	M16				H310X(H2310X)	2.3				UKFL210C	UKFL210D	59 2 5/16	2.3	UKFL210FC	UKFL210FD	70.5 2 25/32	2.8
	1 3/4	8 1/2	5 1/4	1 23/32	7 1/4	3/4	25/32	1 1/32	1 3/32	2 5/32	2 9/32	5/8	UKFLX10	FLX10	UKX10	HE2310X	3.7	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		216	133	44	184	19	20	26	53.5	55	58	M16				H2310X	3.7				UKFLX10C	UKFLX10D	64 2 17/32	3.7	–	–	– –	–
	1 3/4	9 7/16	5 1/2	1 7/8	7 23/64	63/64	3/4	1 7/64	2 3/8	2 5/32	–	7/8	UKFL310	FL310	UK310	HE2310X	4.4	62.0	38.3	13.2	–	–	– –	–	–	–	– –	–
		240	140	48	187	25	19	28	60	55	–	M22				H2310X	4.4				–	–	– –	–	UKFL310C	UKFL310D	83 3 9/32	5.2
50	1 7/8	8 13/16	5 1/8	1 11/16	7 1/4	3/4	23/32	63/64	2 3/32(2 1/4)	1 25/32(2 5/16)	2 17/32	5/8	UKFL211	FL211	UK211	HS311X(HS2311X)	3.3	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		224	130	43	184	19	18	25	53(57.5)	45(59)	64	M16				H311X(H2311X)	3.3				UKFL211C	UKFL211D	63 2 15/32	3.3	UKFL211FC	UKFL211FD	74.5 2 15/16	3.9
	2															HE311X(HE2311X)	3.3				–	–	– –	–	–	–	– –	–
	1 7/8	9 27/32	5 29/32	2 1/16	7 51/64	63/64	25/32	1 3/16	2 17/32	2 5/16	–	7/8	UKFL311	FL311	UK311	HS2311X	5.6	71.6	45.0	13.2	–	–	– –	–	–	–	– –	–
		250	150	52	198	25	20	30	64	59	–	M22				H2311X	5.6				–	–	– –	–	UKFL311C	UKFL311D	87 3 7/16	6.5
	2															HE2311X	5.6				–	–	– –	–	–	–	– –	–

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).
Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10, 309~326
3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKFL206J + H306X, UK206 + H306X)
4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKFL206JL3 + H2306X, UK206L3 + H2306X)
5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.
6. Housings of nodular graphite cast iron are also available.

UKFL
Tapered bore (with adapter)
d_1 55 ~ 115 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X) Unit: mm

Housing No.			Δ_{A2s}	X
FL205~FL210	FLX05~FLX10	FL305~FL310	±0.5	0.7
FL211~FL218		FL311~FL326	±0.8	1

Variations of tolerance of bolt hole diameter (Δ_{Ns}) Unit: mm

Housing No.			Δ_{Ns}
FL205~FL218	FLX05~FLX10	FL305~FL311	±0.2
		FL312~FL326	±0.3

Forms and dimensions of L_c of FL205JE3 (housing with cast iron cover) are shown below.



FL205JE3 L_c = 73 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch (mm) d_1	H	L	A	J	N	A_1	A_2	A_0 1)	B_1 1)	d_e (min.)	Bolt Size inch (mm)	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm (inch) A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm (inch) A_c	Mass kg
55	2 1/8	9 27/32 (250)	5 1/2 (140)	1 7/8 (48)	7 61/64 (202)	29/32 (23)	23/32 (18)	1 9/64 (29)	2 5/16 (58.5)	(2 19/32 (65.5))	1 27/32 (47)	(2 7/16 (62))	2 23/32 (69)	3/4 (M20)	UKFL212	FL212	UK212	HS312X(HS2312X)	4.1	52.4	36.2	14.4	–	–	– (–)	–	–	– (–)	–
																		H312X(H2313X)	4.1				UKFL212C	UKFL212D	73 (2 7/8)	4.1	UKFL212FC	UKFL212FD	86 (3 3/8)	4.9
	2 1/8	10 5/8 (270)	6 5/16 (160)	2 7/32 (56)	8 11/32 (212)	1 7/32 (31)	7/8 (22)	1 19/64 (33)	2 3/4 (69.5)	2 7/16 (62)	– (–)		1 (M27)	UKFL312	FL312	UK312	HS2312X	6.9	81.9	52.2	13.2	–	–	– (–)	–	–	– (–)	–
																		H2312X	6.9				–	–	– (–)	–	UKFL312C	UKFL312D	95 (3 3/8)	8.1
60	2 1/4	10 5/32 (258)	6 3/32 (155)	1 31/32 (50)	8 17/64 (210)	29/32 (23)	25/32 (20)	1 3/16 (30)	2 7/16 (62(67.5))	(2 21/32 (67.5))	1 31/32 (50)	(2 9/16 (65))	2 29/32 (74)	3/4 (M20)	UKFL213	FL213	UK213	HE313X(HE2313X)	5.0	57.2	40.1	14.4	–	–	– (–)	–	–	– (–)	–
																		H313X(H2313X)	5.0				UKFL213C	UKFL213D	74 (2 29/32)	5.0	UKFL213FC	UKFL213FD	87 (3 7/16)	5.9
	2 3/8																	HS313X(HS2313X)	5.0				–	–	– (–)	–	–	– (–)	–
	2 1/4	11 5/8 (295)	6 7/8 (175)	2 9/32 (58)	9 29/64 (240)	1 7/32 (31)	31/32 (25)	1 19/64 (33)	2 13/16 (71.5)	2 9/16 (65)	– (–)		1 (M27)	UKFL313	FL313	UK313	HE2313X	8.6	92.7	59.9	13.2	–	–	– (–)	–	–	– (–)	–
																		H2313X	8.6				–	–	– (–)	–	UKFL313C	UKFL313D	94 (3 11/16)	9.7
	2 3/8																	HS2313X	8.6				–	–	– (–)	–	–	– (–)	–
65	2 1/2	10 13/16 (275)	6 1/2 (165)	2 7/32 (56)	8 55/64 (225)	29/32 (23)	25/32 (20)	1 11/32 (34)	2 23/32 (69(74.5))	(2 15/16 (74.5))	2 5/32 (55)	(2 7/8 (73))	3 11/32 (85)	3/4 (M20)	UKFL215	FL215	UK215	HE315X(HE2315X)	6.6	67.4	48.3	14.5	–	–	– (–)	–	–	– (–)	–
																		H315X(H2315X)	6.6				UKFL215C	UKFL215D	83 (3 9/32)	6.6	UKFL215FC	UKFL215FD	96 (3 25/32)	7.6
	2 1/2	12 19/32 (320)	7 11/16 (195)	2 19/32 (66)	10 15/64 (260)	1 3/8 (35)	1 3/16 (30)	1 17/32 (39)	2 7/32 (81.5)	2 7/8 (73)	– (–)		1 1/8 (M30)	UKFL315	FL315	UK315	HE2315X	11.4	113	77.2	13.2	–	–	– (–)	–	–	– (–)	–
																		H2315X	11.4				–	–	– (–)	–	UKFL315C	UKFL315D	106 (4 3/16)	12.8
70	2 3/4	11 13/32 (290)	7 3/32 (180)	2 9/32 (58)	9 11/64 (233)	63/64 (25)	25/32 (20)	1 11/32 (34)	2 27/32 (72(78.5))	(3 3/32 (78.5))	2 5/16 (59)	(3 1/16 (78))	3 17/32 (90)	7/8 (M22)	UKFL216	FL216	UK216	HE316X(HE2316X)	8.1	72.7	53.0	14.6	–	–	– (–)	–	–	– (–)	–
																		H316X(H2316X)	8.1				UKFL216C	UKFL216D	88 (3 15/32)	8.1	UKFL216FC	UKFL216FD	103 (4 1/16)	9.4
	2 3/4	13 31/32 (355)	8 9/32 (210)	2 11/16 (68)	11 7/32 (285)	1 1/2 (38)	1 1/4 (32)	1 1/2 (38)	3 1/4 (82.5)	3 1/16 (78)	– (–)		1 1/4 (M33)	UKFL316	FL316	UK316	HE2316X	13.9	123	86.7	13.3	–	–	– (–)	–	–	– (–)	–
																		H2316X	13.9				–	–	– (–)	–	UKFL316C	UKFL316D	107 (4 7/32)	15.5
75	3	12 (305)	7 15/32 (190)	2 15/32 (63)	9 49/64 (248)	63/64 (25)	7/8 (22)	1 27/64 (36)	3 (76(82.5))	(3 1/4 (82.5))	2 15/32 (63)	(3 7/32 (82))	3 25/32 (96)	7/8 (M22)	UKFL217	FL217	UK217	H317X(H2317X)	9.9	84.0	61.9	14.5	UKFL217C	UKFL217D	92 (3 5/8)	9.9	UKFL217FC	UKFL217FD	107 (4 7/32)	11.3
																		HE317X(HE2317X)	9.9				–	–	– (–)	–	–	– (–)	–
	3	14 9/16 (370)	8 21/32 (220)	2 29/32 (74)	11 13/16 (300)	1 1/2 (38)	1 1/4 (32)	1 47/64 (44)	3 5/8 (92)	3 7/32 (82)	– (–)		1 1/4 (M33)	UKFL317	FL317	UK317	H2317X	15.8	133	96.8	13.3	–	–	– (–)	–	UKFL317C	UKFL317D	117 (4 19/32)	17.6
																		HE2317X	15.8				–	–	– (–)	–	–	– (–)	–
80	–	12 19/32 (320)	8 1/16 (205)	2 11/16 (68)	10 7/16 (265)	63/64 (25)	29/32 (23)	1 37/64 (40)	3 7/32 (82(89.5))	(3 17/32 (89.5))	2 9/16 (65)	(3 3/8 (86))	4 1/32 (102)	7/8 (M22)	UKFL218	FL218	UK218	H318X(H2318X)	12.2	96.1	71.5	14.5	UKFL218C	UKFL218D	101 (3 31/32)	12.2	UKFL218FC	UKFL218FD	116 (4 9/16)	13.8
	–	15 5/32 (385)	9 1/4 (235)	3 (76)	12 13/32 (315)	1 1/2 (38)	1 13/32 (36)	1 47/64 (44)	3 5/8 (92)	3 3/8 (86)	– (–)		1 1/4 (M33)	UKFL318	FL318	UK318	H2318X	19.1	143	107	13.3	–	–	– (–)	–	UKFL318C	UKFL318D	119 (4 11/16)	21.2
85	3 1/4	15 15/16 (405)	9 27/32 (250)	3 11/16 (94)	13 (330)	1 39/64 (41)	1 9/16 (40)	2 21/64 (59)	4 3/8 (111)	3 17/32 (90)	– (–)		1 3/8 (M36)	UKFL319	FL319	UK319	HE2319X	24.9	153	119	13.3	–	–	– (–)	–	–	– (–)	–
																		H2319X	24.9				–	–	– (–)	–	UKFL319C	UKFL319D	140 (5 1/2)	27.3
90	3 1/2	17 5/16 (440)	10 5/8 (270)	3 11/16 (94)	14 11/64 (360)	1 47/64 (44)	1 9/16 (40)	2 21/64 (59)	4 7/16 (113)	3 13/16 (97)	– (–)		1 1/2 (M39)	UKFL320	FL320	UK320	HE2320X	29.0	173	141	13.2	–	–	– (–)	–	–	– (–)	–
																		H2320X	29.0				–	–	– (–)	–	UKFL320C	UKFL320D	146 (5 3/4)	32.1
100	4	18 1/2 (470)	11 13/16 (300)	3 25/32 (96)	15 23/64 (390)	1 47/64 (44)	1 21/32 (42)	2 23/64 (60)	4 23/32 (120)	4 1/8 (105)	– (–)		1 1/2 (M39)	UKFL322	FL322	UK322	H2322X	36.1	205	180	13.2	–	–	– (–)	–	UKFL322C	UKFL322D	154 (6 1/16)	39.6
																		HE2322X	36.1				–	–	– (–)	–	–	– (–)	–
110	–	20 15/32 (520)	13 (330)	4 11/32 (110)	16 59/64 (430)	1 27/32 (47)	1 7/8 (48)	2 9/16 (65)	5 1/8 (130.5)	4 13/32 (112)	– (–)		1 5/8 (M42)	UKFL324	FL324	UK324	H2324	51.9	207	185	13.5	–	–	– (–)	–	UKFL324C	UKFL324D	163 (6 13/32)	57.0
115	4 1/2	21 21/32 (550)	14 3/16 (360)	4 17/32 (115)	18 7/64 (460)	1 27/32 (47)	1 31/32 (50)	2 9/16 (65)	5 3/16 (131.5)	4 3/4 (121)	– (–)		1 5/8 (M42)	UKFL326	FL326	UK326	HE2326	61.4	229	214	13.6	–	–	– (–)	–	–	– (–)	–
																		H2326	61.4				–	–	– (–)	–	UKFL326C	UKFL326D	172 (6 25/32)	68.0

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09, 305~308
A-R1/8.....211~218, X10, 309~326

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKFL206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKFL206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UCFA
Cylindrical bore (with set screws)
d 12 ~ 55 mm

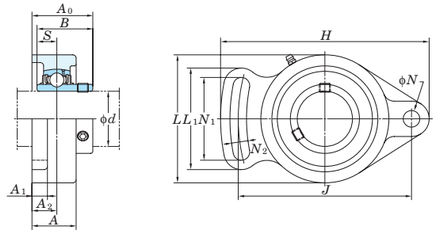

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s})

Unit: mm

Housing No.	Δ_{A2s}
FA204~FA210	±0.5
FA211	±0.8

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FA204~FA211	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm													Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN		Factor	Mass
d		H	L	A	J	N	N_1	N_2	L_1	A_1	A_2	A_0	B	S						C_r	C_{0r}	f_0	kg
12																UCFA201		UC201					0.47
	1/2															UCFA201-8		UC201-8					
15																UCFA202		UC202					0.45
	5/8	3 27/32	2 5/16	15/16	3 5/64	25/64	1 9/16	13/32	1 31/32	7/16	35/64	1 1/4	1.220	0.500	5/16	UCFA202-10	FA204	UC202-10		12.8	6.65	13.2	
		98	59	24	78	10	40	10	50	11	13.8	32.1	31	12.7	M8								
17																UCFA203		UC203					0.44
	3/4															UCFA204-12		UC204-12					
20																UCFA204		UC204					0.42
	7/8															UCFA205-14		UC205-14					
	15/16	4 7/8	2 3/4	1 1/16	3 55/64	7/16	1 15/16	7/16	2 17/32	1/2	5/8	1 13/32	1.343	0.563	3/8	UCFA205-15	FA205	UC205-15		14.0	7.85	13.9	0.68
25		124	70	27	98	11	49	11	64	13	16	35.8	34.1	14.3	M10	UCFA205		UC205					
	1															UCFA205-16		UC205-16					
	1 1/8															UCFA206-18		UC206-18					
		5 9/16	3 9/32	1 3/16	4 39/64	7/16	2 7/32	15/32	2 11/16	1/2	45/64	1 9/16	1.500	0.626	3/8	UCFA206	FA206	UC206		19.5	11.3	13.9	1.0
30	1 3/16	141	83	30	117	11	56	12	68	13	17.8	40	38.1	15.9	M10	UCFA206-19		UC206-19					
	1 1/4															UCFA206-20		UC206-20					
	1 1/4															UCFA207-20		UC207-20					
	1 5/16															UCFA207-21		UC207-21					
	1 3/8	6 3/32	3 25/32	1 11/32	5 1/8	33/64	2 15/32	1/2	2 15/16	9/16	47/64	1 23/32	1.689	0.689	7/16	UCFA207-22	FA207	UC207-22		25.7	15.4	13.9	1.5
35		155	96	34	130	13	63	13	75	14	18.6	44	42.9	17.5	M12	UCFA207		UC207					
	1 7/16															UCFA207-23		UC207-23					
	1 1/2															UCFA208-24		UC208-24					
40	1 9/16	6 23/32	4 1/8	1 1/2	5 43/64	33/64	2 3/4	1/2	3 5/16	9/16	13/16	2	1.937	0.748	7/16	UCFA208-25	FA208	UC208-25		29.1	17.8	14	1.9
		171	105	38	144	13	70	13	84	14	20.8	51	49.2	19	M12	UCFA208		UC208					
	1 5/8															UCFA209-26		UC209-26					
	1 11/16	7 1/16	4 3/8	1 9/16	5 53/64	19/32	2 27/32	19/32	3 15/32	9/16	55/64	2 1/16	1.937	0.748	1/2	UCFA209-27	FA209	UC209-27		34.1	21.3	14	1.7
45	1 3/4	179	111	40	148	15	72	15	88	14	21.8	52	49.2	19	M14	UCFA209-28		UC209-28					
																UCFA209		UC209					
	1 7/8															UCFA210-30		UC210-30					
	1 15/16	7 7/16	4 9/16	1 9/16	6 3/16	19/32	2 15/16	19/32	3 5/8	9/16	57/64	2 5/32	2.031	0.748	1/2	UCFA210-31	FA210	UC210-31		35.1	23.3	14.4	2.0
50		189	116	40	157	15	75	15	92	14	22.5	55.1	51.6	19	M14	UCFA210		UC210					
	2															UCFA210-32		UC210-32					
	2															UCFA211-32		UC211-32					
	2 1/8	8 1/2	5 1/4	1 23/32	7 1/4	5/8	3 3/8	5/8	4 1/32	25/32	1 1/64	2 5/16	2.189	0.874	1/2	UCFA211-34	FA211	UC211-34		43.4	29.4	14.4	3.6
55		216	133	44	184	16	86	16	102	20	25.7	59.1	55.6	22.2	M14	UCFA211		UC211					
	2 3/16															UCFA211-35		UC211-35					

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 211
3. As for triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows Part No. of unit or bearing. (Example of Part No. : UCFA206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKFA205J + H305X, UK205 + H305X)

UCFB
Cylindrical bore (with set screws)
d 12 ~ 50 mm

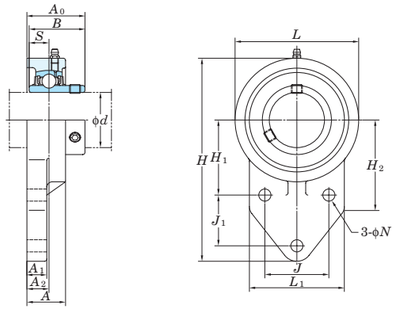

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), variations of tolerance of distance between centers of bolt holes (Δ_{Js}, Δ_{J1s}), variations of tolerance of distance between both grooves (Δ_{H1s})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{Js}	Δ_{J1s}	Δ_{H1s}
FB204~FB210	±0.5			

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FB204~FB210	±0.2

Shaft Dia. mm inch d	Dimensions inch / mm H	L	A	J	J_1	N	H_1	H_2	L_1	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Unit No.	Housing No.		Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12 1/2 15 5/8 17 3/4 20	4 11/32 110	2 7/16 62	15/16 24	1 17/64 32	1 11/16 27	3/8 9.5	1 21/32 42	2 1/16 52	2 1/16 52	1/2 13	17/32 13.5	1 1/4 31.8	1.220 31	0.500 12.7	5/16 M8	UCFB201 UCFB201-8 UCFB202 UCFB202-10 UCFB203 UCFB204-12 UCFB204	FB204		UC201 UC201-8 UC202 UC202-10 UC203 UC204-12 UC204	12.8	6.65	13.2	0.64 0.62 0.61 0.59
25 7/8 15/16 1	4 9/16 116	2 11/16 68	1 1/32 26	1 11/32 34	1 1/16 27	3/8 9.5	1 49/64 45	2 1/16 52	2 7/32 56	1/2 13	19/32 15	1 3/8 34.8	1.343 34.1	0.563 14.3	5/16 M8	UCFB205-14 UCFB205-15 UCFB205 UCFB205-16	FB205		UC205-14 UC205-15 UC205 UC205-16	14.0	7.85	13.9	0.68
30 1 1/8 1 3/16 1 1/4	5 1/8 130	3 1/16 78	1 5/32 29	1 37/64 40	1 9/64 29	3/8 9.5	1 31/32 50	2 5/32 55	2 9/16 65	1/2 13	43/64 17	1 17/32 39.2	1.500 38.1	0.626 15.9	5/16 M8	UCFB206-18 UCFB206 UCFB206-19 UCFB206-20	FB206		UC206-18 UC206 UC206-19 UC206-20	19.5	11.3	13.9	0.92
35 1 1/4 1 5/16 1 3/8 1 7/16	5 21/32 144	3 17/32 90	1 5/16 33	1 13/16 46	1 17/64 32	3/8 9.5	2 11/64 55	2 7/16 62	2 3/4 70	19/32 15	3/4 19	1 3/4 44.4	1.689 42.9	0.689 17.5	5/16 M8	UCFB207-20 UCFB207-21 UCFB207-22 UCFB207 UCFB207-23	FB207		UC207-20 UC207-21 UC207-22 UC207 UC207-23	25.7	15.4	13.9	1.3
40 1 1/2 1 9/16	6 15/32 164	3 15/16 100	1 11/32 34	1 31/32 50	1 39/64 41	7/16 11	2 23/64 60	2 27/32 72	3 1/16 78	5/8 16	25/32 20	1 31/32 50.2	1.937 49.2	0.748 19	3/8 M10	UCFB208-24 UCFB208-25 UCFB208	FB208		UC208-24 UC208-25 UC208	29.1	17.8	14.0	1.8
45 1 5/8 1 11/16 1 3/4	6 27/32 174	4 3/16 106	1 11/32 34	2 1/8 54	1 11/16 43	7/16 11	2 9/16 65	3 76	3 5/32 80	23/32 18	25/32 20	1 31/32 50.2	1.937 49.2	0.748 19	3/8 M10	UCFB209-26 UCFB209-27 UCFB209-28 UCFB209	FB209		UC209-26 UC209-27 UC209-28 UC209	34.1	21.3	14.0	2.0
50 1 7/8 1 15/16 2	7 1/4 184	4 13/32 112	1 3/8 35	2 9/32 58	1 13/16 46	7/16 11	2 43/64 68	3 7/32 82	3 3/8 86	23/32 18	25/32 20	2 1/16 52.6	2.031 51.6	0.748 19	3/8 M10	UCFB210-30 UCFB210-31 UCFB210 UCFB210-32	FB210		UC210-30 UC210-31 UC210 UC210-32	35.1	23.3	14.4	2.3

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fitting is A-1/4-28UNF.
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows Part No. of unit or bearing. (Example of Part No. : UCFB206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKFB205J + H305X, UK205 + H305X)

BLF
Cylindrical bore
(with set screw locking)
ALF
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 35 mm

BLF

ALF



BLF





ALF

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{Js}
LF203~LF207	±0.5	±0.7

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
LF203~LF207	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	S	BLF A_0	BLF B	ALF A_{01}	ALF B_1	Bolt Size inch / mm	Unit No.	Bearing No.	Unit No.	Bearing No.	Housing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg BLF	ALF
12															**BLF201**	SB201	**ALF201**	SA201						
	1/2	3 3/16	2 1/16	23/32	2 1/2	5/16	3/8	3/8	0.236	1	0.866	1 1/4	1.122	1/4	**BLF201-8**	SB201-8	**ALF201-8**	SA201-8						
15		81	52	18	63.5	8	9.5	9.5	6	25.5	22	32	28.5	M6	**BLF202**	SB202	**ALF202**	SA202	LF203	9.55	4.80	13.2	0.25	0.28
	5/8														**BLF202-10**	SB202-10	**ALF202-10**	SA202-10						
17															**BLF203**	SB203	**ALF203**	SA203						
20	3/4	3 17/32	2 3/8	25/32	2 13/16	25/64	7/16	7/16	0.276	1 5/32	0.984	1 5/16	1.161	5/16	**BLF204-12**	SB204-12	**ALF204-12**	SA204-12	LF204	12.8	6.65	13.2	0.33	0.33
		90	60	20	71.5	10	11	11	7	29	25	33.5	29.5	M8	**BLF204**	SB204	**ALF204**	SA204						
25	7/8														**BLF205-14**	SB205-14	**ALF205-14**	SA205-14						
	15/16	3 3/4	2 17/32	25/32	2 63/64	25/64	7/16	7/16	0.295	1 3/16	1.063	1 11/32	1.201	5/16	**BLF205-15**	SB205-15	**ALF205-15**	SA205-15	LF205	14.0	7.85	13.9	0.38	0.42
		95	64	20	76	10	11	11	7.5	30.5	27	34	30.5	M8	**BLF205**	SB205	**ALF205**	SA205						
	1														**BLF205-16**	SB205-16	**ALF205-16**	SA205-16						
30	1 1/8														**BLF206-18**	SB206-18	**ALF206-18**	SA206-18						
		4 7/16	3	7/8	3 9/16	15/32	15/32	15/32	0.315	1 11/32	1.181	1 1/2	1.335	3/8	**BLF206**	SB206	**ALF206**	SA206	LF206	19.5	11.3	13.9	0.57	0.60
	1 3/16	113	76	22.5	90.5	12	12	12	8	34	30	37.9	33.9	M10	**BLF206-19**	SB206-19	**ALF206-19**	SA206-19						
	1 1/4														**BLF206-20**	SB206-20	**ALF206-20**	SA206-20						
35	1 1/4														**BLF207-20**	SB207-20	**ALF207-20**	SA207-20						
	1 5/16																**ALF207-21**	SA207-21						
	1 3/8	4 13/16	3 1/2	15/16	3 15/16	15/32	1/2	33/64	0.335	1 7/16	1.260	1 5/8	1.437	3/8	**BLF207-22**	SB207-22	**ALF207-22**	SA207-22	LF207	25.7	15.4	13.9	0.77	0.85
		122	89	24	100	12	13	13	8.5	36.5	32	41	36.5	M10	**BLF207**	SB207	**ALF207**	SA207						
	1 7/16														**BLF207-23**	SB207-23	**ALF207-23**	SA207-23						

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Allowable load to housing in radial direction is approximately half of basic load rating of bearing, C_r (when safety factor is 4).
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

SATFD-FP9
Cylindrical bore (with set screws)
d 12 ~ 35 mm

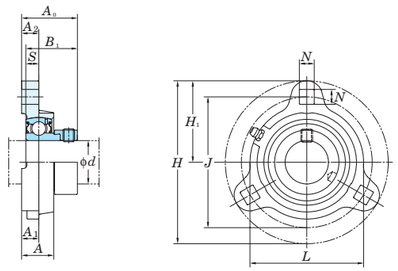

Shaft Dia. mm / inch d	Dimensions inch / mm H	L	A	J	N	H_1	A_0	A_1	A_2	B_1	S	Bolt Size inch / mm	Unit No.	Housing No.		Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12 15 17 1/2 5/8	3 3/16 81	2 3/32 53.2	11/16 17.5	2 1/2 63.5	9/32 7.1	1 19/32 40.5	1 1/4 31.6	3/8 9.5	3/8 9.5	1.126 28.6	0.256 6.5	1/4	**SATFD201FP9** **SATFD201-8FP9** **SATFD202FP9** **SATFD202-10FP9** **SATFD203FP9**	TFD203		SA201FP9 SA201-8FP9 SA202FP9 SA202-10FP9 SA203FP9	9.55	4.80	13.2	0.26
20 3/4	3 9/16 90.5	2 3/8 60.3	25/32 19.8	2 13/16 71.4	11/32 8.7	1 25/32 45.2	1 11/32 34.2	27/64 10.7	27/64 10.7	1.220 31	0.295 7.5	5/16	**SATFD204-12FP9** **SATFD204FP9**	TFD204		SA204-12FP9 SA204FP9	12.8	6.65	13.2	0.34
25 7/8 15/16 1	3 3/4 95.2	2 5/8 66.7	25/32 19.8	3 76.2	11/32 8.7	1 7/8 47.6	1 11/32 34.2	27/64 10.7	27/64 10.7	1.220 31	0.295 7.5	5/16	**SATFD205-14FP9** **SATFD205-15FP9** **SATFD205FP9** **SATFD205-16FP9**	TFD205		SA205-14FP9 SA205-15FP9 SA205FP9 SA205-16FP9	14.0	7.85	13.9	0.39
30 1 1/8 1 3/16 1 1/4	4 7/16 112.7	3 3/32 78.6	7/8 22.2	3 9/16 90.5	13/32 10.3	2 7/32 56.4	1 17/32 38.6	15/32 11.9	15/32 11.9	1.406 35.7	0.354 9	3/8	**SATFD206-18FP9** **SATFD206FP9** **SATFD206-19FP9** **SATFD206-20FP9**	TFD206		SA206-18FP9 SA206FP9 SA206-19FP9 SA206-20FP9	19.5	11.3	13.9	0.61
35 1 1/4 1 5/16 1 3/8 1 7/16	4 13/16 122.2	3 1/2 88.9	15/16 23.8	3 15/16 100	13/32 10.3	2 13/32 61.1	1 21/32 42.1	1/2 12.7	1/2 12.7	1.531 38.9	0.374 9.5	3/8	**SATFD207-20FP9** **SATFD207-21FP9** **SATFD207-22FP9** **SATFD207FP9** **SATFD207-23FP9**	TFD207		SA207-20FP9 SA207-21FP9 SA207-22FP9 SA207FP9 SA207-23FP9	25.7	15.4	13.9	0.82

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fitting is A-1/4-28UNF.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UFL
Cylindrical bore (with set screws)
d 8 ~ 30 mm





With Through Type Cover



With One Side Sealed Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and variations of tolerance of distance between centers of bolt holes (Δ_{As})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{As}
FL08	±0.5	±0.3
FL000~FL006		

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FL08	±0.2
FL000~FL006	

Shaft Dia. mm d	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Rubber Coated Cover Unit No. Open Type	Closed Type	Dimension mm A_s	inch	Mass kg
8	1 7/8 48	1 1/16 27	11/32 8.5	1 29/64 37	3/16 4.8	5/32 4	5/32 4	1/2 12.5	0.472 12	0.1378 3.5	No.8 M4	UFL08	FL08	SU08	0.030	3.27	1.37	12.4	–	–	–	–	–
10	2 3/8 60	1 13/32 36	15/32 12	1 49/64 45	9/32 7	1/4 6	15/64 6	5/8 16	0.591 15	0.197 5	1/4 M6	UFL000	FL000	SU000	0.050	4.55	1.95	12.3	UFL000C	UFL000D	20.5	13/16	0.05
12	2 15/32 63	1 1/2 38	15/32 12	1 57/64 48	9/32 7	1/4 6	15/64 6	5/8 16	0.591 15	0.197 5	1/4 M6	UFL001	FL001	SU001	0.065	5.10	2.40	13.2	UFL001C	UFL001D	20.5	13/16	0.07
15	2 5/8 67	1 21/32 42	1/2 13	2 3/32 53	9/32 7	1/4 6.5	1/4 6.5	11/16 17.5	0.650 16.5	0.217 5.5	1/4 M6	UFL002	FL002	SU002	0.085	5.60	2.85	13.9	UFL002C	UFL002D	22	7/8	0.09
17	2 25/32 71	1 13/16 46	9/16 14	2 13/64 56	9/32 7	9/32 7	9/32 7	23/32 18.5	0.689 17.5	0.236 6	1/4 M6	UFL003	FL003	SU003	0.11	6.00	3.25	14.4	UFL003C	UFL003D	23.5	15/16	0.11
20	3 17/32 90	2 5/32 55	5/8 16	2 51/64 71	13/32 10	5/16 8	5/16 8	7/8 22	0.827 21	0.276 7	5/16 M8	UFL004	FL004	SU004	0.18	9.40	5.05	13.9	UFL004C	UFL004D	27	1 1/16	0.18
25	3 3/4 95	2 3/8 60	5/8 16	2 61/64 75	13/32 10	5/16 8	5/16 8	29/32 23	0.866 22	0.276 7	5/16 M8	UFL005	FL005	SU005	0.23	10.1	5.85	14.5	UFL005C	UFL005D	28	1 3/32	0.23
30	4 13/32 112	2 3/4 70	23/32 18	3 11/32 85	1/2 13	11/32 9	23/64 9	1 1/32 26	0.965 24.5	0.295 7.5	3/8 M10	UFL006	FL006	SU006	0.31	13.2	8.25	14.7	UFL006C	UFL006D	31	1 7/32	0.31

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCSFL-H1S6
Cylindrical bore (with set screws)
d 12 ~ 50 mm

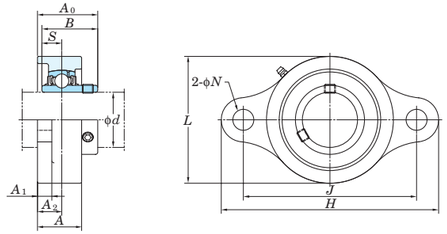

With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{Js}
SFL203H1~SFL210H1	±0.5	±0.3

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
SFL203H1~SFL210H1	±0.2

Shaft Dia. mm inch d	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	Closed Type	Dimension mm inch A_s	Mass kg
12												UCSFL201XSH1S6		UC201XS6					–	–	– –	–
	1/2											UCSFL201-8XSH1S6		UC201-8XS6					–	–	– –	–
15		1 27/32	2 1/16	1 15/16	3	15/32	13/32	9/16	2 3/16	1.079	0.453	UCSFL202XSH1S6	SFL203H1	UC202XS6	0.33	8.15	3.85	13.2	–	–	– –	–
		98	52	24	76.5	12	10	14	29.9	27.4	11.5											
	5/8											UCSFL202-10XSH1S6		UC202-10XS6					–	–	– –	–
17												UCSFL203XSH1S6		UC203XS6					–	–	– –	–
20	3/4	4 7/16	2 3/8	1 1/32	3 35/64	15/32	13/32	19/32	1 5/16	1.220	0.500	UCSFL204-12H1S6	SFL204H1	UC204-12S6	0.47	10.9	5.35	13.2	–	–	– –	–
		113	60	26	90	12	10	15	33.3	31	12.7	UCSFL204H1S6		UC204S6					UCSFL204H1CS6	UCSFL204H1DS6	38 1 1/2	0.47
25	7/8											UCSFL205-14H1S6	SFL205H1	UC205-14S6	0.61	11.9	6.30	13.9	–	–	– –	–
	15/16	5 1/8	2 11/16	1 3/32	3 57/64	5/8	13/32	5/8	1 13/32	1.343	0.563	UCSFL205-15H1S6		UC205-15S6					–	–	– –	–
		130	68	27.5	99	16	10	16	35.8	34.1	14.3	UCSFL205H1S6		UC205S6					UCSFL205H1CS6	UCSFL205H1DS6	40 1 9/16	0.61
	1											UCSFL205-16H1S6		UC205-16S6					–	–	– –	–
30	1 1/8											UCSFL206-18H1S6	SFL206H1	UC206-18S6	0.9	16.5	9.05	13.9	–	–	– –	–
		5 13/16	3 5/32	1 7/32	4 19/32	5/8	13/32	45/64	1 19/32	1.500	0.626	UCSFL206H1S6		UC206S6					UCSFL206H1CS6	UCSFL206H1DS6	45 1 15/32	0.9
	1 3/16	148	80	31	117	16	10	18	40.2	38.1	15.9	UCSFL206-19H1S6		UC206-19S6					–	–	– –	–
	1 1/4											UCSFL206-20H1S6		UC206-20S6					–	–	– –	–
35	1 1/4											UCSFL207-20H1S6	SFL207H1	UC207-20S6	1.1	21.8	12.3	13.9	–	–	– –	–
	1 5/16											UCSFL207-21H1S6		UC207-21S6					–	–	– –	–
	1 3/8	6 11/32	3 11/32	1 11/32	5 1/8	5/8	7/16	3/4	1 3/4	1.689	0.689	UCSFL207-22H1S6		UC207-22S6					–	–	– –	–
		161	85	34	130	16	11	19	44.4	42.9	17.5	UCSFL207H1S6		UC207S6					UCSFL207H1CS6	UCSFL207H1DS6	49 1 15/16	1.1
	1 7/16											UCSFL207-23H1S6		UC207-23S6					–	–	– –	–
40	1 1/2											UCSFL208-24H1S6	SFL208H1	UC208-24S6	1.4	24.8	14.3	14.0	–	–	– –	–
	1 9/16	6 7/8	3 11/16	1 13/32	5 43/64	5/8	15/32	53/64	2 1/32	1.937	0.748	UCSFL208-25H1S6		UC208-25S6					–	–	– –	–
		175	94	36	144	16	12	21	51.2	49.2	19	UCSFL208H1S6		UC208S6					UCSFL208H1CS6	UCSFL208H1DS6	56 2 7/32	1.4
45	1 5/8											UCSFL209-26H1S6	SFL209H1	UC209-26S6	1.6	27.8	16.2	14.0	–	–	– –	–
	1 11/16	7 13/32	3 15/16	1 1/2	5 53/64	3/4	1/2	55/64	2 1/16	1.937	0.748	UCSFL209-27H1S6		UC209-27S6					–	–	– –	–
	1 3/4	188	100	38	148	19	13	22	52.2	49.2	19	UCSFL209-28H1S6		UC209-28S6					–	–	– –	–
												UCSFL209H1S6		UC209S6					UCSFL209H1CS6	UCSFL209H1DS6	57 2 7/32	1.6
50	1 7/8											UCSFL210-30H1S6	SFL210H1	UC210-30S6	1.9	29.8	18.6	14.4	–	–	– –	–
	1 15/16	7 3/4	4 3/16	1 9/16	6 3/16	3/4	1/2	55/64	2 5/32	2.031	0.748	UCSFL210-31H1S6		UC210-31S6					–	–	– –	–
		197	106	40	157	19	13	22	54.6	51.6	19	UCSFL210H1S6		UC210S6					UCSFL210H1CS6	UCSFL210H1DS6	59 2 5/16	1.9
	2											UCSFL210-32H1S6		UC210-32S6					–	–	– –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCSFL-EH1S6
Cylindrical bore (with set screws)
d 12 ~ 50 mm

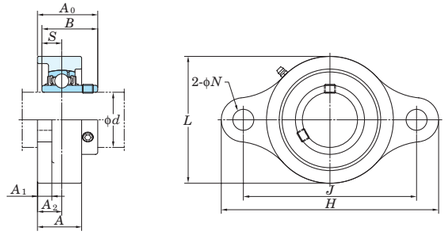

With Pressed Stainless Steel Cover



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{Js}
SFL203EH1~SFL210EH1	±0.5	±0.3

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
SFL203EH1~SFL210EH1	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Stainless Steel Cover Unit No. Open Type	Closed Type	Dimension mm	inch A_s	Mass kg
12													UCSFL201XESH1S6		UC201XS6					–	–	–	–	–
	1/2												UCSFL201-8XESH1S6		UC201-8XS6					–	–	–	–	–
15		1 27/32	2 1/16	1 15/16	3	25/64	13/32	9/16	2 3/16	1.079	0.453	5/16	UCSFL202XESH1S6	SFL203EH1	UC202XS6	0.33	8.15	3.85	13.2	–	–	–	–	–
		98	52	24	76.2	10	10	14	29.9	27.4	11.5		UCSFL202-10XESH1S6		UC202-10XS6					–	–	–	–	–
	5/8												UCSFL203XESH1S6		UC203XS6					–	–	–	–	–
17																								
20	3/4	4 7/16	2 3/8	1 1/32	3 17/32	25/64	13/32	19/32	1 5/16	1.220	0.500	5/16	UCSFL204-12EH1S6	SFL204EH1	UC204-12S6	0.47	10.9	5.35	13.2	–	–	–	–	–
		113	60	26	89.7	10	10	15	33.3	31	12.7		UCSFL204EH1S6		UC204S6					UCSFL204EH1CS6	UCSFL204EH1DS6	38	1 1/2	0.47
25	7/8												UCSFL205-14EH1S6		UC205-14S6					–	–	–	–	–
	15/16	5 1/8	2 11/16	1 3/32	3 57/64	15/32	13/32	5/8	1 13/32	1.343	0.563	3/8	UCSFL205-15EH1S6	SFL205EH1	UC205-15S6	0.61	11.9	6.30	13.9	–	–	–	–	–
		130	68	27.5	98.8	12	10	16	35.8	34.1	14.3		UCSFL205EH1S6		UC205S6					UCSFL205EH1CS6	UCSFL205EH1DS6	40	1 9/16	0.61
	1												UCSFL205-16EH1S6		UC205-16S6					–	–	–	–	–
30	1 1/8												UCSFL206-18EH1S6		UC206-18S6					–	–	–	–	–
		5 13/16	3 5/32	1 7/32	4 19/32	15/32	13/32	45/64	1 19/32	1.500	0.626	3/8	UCSFL206EH1S6	SFL206EH1	UC206S6	0.9	16.5	9.05	13.9	UCSFL206EH1CS6	UCSFL206EH1DS6	45	1 15/32	0.9
	1 3/16	148	80	31	116.7	12	10	18	40.2	38.1	15.9		UCSFL206-19EH1S6		UC206-19S6					–	–	–	–	–
	1 1/4												UCSFL206-20EH1S6		UC206-20S6					–	–	–	–	–
35	1 1/4												UCSFL207-20EH1S6		UC207-20S6					–	–	–	–	–
	1 5/16												UCSFL207-21EH1S6		UC207-21S6					–	–	–	–	–
	1 3/8	6 11/32	3 11/32	1 11/32	5 1/8	33/64	7/16	3/4	1 3/4	1.689	0.689	7/16	UCSFL207-22EH1S6	SFL207EH1	UC207-22S6	1.1	21.8	12.3	13.9	–	–	–	–	–
		161	85	34	130.2	13	11	19	44.4	42.9	17.5		UCSFL207EH1S6		UC207S6					UCSFL207EH1CS6	UCSFL207EH1DS6	49	1 15/16	1.1
	1 7/16												UCSFL207-23EH1S6		UC207-23S6					–	–	–	–	–
40	1 1/2												UCSFL208-24EH1S6		UC208-24S6					–	–	–	–	–
	1 9/16	6 7/8	3 11/16	1 13/32	5 21/32	33/64	15/32	53/64	2 1/32	1.937	0.748	7/16	UCSFL208-25EH1S6	SFL208EH1	UC208-25S6	1.4	24.8	14.3	14.0	–	–	–	–	–
		175	94	36	143.7	13	12	21	51.2	49.2	19		UCSFL208EH1S6		UC208S6					UCSFL208EH1CS6	UCSFL208EH1DS6	56	2 7/32	1.4
45	1 5/8												UCSFL209-26EH1S6		UC209-26S6					–	–	–	–	–
	1 11/16	7 13/32	3 15/16	1 1/2	5 27/32	19/32	1/2	55/64	2 1/16	1.937	0.748	1/2	UCSFL209-27EH1S6	SFL209EH1	UC209-27S6	1.6	27.8	16.2	14.0	–	–	–	–	–
	1 3/4	188	100	38	148.4	15	13	22	52.2	49.2	19		UCSFL209-28EH1S6		UC209-28S6					–	–	–	–	–
													UCSFL209EH1S6		UC209S6					UCSFL209EH1CS6	UCSFL209EH1DS6	57	2 1/4	1.6
50	1 7/8												UCSFL210-30EH1S6		UC210-30S6					–	–	–	–	–
	1 15/16	7 3/4	4 3/16	1 9/16	6 3/16	19/32	1/2	55/64	2 5/32	2.031	0.748	1/2	UCSFL210-31EH1S6	SFL210EH1	UC210-31S6	1.9	29.8	18.6	14.4	–	–	–	–	–
		197	106	40	157	15	13	22	54.6	51.6	19		UCSFL210EH1S6		UC210S6					UCSFL210EH1CS6	UCSFL210EH1DS6	59	2 5/16	1.9
	2												UCSFL210-32EH1S6		UC210-32S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

USFL-S6
Cylindrical bore (with set screws)
d 10 ~ 30 mm

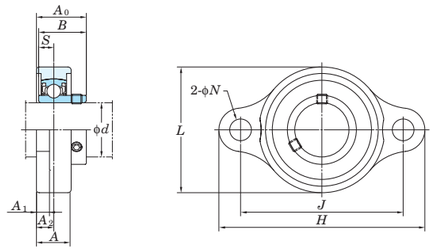

With Through Type Cover



With One Side Sealed Cover



Shaft Dia. mm d	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Rubber Coated Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s		Mass kg
10	2 3/8 60	1 11/32 34	15/32 12	1 49/64 45	9/32 7	3/16 5	15/64 6	5/8 16	0.591 15	0.197 5	1/4 M6	**USFL000S6**	SFL000	SU000S6	0.076	3.9	1.55	12.3	USFL000CS6	USFL000DS6	20.5	13/16	0.08
12	2 15/32 63	1 13/32 36	15/32 12	1 57/64 48	9/32 7	3/16 5	15/64 6	5/8 16	0.591 15	0.197 5	1/4 M6	**USFL001S6**	SFL001	SU001S6	0.080	4.3	1.9	13.2	USFL001CS6	USFL001DS6	20.5	13/16	0.08
15	2 5/8 67	1 5/8 41	1/2 13	2 3/32 53	9/32 7	1/4 6	1/4 6.5	11/16 17.5	0.650 16.5	0.217 5.5	1/4 M6	**USFL002S6**	SFL002	SU002S6	0.1	4.7	2.25	13.9	USFL002CS6	USFL002DS6	22	7/8	0.1
17	2 25/32 71	1 23/32 44	9/16 14	2 13/64 56	9/32 7	1/4 6	9/32 7	23/32 18.5	0.689 17.5	0.236 6	1/4 M6	**USFL003S6**	SFL003	SU003S6	0.13	5.1	2.6	14.4	USFL003CS6	USFL003DS6	23.5	15/16	0.13
20	3 19/32 91	2 3/32 53	5/8 16	2 51/64 71	13/32 10	1/4 6	5/16 8	7/8 22	0.827 21	0.276 7	5/16 M8	**USFL004S6**	SFL004	SU004S6	0.21	7.9	4	13.9	USFL004CS6	USFL004DS6	27	1 1/16	0.21
25	3 3/4 95	2 9/32 58	5/8 16	2 61/64 75	13/32 10	1/4 6	5/16 8	29/32 23	0.866 22	0.276 7	5/16 M8	**USFL005S6**	SFL005	SU005S6	0.23	8.5	4.65	14.5	USFL005CS6	USFL005DS6	28	1 3/32	0.23
30	4 11/32 110	2 19/32 66	23/32 18	3 11/32 85	1/2 13	9/32 7	23/64 9	1 1/32 26	0.965 24.5	0.295 7.5	3/8 M10	**USFL006S6**	SFL006	SU006S6	0.33	11.2	6.6	14.7	USFL006CS6	USFL006DS6	31	1 7/32	0.33

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and variations of tolerance of distance between centers of bolt holes (Δ_{As})

Unit: mm

Housing No.	Δ_{A2s}	Δ_{As}
SFL000~SFL006	±0.5	±0.3

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
SFL000~SFL006	±0.2

UCVFL-S6
Cylindrical bore (with set screws)
d 20 ~ 40 mm

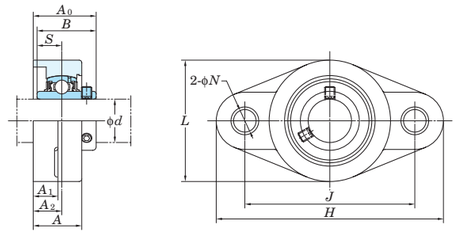



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
VFL204~VFL208	±0.5	0.7

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg
20	3/4	4 7/16	2 9/16	1 1/32	3 35/64	27/64	17/32	19/32	1 5/16	1.220	0.500	3/8	**UCVFL204-12S6**	VFL204	UC204-12S6	0.25	10.9	5.35	13.2	UCVFL204-12CS6	UCVFL204-12DS6	46.5	1 27/32	0.26
		113	65	26.5	90	11	13.4	15	33.3	31	12.7	M8	**UCVFL204S6**		UC204S6					UCVFL204CS6	UCVFL204DS6			
25	7/8	5 5/32	2 3/4	1 3/32	3 57/64	27/64	17/32	5/8	1 13/32	1.343	0.563	3/8	**UCVFL205-14S6**	VFL205	UC205-14S6	0.35	11.9	6.3	13.9	UCVFL205-14CS6	UCVFL205-14DS6	50.2	1 31/32	0.36
	15/16	131	70	27.5	99	11	13.8	16	35.8	34.1	14.3	M8	**UCVFL205-15S6**		UC205-15S6					UCVFL205-15CS6	UCVFL205-15DS6			
													UCVFL205S6		UC205S6					UCVFL205CS6	UCVFL205DS6			
	1												**UCVFL205-16S6**		UC205-16S6					UCVFL205-16CS6	UCVFL205-16DS6			
30	1 1/8	5 13/16	3 5/32	1 3/16	4 39/64	27/64	9/16	45/64	1 19/32	1.500	0.626	3/8	**UCVFL206-18S6**	VFL206	UC206-18S6	0.49	16.5	9.05	13.9	UCVFL206-18CS6	UCVFL206-18DS6	57.5	1 1/4	0.50
		148	80	30.5	117	11	14.3	18	40.2	38.1	15.9	M8	**UCVFL206S6**		UC206S6					UCVFL206CS6	UCVFL206DS6			
	1 3/16												**UCVFL206-19S6**		UC206-19S6					UCVFL206-19CS6	UCVFL206-19DS6			
	1 1/4												**UCVFL206-20S6**		UC206-20S6					UCVFL206-20CS6	UCVFL206-20DS6			
35	1 1/4	6 15/32	3 17/32	1 1/4	5 1/8	33/64	5/8	3/4	1 3/4	1.689	0.689	7/16	**UCVFL207-20S6**	VFL207	UC207-20S6	0.73	21.8	12.3	13.9	UCVFL207-20CS6	UCVFL207-20DS6	61.2	2 13/32	0.75
	1 5/16	164	90	32	130	13	15.5	19	44.4	42.9	17.5	M10	**UCVFL207-21S6**		UC207-21S6					UCVFL207-21CS6	UCVFL207-21DS6			
	1 3/8												**UCVFL207-22S6**		UC207-22S6					UCVFL207-22CS6	UCVFL207-22DS6			
													UCVFL207S6		UC207S6					UCVFL207CS6	UCVFL207DS6			
	1 7/16												**UCVFL207-23S6**		UC207-23S6					UCVFL207-23CS6	UCVFL207-23DS6			
40	1 1/2	6 15/16	3 15/16	1 11/32	5 43/64	35/64	21/32	53/64	2 1/32	1.937	0.748	1/2	**UCVFL208-24S6**	VFL208	UC208-24S6	0.92	24.8	13.3	14.0	UCVFL208-24CS6	UCVFL208-24DS6	69.2	2 23/32	0.95
	1 9/16	176	100	34.5	144	14	16.5	21	51.2	49.2	19	M12	**UCVFL208-25S6**		UC208-25S6					UCVFL208-25CS6	UCVFL208-25DS6			
													UCVFL208S6		UC208S6					UCVFL208CS6	UCVFL208EDS6			

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

FYH

UCVFL-ES7
Cylindrical bore (with set screws)
d 20 ~ 40 mm

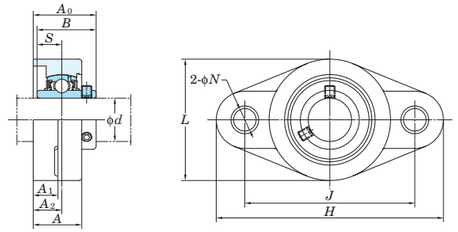



Variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}) and tolerance of position of bolt hole (X)

Unit: mm

Housing No.	Δ_{A2s}	X
VFL204E-VFL208E	±0.5	0.7

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	L	A	J	N	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Plastic Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg
20	3/4	4 7/16	2 9/16	1 1/32	3 35/64	7/16	17/32	19/32	1 5/16	1.220	0.500	3/8	**UCVFL204-12ES7**	VFL204E	UC204-12S7	0.25	12.8	6.65	13.2	UCVFL204-12ECS7	UCVFL204-12EDS7	46.5 1 27/32	0.26
		113	65	26.5	90	11	13.4	15	33.3	31	12.7	M8	**UCVFL204ES7**		UC204S7					UCVFL204ECS7	UCVFL204EDS7		
25	7/8	5 5/32	2 3/4	1 3/32	3 57/64	33/64	17/32	5/8	1 13/32	1.343	0.563	7/16	**UCVFL205-14ES7**	VFL205E	UC205-14S7	0.35	14.0	7.85	13.9	UCVFL205-14ECS7	UCVFL205-14EDS7	50.2 1 31/32	0.36
	15/16	131	70	27.5	99	13	13.8	16	35.8	34.1	14.3	M10	**UCVFL205-15ES7**		UC205-15S7					UCVFL205-15ECS7	UCVFL205-15EDS7		
													UCVFL205ES7		UC205S7					UCVFL205ECS7	UCVFL205EDS7		
	1												**UCVFL205-16ES7**		UC205-16S7					UCVFL205-16ECS7	UCVFL205-16EDS7		
30	1 1/8	5 13/16	3 5/32	1 3/16	4 39/64	33/64	9/16	45/64	1 19/32	1.500	0.626	7/16	**UCVFL206-18ES7**	VFL206E	UC206-18S7	0.49	19.5	11.3	13.9	UCVFL206-18ECS7	UCVFL206-18EDS7	57.5 1 1/4	0.50
		148	80	30.5	117	13	14.3	18	40.2	38.1	15.9	M10	**UCVFL206ES7**		UC206S7					UCVFL206ECS7	UCVFL206EDS7		
	1 3/16												**UCVFL206-19ES7**		UC206-19S7					UCVFL206-19ECS7	UCVFL206-19EDS7		
	1 1/4												**UCVFL206-20ES7**		UC206-20S7					UCVFL206-20ECS7	UCVFL206-20EDS7		
35	1 1/4	6 15/32	3 17/32	1 1/4	5 1/8	35/64	5/8	3/4	1 3/4	1.689	0.689	1/2	**UCVFL207-20ES7**	VFL207E	UC207-20S7	0.73	25.7	15.4	13.9	UCVFL207-20ECS7	UCVFL207-20EDS7	61.2 2 13/32	0.75
	1 5/16	164	90	32	130	14	15.5	19	44.4	42.9	17.5	M12	**UCVFL207-21ES7**		UC207-21S7					UCVFL207-21ECS7	UCVFL207-21EDS7		
	1 3/8												**UCVFL207-22ES7**		UC207-22S7					UCVFL207-22ECS7	UCVFL207-22EDS7		
													UCVFL207ES7		UC207S7					UCVFL207ECS7	UCVFL207EDS7		
	1 7/16												**UCVFL207-23ES7**		UC207-23S7					UCVFL207-23ECS7	UCVFL207-23EDS7		
40	1 1/2	6 15/16	3 15/16	1 11/32	5 43/64	35/64	21/32	53/64	2 1/32	1.937	0.748	1/2	**UCVFL208-24ES7**	VFL208E	UC208-24S7	0.92	29.1	17.8	14.0	UCVFL208-24ECS7	UCVFL208-24EDS7	69.2 2 23/32	0.95
	1 9/16	176	100	34.5	144	14	16.5	21	51.2	49.2	19	M12	**UCVFL208-25ES7**		UC208-25S7					UCVFL208-25ECS7	UCVFL208-25EDS7		
													UCVFL208ES7		UC208S7					UCVFL208ECS7	UCVFL208EDS7		

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is A-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCFC
Cylindrical bore (with set screws)
d 12 ~ 50 mm

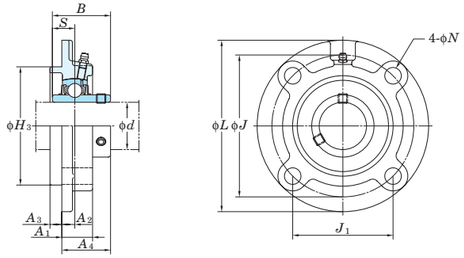

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.		Δ_{H3s}	Δ_{A2s}	X	Y
FC204~FC206	FCX05	0 −0.046	±0.5	0.7	0.2
FC207~FC210	FCX06~FCX10	0 −0.054			
FC211~FC217	FCX11~FCX15	0 −0.063	±0.8	1	0.3
FC218	FCX16~FCX18	0 −0.072			
	FCX20				0.4

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
FC204~FC218	FCX05~FCX20	±0.2

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions L	H_3	J	J_1	N	A_1	A_2	A_3	A_4	B	S	Bolt Size	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings C_r kN	C_{0r} kN	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension A_s mm	inch	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension A_c mm	inch	Mass kg
12														UCFC201		UC201	0.78				UCFC201C	UCFC201D	32	1 1/4	0.78	–	–	–	–	–
	1/2													UCFC201-8		UC201-8	0.78				–	–	–	–	–	–	–	–	–	–
15		3 15/16	2.4409	3 5/64	2 11/64	15/32	13/16	25/64	13/64	1 1/8	1.220	0.500	3/8	UCFC202		UC202	0.76				UCFC202C	UCFC202D	32	1 1/4	0.76	–	–	–	–	–
	5/8	100	62	78	55.1	12	20.5	10	5	28.3	31	12.7	M10	UCFC202-10	FC204	UC202-10	0.76	12.8	6.65	13.2	–	–	–	–	–	–	–	–	–	–
17														UCFC203		UC203	0.75				UCFC203C	UCFC203D	32	1 1/4	0.75	–	–	–	–	–
	3/4													UCFC204-12		UC204-12	0.75				–	–	–	–	–	–	–	–	–	–
20														UCFC204		UC204	0.73				UCFC204C	UCFC204D	32	1 1/4	0.73	UCFC204FC	UCFC204FD	41	1 17/32	0.84
	7/8													UCFC205-14		UC205-14	0.95				–	–	–	–	–	–	–	–	–	–
	15/16	4 17/32	2.7559	3 35/64	2 1/2	15/32	13/16	25/64	15/64	1 3/16	1.343	0.563	3/8	UCFC205-15	FC205	UC205-15	0.95	14.0	7.85	13.9	–	–	–	–	–	–	–	–	–	–
25		115	70	90	63.6	12	21	10	6	29.8	34.1	14.3	M10	UCFC205		UC205	0.95				UCFC205C	UCFC205D	34	1 11/32	0.95	UCFC205FC	UCFC205FD	43	1 21/32	1.1
	1													UCFC205-16		UC205-16	0.95				–	–	–	–	–	–	–	–	–	–
		4 3/8	2.9921	3 5/8	2 9/16	3/8	15/16	25/64	15/64	1 9/32	1.500	0.626	5/16	UCFCX05	FCX05	UCX05	1.2	19.5	11.3	13.9	UCFCX05C	UCFCX05D	36	1 13/32	1.2	–	–	–	–	–
	1	111	76	92	65	9.5	24	10	6	32.2	38.1	15.9	M8	UCFCX05-16		UCX05-16	1.2				–	–	–	–	–	–	–	–	–	–
	1 1/8													UCFC206-18		UC206-18	1.3				–	–	–	–	–	–	–	–	–	–
		4 29/32	3.1496	3 15/16	2 25/32	15/32	29/32	25/64	5/16	1 9/32	1.500	0.626	3/8	UCFC206	FC206	UC206	1.3	19.5	11.3	13.9	UCFC206C	UCFC206D	36	1 13/32	1.3	UCFC206FC	UCFC206FD	45	1 25/32	1.6
	1 3/16	125	80	100	70.7	12	23	10	8	32.2	38.1	15.9	M10	UCFC206-19		UC206-19	1.3				–	–	–	–	–	–	–	–	–	–
30	1 1/4													UCFC206-20		UC206-20	1.3				–	–	–	–	–	–	–	–	–	–
		5	3.3465	4 9/64	2 59/64	15/32	7/8	5/16	3/8	1 5/16	1.689	0.689	3/8	UCFCX06		UCX06	1.5				UCFCX06C	UCFCX06D	38	1 1/2	1.5	–	–	–	–	–
	1 3/16	127	85	105	74.2	12	22.5	8	9.5	33.4	42.9	17.5	M10	UCFCX06-19	FCX06	UCX06-19	1.5	25.7	15.4	13.9	–	–	–	–	–	–	–	–	–	–
	1 1/4													UCFCX06-20		UCX06-20	1.5				–	–	–	–	–	–	–	–	–	–
	1 1/4													UCFC207-20		UC207-20	1.7				–	–	–	–	–	–	–	–	–	–
	1 5/16													UCFC207-21		UC207-21	1.7				–	–	–	–	–	–	–	–	–	–
	1 3/8	5 5/16	3.5433	4 21/64	3 1/16	35/64	1 1/32	7/16	5/16	1 7/16	1.689	0.689	7/16	UCFC207-22	FC207	UC207-22	1.7	25.7	15.4	13.9	–	–	–	–	–	–	–	–	–	–
		135	90	110	77.8	14	26	11	8	36.4	42.9	17.5	M12	UCFC207		UC207	1.7				UCFC207C	UCFC207D	41	1 5/8	1.7	UCFC207FC	UCFC207FD	50	1 31/32	2.1
35	1 7/16													UCFC207-23		UC207-23	1.7				–	–	–	–	–	–	–	–	–	–
	1 3/8													UCFCX07-22		UCX07-22	1.9				–	–	–	–	–	–	–	–	–	–
		5 1/4	3.6220	4 3/8	3 3/32	15/32	1 1/32	23/64	7/16	1 17/32	1.937	0.748	3/8	UCFCX07	FCX07	UCX07	1.9	29.1	17.8	14.0	UCFCX07C	UCFCX07D	43	1 11/16	1.9	–	–	–	–	–
	1 7/16	133	92	111	78.5	12	26	9	11	39.2	49.2	19	M10	UCFCX07-23		UCX07-23	1.9				–	–	–	–	–	–	–	–	–	–
	1 1/2													UCFC208-24		UC208-24	2.0				–	–	–	–	–	–	–	–	–	–
	1 9/16	5 23/32	3.9370	4 23/32	3 11/32	35/64	1 1/32	7/16	25/64	1 5/8	1.937	0.748	7/16	UCFC208-25	FC208	UC208-25	2.0	29.1	17.8	14.0	–	–	–	–	–	–	–	–	–	–
40		145	100	120	84.8	14	26	11	10	41.2	49.2	19	M12	UCFC208		UC208	2.0				UCFC208C	UCFC208D	45	1 25/32	2.0	UCFC208FC	UCFC208FD	54	2 1/8	2.4
	1 1/2	5 1/4	3.6220	4 3/8	3 3/32	15/32	1 1/32	23/64	7/16	1 17/32	1.937	0.748	3/8	UCFCX08-24	FCX08	UCX08-24	2.0	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
		133	92	111	78.5	12	26	9	11	39.2	49.2	19	M10	UCFCX08		UCX08	2.0				UCFCX08C	UCFCX08D	43	1 11/16	2.0	–	–	–	–	–
	1 5/8													UCFC209-26		UC209-26	2.6				–	–	–	–	–	–	–	–	–	–
	1 11/16	6 5/16	4.1339	5 13/64	3 43/64	5/8	1 1/32	25/64	15/32	1 19/32	1.937	0.748	1/2	UCFC209-27	FC209	UC209-27	2.6	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
	1 3/4	160	105	132	93.3	16	26	10	12	40.2	49.2	19	M14	UCFC209-28		UC209-28	2.6				–	–	–	–	–	–	–	–	–	–
45														UCFC209		UC209	2.6				UCFC209C	UCFC209D	44	1 23/32	2.6	UCFC209FC	UCFC209FD	54	2 1/8	3.0
	1 3/4	6 3/32	4.2520	5 1/8	3 5/8	35/64	31/32	5/16	15/32	1 19/32	2.031	0.748	7/16	UCFCX09-28	FCX09	UCX09-28	2.6	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
		155	108	130	91.9	14	25	8	12	40.6	51.6	19	M12	UCFCX09		UCX09	2.6				UCFCX09C	UCFCX09D	45	1 25/32	2.6	–	–	–	–	–
	1 7/8													UCFC210-30		UC210-30	2.9				–	–	–	–	–	–	–	–	–	–
	1 15/16	6 1/2	4.3307	5 7/16	3 27/32	5/8	1 3/32	25/64	15/32	1 11/16	2.031	0.748	1/2	UCFC210-31	FC210	UC210-31	2.9	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
		165	110	138	97.6	16	28	10	12	42.6	51.6	19	M14	UCFC210		UC210	2.9				UCFC210C	UCFC210D	47	1 27/32	2.9	UCFC210FC	UCFC210FD	58.5	2 5/16	3.4
50	2													UCFC210-32		UC210-32	2.9				–	–	–	–	–	–	–	–	–	–
	1 15/16	6 3/8	4.6457	5 23/64	3 25/32	35/64	31/32	9/32	5/8	1 19/32	2.189	0.874	7/16	UCFCX10-31		UCX10-31	3.2				–	–	–	–	–	–	–	–	–	–
		162	118	136	96.2	14	25	7	16	40.4	55.6	22.2	M12	UCFCX10	FCX10	UCX10	3.2	43.4	29.4	14.4	UCFCX10C	UCFCX10D	45	1 25/32	3.2	–	–	–	–	–
	2													UCFCX10-32		UCX10-32	3.2				–	–	–	–	–	–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09
A-R1/8 ..... 211~218, X10~X20
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFC206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFC
Cylindrical bore (with set screws)
d 55 ~ 100 mm

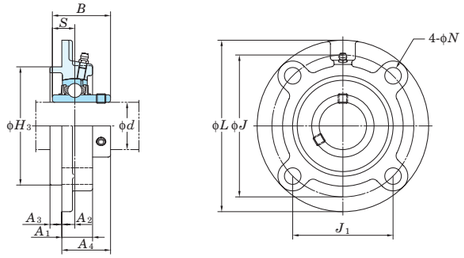

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.		Δ_{H3s}	Δ_{A2s}	X	Y
FC204~FC206	FCX05	0 −0.046	±0.5	0.7	0.2
FC207~FC210	FCX06~FCX10	0 −0.054			
FC211~FC217	FCX11~FCX15	0 −0.063	±0.8	1	0.3
FC218	FCX16~FCX18	0 −0.072			
	FCX20				0.4

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
FC204~FC218	FCX05~FCX20	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	H_3	J	J_1	N	A_1	A_2	A_3	A_4	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
55	2													UCFC211-32	FC211	UC211-32	4.2	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
	2 1/8	7 9/32	4.9213	5 29/32	4 11/64	3/4	1 7/32	33/64	15/32	1 13/16	2.189	0.874	5/8	UCFC211-34		UC211-34	4.2				–	–	– –	–	–	–	– –	–
		185	125	150	106.1	19	31	13	12	46.4	55.6	22.2	M16	UCFC211		UC211	4.2				UCFC211C	UCFC211D	51 2	4.2	UCFC211FC	UCFC211FD	62.5 2 15/32	4.8
	2 3/16													UCFC211-35		UC211-35	4.2				–	–	– –	–	–	–	– –	–
		7 3/32	5	5 63/64	4 15/64	5/8	1 1/32	5/32	55/64	1 23/32	2.563	1.000	1/2	UCFCX11	FCX11	UCX11	4.3	52.4	36.2	14.4	UCFCX11C	UCFCX11D	46 1 13/16	4.3	–	–	– –	–
	2 3/16	180	127	152	107.5	16	26	4	22	43.7	65.1	25.4	M14	UCFCX11-35		UCX11-35	4.3				–	–	– –	–	–	–	– –	–
	2 1/4													UCFCX11-36		UCX11-36	4.3				–	–	– –	–	–	–	– –	–
60	2 1/4													UCFC212-36	FC212	UC212-36	5.0	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		7 11/16	5.3150	6 19/64	4 29/64	3/4	1 13/32	43/64	15/32	2 7/32	2.563	1.000	5/8	UCFC212		UC212	5.0				UCFC212C	UCFC212D	61 2 13/32	5.0	UCFC212FC	UCFC212FD	74 2 29/32	5.8
	2 3/8	195	135	160	113.1	19	36	17	12	56.7	65.1	25.4	M16	UCFC212-38		UC212-38	5.0				–	–	– –	–	–	–	– –	–
	2 7/16													UCFC212-39		UC212-39	5.0				–	–	– –	–	–	–	– –	–
		7 5/8	5.5118	6 1/2	4 19/32	5/8	1 5/16	7/16	25/32	2	2.563	1.000	1/2	UCFCX12	FCX12	UCX12	5.3	57.2	40.1	14.4	UCFCX12C	UCFCX12D	55 2 5/32	5.3	–	–	– –	–
	2 7/16	194	140	165	116.7	16	33	11	20	50.7	65.1	25.4	M14	UCFCX12-39		UCX12-39	5.3				–	–	– –	–	–	–	– –	–
65	2 1/2													UCFC213-40	FC213	UC213-40	5.6	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		8 1/16	5.7087	6 11/16	4 47/64	3/4	1 13/32	5/8	35/64	2 3/16	2.563	1.000	5/8	UCFC213		UC213	5.6				UCFC213C	UCFC213D	60 2 3/8	5.6	UCFC213FC	UCFC213FD	73 2 7/8	6.4
	2 1/2	7 5/8	5.5118	6 1/2	4 19/32	5/8	1 5/16	7/16	25/32	2 3/16	2.937	1.189	1/2	UCFCX13-40	FCX13	UCX13-40	5.7	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		194	140	165	116.7	16	33	11	20	55.4	74.6	30.2	M14	UCFCX13		UCX13	5.7				UCFCX13C	UCFCX13D	60 2 3/8	5.7	–	–	– –	–
70	2 3/4													UCFC214-44	FC214	UC214-44	6.8	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
		8 15/32	5.9055	6 31/32	4 59/64	3/4	1 9/16	43/64	35/64	2 13/32	2.937	1.189	5/8	UCFC214		UC214	6.8				UCFC214C	UCFC214D	66 2 19/32	6.8	UCFC214FC	UCFC214FD	79 3 1/8	7.7
	2 3/4	8 3/4	6.4567	7 31/64	5 9/32	3/4	1 13/32	35/64	25/32	2 5/16	3.063	1.331	5/8	UCFCX14-44	FCX14	UCX14-44	7.3	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		222	164	190	134.3	19	36	14	20	58.5	77.8	33.3	M16	UCFCX14		UCX14	7.3				UCFCX14C	UCFCX14D	63 2 15/32	7.3	–	–	– –	–
75	2 15/16													UCFC215-47	FC215	UC215-47	7.2	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		8 21/32	6.2992	7 1/4	5 1/8	3/4	1 9/16	45/64	5/8	2 15/32	3.063	1.331	5/8	UCFC215		UC215	7.2				UCFC215C	UCFC215D	67 2 5/8	7.2	UCFC215FC	UCFC215FD	80 3 5/32	8.2
	3	220	160	184	130.1	19	40	18	16	62.5	77.8	33.3	M16	UCFC215-48		UC215-48	7.2				–	–	– –	–	–	–	– –	–
	2 15/16													UCFCX15-47	FCX15	UCX15-47	8.0	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		8 3/4	6.4567	7 31/64	5 9/32	3/4	1 3/8	15/32	55/64	2 13/32	3.252	1.311	5/8	UCFCX15		UCX15	8.0				UCFCX15C	UCFCX15D	66 2 19/32	8.0	–	–	– –	–
	3	222	164	190	134.3	19	35	12	22	61.3	82.6	33.3	M16	UCFCX15-48		UCX15-48	8.0				–	–	– –	–	–	–	– –	–
80	3 1/8													UCFC216-50	FC216	UC216-50	8.7	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		9 7/16	6.6929	7 7/8	5 9/16	29/32	1 31/32	45/64	5/8	2 21/32	3.252	1.311	3/4	UCFC216		UC216	8.7				UCFC216C	UCFC216D	72 2 27/32	8.7	UCFC216FC	UCFC216FD	87 3 7/16	9.9
	240	170	200	141.4	23	42	18	16	67.3	82.6	33.3	M20																
	–	10 1/4	7.3228	8 5/8	6 3/32	29/32	1 13/32	25/64	63/64	2 7/16	3.374	1.343	3/4	UCFCX16	FCX16	UCX16	11.3	84.0	61.9	14.5	UCFCX16C	UCFCX16D	66 2 19/32	11.3	–	–	– –	–
		260	186	219	154.8	23	36	10	25	61.6	85.7	34.1	M20															
85	3 1/4													UCFC217-52	FC217	UC217-52	10.3	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		9 27/32	7.0866	8 3/16	5 51/64	29/32	1 25/32	45/64	45/64	2 3/4	3.374	1.343	3/4	UCFC217		UC217	10.3				UCFC217C	UCFC217D	74 2 29/32	10.3	UCFC217FC	UCFC217FD	89 3 1/2	11.7
		250	180	208	147.1	23	45	18	18	69.6	85.7	34.1	M20															
		10 1/4	7.3228	8 5/8	6 3/32	29/32	1 13/32	25/64	63/64	2 5/8	3.780	1.563	3/4	UCFCX17	FCX17	UCX17	12.9	96.1	71.5	14.5	UCFCX17C	UCFCX17D	71 2 25/32	12.9	–	–	– –	–
	3 7/16	260	186	219	154.8	23	36	10	25	66.3	96	39.7	M20	UCFCX17-55		UCX17-55	12.9				–	–	– –	–	–	–	– –	–
90	3 1/2													UCFC218-56	FC218	UC218-56	13.3	96.1	71.5	14.5	–	–	– –	–	–	–	– –	–
		10 7/16	7.4803	8 21/32	6 1/8	29/32	1 31/32	55/64	45/64	3 3/32	3.780	1.563	3/4	UCFC218		UC218	13.3				UCFC218C	UCFC218D	83 3 9/32	13.3	UCFC218FC	UCFC218FD	98 3 27/32	14.8
	265	190	220	155.5	23	50	22	18	78.3	96	39.7	M20																
	–	10 1/4	7.3228	8 5/8	6 3/32	29/32	1 11/16	15/32	1 7/64	2 7/8	4.094	1.689	3/4	UCFCX18	FCX18	UCX18	13.5	109	81.9	14.4	–	–	– –	–	UCFCX18C	UCFCX18C	92 3 5/8	15.4
		260	186	219	154.8	23	43	12	28	73.1	104	42.9	M20															
100														UCFCX20	FCX20	UCX20	18.2	133	105	14.4	–	–	– –	–	UCFCX20C	UCFCX20D	116 4 9/16	20.7
	3 15/16	10 7/8	8.1102	9 3/8	6 5/8	29/32	2 19/32	55/64	1 7/64	3 9/16	4.626	1.937	3/4	UCFCX20-63		UCX20-63	18.2				–	–	– –	–	–	–	– –	–
	4	276	206	238	168.3	23	66	22	28	90.3	117.5	49.2	M20	UCFCX20-64		UCX20-64	18.2				–	–	– –	–	–	–	– –	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210, X05~X09
A-R1/8 ..... 211~218, X10~X20
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFC206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFCX-E
Cylindrical bore (with set screws)
d 25 ~ 100 mm





Variations of tolerance of spigot joint outside diameter (Δ_{H3a}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2a}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.	Δ_{H3a}	Δ_{A2a}	X	Y
FCX05E	0 −0.046	±0.5	0.7	0.2
FCX06E~FCX10E	0 −0.054			
FCX12E~FCX15E	0 −0.063	±0.8	1	0.3
FCX16E~FCX18E	0 −0.072			
FCX20E				0.4

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FCX05E~FCX20E	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	H_3	J	J_1	N	A_1	A_2	A_3	A_4	B	S	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
25	1	4 3/8 111	3.000 76.2	3 5/8 92	2 9/16 65	3/8 9.5	15/16 24	25/64 10	15/64 6	1 9/32 32.2	1.500 38.1	0.626 15.9	5/16 M8	**UCFCX05E** **UCFCX05E-16**	FCX05E	UCX05 UCX05-16	19.5	11.3	13.9	1.2
30	1 3/16 1 1/4	5 127	3.375 85.725	4 9/64 105	2 59/64 74.2	15/32 12	7/8 22.5	5/16 8	3/8 9.5	1 5/16 33.4	1.689 42.9	0.689 17.5	3/8 M10	**UCFCX06E** **UCFCX06E-19** **UCFCX06E-20**	FCX06E	UCX06 UCX06-19 UCX06-20	25.7	15.4	13.9	1.5
35	1 3/8 1 7/16	5 1/4 133	3.625 92.075	4 3/8 111	3 3/32 78.5	15/32 12	1 1/32 26	23/64 9	7/16 11	1 17/32 39.2	1.937 49.2	0.748 19	3/8 M10	**UCFCX07E-22** **UCFCX07E** **UCFCX07E-23**	FCX07E	UCX07-22 UCX07 UCX07-23	29.1	17.8	14.0	1.9
40	1 1/2	5 1/4 133	3.625 92.075	4 3/8 111	3 3/32 78.5	15/32 12	1 1/32 26	23/64 9	7/16 11	1 17/32 39.2	1.937 49.2	0.748 19	3/8 M10	**UCFCX08E-24** **UCFCX08E**	FCX08E	UCX08-24 UCX08	34.1	21.3	14.0	2.0
45	1 3/4	6 3/32 155	4.250 107.95	5 1/8 130	3 5/8 91.9	35/64 14	31/32 25	5/16 8	15/32 12	1 19/32 40.6	2.031 51.6	0.748 19	7/16 M12	**UCFCX09E-28** **UCFCX09E**	FCX09E	UCX09-28 UCX09	35.1	23.3	14.4	2.6
50	1 15/16 2	6 3/8 162	4.5 114.3	5 23/64 136	3 25/32 96.2	35/64 14	31/32 25	9/32 7	5/8 16	1 19/32 40.4	2.189 55.6	0.874 22.2	7/16 M12	**UCFCX10E-31** **UCFCX10E** **UCFCX10E-32**	FCX10E	UCX10-31 UCX10 UCX10-32	43.4	29.4	14.4	3.2
60	2 7/16	7 5/8 194	5.500 139.7	6 1/2 165	4 19/32 116.7	5/8 16	1 5/16 33	7/16 11	25/32 20	2 50.7	2.563 65.1	1.000 25.4	1/2 M14	**UCFCX12E** **UCFCX12E-39**	FCX12E	UCX12 UCX12-39	57.2	40.1	14.4	5.3
65	2 1/2	7 5/8 194	5.500 139.7	6 1/2 165	4 19/32 116.7	5/8 16	1 5/16 33	7/16 11	25/32 20	2 3/16 55.4	2.937 74.6	1.189 30.2	1/2 M14	**UCFCX13E-40** **UCFCX13E**	FCX13E	UCX13-40 UCX13	62.2	44.1	14.5	5.7
70	2 3/4	8 3/4 222	6.375 161.925	7 31/64 190	5 9/32 134.3	3/4 19	1 13/32 36	35/64 14	25/32 20	2 5/16 58.5	3.063 77.8	1.331 33.3	5/8 M16	**UCFCX14E-44** **UCFCX14E**	FCX14E	UCX14-44 UCX14	67.4	48.3	14.5	7.3
75	2 15/16 3	8 3/4 222	6.375 161.925	7 31/64 190	5 9/32 134.3	3/4 19	1 3/8 35	15/32 12	55/64 22	2 13/32 61.3	3.252 82.6	1.311 33.3	5/8 M16	**UCFCX15E-47** **UCFCX15E** **UCFCX15E-48**	FCX15E	UCX15-47 UCX15 UCX15-48	72.7	53.0	14.6	8.0
80	–	10 1/4 260	7.375 187.325	8 5/8 219	6 3/32 154.8	29/32 23	1 13/32 36	25/64 10	63/64 25	2 7/16 61.6	3.374 85.7	1.343 34.1	3/4 M20	**UCFCX16E**	FCX16E	UCX16	84.0	61.9	14.5	11.3
85	3 7/16	10 1/4 260	7.375 187.325	8 5/8 219	6 3/32 154.8	29/32 23	1 13/32 36	25/64 10	63/64 25	2 5/8 66.3	3.780 96	1.563 39.7	3/4 M20	**UCFCX17E** **UCFCX17E-55**	FCX17E	UCX17 UCX17-55	96.1	71.5	14.5	12.9
90	–	10 1/4 260	7.375 187.325	8 5/8 219	6 3/32 154.8	29/32 23	1 11/16 43	15/32 12	1 7/64 28	2 7/8 73.1	4.094 104	1.689 42.9	3/4 M20	**UCFCX18E**	FCX18E	UCX18	109	81.9	14.4	13.5
100	3 15/16 4	10 7/8 276	8.125 206.375	9 3/8 238	6 5/8 168.3	29/32 23	2 19/32 66	55/64 22	1 7/64 28	3 9/16 90.3	4.626 117.5	1.937 49.2	3/4 M20	**UCFCX20E** **UCFCX20E-63** **UCFCX20E-64**	FCX20E	UCX20 UCX20-63 UCX20-64	133	105	14.4	18.2

Remarks 1. In Part No. of unit, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... X05~X09
A-R1/8 ..... X10~X20
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFCX06EL3, UCX06L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCFCF
Cylindrical bore
(with set screw locking)
d 25 ~ 55 mm

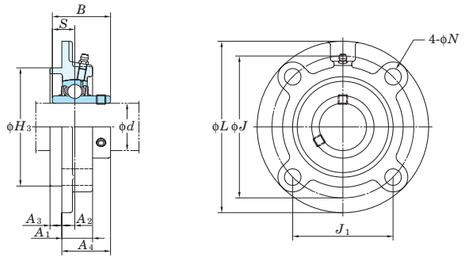

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.	Δ_{H3s}	Δ_{A2s}	X	Y
FCF205~FCF206	0 −0.046	±0.5	0.7	0.2
FCF207~FCF210	0 −0.054			
FCF211	0 −0.063	±0.8	1	0.3

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FCF205~FCF211	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	H_3	J	J_1	N	A_1	A_2	A_3	A_4	B	S	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0
25	7/8	4 3/8	3	3 5/8	2 9/16	13/32	7/8	7/16	1/4	1 7/32	1.343	0.563	5/16	UCFCF205-14	FCF205	UC205-14	1.2	14.0	7.85	13.9
	15/16	111	76.2	92.1	65.1	10.5	22.1	11.1	6.4	30.9	34.1	14.3	M8	UCFCF205-15		UC205-15				
														UCFCF205		UC205				
	1													UCFCF205-16		UC205-16				
30	1 1/8	5	3.375	4 1/8	2 29/32	15/32	25/32	19/64	27/64	1 5/32	1.500	0.626	7/16	UCFCF206-18	FCF206	UC206-18	1.8	19.5	11.3	13.9
		127	85.725	104.8	74.1	12	20	7.5	10.5	29.7	38.1	15.9	M10	UCFCF206		UC206				
	1 3/16													UCFCF206-19		UC206-19				
	1 1/4													UCFCF206-20		UC206-20				
35	1 1/4	5 1/4	3.625	4 3/8	3 3/32	15/32	7/8	9/32	15/32	1 9/32	1.689	0.689	7/16	UCFCF207-20	FCF207	UC207-20	1.8	25.7	15.4	13.9
	1 5/16	133	92.075	111.1	78.6	12	22.2	7.1	11.9	32.5	42.9	17.5	M10	UCFCF207-21		UC207-21				
	1 3/8													UCFCF207-22		UC207-22				
														UCFCF207		UC207				
	1 7/16													UCFCF207-23		UC207-23				
40	1 1/2	5 1/4	3.625	4 3/8	3 3/32	15/32	1 1/32	3/8	15/32	1 9/16	1.937	0.748	7/16	UCFCF208-24	FCF208	UC208-24	2.1	29.1	17.8	14.0
	1 9/16	133	92.075	111.1	78.6	12	26.1	9.5	11.9	39.7	49.2	19	M10	UCFCF208-25		UC208-25				
														UCFCF208		UC208				
45	1 5/8	6 5/32	4.25	5 1/8	3 5/8	17/32	7/8	7/32	15/32	1 13/32	1.937	0.748	1/2	UCFCF209-26	FCF209	UC209-26	2.8	34.1	21.3	14.0
	1 11/16	156	107.95	130.2	92.05	13.5	22	5.5	12	35.7	49.2	19	M12	UCFCF209-27		UC209-27				
	1 3/4													UCFCF209-28		UC209-28				
														UCFCF209		UC209				
50	1 7/8	6 3/8	4.5	5 3/8	3 51/64	17/32	1 1/16	11/32	5/8	1 5/8	2.031	0.748	1/2	UCFCF210-30	FCF210	UC210-30	3.2	35.1	23.3	14.4
	1 15/16	162	114.3	136.5	96.5	13.5	27.1	8.7	15.9	41.3	51.6	19	M12	UCFCF210-31		UC210-31				
														UCFCF210		UC210				
	2													UCFCF210-32		UC210-32				
55	2	7 1/8	5	6	4 1/4	19/32	7/8	7/32	7/8	1 17/32	2.189	0.874	1/2	UCFCF211-32	FCF211	UC211-32	4.2	43.4	29.4	14.4
	2 1/8	181	127	152.4	107.8	15	22.2	5.5	22.2	38.9	55.6	22.2	M14	UCFCF211-34		UC211-34				
														UCFCF211		UC211				
	2 3/16													UCFCF211-35		UC211-35				

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 205~210
A-R1/8 211
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCFC206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

NCFC
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

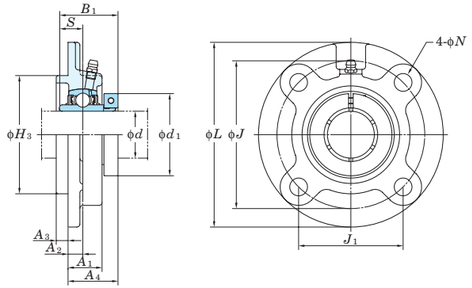

Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.	Δ_{H3s}	Δ_{A2s}	X	Y
FC204~FC206	0 / −0.046	±0.5	0.7	0.2
FC207~FC210	0 / −0.054			
FC211~FC212	0 / −0.063	±0.8	1	0.3

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.	Δ_{Ns}
FC204~FC212	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm L	H_3	J	J_1	N	A_1	A_2	A_3	A_4	B_1	S	d_1	Bolt Size inch / mm	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	3 15/16 100	2.4409 62	3 5/64 78	2 11/64 55.1	15/32 12	13/16 20.5	25/64 10	13/64 5	1 3/16 29.8	1 9/32 32.5	0.500 12.7	1 3/4 44.5	3/8 M10	**NCFC204-12** **NCFC204**	FC204	NC204-12 NC204	12.8	6.65	13.2	0.87
25	7/8 15/16 1	4 17/32 115	2.7559 70	3 35/64 90	2 1/2 63.6	15/32 12	13/16 21	25/64 10	15/64 6	1 9/32 32.2	1 7/16 36.5	0.563 14.3	1 15/16 49.2	3/8 M10	**NCFC205-14** **NCFC205-15** **NCFC205** **NCFC205-16**	FC205	NC205-14 NC205-15 NC205 NC205-16	14.0	7.85	13.9	1.15
30	1 1/8 1 3/16 1 1/4	4 29/32 125	3.1496 80	3 15/16 100	2 25/32 70.7	15/32 12	29/32 23	25/64 10	5/16 8	1 11/32 33.8	1 9/16 39.7	0.626 15.9	2 3/16 55.6	3/8 M10	**NCFC206-18** **NCFC206** **NCFC206-19** **NCFC206-20**	FC206	NC206-18 NC206 NC206-19 NC206-20	19.5	11.3	13.9	1.5
35	1 1/4	5 5/16 135	3.5433 90	4 21/64 110	3 1/16 77.8	35/64 14	1 1/32 26	7/16 11	5/16 8	1 1/2 38	1 3/4 44.5	0.689 17.5	2 7/16 61.9	7/16 M12	**NCFC207-20**	FC207	NC207-20	25.7	15.4	13.9	2.0
	1 3/8 1 7/16	5 5/16 135	3.5433 90	4 21/64 110	3 1/16 77.8	35/64 14	1 1/32 26	7/16 11	5/16 8	1 1/2 38	1 3/4 44.5	0.689 17.5	2 9/16 65.1	7/16 M12	**NCFC207-22** **NCFC207** **NCFC207-23**	FC207	NC207-22 NC207 NC207-23	25.7	15.4	13.9	2.0
40	1 1/2	5 23/32 145	3.9370 100	4 23/32 120	3 11/32 84.8	35/64 14	1 1/32 26	7/16 11	25/64 10	1 11/16 42.8	2 50.8	0.748 19	2 11/16 68.3	7/16 M12	**NCFC208-24** **NCFC208**	FC208	NC208-24 NC208	29.1	17.8	14.0	2.4
45	1 5/8	6 5/16 160	4.1339 105	5 13/64 132	3 43/64 93.3	5/8 16	1 1/32 26	25/64 10	15/32 12	1 21/32 41.8	2 50.8	0.748 19	2 13/16 71.4	1/2 M14	**NCFC209-26**	FC209	NC209-26	34.1	21.3	14.0	3.0
	1 11/16 1 3/4	6 5/16 160	4.1339 105	5 13/64 132	3 43/64 93.3	5/8 16	1 1/32 26	25/64 10	15/32 12	1 21/32 41.8	2 50.8	0.748 19	2 15/16 74.6	1/2 M14	**NCFC209-27** **NCFC209-28** **NCFC209**	FC209	NC209-27 NC209-28 NC209	34.1	21.3	14.0	3.0
50	1 15/16 2	6 1/2 165	4.3307 110	5 7/16 138	3 27/32 97.6	5/8 16	1 3/32 28	25/64 10	15/32 12	1 3/4 44.1	2 3/32 53.1	0.748 19	3 3/8 85.7	1/2 M14	**NCFC210-31** **NCFC210** **NCFC210-32**	FC210	NC210-31 NC210 NC210-32	35.1	23.3	14.4	3.5
55	2	7 9/32 185	4.9213 125	5 29/32 150	4 11/64 106.1	3/4 19	1 7/32 31	33/64 13	15/32 12	1 7/8 47.9	2 1/4 57.1	0.874 22.2	3 1/2 88.9	5/8 M16	**NCFC211-32**	FC211	NC211-32	43.4	29.4	14.4	4.6
	2 3/16	7 9/32 185	4.9213 125	5 29/32 150	4 11/64 106.1	3/4 19	1 7/32 31	33/64 13	15/32 12	1 7/8 47.9	2 1/4 57.1	0.874 22.2	3 5/8 92.1	5/8 M16	**NCFC211** **NCFC211-35**	FC211	NC211 NC211-35	43.4	29.4	14.4	4.6
60	2 1/4	7 11/16 195	5.3150 135	6 19/64 160	4 29/64 113.1	3/4 19	1 13/32 36	43/64 17	15/32 12	2 9/32 58.3	2 5/8 66.7	1.000 25.4	4 1/16 103.2	5/8 M16	**NCFC212-36**	FC212	NC212-36	52.4	36.2	14.4	5.7
	2 7/16	7 11/16 195	5.3150 135	6 19/64 160	4 29/64 113.1	3/4 19	1 13/32 36	43/64 17	15/32 12	2 9/32 58.3	2 5/8 66.7	1.000 25.4	4 1/8 104.8	5/8 M16	**NCFC212** **NCFC212-39**	FC212	NC212 NC212-39	52.4	36.2	14.4	5.7

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

UKFC
Tapered bore (with adapter)
d_1 20 ~ 65 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.		Δ_{H3s}	Δ_{A2s}	X	Y
FC205~FC206	FCX05	0 −0.046	±0.5	0.7	0.2
FC207~FC210	FCX06~FCX10	0 −0.054			
FC211~FC217	FCX11~FCX15	0 −0.063	±0.8	1	0.3
FC218	FCX16~FCX18	0 −0.072			
	FCX20				0.4

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
FC204~FC218	FCX05~FCX20	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d_1	L	H_3	J	J_1	N	A_1	A_2	A_3	A_4 1)	B_1 1)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
20	3/4	4 17/32	2.7559	3 35/64	2 1/2	15/32	13/16	25/64	15/64	1 1/8(1 3/16)	1 5/32(1 3/8)	3/8	UKFC205	FC205	UK205	HE305X(HE2305X)	0.99	14.0	7.85	13.9	–	–	– –	–	–	–	– –	–
		115	70	90	63.6	12	21	10	6	28.5(30)	29(35)	M10				H305X(H2305X)	0.99				UKFC205C	UKFC205D	34 1 11/32	0.99	UKFC205FC	UKFC205FD	43 1 21/32	1.2
	3/4	4 3/8	2.9921	3 5/8	2 9/16	3/8	15/16	25/64	15/64	1 5/32	1 3/8	5/16	UKFCX05	FCX05	UKX05	HE2305X	1.2	19.5	11.3	13.9	–	–	– –	–	–	–	– –	–
		111	76	92	65	9.5	24	10	6	29.5	35	M8				H2305X	1.2				UKFCX05C	UKFCX05D	36 1 13/32	1.2	–	–	– –	–
25		4 29/32	3.1496	3 15/16	2 25/32	19/32	29/32	25/64	5/16	1 9/32(1 1/4)	1 7/32(1 1/2)	3/8	UKFC206	FC206	UK206	H306X(H2306X)	1.3	19.5	11.3	13.9	UKFC206C	UKFC206D	36 1 13/32	1.3	UKFC206FC	UKFC206FD	45 1 25/32	1.6
	1	125	80	100	70.7	12	23	10	8	29.5(31.5)	31(38)	M10				H306X(HE2306X)	1.3				–	–	– –	–	–	–	– –	–
		5	3.3465	4 9/64	2 59/64	15/32	7/8	5/16	3/8	1 5/32	1 1/2	3/8	UKFCX06	FCX06	UKX06	H2306X	1.5	25.7	15.4	13.9	UKFCX06C	UKFCX06D	38 1 1/2	1.5	–	–	–	–
	1	127	85	105	74.2	12	22.5	8	9.5	29	38	M10				HE2306X	1.5				–	–	– –	–	–	–	– –	–
30	1 1/8	5 5/16	3.5433	4 21/64	3 1/16	35/64	1 1/32	7/16	5/16	1 5/16(1 3/8)	1 3/8(1 11/16)	7/16	UKFC207	FC207	UK207	HS307X(HS2307X)	1.7	25.7	15.4	13.9	–	–	– –	–	–	–	– –	–
		135	90	110	77.8	14	26	11	8	33(35)	35(43)	M12				H307X(H2307X)	1.7				UKFC207C	UKFC207D	41 1 5/8	1.7	UKFC207FC	UKFC207FD	50 1 31/32	2.1
	1 1/8	5 1/4	3.6220	4 3/8	3 3/32	15/32	1 1/32	23/64	7/16	1 1/4	1 11/16	3/8	UKFCX07	FCX07	UKX07	HS2307X	1.9	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		133	92	111	78.5	12	26	9	11	31.5	43	M10				H2307X	1.9				UKFCX07C	UKFCX07D	43 1 11/16	1.9	–	–	– –	–
35	1 1/4	5 23/32	3.9370	4 23/32	3 11/32	35/64	1 1/32	7/16	25/64	1 11/32(1 1/2)	1 13/32(1 13/16)	7/16	UKFC208	FC208	UK208	HE308X(HE2308X)	2.0	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
	1 3/8															HS308X(HS2308X)	2.0				–	–	– –	–	–	–	– –	–
		145	100	120	84.8	14	26	11	10	34.5(38)	36(46)	M12				H308X(H2308X)	2.0				UKFC208C	UKFC208D	45 1 25/32	2.0	UKFC208FC	UKFC208FD	54 2 1/8	2.4
	1 1/4	5 1/4	3.6220	4 3/8	3 3/32	15/32	1 1/32	23/64	7/16	1 5/16	1 13/16	3/8	UKFCX08	FCX08	UKX08	HE2308X	1.9	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
	1 3/8															HS2308X	1.9				–	–	– –	–	–	–	– –	–
		133	92	111	78.5	12	26	9	11	33.5	46	M10				H2308X	1.9				UKFCX08C	UKFCX08D	43 1 11/16	1.9	–	–	– –	–
40	1 1/2	6 5/16	4.1339	5 13/64	3 43/64	5/8	1 1/32	25/64	15/32	1 13/32(1 17/32)	1 17/32(1 31/32)	1/2	UKFC209	FC209	UK209	HE309X(HE2309X)	2.7	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		160	105	132	93.3	16	26	10	12	35.5(39)	39(50)	M14				H309X(H2309X)	2.7				UKFC209C	UKFC209D	44 1 23/32	2.7	UKFC209FC	UKFC209FD	54 2 1/8	3.2
	1 1/2	6 3/32	4.2520	5 1/8	3 5/8	35/64	31/32	5/16	15/32	1 5/16	1 31/32	7/16	UKFCX09	FCX09	UKX09	HE2309X	2.6	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		155	108	130	91.9	14	25	8	12	33.5	50	M12				H2309X	2.6				UKFCX09C	UKFCX09D	45 1 25/32	2.6	–	–	– –	–
45	1 3/4	6 1/2	4.3307	5 7/16	3 27/32	5/8	1 3/32	25/64	15/32	1 7/16(1 9/16)	1 21/32(2 5/32)	1/2	UKFC210	FC210	UK210	HE310X(HE2310X)	3.0	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		165	110	138	97.6	16	28	10	12	36.5(40)	42(55)	M14				H310X(H2310X)	3.0				UKFC210C	UKFC210D	47 1 27/32	3.0	UKFC210FC	UKFC210FD	58.5 2 5/16	3.5
	1 3/4	6 3/8	4.6457	5 23/64	3 25/32	35/64	31/32	9/32	5/8	1 11/32	2 5/32	7/16	UKFCX10	FCX10	UKX10	HE2310X	3.1	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		162	118	136	96.2	14	25	7	16	34.5	55	M12				H2310X	3.1				UKFCX10C	UKFCX10D	45 1 25/32	3.1	–	–	– –	–
50	1 7/8	7 9/32	4.9213	5 29/32	4 11/64	3/4	1 7/32	33/64	15/32	1 5/8(1 25/32)	1 25/32(2 5/16)	5/8	UKFC211	FC211	UK211	HS311X(HS2311X)	4.3	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
																H311X(H2311X)	4.3				UKFC211C	UKFC211D	51 2	4.3	UKFC211FC	UKFC211FD	62.5 2 15/32	4.9
	2	185	125	150	106.1	19	31	13	12	41(45.5)	45(59)	M16				HE311X(HE2311X)	4.3				–	–	– –	–	–	–	– –	–
	1 7/8	7 3/32	5	5 63/64	4 15/64	5/8	1 1/32	5/32	55/64	1 5/16	2 5/16	1/2	UKFCX11	FCX11	UKX11	HS2311X	4.0	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
																H2311X	4.0				UKFCX11C	UKFCX11D	48 1 7/8	4.0	–	–	– –	–
	2	180	127	152	107.5	16	26	4	22	33	59	M14				HE2311X	4.0				–	–	– –	–	–	–	– –	–
55	2 1/8	7 11/16	5.3150	6 19/64	4 29/64	3/4	1 13/32	43/64	15/32	1 27/32(2 3/32)	1 27/32(2 7/16)	5/8	UKFC212	FC212	UK212	HS312X(HS2312X)	4.9	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		195	135	160	113.1	19	36	17	12	46.5(53.5)	47(62)	M16				H312X(H2313X)	4.9				UKFC212C	UKFC212D	61 2 13/32	4.9	UKFC212FC	UKFC212FD	74 2 29/32	5.7
	2 1/8	7 5/8	5.5118	6 1/2	4 19/32	5/8	1 5/16	7/16	25/32	1 21/32	2 7/16	1/2	UKFCX12	FCX12	UKX12	HS2312X	5.1	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
		194	140	165	116.7	16	33	11	20	42	62	M14				H2312X	5.1				UKFCX12C	UKFCX12D	55 2 5/32	5.1	–	–	– –	–
60	2 1/4	8 1/16	5.7087	6 11/16	4 47/64	3/4	1 13/32	5/8	35/64	1 7/8(2 3/32)	1 31/32(2 9/16)	5/8	UKFC213	FC213	UK213	HE313X(HE2313X)	5.5	57.2	40.1	14.4	–	–	– –	–	–	–	– –	–
																H313X(H2313X)	5.5				UKFC213C	UKFC213D	60 2 3/8	5.5	UKFC213FC	UKFC213FD	73 2 7/8	6.4
	2 3/8	205	145	170	120.2	19	36	16	14	48(53.5)	50(65)	M16				HS313X(HS2313X)	5.5				–	–	– –	–	–	–	– –	–
	2 1/4	7 5/8	5.5118	6 1/2	4 19/32	5/8	1 5/16	7/16	25/32	1 25/32	2 9/16	1/2	UKFCX13	FCX13	UKX13	HE2313X	5.3	62.2	44.1	14.5	–	–	– –	–	–	–	– –	–
																H2313X	5.3				UKFCX13C	UKFCX13D	60 2 3/8	5.3	–	–	– –	–
	2 3/8	194	140	165	116.7	16	33	11	20	45	65	M14				HS2313X	5.3				–	–	– –	–	–	–	– –	–
65	2 1/2	8 21/32	6.2992	7 1/4	5 1/8	3/4	1 9/16	45/64	5/8	2 3/32(2 5/16)	2 5/32(2 7/8)	5/8	UKFC215	FC215	UK215	HE315X(HE2315X)	7.4	67.4	48.3	14.5	–	–	– –	–	–	–	– –	–
		220	160	184	130.1	19	40	18	16	53(58.5)	55(73)	M16				H315X(H2315X)	7.4				UKFC215C	UKFC215D	67 2 5/8	7.4	UKFC215FC	UKFC215FD	80 3 5/32	8.4
	2 1/2	8 3/4	6.4567	7 31/64	5 9/32	3/4	1 3/8	15/32	55/64	1 7/8	2 7/8	5/8	UKFCX15	FCX15	UKX15	HE2315X	7.7	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		222	164	190	134.3	19	35	12	22	48	73	M16				H2315X	7.7				UKFCX15C	UKFCX15D	66 2 19/32	7.7	–	–	– –	–

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09
A-R1/8.....211~218, X10~X20

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKFC206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UKFC206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UKFC
Tapered bore (with adapter)
d_1 70 ~ 90 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of spigot joint outside diameter (Δ_{H3s}), variations of tolerance of distance from mounting surface to center of spherical bore (Δ_{A2s}), tolerance of position of bolt hole (X), and tolerance of circumferential runout of spigot joint (Y)

Unit: mm

Housing No.		Δ_{H3s}	Δ_{A2s}	X	Y
FC205~FC206	FCX05	0 −0.046	±0.5	0.7	0.2
FC207~FC210	FCX06~FCX10	0 −0.054			
FC211~FC217	FCX11~FCX15	0 −0.063	±0.8	1	0.3
FC218	FCX16~FCX18	0 −0.072			
	FCX20				0.4

Variations of tolerance of bolt hole diameter (Δ_{Ns})

Unit: mm

Housing No.		Δ_{Ns}
FC204~FC218	FCX05~FCX20	±0.2

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d_1	L	H_3	J	J_1	N	A_1	A_2	A_3	A_4 1)	B_1 1)	Bolt Size inch / mm	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	Closed Type	Dimension mm / inch A_c	Mass kg
70	2 3/4	9 7/16	6.6929	7 7/8	5 9/16	29/32	1 31/32	45/64	5/8	2 7/32(2 15/32)	2 5/16(3 1/16)	3/4	UKFC216	FC216	UK216	HE316X(HE2316X)	9.0	72.7	53.0	14.6	–	–	– –	–	–	–	– –	–
		240	170	200	141.4	23	42	18	16	56(62.5)	59(78)	M20				H316X(H2316X)	9.0				UKFC216C	UKFC216D	72 2 27/32	9.0	UKFC216FC	UKFC216FD	87 3 7/16	10.3
	2 3/4	10 1/4	7.3228	8 5/8	6 3/32	29/32	1 13/32	25/64	63/64	1 15/16	3 1/16	3/4	UKFCX16	FCX16	UKX16	HE2316X	11.4	84.0	61.9	14.5	–	–	– –	–	–	–	– –	–
		260	186	219	154.8	23	36	10	25	49	78	M20				H2316X	11.4				UKFCX16C	UKFCX16D	66 2 19/32	11.4	–	–	– –	–
75	3	9 27/32	7.0866	8 3/16	5 51/64	29/32	1 25/32	45/64	45/64	2 9/32(3 17/32)	2 15/32(3 7/32)	3/4	UKFC217	FC217	UK217	H317X(H2317X)	10.4	84.0	61.9	14.5	UKFC217C	UKFC217D	74 2 29/32	10.4	UKFC217FC	UKFC217FD	89 3 1/2	11.8
		250	180	208	147.1	23	45	18	18	58(64.5)	63(82)	M20				H317X(HE2317X)	10.4				–	–	– –	–	–	–	– –	–
	3	10 1/4	7.3228	8 5/8	6 3/32	29/32	1 13/32	25/64	63/64	2 1/16	3 7/32	3/4	UKFCX17	FCX17	UKX17	H2317X	12.6	96.1	71.5	14.5	UKFCX17C	UKFCX17D	71 2 25/32	12.6	–	–	–	–
		260	186	219	154.8	23	36	10	25	52	82	M20				HE2317X	12.6				–	–	– –	–	–	–	– –	–
80	–	10 7/16	7.4803	8 21/32	6 1/8	29/32	1 31/32	55/64	45/64	2 17/32(2 13/16)	2 9/16(3 3/8)	3/4	UKFC218	FC218	UK218	H318X(H2318X)	13.3	96.1	71.5	14.5	UKFC218C	UKFC218D	83 3 9/32	13.3	UKFC218FC	UKFC218FD	98 3 27/32	14.9
		265	190	220	155.5	23	50	22	18	64(71.5)	65(86)	M20																
	–	10 1/4	7.3228	8 5/8	6 3/32	29/32	1 11/16	15/32	1 7/64	2 5/32	3 3/8	3/4	UKFCX18	FCX18	UKX18	H2318X	13.0	109	81.9	14.4	–	–	– –	–	UKFCX18C	UKFCX18D	92 3 5/8	15.1
		260	186	219	154.8	23	43	12	28	55	86	M20																
90	3 1/2	10 7/8	8.1102	9 3/8	6 5/8	29/32	2 19/32	55/64	1 7/64	2 23/32	3 13/16	3/4	UKFCX20	FCX20	UKX20	HE2320X	17.1	133	105	14.4	–	–	– –	–	–	–	– –	–
		276	206	238	168.3	23	66	22	28	69	97	M20				H2320X	17.1				–	–	– –	–	UKFCX20C	UKFCX20D	116 4 9/16	19.9

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF.....205~210, X05~X09
A-R1/8.....211~218, X10~X20

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKFC206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKFC206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

FYH

SBPF
Cylindrical bore
(with set screw locking)
SAPF
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 35 mm

SBPF

SAPF



SBPF





SAPF

Variations of tolerance of distance between centers of bolt holes (Δ_{J_s})

Unit: mm

Housing No.	Δ_{J_s}
PF203~PF207	±0.4

Variations of tolerance of bolt hole diameter (Δ_{N_s})

Unit: mm

Housing No.	Δ_{N_s}
PF203~PF207	±0.25

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm H	A	A_1	J	N	H_2	S	SBPF B	SAPF B_1	Bolt Size inch / mm	Unit No.	Bearing No.	Unit No.	Bearing No.	Housing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg SBPF	SAPF
12												**SBPF201**	SB201	**SAPF201**	SA201						
	1/2	3 3/16	9/16	5/32	2 1/2	9/32	1 15/16	0.236	0.866	1.122	1/4	**SBPF201-8**	SB201-8	**SAPF201-8**	SA201-8						
15		81	14	4	63.5	7.1	49	6	22	28.5	M6	**SBPF202**	SB202	**SAPF202**	SA202	PF203	9.55	4.80	13.2	0.27	0.3
	5/8											**SBPF202-10**	SB202-10	**SAPF202-10**	SA202-10						
17												**SBPF203**	SB203	**SAPF203**	SA203						
20	3/4	3 17/32	5/8	5/32	2 13/16	23/64	25/32	0.276	0.984	1.161	5/16	**SBPF204-12**	SB204-12	**SAPF204-12**	SA204-12	PF204	12.8	6.65	13.2	0.33	0.33
		90	16	4	71.5	9	55	7	25	29.5	M8	**SBPF204**	SB204	**SAPF204**	SA204						
	7/8											**SBPF205-14**	SB205-14	**SAPF205-14**	SA205-14						
25	15/16	3 3/4	23/32	5/32	2 63/64	23/64	2 3/8	0.295	1.063	1.201	5/16	**SBPF205-15**	SB205-15	**SAPF205-15**	SA205-15	PF205	14.0	7.85	13.9	0.38	0.42
		95	18	4	76	9	60	7.5	27	30.5	M8	**SBPF205**	SB205	**SAPF205**	SA205						
	1											**SBPF205-16**	SB205-16	**SAPF205-16**	SA205-16						
	1 1/8											**SBPF206-18**	SB206-18	**SAPF206-18**	SA206-18						
30		4 7/16	3/4	13/64	3 9/16	7/16	2 25/32	0.315	1.181	1.335	3/8	**SBPF206**	SB206	**SAPF206**	SA206	PF206	19.5	11.3	13.9	0.62	0.65
	13/16	113	19	5.2	90.5	11	71	8	30	33.9	M10	**SBPF206-19**	SB206-19	**SAPF206-19**	SA206-19						
	1 1/4											**SBPF206-20**	SB206-20	**SAPF206-20**	SA206-20						
	1 1/4											**SBPF207-20**	SB207-20	**SAPF207-20**	SA207-20						
	15/16													**SAPF207-21**	SA207-21						
35	1 3/8	4 13/16	7/8	13/64	3 15/16	7/16	3 3/16	0.335	1.260	1.437	3/8	**SBPF207-22**	SB207-22	**SAPF207-22**	SA207-22	PF207	25.7	15.4	13.9	0.82	0.9
		122	22	5.2	100	11	81	8.5	32	36.5	M10	**SBPF207**	SB207	**SAPF207**	SA207						
	1 7/16											**SBPF207-23**	SB207-23	**SAPF207-23**	SA207-23						

Note 1) H_2 is the minimum size of the mounting hole.

Remark For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

FYH

SBPFL
Cylindrical bore
(with set screw locking)
SAPFL
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 35 mm

SBPFL

SAPFL

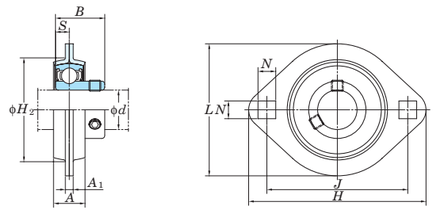

SBPFL



SAPFL

Variations of tolerance of distance between centers of bolt holes (Δ_{J_s})

Unit: mm

Housing No.	Δ_{J_s}
PFL203~PFL207	±0.4

Variations of tolerance of bolt hole diameter (Δ_{N_s})

Unit: mm

Housing No.	Δ_{N_s}
PFL203~PFL207	±0.25

Shaft Dia mm	Shaft Dia inch	Dimensions inch / mm H	L	A	A_1	J	N	H_2	S	SBPFL B	SAPFL B_1	Bolt Size inch / mm	Unit No.	Bearing No.	Unit No.	Bearing No.	Housing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg SBPFL	SAPFL
12	1/2	3 3/16	2 5/16	9/16	5/32	2 1/2	9/32	1 15/16	0.236	0.866	1.122	1/4	**SBPFL201**	SB201	**SAPFL201**	SA201	PFL203	9.55	4.80	13.2	0.19	0.22
15		81	59	14	4	63.5	7.1	49	6	22	28.5	M6	**SBPFL201-8**	SB201-8	**SAPFL201-8**	SA201-8						
	5/8												**SBPFL202**	SB202	**SAPFL202**	SA202						
													SBPFL202-10	SB202-10	**SAPFL202-10**	SA202-10						
17													**SBPFL203**	SB203	**SAPFL203**	SA203						
20	3/4	3 17/32	2 5/8	5/8	5/32	2 13/16	23/64	25/32	0.276	0.984	1.161	5/16	**SBPFL204-12**	SB204-12	**SAPFL204-12**	SA204-12	PFL204	12.8	6.65	13.2	0.24	0.24
		90	67	16	4	71.5	9	55	7	25	29.5	M8	**SBPFL204**	SB204	**SAPFL204**	SA204						
25	7/8	3 3/4	2 25/32	23/32	5/32	2 63/64	23/64	2 3/8	0.295	1.063	1.201	5/16	**SBPFL205-14**	SB205-14	**SAPFL205-14**	SA205-14	PFL205	14.0	7.85	13.9	0.28	0.32
	15/16	95	71	18	4	76	9	60	7.5	27	30.5	M8	**SBPFL205-15**	SB205-15	**SAPFL205-15**	SA205-15						
													SBPFL205	SB205	**SAPFL205**	SA205						
	1												**SBPFL205-16**	SB205-16	**SAPFL205-16**	SA205-16						
30	1 1/8	4 7/16	3 5/16	3/4	13/64	3 9/16	7/16	2 25/32	0.315	1.181	1.335	3/8	**SBPFL206-18**	SB206-18	**SAPFL206-18**	SA206-18	PFL206	19.5	11.3	13.9	0.38	0.41
		113	84	19	5.2	90.5	11	71	8	30	33.9	M10	**SBPFL206**	SB206	**SAPFL206**	SA206						
	13/16												**SBPFL206-19**	SB206-19	**SAPFL206-19**	SA206-19						
	1 1/4												**SBPFL206-20**	SB206-20	**SAPFL206-20**	SA206-20						
35	1 1/4	4 13/16	3 11/16	7/8	13/64	3 15/16	7/16	3 3/16	0.335	1.260	1.437	3/8	**SBPFL207-20**	SB207-20	**SAPFL207-20**	SA207-20	PFL207	25.7	15.4	13.9	0.66	0.74
	15/16	122	94	22	5.2	100	11	81	8.5	32	36.5	M10			**SAPFL207-21**	SA207-21						
	1 3/8												**SBPFL207-22**	SB207-22	**SAPFL207-22**	SA207-22						
													SBPFL207	SB207	**SAPFL207**	SA207						
	1 7/16												**SBPFL207-23**	SB207-23	**SAPFL207-23**	SA207-23						

Note 1) H_2 is the minimum size of the mounting hole.

Remark For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCT
Cylindrical bore (with set screws)
d 12 ~ (45) mm

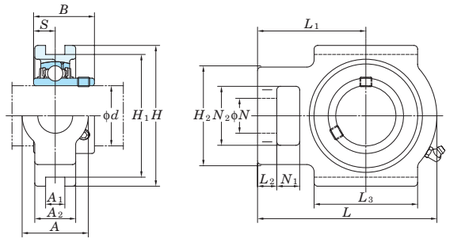

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T204~T210	TX05~TX10	T305~T310	+0.2 / 0	0 / −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 / 0	0 / −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimensions of L_c of T204JE3 and T205JE3 (housing with cast iron cover) are shown below.

T204JE3 L_c = 97 mm
T205JE3 L_c = 102 mm

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_s	inch	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_c	inch	Mass kg
12																	UCT201	T204	UC201	0.81				UCT201C	UCT201CD	44	1 23/32	0.81	–	–	–	–	–
	1/2																UCT201-8		UC201-8	0.81				–	–	–	–	–	–	–	–	–	–
15		1 1/4	15/32	13/16	3 1/2	2 63/64	2	3 11/16	2 13/32	13/32	2	3/4	5/8	1 1/4	1.220	0.500	UCT202		UC202	0.79				UCT202C	UCT202CD	44	1 23/32	0.79	–	–	–	–	–
	5/8	32	12	21	89	76	51	94	61	10	51	19	16	32	31	12.7	UCT202-10		UC202-10	0.79	12.8	6.65	13.2	–	–	–	–	–	–	–	–	–	–
17																	UCT203		UC203	0.78				UCT203C	UCT203CD	44	1 23/32	0.78	–	–	–	–	–
	3/4																UCT204-12		UC204-12	0.78				–	–	–	–	–	–	–	–	–	–
20																	UCT204		UC204	0.76				UCT204C	UCT204CD	44	1 23/32	0.76	UCT204FC	UCT204FCD	62	2 7/16	1.1
	7/8																UCT205-14	T205	UC205-14	0.84				–	–	–	–	–	–	–	–	–	–
	15/16	1 1/4	15/32	15/16	3 1/2	2 63/64	2	3 13/16	2 7/16	13/32	2	3/4	5/8	1 1/4	1.343	0.563	UCT205-15		UC205-15	0.84	14.0	7.85	13.9	–	–	–	–	–	–	–	–	–	–
		32	12	24	89	76	51	97	62	10	51	19	16	32	34.1	14.3	UCT205		UC205	0.84				UCT205C	UCT205CD	48	1 7/8	0.84	UCT205FC	UCT205FCD	66	2 19/32	1.2
25	1																UCT205-16		UC205-16	0.84				–	–	–	–	–	–	–	–	–	–
		1 15/32	15/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1.500	0.626	UCTX05	TX05	UCX05	1.4	19.5	11.3	13.9	UCTX05C	UCTX05CD	52	2 1/16	1.4	–	–	–	–	–
	1	37	12	28	102	89	56	113	70	10	57	22	16	37	38.1	15.9	UCTX05-16		UCX05-16	1.4				–	–	–	–	–	–	–	–	–	–
		1 13/32	15/32	1 1/32	3 1/2	3 5/32	2 7/16	4 13/16	3	15/32	2 9/16	1 1/32	5/8	1 13/32	1.496	0.591	UCT305	T305	UC305	1.4	21.2	10.9	12.6	–	–	–	–	–	UCT305C	UCT305CD	76	3	2.0
	1	36	12	26	89	80	62	122	76	12	65	26	16	36	38	15	UCT305-16		UC305-16	1.4				–	–	–	–	–	–	–	–	–	–
30	1 1/8																UCT206-18	T206	UC206-18	1.3				–	–	–	–	–	–	–	–	–	–
		1 15/32	15/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1.500	0.626	UCT206		UC206	1.3	19.5	11.3	13.9	UCT206C	UCT206CD	52	2 1/16	1.3	UCT206FC	UCT206FCD	70	2 3/4	1.8
	1 3/16	37	12	28	102	89	56	113	70	10	57	22	16	37	38.1	15.9	UCT206-19		UC206-19	1.3				–	–	–	–	–	–	–	–	–	–
	1 1/4																UCT206-20		UC206-20	1.3				–	–	–	–	–	–	–	–	–	–
		1 15/32	15/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1.689	0.689	UCTX06	TX06	UCX06	1.7	25.7	15.4	13.9	UCTX06C	UCTX06CD	59	2 5/16	1.7	–	–	–	–	–
	1 3/16	37	12	30	102	89	64	129	78	13	64	22	16	37	42.9	17.5	UCTX06-19		UCX06-19	1.7				–	–	–	–	–	–	–	–	–	–
	1 1/4																UCTX06-20		UCX06-20	1.7				–	–	–	–	–	–	–	–	–	–
	–	1 5/8	5/8	1 3/32	3 15/16	3 35/64	2 3/4	5 13/32	3 11/32	9/16	2 29/32	1 3/32	23/32	1 5/8	1.693	0.669	UCT306	T306	UC306	1.8	26.7	15.0	13.3	–	–	–	–	–	UCT306C	UCT306CD	82	3 7/32	2.4
35	1 1/4																UCT207-20	T207	UC207-20	1.6				–	–	–	–	–	–	–	–	–	–
	1 5/16																UCT207-21		UC207-21	1.6				–	–	–	–	–	–	–	–	–	–
		1 15/32	15/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1.689	0.689	UCT207-22		UC207-22	1.6	25.7	15.4	13.9	–	–	–	–	–	–	–	–	–	–
	1 3/8	37	12	30	102	89	64	129	78	13	64	22	16	37	42.9	17.5	UCT207		UC207	1.6				UCT207C	UCT207CD	59	2 5/16	1.6	UCT207FC	UCT207FCD	78	3 1/16	2.3
	1 7/16																UCT207-23		UC207-23	1.6				–	–	–	–	–	–	–	–	–	–
	1 3/8																UCTX07-22	TX07	UCX07-22	2.7				–	–	–	–	–	–	–	–	–	–
		1 15/16	5/8	1 13/32	4 1/2	4 1/64	3 9/32	5 21/32	3 15/32	19/32	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCTX07		UCX07	2.7	29.1	17.8	14.0	UCTX07C	UCTX07CD	68	2 11/16	2.7	–	–	–	–	–
	1 7/16	49	16	36	114	102	83	144	88	15	83	29	19	49	49.2	19	UCTX07-23		UCX07-23	2.7				–	–	–	–	–	–	–	–	–	–
	–	1 25/32	5/8	1 1/4	4 3/8	3 15/16	2 15/16	5 29/32	3 11/16	19/32	3 5/32	1 3/16	25/32	1 25/32	1.890	0.748	UCT307	T307	UC307	2.3	33.4	19.3	13.2	–	–	–	–	–	UCT307C	UCT307CD	88	3 15/32	3.1
40	1 1/2																UCT208-24	T208	UC208-24	2.5				–	–	–	–	–	–	–	–	–	–
	1 9/16	1 15/16	5/8	1 5/16	4 1/2	4 1/64	3 9/32	5 21/32	3 15/32	5/8	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCT208-25		UC208-25	2.5	29.1	17.8	14.0	–	–	–	–	–	–	–	–	–	–
		49	16	33	114	102	83	144	88	16	83	29	19	49	49.2	19	UCT208		UC208	2.5				UCT208C	UCT208CD	68	2 11/16	2.5	UCT208FC	UCT208FCD	86	3 3/8	3.3
	1 1/2	1 15/16	5/8	1 13/32	4 19/32	4 1/64	3 9/32	5 21/32	3 7/16	19/32	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCTX08-24	TX08	UCX08-24	2.6	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
		49	16	36	117	102	83	144	87	15	83	29	19	49	49.2	19	UCTX08		UCX08	2.6				UCTX08C	UCTX08CD	68	2 11/16	2.6	–	–	–	–	–
	1 1/2	1 31/32	45/64	1 11/32	4 7/8	4 13/32	3 9/32	6 3/8	3 15/16	21/32	3 1/2	1 1/4	7/8	1 31/32	2.047	0.748	UCT308-24	T308	UC308-24	3.0	40.7	24.0	13.2	–	–	–	–	–	–	–	–	–	–
		50	18	34	124	112	83	162	100	17	89	32	22	50	52	19	UCT308		UC308	3.0				–	–	–	–	–	UCT308C	UCT308CD	96	3 25/32	4.0
45	1 5/8																UCT209-26	T209	UC209-26	2.4				–	–	–	–	–	–	–	–	–	–
	1 11/16	1 15/16	5/8	1 3/8	4 19/32	4 1/64	3 9/32	5 21/32	3 7/16	5/8	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCT209-27		UC209-27	2.4	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
	1 3/4	49	16	35	117	102	83	144	87	16	83	29	19	49	49.2	19	UCT209-28		UC209-28	2.4				–	–	–	–	–	–	–	–	–	–
																	UCT209		UC209	2.4				UCT209C	UCT209CD	68	2 11/16	2.4	UCT209FC	UCT209FCD	88	3 15/32	3.2
	1 3/4	1 15/16	5/8	1 1/2	4 19/32	4 1/64	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	2.031	0.748	UCTX09-28	TX09	UCX09-28	2.9	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
		49	16	38	117	102	83	149	90	16	86	29	19	49	51.6	19	UCTX09		UCX09	2.9				UCTX09C	UCTX09CD	73	2 7/8	2.9	–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210, X05~X09, 305~308
B-R1/8 ..... 211~217, X10~X17, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCT206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCT
Cylindrical bore (with set screws)
d (45) ~ (75) mm

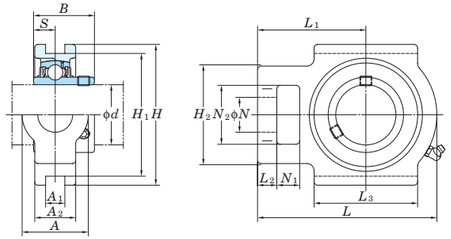

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T204~T210	TX05~TX10	T305~T310	+0.2 / 0	0 / −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 / 0	0 / −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimensions of L_c of T204JE3 and T205JE3 (housing with cast iron cover) are shown below.

T204JE3 L_c = 97 mm
T205JE3 L_c = 102 mm

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S	Standard Unit No.	Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_s		Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm / inch A_c		Mass kg
45	1 3/4	2 5/32	45/64	1 1/2	5 7/16	4 59/64	3 17/32	7	4 11/32	23/32	3 13/16	1 11/32	15/16	2 5/32	2.244	0.866	UCT309-28	T309	UC309-28	4.1	48.9	29.5	13.3	–	–	–	–	–	–	–	–	–	–
		55	18	38	138	125	90	178	110	18	97	34	24	55	57	22	UCT309		UC309	4.1				–	–	–	–	–	UCT309C	UCT309CD	102	4 1/32	5.4
50	1 7/8																UCT210-30	T210	UC210-30	2.6	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
	1 15/16	1 15/16	5/8	1 15/32	4 19/32	4 1/64	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	2.031	0.748	UCT210-31		UC210-31	2.6				–	–	–	–	–	–	–	–	–	–
		49	16	37	117	102	83	149	90	16	86	29	19	49	51.6	19	UCT210		UC210	2.6				UCT210C	UCT210CD	73	2 7/8	2.6	UCT210FC	UCT210FCD	97	3 13/16	3.6
	2																UCT210-32		UC210-32	2.6				–	–	–	–	–	–	–	–	–	–
	1 15/16	2 17/32	55/64	1 21/32	5 3/4	5 1/8	4 1/32	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2.189	0.874	UCTX10-31	TX10	UCX10-31	4.4	43.4	29.4	14.4	–	–	–	–	–	–	–	–	–	–
		64	22	42	146	130	102	171	106	19	95	35	25	64	55.6	22.2	UCTX10		UCX10	4.4				UCTX10C	UCTX10CD	75	2 15/16	4.4	–	–	–	–	–
	2																UCTX10-32		UCX10-32	4.4				–	–	–	–	–	–	–	–	–	–
	–	2 13/32	25/32	1 9/16	5 15/16	5 33/64	3 27/32	7 17/32	4 19/32	25/32	4 3/16	1 15/32	1 1/16	2 13/32	2.402	0.866	UCT310	T310	UC310	4.9	62.0	38.3	13.2	–	–	–	–	–	UCT310C	UCT310CD	110	4 11/32	6.5
		61	20	40	151	140	98	191	117	20	106	37	27	61	61	22																	
55	2																UCT211-32	T211	UC211-32	4.0	43.4	29.4	14.4	–	–	–	–	–	–	–	–	–	–
	2 1/8	2 17/32	55/64	1 1/2	5 3/4	5 1/8	4 1/32	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2.189	0.874	UCT211-34		UC211-34	4.0				–	–	–	–	–	–	–	–	–	–
		64	22	38	146	130	102	171	106	19	95	35	25	64	55.6	22.2	UCT211		UC211	4.0				UCT211C	UCT211CD	75	2 15/16	4.0	UCT211FC	UCT211FCD	99	3 29/32	5.2
	2 3/16																UCT211-35		UC211-35	4.0				–	–	–	–	–	–	–	–	–	–
	2 3/16	2 17/32	55/64	1 23/32	5 3/4	5 1/8	4 1/32	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	2.563	1.000	UCTX11	TX11	UCX11	5.3	52.4	36.2	14.4	UCTX11C	UCTX11CD	88	3 15/32	5.3	–	–	–	–	–
		64	22	44	146	130	102	194	119	19	102	35	32	64	65.1	25.4	UCTX11-35		UCX11-35	5.3				–	–	–	–	–	–	–	–	–	–
	2 1/4																UCTX11-36		UCX11-36	5.3				–	–	–	–	–	–	–	–	–	–
	2	2 19/32	55/64	1 23/32	6 13/32	5 29/32	4 1/8	8 5/32	5	13/16	4 17/32	1 17/32	1 5/32	2 19/32	2.598	0.984	UCT311-32	T311	UC311-32	6.1	71.6	45.0	13.2	–	–	–	–	–	–	–	–	–	–
		66	22	44	163	150	105	207	127	21	115	39	29	66	66	25	UCT311		UC311	6.1				–	–	–	–	–	UCT311C	UCT311CD	114	4 1/2	7.9
	2 3/16																UCT311-35		UC311-35	6.1				–	–	–	–	–	–	–	–	–	–
60	2 1/4																UCT212-36	T212	UC212-36	4.9	52.4	36.2	14.4	–	–	–	–	–	–	–	–	–	–
		2 17/32	55/64	1 21/32	5 3/4	5 1/8	4 1/32	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	2.563	1.000	UCT212		UC212	4.9				UCT212C	UCT212CD	88	3 15/32	4.9	UCT212FC	UCT212FCD	114	4 1/2	6.4
	2 3/8	64	22	42	146	130	102	194	119	19	102	35	32	64	65.1	25.4	UCT212-38		UC212-38	4.9				–	–	–	–	–	–	–	–	–	–
	2 7/16																UCT212-39		UC212-39	4.9				–	–	–	–	–	–	–	–	–	–
		2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.563	1.000	UCTX12	TX12	UCX12	7.4	57.2	40.1	14.4	UCTX12C	UCTX12CD	88	3 15/32	7.4	–	–	–	–	–
	2 7/16	70	26	48	167	151	111	224	137	21	121	41	32	70	65.1	25.4	UCTX12-39		UCX12-39	7.4				–	–	–	–	–	–	–	–	–	–
		2 25/32	55/64	1 13/16	7	6 19/64	4 7/16	8 21/32	5 5/16	29/32	4 27/32	1 5/8	1 7/32	2 25/32	2.795	1.024	UCT312	T312	UC312	7.6	81.9	52.2	13.2	–	–	–	–	–	UCT312C	UCT312CD	124	4 7/8	9.9
	2 7/16	71	22	46	178	160	113	220	135	23	123	41	31	71	71	26	UCT312-39		UC312-39	7.6				–	–	–	–	–	–	–	–	–	–
65	2 1/2	2 3/4	1 1/32	1 23/32	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.563	1.000	UCT213-40	T213	UC213-40	6.9	57.2	40.1	14.4	–	–	–	–	–	–	–	–	–	–
		70	26	44	167	151	111	224	137	21	121	41	32	70	65.1	25.4	UCT213		UC213	6.9				UCT213C	UCT213CD	88	3 15/32	6.9	UCT213FC	UCT213FCD	114	4 1/2	8.6
	2 1/2	2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.937	1.189	UCTX13-40	TX13	UCX13-40	7.6	62.2	44.1	14.5	–	–	–	–	–	–	–	–	–	–
		70	26	48	167	151	111	224	137	21	121	41	32	70	74.6	30.2	UCTX13		UCX13	7.6				UCTX13C	UCTX13CD	98	3 27/32	7.6	–	–	–	–	–
	2 1/2	3 5/32	1 1/32	1 31/32	7 15/32	6 11/16	4 9/16	9 3/8	5 3/4	31/32	5 9/32	1 11/16	1 1/4	2 3/4	2.953	1.181	UCT313-40	T313	UC313-40	9.3	92.7	59.9	13.2	–	–	–	–	–	–	–	–	–	–
		80	26	50	190	170	116	238	146	25	134	43	32	70	75	30	UCT313		UC313	9.3				–	–	–	–	–	UCT313C	UCT313CD	122	4 13/16	11.4
70	2 3/4	2 3/4	1 1/32	1 13/16	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.937	1.189	UCT214-44	T214	UC214-44	7.0	62.2	44.1	14.5	–	–	–	–	–	–	–	–	–	–
		70	26	46	167	151	111	224	137	21	121	41	32	70	74.6	30.2	UCT214		UC214	7.0				UCT214C	UCT214CD	98	3 27/32	7.0	UCT214FC	UCT214FCD	124	4 7/8	8.9
	2 3/4	2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	9 1/8	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.063	1.331	UCTX14-44	TX14	UCX14-44	7.9	67.4	48.3	14.5	–	–	–	–	–	–	–	–	–	–
		70	26	48	167	151	111	232	140	21	121	41	32	70	77.8	33.3	UCTX14		UCX14	7.9				UCTX14C	UCTX14CD	98	3 27/32	7.9	–	–	–	–	–
	2 3/4	3 17/32	1 1/32	2 1/16	7 15/16	7 3/32	5 1/8	9 29/32	6 3/32	31/32	5 1/2	1 13/16	1 13/32	3 11/32	3.071	1.299	UCT314-44	T314	UC314-44	11.1	104	68.2	13.2	–	–	–	–	–	–	–	–	–	–
		90	26	52	202	180	130	252	155	25	140	46	36	85	78	33	UCT314		UC314	11.1				–	–	–	–	–	UCT314C	UCT314CD	124	4 7/8	13.4
75	2 15/16																UCT215-47	T215	UC215-47	7.3	67.4	48.3	14.5	–	–	–	–	–	–	–	–	–	–
		2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	9 1/8	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.063	1.331	UCT215		UC215	7.3				UCT215C	UCT215CD	98	3 27/32	7.3	UCT215FC	UCT215FCD	124	4 7/8	9.2
	3	70	26	48	167	151	111	232	140	21	121	41	32	70	77.8	33.3	UCT215-48		UC215-48	7.3				–	–	–	–	–	–	–	–	–	–
	2 15/16																UCTX15-47	TX15	UCX15-47	8.7	72.7	53.0	14.6	–	–	–	–	–	–	–	–	–	–
		2 3/4	1 7/64	1 7/8	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.252	1.311	UCTX15		UCX15	8.7				UCTX15C	UCTX15CD	108	4 1/4	8.7	–	–	–	–	–
	3	70	28	48	184	165	111	235	140	21	121	41	32	70	82.6	33.3	UCTX15-48		UCX15-48	8.7				–	–	–	–	–	–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210, X05~X09, 305~308
B-R1/8 ..... 211~217, X10~X17, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCT206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCT
Cylindrical bore (with set screws)
d (75) ~ 140 mm

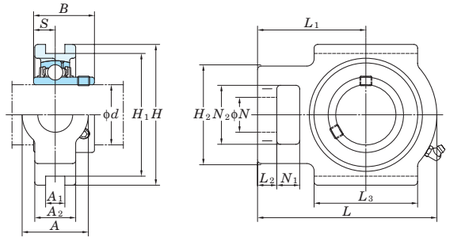

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T204~T210	TX05~TX10	T305~T310	+0.2 0	0 −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 0	0 −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimensions of L_c of T204JE3 and T205JE3 (housing with cast iron cover) are shown below.

T204JE3 L_c = 97 mm
T205JE3 L_c = 102 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm															Standard Unit No.	Standard Housing No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	Basic Load Ratings kN C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	With Pressed Steel Cover Unit No. One Side Closed Type	With Pressed Steel Cover Dimension mm	With Pressed Steel Cover Dimension inch A_s	With Pressed Steel Cover Mass kg	With Cast Iron Cover Unit No. Open Type	With Cast Iron Cover Unit No. One Side Closed Type	With Cast Iron Cover Dimension mm	With Cast Iron Cover Dimension inch A_c	With Cast Iron Cover Mass kg
d		A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S																		
75	2 15/16	3 17/32	1 1/32	2 5/32	8 1/2	7 9/16	5 3/16	10 5/16	6 5/16	31/32	5 29/32	1 13/16	1 13/32	3 11/32	3.228	1.260	UCT315-47	T315	UC315-47	13.0				–	–	–	–	–	–	–	–	–	–	–
		90	26	55	216	192	132	262	160	25	150	46	36	85	82	32	UCT315		UC315	13.0	113	77.2	13.2	–	–	–	–	–	UCT315C	UCT315CD	134	5 9/32	15.5
	3																UCT315-48		UC315-48	13.0				–	–	–	–	–	–	–	–	–	–
80	3 1/8	2 3/4	1 1/32	2	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.252	1.311	UCT216-50	T216	UC216-50	8.2	72.7	53.0	14.6	–	–	–	–	–	–	–	–	–	–
		70	26	51	184	165	111	235	140	21	121	41	32	70	82.6	33.3	UCT216		UC216	8.2				UCT216C	UCT216CD	108	4 1/4	8.2	UCT216FC	UCT216FCD	138	5 7/16	10.6
	–	2 7/8	1 7/64	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3.374	1.343	UCTX16	TX16	UCX16	11.7	84.0	61.9	14.5	UCTX16C	UCTX16CD	112	4 13/32	11.7	–	–	–	–	–
		73	28	54	198	173	124	260	162	28	157	48	38	73	85.7	34.1																	
	–	4 1/32	1 3/16	2 3/8	9 1/16	8 1/32	5 29/32	11 3/32	6 27/32	1 3/32	6 5/16	2 3/32	1 21/32	3 27/32	3.386	1.339	UCT316	T316	UC316	16.2	123	86.7	13.3	–	–	–	–	–	UCT316C	UCT316CD	138	5 7/16	19.1
		102	30	60	230	204	150	282	174	28	160	53	42	98	86	34																	
85	3 1/4	2 7/8	1 3/16	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 5/32	6 3/16	1 7/8	1 1/2	2 7/8	3.374	1.343	UCT217-52	T217	UC217-52	11.0	84.0	61.9	14.5	–	–	–	–	–	–	–	–	–	–
		73	30	54	198	173	124	260	162	29	157	48	38	73	85.7	34.1	UCT217		UC217	11.0				UCT217C	UCT217CD	112	4 13/32	11.0	UCT217FC	UCT217FCD	142	5 19/32	13.7
	3 7/16	2 7/8	1 7/64	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3.780	1.563	UCTX17	TX17	UCX17	11.7	96.1	71.5	14.5	UCTX17C	UCTX17CD	122	4 13/16	11.7	–	–	–	–	–
		73	28	54	198	173	124	260	162	28	157	48	38	73	96	39.7	UCTX17-55		UCX17-55	11.7				–	–	–	–	–	–	–	–	–	–
	–	4 1/32	1 17/64	2 17/32	9 7/16	8 27/64	5 31/32	11 23/32	7 7/32	1 3/16	6 11/16	2 3/32	1 21/32	3 27/32	3.780	1.575	UCT317	T317	UC317	19.0	133	96.8	13.3	–	–	–	–	–	UCT317C	UCT317CD	146	5 3/4	22.3
		102	32	64	240	214	152	298	183	30	170	53	42	98	96	40																	
90	3 1/2	4 11/32	1 17/64	2 19/32	10 1/32	8 31/32	6 5/16	12 9/32	7 9/16	1 3/16	6 7/8	2 1/4	1 13/16	4 3/16	3.780	1.575	UCT318-56	T318	UC318-56	21.6	143	107	13.3	–	–	–	–	–	–	–	–	–	–
		110	32	66	255	228	160	312	192	30	175	57	46	106	96	40	UCT318		UC318	21.6				–	–	–	–	–	UCT318C	UCT318CD	150	5 29/32	25.4
95	–	4 11/32	1 3/8	2 27/32	10 5/8	9 29/64	6 1/2	12 11/16	7 3/4	1 7/32	7 3/32	2 1/4	1 13/16	4 3/16	4.055	1.614	UCT319	T319	UC319	24.9	153	119	13.3	–	–	–	–	–	UCT319C	UCT319CD	162	6 3/8	29.2
		110	35	72	270	240	165	322	197	31	180	57	46	106	103	41																	
100	3 15/16	4 23/32	1 3/8	2 15/16	11 13/32	10 15/64	6 7/8	13 19/32	8 9/32	1 1/4	7 7/8	2 5/16	1 7/8	4 17/32	4.252	1.654	UCT320	T320	UC320	30.7	173	141	13.2	–	–	–	–	–	UCT320C	UCT320CD	174	6 27/32	36.3
	4	120	35	75	290	260	175	345	210	32	200	59	48	115	108	42	UCT320-63		UC320-63	30.7				–	–	–	–	–	–	–	–	–	–
																	UCT320-64		UC320-64	30.7				–	–	–	–	–	–	–	–	–	–
105	–	4 23/32	1 3/8	2 15/16	11 13/32	10 15/64	6 7/8	13 19/32	8 9/32	1 1/4	7 7/8	2 5/16	1 7/8	4 17/32	4.409	1.732	UCT321	T321	UC321	36.7	184	153	13.2	–	–	–	–	–	UCT321C	UCT321CD	178	7	42.7
		120	35	75	290	260	175	345	210	32	200	59	48	115	112	44																	
110	–	5 1/8	1 1/2	3 5/32	12 19/32	11 7/32	7 9/32	15 5/32	9 1/4	1 1/2	8 15/32	2 9/16	2 1/16	4 29/32	4.606	1.811	UCT322	T322	UC322	39.7	205	180	13.2	–	–	–	–	–	UCT322C	UCT322CD	188	7 13/32	46.5
		130	38	80	320	285	185	385	235	38	215	65	52	125	117	46																	
120	–	5 1/2	1 49/64	3 17/32	13 31/32	12 9/32	8 9/32	17	10 1/2	1 21/32	9 1/16	2 3/4	2 3/8	5 1/2	4.961	2.008	UCT324	T324	UC324	54.4	207	185	13.5	–	–	–	–	–	UCT324C	UCT324CD	196	7 23/32	63.9
		140	45	90	355	320	210	432	267	42	230	70	60	140	126	51																	
130	–	5 29/32	1 31/32	3 15/16	15 5/32	13 25/32	8 21/32	18 5/16	11 7/32	1 25/32	9 7/16	2 15/16	2 9/16	5 29/32	5.315	2.126	UCT326	T326	UC326	69.3	229	214	13.6	–	–	–	–	–	UCT326C	UCT326CD	214	8 7/16	81.4
		150	50	100	385	350	220	465	285	45	240	75	65	150	135	54																	
140	–	6 3/32	1 31/32	3 15/16	16 11/32	14 61/64	9 1/16	20 9/32	12 13/32	1 31/32	10 1/32	3 5/32	2 3/4	6 5/16	5.709	2.323	UCT328	T328	UC328	85.1	253	246	13.6	–	–	–	–	–	UCT328C	UCT328CD	222	8 3/4	101
		155	50	100	415	380	230	515	315	50	255	80	70	160	145	59																	

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210, X05~X09, 305~308
B-R1/8 ..... 211~217, X10~X17, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCT206JL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCT-E
Cylindrical bore (with set screws)
d 12 ~ 50 mm





Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.		Δ_{A1s}	Δ_{H1s}	X
T204E~T210E	TX05E~TX10E	+0.2 0	0 −0.5	0.5
T211E~T217E	TX11E~TX17E	+0.3 0	0 −0.8	0.6

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm															Unit No.		Housing No.	Bearing No.	Basic Load Ratings kN		Factor	Mass
d		A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S					C_r	C_{0r}	f_0	kg
12																	UCT201E		T204E	UC201	12.8	6.65	13.2	0.81
	1/2																UCT201E-8			UC201-8				
15		1 1/4	17/32	13/16	3 1/2	3	2	3 11/16	2 13/32	13/32	2	3/4	5/8	1 1/4	1.220	0.500	UCT202E			UC202				0.79
	5/8	32	13.5	21	89	76.2	51	94	61	10	51	19	16	32	31	12.7	UCT202E-10			UC202-10				
17																	UCT203E			UC203				0.78
	3/4																UCT204E-12			UC204-12				
20																	UCT204E			UC204				0.76
25	7/8																UCT205E-14		T205E	UC205-14	14.0	7.85	13.9	0.84
	15/16	1 1/4	17/32	15/16	3 1/2	3	2	3 13/16	2 7/16	13/32	2	3/4	5/8	1 1/4	1.343	0.563	UCT205E-15			UC205-15				
		32	13.5	24	89	76.2	51	97	62	10	51	19	16	32	34.1	14.3	UCT205E			UC205				
	1																UCT205E-16			UC205-16				
	1	1 15/32	17/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1.500	0.626	UCTX05E		TX05E	UCX05	19.5	11.3	13.9	1.4
		37	13.5	28	102	88.9	56	113	70	10	57	22	16	37	38.1	15.9	UCTX05E-16			UCX05-16				
30	1 1/8																UCT206E-18		T206E	UC206-18	19.5	11.3	13.9	1.3
		1 15/32	17/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1.500	0.626	UCT206E			UC206				
	1 3/16	37	13.5	28	102	88.9	56	113	70	10	57	22	16	37	38.1	15.9	UCT206E-19			UC206-19				
	1 1/4																UCT206E-20			UC206-20				
		1 15/32	17/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1.689	0.689	UCTX06E		TX06E	UCX06	25.7	15.4	13.9	1.7
	1 3/16	37	13.5	30	102	88.9	64	129	78	13	64	22	16	37	42.9	17.5	UCTX06E-19			UCX06-19				
	1 1/4																UCTX06E-20			UCX06-20				
35	1 1/4																UCT207E-20		T207E	UC207-20	25.7	15.4	13.9	1.6
	1 5/16																UCT207E-21			UC207-21				
	1 3/8	1 15/32	17/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1.689	0.689	UCT207E-22			UC207-22				
		37	13.5	30	102	88.9	64	129	78	13	64	22	16	37	42.9	17.5	UCT207E			UC207				
	1 7/16																UCT207E-23			UC207-23				
	1 3/8																UCTX07E-22		TX07E	UCX07-22	29.1	17.8	14.0	2.7
		1 15/16	11/16	1 13/32	4 1/2	4	3 9/32	5 21/32	3 15/32	19/32	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCTX07E			UCX07				
	1 7/16	49	17.5	36	114	101.6	83	144	88	15	83	29	19	49	49.2	19	UCTX07E-23			UCX07-23				
40	1 1/2																UCT208E-24		T208E	UC208-24	29.1	17.8	14.0	2.5
	1 9/16	1 15/16	11/16	1 5/16	4 1/2	4	3 9/32	5 21/32	3 15/32	19/32	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCT208E-25			UC208-25				
		49	17.5	33	114	101.6	83	144	88	16	83	29	19	49	49.2	19	UCT208E			UC208				
	1 1/2	1 15/16	11/16	1 13/32	4 19/32	4	3 9/32	5 21/32	3 7/16	19/32	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCTX08E-24		TX08E	UCX08-24	34.1	21.3	14.0	2.6
		49	17.5	36	117	101.6	83	144	87	15	83	29	19	49	49.2	19	UCTX08E			UCX08				
45	1 5/8																UCT209E-26		T209E	UC209-26	34.1	21.3	14.0	2.4
	1 11/16	1 15/16	11/16	1 3/8	4 19/32	4	3 9/32	5 21/32	3 7/16	5/8	3 9/32	1 5/32	3/4	1 15/16	1.937	0.748	UCT209E-27			UC209-27				
	1 3/4	49	17.5	35	117	101.6	83	144	87	16	83	29	19	49	49.2	19	UCT209E-28			UC209-28				
																	UCT209E			UC209				
	1 3/4	1 15/16	11/16	1 1/2	4 19/32	4	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	2.031	0.748	UCTX09E-28		TX09E	UCX09-28	35.1	23.3	14.4	2.9
		49	17.5	38	117	101.6	83	149	90	16	86	29	19	49	51.6	19	UCTX09E			UCX09				
50	1 7/8																UCT210E-30		T210E	UC210-30	35.1	23.3	14.4	2.6
	1 15/16	1 15/16	11/16	1 15/32	4 19/32	4	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	2.031	0.748	UCT210E-31			UC210-31				
		49	17.5	37	117	101.6	83	149	90	16	86	29	19	49	51.6	19	UCT210E			UC210				
	2																UCT210E-32			UC210-32				
	1 15/16	2 17/32	1 1/16	1 21/32	5 3/4	5 1/8	4 1/64	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2.189	0.874	UCTX10E-31		TX10E	UCX10-31	43.4	29.4	14.4	4.4
		64	27	42	146	130.17	102	171	106	19	95	35	25	64	55.6	22.2	UCTX10E			UCX10				
	2																UCTX10E-32			UCX10-32				

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210, X05~X09, 305~308
B-R1/8 ..... 211~217, X10~X17, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCT206EL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

UCT-E
Cylindrical bore (with set screws)
d 55 ~ 85 mm





Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.		Δ_{A1s}	Δ_{H1s}	X
T204E~T210E	TX05E~TX10E	+0.2 0	0 −0.5	0.5
T211E~T217E	TX11E~TX17E	+0.3 0	0 −0.8	0.6

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
55	2	2 17/32	1 1/16	1 1/2	5 3/4	5 1/8	4 1/64	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2.189	0.874	UCT211E-32	T211E	UC211-32	43.4	29.4	14.4	4.0
	2 1/8	64	27	38	146	130.17	102	171	106	19	95	35	25	64	55.6	22.2	UCT211E-34		UC211-34				
																	UCT211E		UC211				
	2 3/16																UCT211E-35		UC211-35				
	2 3/16	2 17/32	1 1/16	1 23/32	5 3/4	5 1/8	4 1/64	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	2.563	1.000	UCTX11E	TX11E	UCX11	52.4	36.2	14.4	5.3
		64	27	44	146	130.17	102	194	119	19	102	35	32	64	65.1	25.4	UCTX11E-35		UCX11-35				
	2 1/4																UCTX11E-36		UCX11-36				
60	2 1/4	2 17/32	1 1/16	1 21/32	5 3/4	5 1/8	4 1/64	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	2.563	1.000	UCT212E-36	T212E	UC212-36	52.4	36.2	14.4	4.9
		64	27	42	146	130.17	102	194	119	19	102	35	32	64	65.1	25.4	UCT212E		UC212				
	2 3/8																UCT212E-38		UC212-38				
	2 7/16																UCT212E-39		UC212-39				
	2 7/16	2 3/4	1 1/16	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.563	1.000	UCTX12E	TX12E	UCX12	57.2	40.1	14.4	7.4
		70	27	48	167	150.8	111	224	137	21	121	41	32	70	65.1	25.4	UCTX12E-39		UCX12-39				
65	2 1/2	2 3/4	1 1/16	1 23/32	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.563	1.000	UCT213E-40	T213E	UC213-40	57.2	40.1	14.4	6.9
		70	27	44	167	150.8	111	224	137	21	121	41	32	70	65.1	25.4	UCT213E		UC213				
	2 1/2	2 3/4	1 1/16	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.937	1.189	UCTX13E-40	TX13E	UCX13-40	62.2	44.1	14.5	7.6
		70	27	48	167	150.8	111	224	137	21	121	41	32	70	74.6	30.2	UCTX13E		UCX13				
70	2 3/4	2 3/4	1 1/16	1 13/16	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2.937	1.189	UCT214E-44	T214E	UC214-44	62.2	44.1	14.5	7.0
		70	27	46	167	150.8	111	224	137	21	121	41	32	70	74.6	30.2	UCT214E		UC214				
	2 3/4	2 3/4	1 1/16	1 7/8	6 9/16	5 15/16	4 3/8	9 1/8	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.063	1.331	UCTX14E-44	TX14E	UCX14-44	67.4	48.3	14.5	7.9
		70	27	48	167	150.8	111	232	140	21	121	41	32	70	77.8	33.3	UCTX14E		UCX14				
75	2 15/16	2 3/4	1 1/16	1 7/8	6 9/16	5 15/16	4 3/8	9 1/8	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.063	1.331	UCT215E-47	T215E	UC215-47	67.4	48.3	14.5	7.3
		70	27	48	167	150.8	111	232	140	21	121	41	32	70	77.8	33.3	UCT215E		UC215				
	3																UCT215E-48		UC215-48				
	2 15/16	2 3/4	1 1/16	1 7/8	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.252	1.311	UCTX15E-47	TX15E	UCX15-47	72.7	53.0	14.6	8.7
		70	27	48	184	165	111	235	140	21	121	41	32	70	82.6	33.3	UCTX15E		UCX15				
	3																UCTX15E-48		UCX15-48				
80	3 1/8	2 3/4	1 1/16	2	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.252	1.311	UCT216E-50	T216E	UC216-50	72.7	53.0	14.6	8.2
		70	27	51	184	165	111	235	140	21	121	41	32	70	82.6	33.3	UCT216E		UC216				
	–	3 1/2	1 13/16	2 11/16	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3.374	1.343	UCTX16E	TX16E	UCX16	84.0	61.9	14.5	12.4
		89	46	68	198	173	124	260	162	28	157	48	38	73	85.7	34.1							
85	3 1/4	3 1/2	1 13/16	2 11/16	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 5/32	6 3/16	1 7/8	1 1/2	2 7/8	3.374	1.343	UCT217E-52	T217E	UC217-52	84.0	61.9	14.5	12.1
		89	46	68	198	173	124	260	162	29	157	48	38	73	85.7	34.1	UCT217E		UC217				
	3 7/16	3 1/2	1 13/16	2 11/16	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3.780	1.563	UCTX17E	TX17E	UCX17	96.1	71.5	14.5	13.3
		89	46	68	198	173	124	260	162	28	157	48	38	73	96	39.7	UCTX17E-55		UCX17-55				

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210, X05~X09, 305~308
B-R1/8 ..... 211~217, X10~X17, 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCT206EL3, UC206L3)
4. As for the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
5. Housings of nodular graphite cast iron are also available.

NAT-E
Cylindrical bore
(with eccentric locking collar)
d 12 ~ 75 mm

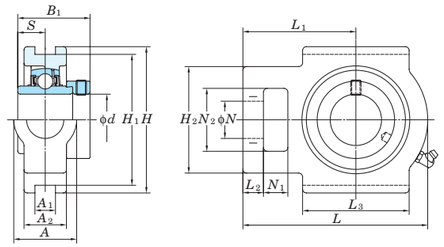

Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.	Δ_{A1s}	Δ_{H1s}	X
T204E~T210E	+0.2 0	0 −0.5	0.5
T211E~T215E	+0.3 0	0 −0.8	0.6

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1	S	Unit No.		Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12																	NAT201E			NA201				0.83
	1/2																NAT201-8E			NA201-8				
15		1 1/4	17/32	13/16	3 1/2	3	2	3 11/16	2 13/32	13/32	2	3/4	5/8	1 1/4	1.720	0.673	NAT202E			NA202				0.81
	5/8	32	13.5	21	89	76.2	51	94	61	10	51	19	16	32	43.7	17.1	NAT202-10E		T204E	NA202-10	12.8	6.65	13.2	
17																	NAT203E			NA203				0.8
	3/4																NAT204-12E			NA204-12				0.84
20																	NAT204E			NA204				
	7/8																NAT205-14E			NA205-14				
25	15/16	1 1/4	17/32	15/16	3 1/2	3	2	3 13/16	2 7/16	13/32	2	3/4	5/8	1 1/4	1.748	0.689	NAT205-15E			NA205-15				
		32	13.5	24	89	76.2	51	97	62	10	51	19	16	32	44.4	17.5	NAT205E		T205E	NA205	14.0	7.85	13.9	0.89
	1																NAT205-16E			NA205-16				
	1 1/8																NAT206-18E			NA206-18				
30		1 15/32	17/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1.906	0.720	NAT206E			NA206				
	1 3/16	37	13.5	28	102	88.9	56	113	70	10	57	22	16	37	48.4	18.3	NAT206-19E		T206E	NA206-19	19.5	11.3	13.9	1.39
	1 1/4																NAT206-20E			NA206-20				
	1 1/4																NAT207-20E			NA207-20				
	1 5/16																NAT207-21E			NA207-21				
35	1 3/8	1 15/32	17/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	2.012	0.740	NAT207-22E			NA207-22				
		37	13.5	30	102	88.9	64	129	78	13	64	22	16	37	51.1	18.8	NAT207E		T207E	NA207	25.7	15.4	13.9	1.73
	1 7/16																NAT207-23E			NA207-23				
	1 1/2																NAT208-24E			NA208-24				
40	1 9/16	1 15/16	11/16	1 5/16	4 1/2	4	3 9/32	5 21/32	3 15/32	5/8	3 9/32	1 15/32	3/4	1 15/16	2.217	0.843	NAT208-25E			NA208-25				
		49	17.5	33	114	101.6	83	144	88	16	83	29	19	49	56.3	21.4	NAT208E		T208E	NA208	29.1	17.8	14.0	2.74
	1 5/8																NAT209-26E			NA209-26				
45	1 11/16	1 15/16	11/16	1 3/8	4 19/32	4	3 9/32	5 21/32	3 7/16	5/8	3 9/32	1 5/32	3/4	1 15/16	2.217	0.843	NAT209-27E			NA209-27				
	1 3/4	49	17.5	35	117	101.6	83	144	87	16	83	29	19	49	56.3	21.4	NAT209-28E		T209E	NA209-28	34.1	21.3	14.0	2.57
																	NAT209E			NA209				
	1 7/8																NAT210-30E			NA210-30				
50	1 15/16	1 15/16	11/16	1 15/32	4 19/32	4	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	2.469	0.969	NAT210-31E			NA210-31				
		49	17.5	37	117	101.6	83	149	90	16	86	29	19	49	62.7	24.6	NAT210E		T210E	NA210	35.1	23.3	14.4	2.81
	2																NAT210-32E			NA210-32				
	2																NAT211-32E			NA211-32				
55	2 1/8	2 17/32	1 1/16	1 1/2	5 3/4	5 1/8	4 1/32	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2.811	1.094	NAT211-34E			NA211-34				
		64	27	38	146	130.17	102	171	106	19	95	35	25	64	71.4	27.8	NAT211E		T211E	NA211	43.4	29.4	14.4	4.28
	2 3/16																NAT211-35E			NA211-35				
	2 1/4																NAT212-36E			NA212-36				
60		2 17/32	1 1/16	1 21/32	5 3/4	5 1/8	4 1/32	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	3.063	1.220	NAT212E			NA212				
	2 3/8	64	27	42	146	130.17	102	194	119	19	102	35	32	64	77.8	31	NAT212-38E		T212E	NA212-38	52.4	36.2	14.4	5.23
	2 7/16																NAT212-39E			NA212-39				
65	2 1/2	2 3/4	1 1/16	1 23/32	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.374	1.343	NAT213-40E		T213E	NA213-40	57.2	40.1	14.4	7.49
		70	27	44	167	150.8	111	224	137	21	121	41	32	70	85.7	34.1	NAT213E			NA213				
70	2 3/4	2 3/4	1 1/16	1 13/16	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.374	1.343	NAT214-44E		T214E	NA214-44	62.2	44.1	14.5	7.87
		70	27	46	167	150.8	111	224	137	21	121	41	32	70	85.7	34.1	NAT214E			NA214				
75	2 15/16	2 3/4	1 1/16	1 7/8	6 9/16	5 15/16	4 3/8	9 1/8	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	3.626	1.469	NAT215-47E		T215E	NA215-47	67.4	48.3	14.5	7.83
		70	27	48	167	150.8	111	232	140	21	121	41	32	70	92.1	37.3	NAT215E			NA215				

FYH

NCT
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

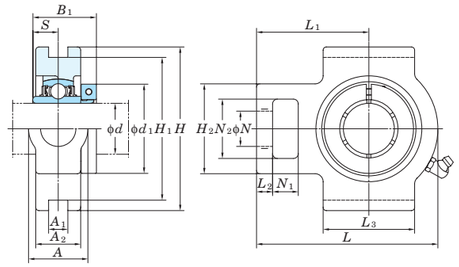

Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.	Δ_{A1s}	Δ_{H1s}	X
T204~T210	+0.2 / 0	0 / −0.5	0.5
T211~T212	+0.3 / 0	0 / −0.8	0.6

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1	S	d_1	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
20	3/4	1 1/4 32	15/32 12	13/16 21	3 1/2 89	2 63/64 76	2 51	3 11/16 94	2 13/32 61	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	1 9/32 32.5	0.500 12.7	1 3/4 44.5	**NCT204-12** **NCT204**	T204	NC204-12 NC204	12.8	6.65	13.2	0.9
25	7/8 15/16 1	1 1/4 32	15/32 12	15/16 24	3 1/2 89	2 63/64 76	2 51	3 13/16 97	2 7/16 62	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	1 7/16 36.5	0.563 14.3	1 15/16 49.2	**NCT205-14** **NCT205-15** **NCT205** **NCT205-16**	T205	NC205-14 NC205-15 NC205 NC205-16	14.0	7.85	13.9	1.0
30	1 1/8 1 3/16 1 1/4	1 15/32 37	15/32 12	1 3/32 28	4 1/32 102	3 1/2 89	2 7/32 56	4 7/16 113	2 3/4 70	13/32 10	2 1/4 57	7/8 22	5/8 16	1 15/32 37	1 9/16 39.7	0.626 15.9	2 3/16 55.6	**NCT206-18** **NCT206** **NCT206-19** **NCT206-20**	T206	NC206-18 NC206 NC206-19 NC206-20	19.5	11.3	13.9	1.5
35	1 1/4	1 15/32 37	15/32 12	1 3/16 30	4 1/32 102	3 1/2 89	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	7/8 22	5/8 16	1 15/32 37	1 3/4 44.5	0.689 17.5	2 7/16 61.9	**NCT207-20**	T207	NC207-20	25.7	15.4	13.9	1.9
	1 3/8 1 7/16	1 15/32 37	15/32 12	1 3/16 30	4 1/32 102	3 1/2 89	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	7/8 22	5/8 16	1 15/32 37	1 3/4 44.5	0.689 17.5	2 9/16 65.1	**NCT207-22** **NCT207** **NCT207-23**	T207	NC207-22 NC207 NC207-23	25.7	15.4	13.9	1.9
40	1 1/2	1 15/16 49	5/8 16	1 5/16 33	4 1/2 114	4 1/64 102	3 9/32 83	5 21/32 144	3 15/32 88	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 11/16 68.3	**NCT208-24** **NCT208**	T208	NC208-24 NC208	29.1	17.8	14.0	2.9
45	1 5/8	1 15/16 49	5/8 16	1 3/8 35	4 19/32 117	4 1/64 102	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 13/16 71.4	**NCT209-26**	T209	NC209-26	34.1	21.3	14.0	2.8
	1 11/16 1 3/4	1 15/16 49	5/8 16	1 3/8 35	4 19/32 117	4 1/64 102	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 15/16 74.6	**NCT209-27** **NCT209-28** **NCT209**	T209	NC209-27 NC209-28 NC209	34.1	21.3	14.0	2.8
50	1 15/16 2	1 15/16 49	5/8 16	1 15/32 37	4 19/32 117	4 1/64 102	3 9/32 83	5 7/8 149	3 17/32 90	5/8 16	3 3/8 86	1 5/32 29	3/4 19	1 15/16 49	2 3/32 53.1	0.748 19	3 3/8 85.7	**NCT210-31** **NCT210** **NCT210-32**	T210	NC210-31 NC210 NC210-32	35.1	23.3	14.4	3.2
55	2	2 17/32 64	55/64 22	1 1/2 38	5 3/4 146	5 1/8 130	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	31/32 25	2 17/32 64	2 1/4 57.1	0.874 22.2	3 1/2 88.9	**NCT211-32**	T211	NC211-32	43.4	29.4	14.4	4.4
	2 3/16	2 17/32 64	55/64 22	1 1/2 38	5 3/4 146	5 1/8 130	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	31/32 25	2 17/32 64	2 1/4 57.1	0.874 22.2	3 5/8 92.1	**NCT211** **NCT211-35**	T211	NC211 NC211-35	43.4	29.4	14.4	4.4
60	2 1/4	2 17/32 64	55/64 22	1 21/32 42	5 3/4 146	5 1/8 130	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2 5/8 66.7	1.000 25.4	4 1/16 103.2	**NCT212-36**	T212	NC212-36	52.4	36.2	14.4	5.6
	2 7/16	2 17/32 64	55/64 22	1 21/32 42	5 3/4 146	5 1/8 130	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2 5/8 66.7	1.000 25.4	4 1/8 104.8	**NCT212** **NCT212-39**	T212	NC212 NC212-39	52.4	36.2	14.4	5.6

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF..... 204~210
A-R1/8..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

NCT-E
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm

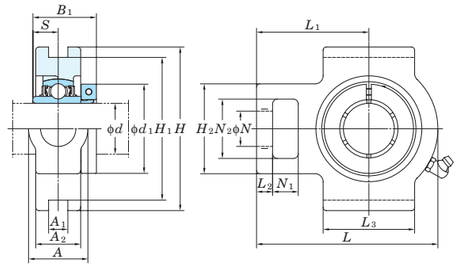

Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.	Δ_{A1s}	Δ_{H1s}	X
T204E~T210E	+0.2 0	0 −0.5	0.5
T211E~T212E	+0.3 0	0 −0.8	0.6

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm																Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN		Factor	Mass
d		A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1	S	d_1				C_r	C_{0r}	f_0	kg
20	3/4	1 1/4 32	17/32 13.5	13/16 21	3 1/2 89	3 76.2	2 51	3 11/16 94	2 13/32 61	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	1 9/32 32.5	0.500 12.7	1 3/4 44.5	**NCT204-12E** **NCT204E**	T204E	NC204-12 NC204	12.8	6.65	13.2	0.9
25	7/8 15/16 1	1 1/4 32	17/32 13.5	15/16 24	3 1/2 89	3 76.2	2 51	3 13/16 97	2 7/16 62	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	1 7/16 36.5	0.563 14.3	1 15/16 49.2	**NCT205-14E** **NCT205-15E** **NCT205E** **NCT205-16E**	T205E	NC205-14 NC205-15 NC205 NC205-16	14.0	7.85	13.9	1.0
30	1 1/8 1 3/16 1 1/4	1 15/32 37	17/32 13.5	1 3/32 28	4 1/32 102	3 1/2 88.9	2 7/32 56	4 7/16 113	2 3/4 70	13/32 10	2 1/4 57	7/8 22	5/8 16	1 15/32 37	1 9/16 39.7	0.626 15.9	2 3/16 55.6	**NCT206-18E** **NCT206E** **NCT206-19E** **NCT206-20E**	T206E	NC206-18 NC206 NC206-19 NC206-20	19.5	11.3	13.9	1.5
35	1 1/4	1 15/32 37	17/32 13.5	1 3/16 30	4 1/32 102	3 1/2 88.9	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	7/8 22	5/8 16	1 15/32 37	1 3/4 44.5	0.689 17.5	2 7/16 61.9	**NCT207-20E**	T207E	NC207-20	25.7	15.4	13.9	1.9
	1 3/8 1 7/16	1 15/32 37	17/32 13.5	1 3/16 30	4 1/32 102	3 1/2 88.9	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	7/8 22	5/8 16	1 15/32 37	1 3/4 44.5	0.689 17.5	2 9/16 65.1	**NCT207-22E** **NCT207E** **NCT207-23E**	T207E	NC207-22 NC207 NC207-23	25.7	15.4	13.9	1.9
40	1 1/2	1 15/16 49	11/16 17.5	1 5/16 33	4 1/2 114	4 101.6	3 9/32 83	5 21/32 144	3 15/32 88	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 11/16 68.3	**NCT208-24E** **NCT208E**	T208E	NC208-24 NC208	29.1	17.8	14.0	2.9
45	1 5/8	1 15/16 49	11/16 17.5	1 3/8 35	4 19/32 117	4 101.6	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 13/16 71.4	**NCT209-26E**	T209E	NC209-26	34.1	21.3	14.0	2.8
	1 11/16 1 3/4	1 15/16 49	11/16 17.5	1 3/8 35	4 19/32 117	4 101.6	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	1 5/32 29	3/4 19	1 15/16 49	2 50.8	0.748 19	2 15/16 74.6	**NCT209-27E** **NCT209-28E** **NCT209E**	T209E	NC209-27 NC209-28 NC209	34.1	21.3	14.0	2.8
50	1 15/16 2	1 15/16 49	11/16 17.5	1 15/32 37	4 19/32 117	4 101.6	3 9/32 83	5 7/8 149	3 17/32 90	5/8 16	3 3/8 86	1 5/32 29	3/4 19	1 15/16 49	2 3/32 53.1	0.748 19	3 3/8 85.7	**NCT210-31E** **NCT210E** **NCT210-32E**	T210E	NC210-31 NC210 NC210-32	35.1	23.3	14.4	3.2
55	2	2 17/32 64	1 1/16 27	1 1/2 38	5 3/4 146	5 1/8 130.17	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	31/32 25	2 17/32 64	2 1/4 57.1	0.874 22.2	3 1/2 88.9	**NCT211-32E**	T211E	NC211-32	43.4	29.4	14.4	4.4
	2 3/16	2 17/32 64	1 1/16 27	1 1/2 38	5 3/4 146	5 1/8 130.17	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	31/32 25	2 17/32 64	2 1/4 57.1	0.874 22.2	3 5/8 92.1	**NCT211E** **NCT211-35E**	T211E	NC211 NC211-35	43.4	29.4	14.4	4.4
60	2 1/4	2 17/32 64	1 1/16 27	1 21/32 42	5 3/4 146	5 1/8 130.17	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2 5/8 66.7	1.000 25.4	4 1/16 103.2	**NCT212-36E**	T212E	NC212-36	52.4	36.2	14.4	5.6
	2 7/16	2 17/32 64	1 1/16 27	1 21/32 42	5 3/4 146	5 1/8 130.17	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2 5/8 66.7	1.000 25.4	4 1/8 104.8	**NCT212E** **NCT212-39E**	T212E	NC212 NC212-39	52.4	36.2	14.4	5.6

Remarks 1. In Part No. of unit, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 204~210
A-R1/8 ..... 211~212
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
4. Representative examples of the forms of housing are indicated.

FYH

UKT
Tapered bore (with adapter)
d_1 20 ~ (50) mm

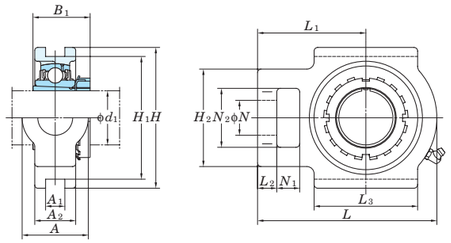

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T205~T210	TX05~TX10	T305~T310	+0.2 0	0 −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 0	0 −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimension of L_c of T205JE3 (housing with cast iron cover) are shown below.

T205JE3 L_c = 102 mm

Shaft Dia. d_1 mm	Shaft Dia. d_1 inch	Dimensions A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1 1)	Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension A_c	Mass kg
20	3/4	1 1/4	15/32	15/16	3 1/2	2 63/64	2	3 13/16	2 7/16	13/32	2	3/4	5/8	1 1/4	1 5/32(1 3/8)	UKT205	T205	UK205	HE305X(HE2305X)	0.88	14.0	7.85	13.9	–	–	– –	–	–	–	– –	–
		32	12	24	89	76	51	97	62	10	51	19	16	32	29(35)				H305X(H2305X)	0.88				UKT205C	UKT205CD	48 1 7/8	0.88	UKT205FC	UKT205FCD	66 2 19/32	1.3
	3/4	1 15/32	15/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1 3/8	UKTX05	TX05	UKX05	HE2305X	1.3	19.5	11.3	13.9	–	–	– –	–	–	–	– –	–
		37	12	28	102	89	56	113	70	10	57	22	16	37	35				H2305X	1.3				UKTX05C	UKTX05CD	52 2 1/16	1.3	–	–	– –	–
	3/4	1 13/32	15/32	1 1/32	3 1/2	3 5/32	2 7/16	4 13/16	3	15/32	2 9/16	1 1/32	5/8	1 13/32	1 3/8	UKT305	T305	UK305	HE2305X	1.5	21.2	10.9	12.6	–	–	– –	–	–	–	– –	–
		36	12	26	89	80	62	122	76	12	65	26	16	36	35				H2305X	1.5				–	–	– –	–	UKT305C	UKT305CD	76 3	2.1
25		1 15/32	15/32	1 3/32	4 1/32	3 1/2	2 7/32	4 7/16	2 3/4	13/32	2 1/4	7/8	5/8	1 15/32	1 7/32(1 1/2)	UKT206	T206	UK206	H306X(H2306X)	1.3	19.5	11.3	13.9	UKT206C	UKT206CD	52 2 1/16	1.3	UKT206FC	UKT206FCD	70 2 3/4	1.8
	1	37	12	28	102	89	56	113	70	10	57	22	16	37	31(38)				HE306X(HE2306X)	1.3				–	–	– –	–	–	–	– –	–
		1 15/32	15/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1 1/2	UKTX06	TX06	UKX06	H2306X	1.7	25.7	15.4	13.9	UKTX06C	UKTX06CD	59 2 5/16	1.7	–	–	– –	–
	1	37	12	30	102	89	64	129	78	13	64	22	16	37	38				HE2306X	1.7				–	–	– –	–	–	–	– –	–
		1 5/8	5/8	1 3/32	3 15/16	3 35/64	2 3/4	5 13/32	3 11/32	9/16	2 29/32	1 3/32	23/32	1 5/8	1 1/2	UKT306	T306	UK306	H2306X	1.9	26.7	15.0	13.3	–	–	– –	–	UKT306C	UKT306CD	82 3 7/32	2.5
	1	41	16	28	100	90	70	137	85	14	74	28	18	41	38				HE2306X	1.9				–	–	– –	–	–	–	– –	–
30		1 15/32	15/32	1 3/16	4 1/32	3 1/2	2 17/32	5 3/32	3 1/16	1/2	2 17/32	7/8	5/8	1 15/32	1 3/8(1 11/16)	UKT207	T207	UK207	HS307X(HS2307X)	1.7	25.7	15.4	13.9	–	–	– –	–	–	–	– –	–
		37	12	30	102	89	64	129	78	13	64	22	16	37	35(43)				H307X(H2307X)	1.7				UKT207C	UKT207CD	59 2 5/16	1.7	UKT207FC	UKT207FCD	78 3 1/16	2.5
	1 1/8	1 15/16	5/8	1 13/32	4 1/2	4 1/64	3 9/32	5 21/32	3 15/32	19/32	3 9/32	1 5/32	3/4	1 15/16	1 11/16	UKTX07	TX07	UKX07	HS2307X	2.6	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		49	16	36	114	102	83	144	88	15	83	29	19	49	43				H2307X	2.6				UKTX07C	UKTX07CD	68 2 11/16	2.6	–	–	– –	–
	1 1/8	1 25/32	5/8	1 1/4	4 3/8	3 15/16	2 15/16	5 29/32	3 11/16	19/32	3 5/32	1 3/16	25/32	1 25/32	1 11/16	UKT307	T307	UK307	HS2307X	2.4	33.4	19.3	13.2	–	–	– –	–	–	–	– –	–
		45	16	32	111	100	75	150	94	15	80	30	20	45	43				H2307X	2.4				–	–	– –	–	UKT307C	UKT307CD	88 3 15/32	3.3
35	1 1/4 1 3/8	1 15/16	5/8	1 5/16	4 1/2	4 1/64	3 9/32	5 21/32	3 15/32	5/8	3 9/32	1 5/32	3/4	1 15/16	1 13/32(1 13/16)	UKT208	T208	UK208	HE308X(HE2308X)	2.5	29.1	17.8	14.0	–	–	– –	–	–	–	– –	–
		49	16	33	114	102	83	144	88	16	83	29	19	49	36(46)				HS308X(HS2308X)	2.5				–	–	– –	–	–	–	– –	–
																			H308X(H2308X)	2.5				UKT208C	UKT208CD	68 2 11/16	2.5	UKT208FC	UKT208FCD	86 3 3/8	3.4
	1 1/4 1 3/8	1 15/16	5/8	1 13/32	4 19/32	4 1/64	3 9/32	5 21/32	3 7/16	19/32	3 9/32	1 5/32	3/4	1 15/16	1 13/16	UKTX08	TX08	UKX08	HE2308X	2.6	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		49	16	36	117	102	83	144	87	15	83	29	19	49	46				HS2308X	2.6				–	–	– –	–	–	–	– –	–
																			H2308X	2.6				UKTX08C	UKTX08CD	68 2 11/16	2.6	–	–	– –	–
	1 1/4 1 3/8	1 31/32	45/64	1 11/32	4 7/8	4 13/32	3 9/32	6 3/8	3 15/16	21/32	3 1/2	1 1/4	7/8	1 31/32	1 13/16	UKT308	T308	UK308	HE2308X	3.0	40.7	24.0	13.2	–	–	– –	–	–	–	– –	–
		50	18	34	124	112	83	162	100	17	89	32	22	50	46				HS2308X	3.0				–	–	– –	–	–	–	– –	–
																			H2308X	3.0				–	–	– –	–	UKT308C	UKT308CD	96 3 25/32	4.0
40	1 1/2	1 15/16	5/8	1 3/8	4 19/32	4 1/64	3 9/32	5 21/32	3 7/16	5/8	3 9/32	1 5/32	3/4	1 15/16	1 17/32(1 31/32)	UKT209	T209	UK209	HE309X(HE2309X)	2.5	34.1	21.3	14.0	–	–	– –	–	–	–	– –	–
		49	16	35	117	102	83	144	87	16	83	29	19	49	39(50)				H309X(H2309X)	2.5				UKT209C	UKT209CD	68 2 11/16	2.5	UKT209FC	UKT209FCD	88 3 15/32	3.4
	1 1/2	1 15/16	5/8	1 1/2	4 19/32	4 1/64	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	1 31/32	UKTX09	TX09	UKX09	HE2309X	2.9	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		49	16	38	117	102	83	149	90	16	86	29	19	49	50				H2309X	2.9				UKTX09C	UKTX09CD	73 2 7/8	2.9	–	–	– –	–
	1 1/2	2 5/32	45/64	1 1/2	5 7/16	4 59/64	3 17/32	7	4 11/32	23/32	3 13/16	1 11/32	15/16	2 5/32	1 31/32	UKT309	T309	UK309	HE2309X	4.2	48.9	29.5	13.3	–	–	– –	–	–	–	– –	–
		55	18	38	138	125	90	178	110	18	97	34	24	55	50				H2309X	4.2				–	–	– –	–	UKT309C	UKT309CD	102 4 1/32	5.5
45	1 3/4	1 15/16	5/8	1 15/32	4 19/32	4 1/64	3 9/32	5 7/8	3 17/32	5/8	3 3/8	1 5/32	3/4	1 15/16	1 21/32(2 5/32)	UKT210	T210	UK210	HE310X(HE2310X)	2.7	35.1	23.3	14.4	–	–	– –	–	–	–	– –	–
		49	16	37	117	102	83	149	90	16	86	29	19	49	42(55)				H310X(H2310X)	2.7				UKT210C	UKT210CD	73 2 7/8	2.7	UKT210FC	UKT210FCD	97 3 13/16	3.8
	1 3/4	2 17/32	55/64	1 21/32	5 3/4	5 1/8	4 1/32	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	2 5/32	UKTX10	TX10	UKX10	HE2310X	4.4	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		64	22	42	146	130	102	171	106	19	95	35	25	64	55				H2310X	4.4				UKTX10C	UKTX10CD	75 2 15/16	4.4	–	–	– –	–
	1 3/4	2 13/32	25/32	1 9/16	5 15/16	5 33/64	3 27/32	7 17/32	4 19/32	25/32	4 3/16	1 15/32	1 1/16	2 13/32	2 5/32	UKT310	T310	UK310	HE2310X	5.0	62.0	38.3	13.2	–	–	– –	–	–	–	– –	–
		61	20	40	151	140	98	191	117	20	106	37	27	61	55				H2310X	5.0				–	–	– –	–	UKT310C	UKT310CD	110 4 11/32	6.7
50	1 7/8 2	2 17/32	55/64	1 1/2	5 3/4	5 1/8	4 1/32	6 23/32	4 3/16	3/4	3 3/4	1 3/8	31/32	2 17/32	1 25/32(2 5/16)	UKT211	T211	UK211	HS311X(HS2311X)	4.1	43.4	29.4	14.4	–	–	– –	–	–	–	– –	–
		64	22	38	146	130	102	171	106	19	95	35	25	64	45(59)				H311X(H2311X)	4.1				UKT211C	UKT211CD	75 2 15/16	4.1	UKT211FC	UKT211FCD	99 3 29/32	5.4
																			HE311X(HE2311X)	4.1				–	–	– –	–	–	–	– –	–
	1 7/8 2	2 17/32	55/64	1 23/32	5 3/4	5 1/8	4 1/32	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	2 5/16	UKTX11	TX11	UKX11	HS2311X	5.1	52.4	36.2	14.4	–	–	– –	–	–	–	– –	–
		64	22	44	146	130	102	194	119	19	102	35	32	64	59				H2311X	5.1				UKTX11C	UKTX11CD	88 3 15/32	5.1	–	–	– –	–
																			HE2311X	5.1				–	–	– –	–	–	–	– –	–

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF.....205~210, X05~X09, 305~308
B-R1/8.....211~217, X10~X17, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKT206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKT206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UKT
Tapered bore (with adapter)
d_1 (50) ~ 110 mm

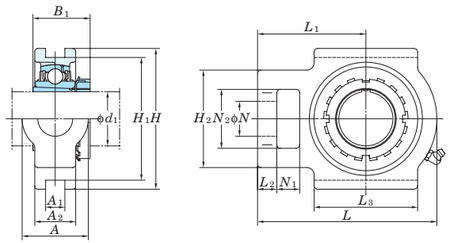

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T205~T210	TX05~TX10	T305~T310	+0.2 0	0 −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 0	0 −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimension of L_c of T205JE3 (housing with cast iron cover) are shown below.

T205JE3 L_c = 102 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm														Standard Unit No.	Standard Housing No.	Standard Bearing No.	Adapter[1] No.	Mass	Basic Load Ratings kN		Factor	With Pressed Steel Cover Unit No.		Dimension mm	Dimension inch	Mass	With Cast Iron Cover Unit No.		Dimension mm	Dimension inch	Mass
d_1		A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1[1]					kg	C_r	C_{0r}	f_0	Open Type	One Side Closed Type	A_s		kg	Open Type	One Side Closed Type	A_c		kg
50	1 7/8	2 19/32	55/64	1 23/32	6 13/32	5 29/32	4 1/8	8 5/32	5	13/16	4 17/32	1 17/32	1 5/32	2 19/32	2 5/16	UKT311	T311	UK311	HS2311X	6.4	71.6	45.0	13.2	–	–	–	–	–	–	–	–	–	–
		66	22	44	163	150	105	207	127	21	115	39	29	66	59				H2311X	6.4				–	–	–	–	–	UKT311C	UKT311CD	114	4 1/2	8.3
	2																		HE2311X	6.4				–	–	–	–	–	–	–	–	–	–
55	2 1/8	2 17/32	55/64	1 21/32	5 3/4	5 1/8	4 1/32	7 5/8	4 11/16	3/4	4 1/32	1 3/8	1 1/4	2 17/32	1 27/32(2 7/16)	UKT212	T212	UK212	HS312X(HS2312X)	4.8	52.4	36.2	14.4	–	–	–	–	–	–	–	–	–	–
		64	22	42	146	130	102	194	119	19	102	35	32	64	47(62)				H312X(H2313X)	4.8				UKT212C	UKT212CD	88	3 15/32	4.8	UKT212FC	UKT212FCD	114	4 1/2	6.3
	2 1/8	2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2 7/16	UKTX12	TX12	UKX12	HS2312X	7.3	57.2	40.1	14.4	–	–	–	–	–	–	–	–	–	–
		70	26	48	167	151	111	224	137	21	121	41	32	70	62				H2312X	7.3				UKTX12C	UKTX12CD	88	3 15/32	7.3	–	–	–	–	–
	2 1/8	2 25/32	55/64	1 13/16	7	6 19/64	4 7/16	8 21/32	5 5/16	29/32	4 27/32	1 5/8	1 7/32	2 25/32	2 7/16	UKT312	T312	UK312	HS2312X	7.5	81.9	52.2	13.2	–	–	–	–	–	–	–	–	–	–
		71	22	46	178	160	113	220	135	23	123	41	31	71	62				H2312X	7.5				–	–	–	–	–	UKT312C	UKT312CD	124	4 7/8	9.9
60	2 1/4	2 3/4	1 1/32	1 23/32	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	1 31/32(2 9/16)	UKT213	T213	UK213	HE313X(HE2313X)	6.8	57.2	40.1	14.4	–	–	–	–	–	–	–	–	–	–
		70	26	44	167	151	111	224	137	21	121	41	32	70	50(65)				H313X(H2313X)	6.8				UKT213C	UKT213CD	88	3 15/32	6.8	UKT213FC	UKT213FCD	114	4 1/2	8.5
	2 3/8																		HS313X(HS2313X)	6.8				–	–	–	–	–	–	–	–	–	–
	2 1/4	2 3/4	1 1/32	1 7/8	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2 9/16	UKTX13	TX13	UKX13	HE2313X	7.2	62.2	44.1	14.5	–	–	–	–	–	–	–	–	–	–
		70	26	48	167	151	111	224	137	21	121	41	32	70	65				H2313X	7.2				UKTX13C	UKTX13CD	98	3 27/32	7.2	–	–	–	–	–
	2 3/8																		HS2313X	7.2				–	–	–	–	–	–	–	–	–	–
	2 1/4	3 5/32	1 1/32	1 31/32	7 15/32	6 11/16	4 9/16	9 3/8	5 3/4	31/32	5 9/32	1 11/16	1 1/4	2 3/4	2 9/16	UKT313	T313	UK313	HE2313X	9.4	92.7	59.9	13.2	–	–	–	–	–	–	–	–	–	–
		80	26	50	190	170	116	238	146	25	134	43	32	70	65				H2313X	9.4				–	–	–	–	–	UKT313C	UKT313CD	122	4 13/16	11.6
	2 3/8																		HS2313X	9.4				–	–	–	–	–	–	–	–	–	–
65	2 1/2	2 3/4	1 1/32	1 13/16	6 9/16	5 15/16	4 3/8	8 13/16	5 13/32	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2 5/32(2 7/8)	UKT215	T215	UK215	HE315X(HE2315X)	7.4	67.4	48.3	14.5	–	–	–	–	–	–	–	–	–	–
		70	26	48	167	151	111	232	140	21	121	41	32	70	55(73)				H315X(H2315X)	7.4				UKT215C	UKT215CD	98	3 27/32	7.4	UKT215FC	UKT215FCD	124	4 7/8	9.4
	2 1/2	2 3/4	1 7/64	1 7/8	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2 7/8	UKTX15	TX15	UKX15	HE2315X	8.4	72.7	53.0	14.6	–	–	–	–	–	–	–	–	–	–
		70	28	48	184	165	111	235	140	21	121	41	32	70	73				H2315X	8.4				UKTX15C	UKTX15CD	108	4 1/4	8.4	–	–	–	–	–
	2 1/2	3 17/32	1 1/32	2 5/32	8 1/2	7 9/16	5 3/16	10 5/16	6 5/16	31/32	5 29/32	1 13/16	1 13/32	3 11/32	2 7/8	UKT315	T315	UK315	HE2315X	13.1	113	77.2	13.2	–	–	–	–	–	–	–	–	–	–
		90	26	55	216	192	132	262	160	25	150	46	36	85	73				H2315X	13.1				–	–	–	–	–	UKT315C	UKT315CD	134	5 9/32	15.9
70	2 3/4	2 3/4	1 1/32	2	7 1/4	6 1/2	4 3/8	9 1/4	5 1/2	13/16	4 3/4	1 5/8	1 1/4	2 3/4	2 5/16(3 1/16)	UKT216	T216	UK216	HE316X(HE2316X)	8.5	72.7	53.0	14.6	–	–	–	–	–	–	–	–	–	–
		70	26	51	184	165	111	235	140	21	121	41	32	70	59(78)				H316X(H2316X)	8.5				UKT216C	UKT216CD	108	4 1/4	8.5	UKT216FC	UKT216FCD	138	5 7/16	11.0
	2 3/4	2 7/8	1 7/64	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3 1/16	UKTX16	TX16	UKX16	HE2316X	11.8	84.0	61.9	14.5	–	–	–	–	–	–	–	–	–	–
		73	28	54	198	173	124	260	162	28	157	48	38	73	78				H2316X	11.8				UKTX16C	UKTX16CD	112	4 13/32	11.8	–	–	–	–	–
	2 3/4	4 1/32	1 3/16	2 3/8	9 1/16	8 1/32	5 29/32	11 3/32	6 27/32	1 3/32	6 5/16	2 3/32	1 21/32	3 27/32	3 1/16	UKT316	T316	UK316	HE2316X	16.3	123	86.7	13.3	–	–	–	–	–	–	–	–	–	–
		102	30	60	230	204	150	282	174	28	160	53	42	98	78				H2316X	16.3				–	–	–	–	–	UKT316C	UKT316CD	138	5 7/16	19.4
75	3	2 7/8	1 3/16	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 5/32	6 3/16	1 7/8	1 1/2	2 7/8	2 15/32(3 7/32)	UKT217	T217	UK217	H317X(H2317X)	11.2	84.0	61.9	14.5	UKT217C	UKT217CD	112	4 13/32	11.2	UKT217FC	UKT217FCD	142	5 19/32	14.0
		73	30	54	198	173	124	260	162	29	157	48	38	73	63(82)				HE317X(HE2317X)	11.2				–	–	–	–	–	–	–	–	–	–
	3	2 7/8	1 7/64	2 1/8	7 25/32	6 13/16	4 7/8	10 1/4	6 3/8	1 3/32	6 3/16	1 7/8	1 1/2	2 7/8	3 7/32	UKTX17	TX17	UKX17	H2317X	11.4	96.1	71.5	14.5	UKTX17C	UKTX17CD	122	4 13/16	11.4	–	–	–	–	–
		73	28	54	198	173	124	260	162	28	157	48	38	73	82				HE2317X	11.4				–	–	–	–	–	–	–	–	–	–
	3	4 1/32	1 17/64	2 17/32	9 7/16	8 27/64	5 31/32	11 23/32	7 7/32	1 3/16	6 11/16	2 3/32	1 21/32	3 27/32	3 7/32	UKT317	T317	UK317	H2317X	18.9	133	96.8	13.3	–	–	–	–	–	UKT317C	UKT317CD	146	5 3/4	22.4
		102	32	64	240	214	152	298	183	30	170	53	42	98	82				HE2317X	18.9				–	–	–	–	–	–	–	–	–	–
80	–	4 11/32	1 17/64	2 19/32	10 1/32	8 31/32	6 5/16	12 9/32	7 9/16	1 3/16	6 7/8	2 1/4	1 13/16	4 3/16	3 3/8	UKT318	T318	UK318	H2318X	21.7	143	107	13.3	–	–	–	–	–	UKT318C	UKT318CD	150	5 29/32	25.9
		110	32	66	255	228	160	312	192	30	175	57	46	106	86																		
85	3 1/4	4 11/32	1 3/8	2 27/32	10 5/8	9 29/64	6 1/2	12 11/16	7 3/4	1 7/32	7 3/32	2 1/4	1 13/16	4 3/16	3 17/32	UKT319	T319	UK319	HE2319X	25.2	153	119	13.3	–	–	–	–	–	–	–	–	–	–
		110	35	72	270	240	165	322	197	31	180	57	46	106	90				H2319X	25.2				–	–	–	–	–	UKT319C	UKT319CD	162	6 3/8	29.9
90	3 1/2	4 23/32	1 3/8	2 15/16	11 13/32	10 15/64	6 7/8	13 19/32	8 9/32	1 1/4	7 7/8	2 5/16	1 7/8	4 17/32	3 13/16	UKT320	T320	UK320	HE2320X	30.4	173	141	13.2	–	–	–	–	–	–	–	–	–	–
		120	35	75	290	260	175	345	210	32	200	59	48	115	97				H2320X	30.4				–	–	–	–	–	UKT320C	UKT320CD	174	6 27/32	36.6
100	4	5 1/8	1 1/2	3 5/32	12 19/32	11 7/32	7 9/32	15 5/32	9 1/4	1 1/2	8 15/32	2 9/16	2 1/16	4 29/32	4 1/8	UKT322	T322	UK322	H2322X	39.5	205	180	13.2	–	–	–	–	–	UKT322C	UKT322CD	188	7 13/32	46.4
		130	38	80	320	285	185	385	235	38	215	65	52	125	105				HE2322X	39.5				–	–	–	–	–	–	–	–	–	–
110	–	5 1/2	1 49/64	3 17/32	13 31/32	12 9/32	8 9/32	17	10 1/2	1 21/32	9 1/16	2 3/4	2 3/8	5 1/2	4 13/32	UKT324	T324	UK324	H2324	54.7	207	185	13.5	–	–	–	–	–	UKT324C	UKT324CD	196	7 23/32	65.0
		140	45	90	355	320	210	432	267	42	230	70	60	140	112																		

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF.....205~210, X05~X09, 305~308
B-R1/8.....211~217, X10~X17, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKT206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UKT206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

FYH

UKT
Tapered bore (with adapter)
d_1 115 ~ 125 mm





With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.			Δ_{A1s}	Δ_{H1s}	X
T205~T210	TX05~TX10	T305~T310	+0.2 0	0 −0.5	0.5
T211~T217	TX11~TX17	T311~T318	+0.3 0	0 −0.8	0.6
		T319~T322			0.7
		T324~T328			0.8

Form and dimension of L_c of T205JE3 (housing with cast iron cover) are shown below.

T205JE3 L_c = 102 mm

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm														Standard Unit No.	Housing No.	Bearing No.	Adapter 1) No.	Mass	Basic Load Ratings kN		Factor	With Pressed Steel Cover Unit No.		Dimension	Mass	With Cast Iron Cover Unit No.		Dimension	Mass
d_1		A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B_1 1)					kg	C_r	C_{0r}	f_0	Open Type	One Side Closed Type	A_s	kg	Open Type	One Side Closed Type	A_c	kg
115	4 1/2	5 29/32	1 31/32	3 15/16	15 5/32	13 25/32	8 21/32	18 5/16	11 7/32	1 25/32	9 7/16	2 15/16	2 9/16	5 29/32	4 3/4	UKT326	T326	UK326	HE2326	69.1	229	214	13.6	–	–	– –	–	–	–	– –	–
		150	50	100	385	350	220	465	285	45	240	75	65	150	121				H2326	69.1				–	–	– –	–	UKT326C	UKT326CD	214 8 7/16	82.4
125	–	6 3/32	1 31/32	3 15/16	16 11/32	14 61/64	9 1/16	20 9/32	12 13/32	1 31/32	10 1/32	3 5/32	2 3/4	6 5/16	5 5/32	UKT328	T328	UK328	H2328	85.1	253	246	13.6	–	–	– –	–	UKT328C	UKT328CD	222 8 3/4	102
		155	50	100	415	380	230	515	315	50	255	80	70	160	131																

Note 1) Codes shown in parentheses indicate the dimensions and Part No. of applicable adapter (H2300X series) for UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)

2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF.....205~210, X05~X09, 305~308
B-R1/8.....211~217, X10~X17, 309~328

3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables.
(Example of Part No. : UKT206J + H306X, UK206 + H306X)

4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing.
(Example of Part No. : UKT206JL3 + H2306X, UK206L3 + H2306X)

5. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

6. Housings of nodular graphite cast iron are also available.

UCST-H1S6
Cylindrical bore (with set screws)
d 20 ~ 50 mm





With Pressed Stainless Steel Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.	Δ_{A1s}	Δ_{H1s}	X
ST204H1~210H1	+0.2 0	0 −0.5	0.5

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg	With Pressed Stainless Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_s		Mass kg
20	3/4	1 1/4	17/32	29/32	3 1/2	3	1 13/16	3 1/2	2 5/16	11/32	1 23/32	3/4	23/32	1 1/4	1.220	0.500	UCST204-12H1S6	ST204H1	UC204-12S6	10.9	5.35	13.2	0.73	–	–	–	–	–
		32	13.5	23	89	76.2	46	89	59	9	44	19	18	32	31	12.7	UCST204H1S6		UC204S6					UCST204H1CS6	UCST204H1CDS6	45	1 25/32	0.73
25	7/8	1 1/4	17/32	31/32	3 1/2	3	1 13/16	3 21/32	2 3/8	11/32	1 23/32	3/4	23/32	1 1/4	1.343	0.563	UCST205-14H1S6	ST205H1	UC205-14S6	11.9	6.30	13.9	0.79	–	–	–	–	–
	15/16																UCST205-15H1S6		UC205-15S6					–	–	–	–	–
		32	13.5	25	89	76.2	46	93	60	9	44	19	18	32	34.1	14.3	UCST205H1S6		UC205S6					UCST205H1CS6	UCST205H1CDS6	49	1 15/16	0.79
	1																UCST205-16H1S6		UC205-16S6					–	–	–	–	–
30	1 1/8	1 15/32	17/32	1 1/16	4 1/32	3 1/2	2 1/16	4 3/16	2 5/8	11/32	1 31/32	7/8	23/32	1 15/32	1.500	0.626	UCST206-18H1S6	ST206H1	UC206-18S6	16.5	9.05	13.9	1.1	–	–	–	–	–
																	UCST206H1S6		UC206S6					UCST206H1CS6	UCST206H1CDS6	53	2 3/32	1.1
	1 3/16	37	13.5	27	102	88.9	52	106	67	9	50	22	18	37	38.1	15.9	UCST206-19H1S6		UC206-19S6					–	–	–	–	–
	1 1/4																UCST206-20H1S6		UC206-20S6					–	–	–	–	–
35	1 1/4	1 15/32	17/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689	0.689	UCST207-20H1S6	ST207H1	UC207-20S6	21.8	12.3	13.9	1.5	–	–	–	–	–
	1 5/16																UCST207-21H1S6		UC207-21S6					–	–	–	–	–
	1 3/8	37	13.5	31	102	88.9	56	119	75	11	56	22	18	37	42.9	17.5	UCST207-22H1S6		UC207-22S6					–	–	–	–	–
																	UCST207H1S6		UC207S6					UCST207H1CS6	UCST207H1CDS6	60	2 3/8	1.5
	1 7/16																UCST207-23H1S6		UC207-23S6					–	–	–	–	–
40	1 1/2	1 15/16	5/8	1 1/4	4 1/2	4	2 29/32	5 5/16	3 11/32	9/16	2 17/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST208-24H1S6	ST208H1	UC208-24S6	24.8	14.3	14.0	2.0	–	–	–	–	–
	1 9/16																UCST208-25H1S6		UC208-254S6					–	–	–	–	–
		49	16	32	114	101.6	74	135	85	14	64	29	20	49	49.2	19	UCST208H1S6		UC208S6					UCST208H1CS6	UCST208H1CDS6	69	2 23/32	2.0
45	1 5/8	1 15/16	5/8	1 11/32	4 19/32	4	2 29/32	5 13/32	3 11/32	9/16	2 19/32	1 5/32	25/32	1 15/16	1.937	0.748	UCST209-26H1S6	ST209H1	UC209-26S6	27.8	16.2	14.0	2.1	–	–	–	–	–
	1 11/16																UCST209-27H1S6		UC209-27S6					–	–	–	–	–
	1 3/4	49	16	34	117	101.6	74	137	85	14	66	29	20	49	49.2	19	UCST209-28H1S6		UC209-28S6					–	–	–	–	–
																	UCST209H1S6		UC209S6					UCST209H1CS6	UCST209H1CDS6	69	2 23/32	2.1
50	1 7/8	1 15/16	5/8	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031	0.748	UCST210-30H1S6	ST210H1	UC210-30S6	29.8	18.6	14.4	2.3	–	–	–	–	–
	1 15/16																UCST210-31H1S6		UC210-31S6					–	–	–	–	–
		49	16	35	117	101.6	74	143	87	14	72	29	20	49	51.6	19	UCST210H1S6		UC210S6					UCST210H1CS6	UCST210H1CDS6	74	2 29/32	2.3
	2																UCST210-32H1S6		UC210-32S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is B-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCST-EH1S6
Cylindrical bore (with set screws)
d 20 ~ 50 mm





With Pressed Stainless Steel Cover



Variations of tolerance of groove width (Δ_{A1s}), variations of tolerance of distance between both grooves (Δ_{H1s}), and tolerance of symmetry of both groove sides (X)

Unit: mm

Housing No.	Δ_{A1s}	Δ_{H1s}	X
ST204EH1~210EH1	+0.2 0	0 −0.5	0.5

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm A	A_1	A_2	H	H_1	H_2	L	L_1	L_2	L_3	N	N_1	N_2	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg	With Pressed Stainless Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm inch A_s		Mass kg
20	3/4	1 1/4	17/32	29/32	3 1/2	3	1 13/16	3 1/2	2 5/16	11/32	1 23/32	3/4	23/32	1 1/4	1.220	0.500	**UCST204-12EH1S6**	ST204EH1	UC204-12S6	10.9	5.35	13.2	0.73	–	–	–	–	–
		32	13.5	23	89	76.2	46	89	59	9	44	19	18	32	31	12.7	**UCST204EH1S6**		UC204S6					UCST204EH1CS6	UCST204EH1CDS6	45	1 25/32	0.73
25	7/8	1 1/4	17/32	31/32	3 1/2	3	1 13/16	3 21/32	2 3/8	11/32	1 23/32	3/4	23/32	1 1/4	1.343	0.563	**UCST205-14EH1S6**	ST205EH1	UC205-14S6	11.9	6.30	13.9	0.79	–	–	–	–	–
	15/16	32	13.5	25	89	76.2	46	93	60	9	44	19	18	32	34.1	14.3	**UCST205-15EH1S6**		UC205-15S6					–	–	–	–	–
																	UCST205EH1S6		UC205S6					UCST205EH1CS6	UCST205EH1CDS6	49	1 15/16	0.79
	1																**UCST205-16EH1S6**		UC205-16S6					–	–	–	–	–
30	1 1/8	1 15/32	17/32	1 1/16	4 1/32	3 1/2	2 1/16	4 3/16	2 5/8	11/32	1 31/32	7/8	23/32	1 15/32	1.500	0.626	**UCST206-18EH1S6**	ST206EH1	UC206-18S6	16.5	9.05	13.9	1.1	–	–	–	–	–
																	UCST206EH1S6		UC206S6					UCST206EH1CS6	UCST206EH1CDS6	53	2 3/32	1.1
	1 3/16	37	13.5	27	102	88.9	52	106	67	9	50	22	18	37	38.1	15.9	**UCST206-19EH1S6**		UC206-19S6					–	–	–	–	–
	1 1/4																**UCST206-20EH1S6**		UC206-20S6					–	–	–	–	–
35	1 1/4	1 15/32	17/32	1 7/32	4 1/32	3 1/2	2 7/32	4 11/16	2 15/16	7/16	2 7/32	7/8	23/32	1 15/32	1.689	0.689	**UCST207-20EH1S6**	ST207EH1	UC207-20S6	21.8	12.3	13.9	1.5	–	–	–	–	–
	1 5/16																**UCST207-21EH1S6**		UC207-21S6					–	–	–	–	–
	1 3/8	37	13.5	31	102	88.9	56	119	75	11	56	22	18	37	42.9	17.5	**UCST207-22EH1S6**		UC207-22S6					–	–	–	–	–
																	UCST207EH1S6		UC207S6					UCST207EH1CS6	UCST207EH1CDS6	60	2 3/8	1.5
	1 7/16																**UCST207-23EH1S6**		UC207-23S6					–	–	–	–	–
40	1 1/2	1 15/16	11/16	1 1/4	4 1/2	4	2 29/32	5 5/16	3 11/32	9/16	2 17/32	1 5/32	25/32	1 15/16	1.937	0.748	**UCST208-24EH1S6**	ST208EH1	UC208-24S6	24.8	14.3	14.0	2.0	–	–	–	–	–
	1 9/16	49	17.5	32	114	101.6	74	135	85	14	64	29	20	49	49.2	19	**UCST208-25EH1S6**		UC208-254S6					–	–	–	–	–
																	UCST208EH1S6		UC208S6					UCST208EH1CS6	UCST208EH1CDS6	69	2 23/32	2.0
45	1 5/8	1 15/16	11/16	1 11/32	4 19/32	4	2 29/32	5 13/32	3 11/32	9/16	2 19/32	1 5/32	25/32	1 15/16	1.937	0.748	**UCST209-26EH1S6**	ST209EH1	UC209-26S6	27.8	16.2	14.0	2.1	–	–	–	–	–
	1 11/16	49	17.5	34	117	101.6	74	137	85	14	66	29	20	49	49.2	19	**UCST209-27EH1S6**		UC209-27S6					–	–	–	–	–
	1 3/4																**UCST209-28EH1S6**		UC209-28S6					–	–	–	–	–
																	UCST209EH1S6		UC209S6					UCST209EH1CS6	UCST209EH1CDS6	69	2 23/32	2.1
50	1 7/8	1 15/16	11/16	1 3/8	4 19/32	4	2 29/32	5 5/8	3 7/16	9/16	2 27/32	1 5/32	25/32	1 15/16	2.031	0.748	**UCST210-30EH1S6**	ST210EH1	UC210-30S6	29.8	18.6	14.4	2.3	–	–	–	–	–
	1 15/16	49	17.5	35	117	101.6	74	143	87	14	72	29	20	49	51.6	19	**UCST210-31EH1S6**		UC210-31S6					–	–	–	–	–
																	UCST210EH1S6		UC210S6					UCST210EH1CS6	UCST210EH1CDS6	74	2 29/32	2.3
	2																**UCST210-32EH1S6**		UC210-32S6					–	–	–	–	–

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of the applicable grease fitting is B-1/4-28UNFN12.
3. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

FYH

UCTH
Cylindrical bore (with set screws)
d 12 ~ 65 mm



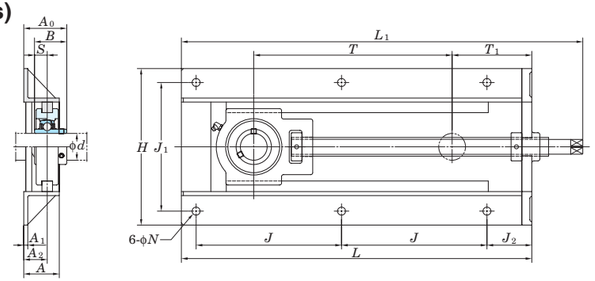

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance between centers of bolt holes (Δ_{Js}, Δ_{J1s})

Unit: mm

Nominal unit code	Δ_{Js}	Δ_{J1s}
UCTH201~UCTH213	±0.5	±0.5

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions inch / mm H	L	L_1	A	J	J_1	J_2	N	T	T_1	A_1	A_2	A_0	B	S	Bolt Size inch / mm	Standard Unit No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension A_s mm	inch	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension A_c mm	inch	Mass kg
12																		UCTH201-150	UC201	6.7				UCTH201C-150	UCTH201CD-150	44	1 23/32	6.7	–	–	–	–	–
	1/2																	UCTH201-8-150	UC201-8	6.7				–	–	–	–	–	–	–	–	–	–
15		7 7/8	12 17/32	14 13/16	1 31/32	4 39/64	6 1/16	2 9/16	15/32	5 1/32	3 15/32	1/4	1 7/64	1 13/16	1.220	0.500	3/8	UCTH202-150	UC202	6.7				UCTH202C-150	UCTH202CD-150	44	1 23/32	6.7	–	–	–	–	–
	5/8	200	318	376	50	117	154	65	12	153	88	6	28	46.3	31	12.7	M10	UCTH202-10-150	UC202-10	6.7	12.8	6.65	13.2	–	–	–	–	–	–	–	–	–	–
17																		UCTH203-150	UC203	6.7				UCTH203C-150	UCTH203CD-150	44	1 23/32	6.7	–	–	–	–	–
	3/4																	UCTH204-12-150	UC204-12	6.7				–	–	–	–	–	–	–	–	–	–
20																		UCTH204-150	UC204	6.7				UCTH204C-150	UCTH204CD-150	44	1 23/32	6.7	UCTH204FC-150	UCTH204FCD-150	62	2 7/16	7.0
	7/8																	UCTH205-14-150	UC205-14	6.7				–	–	–	–	–	–	–	–	–	–
25	15/16	7 7/8	12 17/32	14 27/32	1 31/32	4 39/64	6 1/16	2 9/16	15/32	5 31/32	3 15/32	1/4	1 7/64	1 7/8	1.343	0.563	3/8	UCTH205-15-150	UC205-15	6.7	14.0	7.85	13.9	–	–	–	–	–	–	–	–	–	–
	1	200	318	377	50	117	154	65	12	152	88	6	28	47.8	34.1	14.3	M10	UCTH205-150	UC205	6.7				UCTH205C-150	UCTH205CD-150	48	1 7/8	6.7	UCTH205FC-150	UCTH205FCD-150	66	2 19/32	7.1
																		UCTH205-16-150	UC205-16	6.7				–	–	–	–	–	–	–	–	–	–
	1 1/8																	UCTH206-18-150	UC206-18	8.0				–	–	–	–	–	–	–	–	–	–
30		8 3/8	13 7/32	16 1/32	1 31/32	4 31/32	6 17/32	2 9/16	15/32	5 5/8	3 15/16	1/4	1 17/64	2 1/8	1.500	0.626	3/8	UCTH206-150	UC206	8.0	19.5	11.3	13.9	UCTH206C-150	UCTH206CD-150	52	2 1/16	8.0	UCTH206FC-150	UCTH206FCD-150	70	2 3/4	8.5
	1 3/16	213	336	407	50	126	166	65	12	143	100	6	32	54.2	38.1	15.9	M10	UCTH206-19-150	UC206-19	8.0				–	–	–	–	–	–	–	–	–	–
	1 1/4																	UCTH206-20-150	UC206-20	8.0				–	–	–	–	–	–	–	–	–	–
	1 1/4																	UCTH207-20-230	UC207-20	10.5				–	–	–	–	–	–	–	–	–	–
	1 5/16																	UCTH207-21-230	UC207-21	10.5				–	–	–	–	–	–	–	–	–	–
35	1 3/8	8 3/8	16 15/16	19 11/16	1 31/32	6 13/16	6 17/32	2 9/16	15/32	8 5/8	4 7/32	1/4	1 17/64	2 1/4	1.689	0.689	3/8	UCTH207-22-230	UC207-22	10.5	3	15.4	13.9	–	–	–	–	–	–	–	–	–	–
		213	430	500	50	173	166	65	12	219	107	6	32	57.4	42.9	17.5	M10	UCTH207-230	UC207	10.5				UCTH207C-230	UCTH207CD-230	59	2 5/16	10.5	UCTH207FC-230	UCTH207FCD-230	78	3 1/16	11.2
	1 7/16																	UCTH207-23-230	UC207-23	10.5				–	–	–	–	–	–	–	–	–	–
	1 1/2																	UCTH208-24-300	UC208-24	12.5				–	–	–	–	–	–	–	–	–	–
40	1 9/16	9 7/32	20 19/32	23 19/32	1 31/32	8 35/64	7 9/16	2 5/8	15/32	11 21/32	4 11/16	1/4	1 3/8	2 9/16	1.937	0.748	3/8	UCTH208-25-300	UC208-25	12.5	29.1	17.8	14.0	–	–	–	–	–	–	–	–	–	–
		234	523	599	50	217	192	67	12	296	119	6	35	65.2	49.2	19	M10	UCTH208-300	UC208	12.5				UCTH208C-300	UCTH208CD-300	68	2 11/16	12.5	UCTH208FC-300	UCTH208FCD-300	86	3 3/8	13.3
	1 5/8																	UCTH209-26-300	UC209-26	12.4				–	–	–	–	–	–	–	–	–	–
45	1 11/16	9 7/32	20 19/32	23 17/32	1 31/32	8 35/64	7 9/16	2 5/8	15/32	11 11/16	4 21/32	1/4	1 3/8	2 9/16	1.937	0.748	3/8	UCTH209-27-300	UC209-27	12.4	34.1	21.3	14.0	–	–	–	–	–	–	–	–	–	–
	1 3/4	234	523	598	50	217	192	67	12	297	118	6	35	65.2	49.2	19	M10	UCTH209-28-300	UC209-28	12.4				–	–	–	–	–	–	–	–	–	–
																		UCTH209-300	UC209	12.4				UCTH209C-300	UCTH209CD-300	68	2 11/16	12.4	UCTH209FC-300	UCTH209FCD-300	88	3 15/32	13.2
	1 7/8																	UCTH210-30-300	UC210-30	12.6				–	–	–	–	–	–	–	–	–	–
50	1 15/16	9 7/32	20 3/4	23 3/4	1 31/32	8 5/8	7 9/16	2 5/8	19/32	11 21/32	4 3/4	1/4	1 3/8	2 21/32	2.031	0.748	7/16	UCTH210-31-300	UC210-31	12.6	35.1	23.3	14.4	–	–	–	–	–	–	–	–	–	–
		234	527	603	50	219	192	67	15	296	121	6	35	67.6	51.6	19	M12	UCTH210-300	UC210	12.6				UCTH210C-300	UCTH210CD-300	73	2 7/8	12.6	UCTH210FC-300	UCTH210FCD-300	97	3 13/16	13.6
	2																	UCTH210-32-300	UC210-32	12.6				–	–	–	–	–	–	–	–	–	–
	2																	UCTH211-32-300	UC211-32	20.1				–	–	–	–	–	–	–	–	–	–
55	2 1/8	11 31/32	21 15/32	24 3/4	2 9/16	9 1/16	9 7/16	2 15/32	19/32	11 15/32	5 9/16	1/4	1 1/2	2 13/16	2.189	0.874	7/16	UCTH211-34-300	UC211-34	20.1	43.4	29.4	14.4	–	–	–	–	–	–	–	–	–	–
		304	545	629	65	230	240	63	15	291	141	6	38	71.4	55.6	22.2	M12	UCTH211-300	UC211	20.1				UCTH211C-300	UCTH211CD-300	75	2 15/16	20.1	UCTH211FC-300	UCTH211FCD-300	99	3 29/32	21.3
	2 3/16																	UCTH211-35-300	UC211-35	20.1				–	–	–	–	–	–	–	–	–	–
	2 1/4																	UCTH212-36-300	UC212-36	21.4				–	–	–	–	–	–	–	–	–	–
60		11 31/32	22 15/32	25 5/8	2 9/16	9 9/16	9 7/16	2 15/32	19/32	11 11/32	6 1/16	1/4	1 1/2	3 1/16	2.563	1.000	7/16	UCTH212-300	UC212	21.4	52.4	36.2	14.4	UCTH212C-300	UCTH212CD-300	88	3 15/32	21.4	UCTH212FC-300	UCTH212FCD-300	114	4 1/2	21.9
	2 3/8	304	571	651	65	243	240	63	15	288	154	6	38	77.7	65.1	25.4	M12	UCTH212-38-300	UC212-38	21.4				–	–	–	–	–	–	–	–	–	–
	2 7/16																	UCTH212-39-300	UC212-39	21.4				–	–	–	–	–	–	–	–	–	–
65	2 1/2	13 1/16	23 31/32	28 1/16	2 9/16	10 15/64	10 15/64	2 5/8	19/32	11 13/16	7	1/4	1 11/16	3 1/4	2.563	1.000	7/16	UCTH213-40-300	UC213-40	25.5	57.2	40.1	14.4	–	–	–	–	–	–	–	–	–	–
		332	609	713	65	260	260	67	15	300	178	6	43	82.7	65.1	25.4	M12	UCTH213-300	UC213	25.5				UCTH213C-300	UCTH213CD-300	88	3 15/32	25.5	UCTH213FC-300	UCTH213FCD-300	114	4 1/2	27.2

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
B-1/4-28UNF ..... 201~210
B-R1/8 ..... 211~213
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCTH206JL3-150, UC206L3)
4. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.
5. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
6. Tapered bore (with adapter) type products are also available.
(Example of Part No. : UKTH205J-150 + H305X, UK205 + H305X)

UCTL
Cylindrical bore (with set screws)
d 20 ~ 45 mm

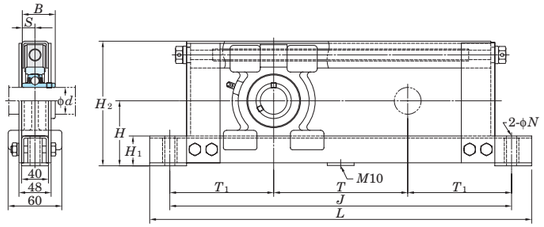

With Pressed Steel Cover



With Cast Iron Cover



Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Nominal unit code	Δ_{Hs}	Δ_{Js}
UCTL204~207	±2	±0.5
UCTL208, 209		±0.8

Shaft Dia. mm d	Dimensions mm H	H_1	H_2	L	J	N	T	T_1	B	S	Bolt Size mm	Standard Unit No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_c	Mass kg
20	77	44	146	430	370	15	100	135	31	12.7	M12	**UCTL204-100**	UC204	6.0	12.8	6.65	13.2	UCTL204C-100	UCTL204CD-100	44	6.0	–	–	–	–
	77	44	146	530	470	15	200	135	31	12.7	M12	**UCTL204-200**	UC204	7.0	12.8	6.65	13.2	UCTL204C-200	UCTL204CD-200	44	7.0	–	–	–	–
	77	44	146	630	570	15	300	135	31	12.7	M12	**UCTL204-300**	UC204	7.5	12.8	6.65	13.2	UCTL204C-300	UCTL204CD-300	44	7.5	–	–	–	–
	77	44	146	730	670	15	400	135	31	12.7	M12	**UCTL204-400**	UC204	8.0	12.8	6.65	13.2	UCTL204C-400	UCTL204CD-400	44	8.0	–	–	–	–
25	82	44	156	440	380	15	100	140	34.1	14.3	M12	**UCTL205-100**	UC205	7.0	14.0	7.85	13.9	UCTL205C-100	UCTL205CD-100	48	7.0	–	–	–	–
	82	44	156	540	480	15	200	140	34.1	14.3	M12	**UCTL205-200**	UC205	7.5	14.0	7.85	13.9	UCTL205C-200	UCTL205CD-200	48	7.5	–	–	–	–
	82	44	156	640	580	15	300	140	34.1	14.3	M12	**UCTL205-300**	UC205	8.0	14.0	7.85	13.9	UCTL205C-300	UCTL205CD-300	48	8.0	–	–	–	–
	82	44	156	740	680	15	400	140	34.1	14.3	M12	**UCTL205-400**	UC205	9.0	14.0	7.85	13.9	UCTL205C-400	UCTL205CD-400	48	9.0	–	–	–	–
30	87	44	166	450	390	15	100	145	38.1	15.9	M12	**UCTL206-100**	UC206	7.0	19.5	11.3	13.9	UCTL206C-100	UCTL206CD-100	52	7.0	UCTL206FC-100	UCTL206FCD-100	70	7.5
	87	44	166	550	490	15	200	145	38.1	15.9	M12	**UCTL206-200**	UC206	8.0	19.5	11.3	13.9	UCTL206C-200	UCTL206CD-200	52	8.0	UCTL206FC-200	UCTL206FCD-200	70	8.5
	87	44	166	650	590	15	300	145	38.1	15.9	M12	**UCTL206-300**	UC206	9.0	19.5	11.3	13.9	UCTL206C-300	UCTL206CD-300	52	9.0	UCTL206FC-300	UCTL206FCD-300	70	9.5
	87	44	166	750	690	15	400	145	38.1	15.9	M12	**UCTL206-400**	UC206	9.5	19.5	11.3	13.9	UCTL206C-400	UCTL206CD-400	52	9.5	UCTL206FC-400	UCTL206FCD-400	70	10
35	92	44	176	460	400	15	100	150	42.9	17.5	M12	**UCTL207-100**	UC207	8.0	25.7	15.4	13.9	UCTL207C-100	UCTL207CD-100	59	8.0	UCTL207FC-100	UCTL207FCD-100	78	9.0
	92	44	176	560	500	15	200	150	42.9	17.5	M12	**UCTL207-200**	UC207	8.5	25.7	15.4	13.9	UCTL207C-200	UCTL207CD-200	59	8.5	UCTL207FC-200	UCTL207FCD-200	78	9.5
	92	44	176	660	600	15	300	150	42.9	17.5	M12	**UCTL207-300**	UC207	9.0	25.7	15.4	13.9	UCTL207C-300	UCTL207CD-300	59	9.0	UCTL207FC-300	UCTL207FCD-300	78	10
	92	44	176	760	700	15	400	150	42.9	17.5	M12	**UCTL207-400**	UC207	10	25.7	15.4	13.9	UCTL207C-400	UCTL207CD-400	59	10	UCTL207FC-400	UCTL207FCD-400	78	11
40	97	44	186	470	410	15	100	155	49.2	19	M12	**UCTL208-100**	UC208	8.5	29.1	17.8	14.0	UCTL208C-100	UCTL208CD-100	68	8.5	UCTL208FC-100	UCTL208FCD-100	86	9.5
	97	44	186	570	510	15	200	155	49.2	19	M12	**UCTL208-200**	UC208	9.0	29.1	17.8	14.0	UCTL208C-200	UCTL208CD-200	68	9.0	UCTL208FC-200	UCTL208FCD-200	86	10
	97	44	186	670	610	15	300	155	49.2	19	M12	**UCTL208-300**	UC208	10	29.1	17.8	14.0	UCTL208C-300	UCTL208CD-300	68	10	UCTL208FC-300	UCTL208FCD-300	86	11
	97	44	186	770	710	15	400	155	49.2	19	M12	**UCTL208-400**	UC208	10.5	29.1	17.8	14.0	UCTL208C-400	UCTL208CD-400	68	10.5	UCTL208FC-400	UCTL208FCD-400	86	11.5
45	100	44	192	480	420	15	100	160	49.2	19	M12	**UCTL209-100**	UC209	9.0	34.1	21.3	14.0	UCTL209C-100	UCTL209CD-100	68	9.0	UCTL209FC-100	UCTL209FCD-100	88	10
	100	44	192	580	520	15	200	160	49.2	19	M12	**UCTL209-200**	UC209	9.5	34.1	21.3	14.0	UCTL209C-200	UCTL209CD-200	68	9.5	UCTL209FC-200	UCTL209FCD-200	88	10.5
	100	44	192	680	620	15	300	160	49.2	19	M12	**UCTL209-300**	UC209	10.5	34.1	21.3	14.0	UCTL209C-300	UCTL209CD-300	68	10.5	UCTL209FC-300	UCTL209FCD-300	88	11.5
	100	44	192	780	720	15	400	160	49.2	19	M12	**UCTL209-400**	UC209	11	34.1	21.3	14.0	UCTL209C-400	UCTL209CD-400	68	11	UCTL209FC-400	UCTL209FCD-400	88	12

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter codes. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings is C-1/4-28UNF.
3. As for the triple seal type product (204 and 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCTL206JL3-100, UC206L3)
4. The unit should be mounted so that load is applied to the frame mounting surface vertically and downward.
5. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.
6. Tapered bore (with adapter) type bearing units are also available. (Example of Part No. : UKTL206J-100 + H306X, UK206 + H306X)
7. If frame parts need to be corrosion resistant, contact with FYH.
8. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCTU
Cylindrical bore (with set screws)
d 40 ~ 80 mm

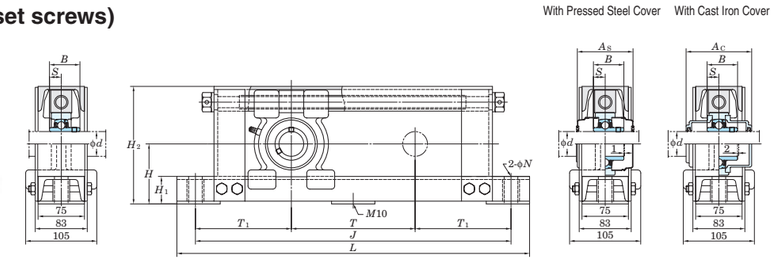

UCTU200

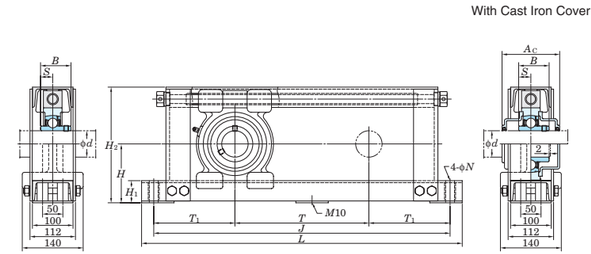

UCTU300

Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Nominal unit code	Δ_{Hs}	Δ_{Js}
UCTU208~212 UCTU313~315	±2	±0.8
UCTU316~318		±1.2

Shaft Dia. mm	Dimensions mm										Bolt Size mm	Standard Unit No.	Standard Bearing No.	Standard Mass	Basic Load Ratings kN		Factor	With Pressed Steel Cover Unit No.		With Pressed Steel Cover Dimension mm	With Pressed Steel Cover Mass	With Cast Iron Cover Unit No.		With Cast Iron Cover Dimension mm	With Cast Iron Cover Mass
d	H	H_1	H_2	L	J	N	T	T_1	B	S				kg	C_r	C_{0r}	f_0	Open Type	One Side Closed Type	A_s	kg	Open Type	One Side Closed Type	A_c	kg
40	97	44	190	870	810	22	500	155	49.2	19	M18	**UCTU208-500**	UC208	21	29.1	17.8	14.0	UCTU208C-500	UCTU208CD-500	68	21	UCTU208FC-500	UCTU208FCD-500	86	22
	97	44	190	970	910	22	600	155	49.2	19	M18	**UCTU208-600**	UC208	22	29.1	17.8	14.0	UCTU208C-600	UCTU208CD-600	68	22	UCTU208FC-600	UCTU208FCD-600	86	23
	97	44	190	1,070	1,010	22	700	155	49.2	19	M18	**UCTU208-700**	UC208	24	29.1	17.8	14.0	UCTU208C-700	UCTU208CD-700	68	24	UCTU208FC-700	UCTU208FCD-700	86	25
	97	44	190	1,170	1,110	22	800	155	49.2	19	M18	**UCTU208-800**	UC208	26	29.1	17.8	14.0	UCTU208C-800	UCTU208CD-800	68	26	UCTU208FC-800	UCTU208FCD-800	86	27
	97	44	190	1,270	1,210	22	900	155	49.2	19	M18	**UCTU208-900**	UC208	28	29.1	17.8	14.0	UCTU208C-900	UCTU208CD-900	68	28	UCTU208FC-900	UCTU208FCD-900	86	29
45	102	44	200	880	820	22	500	160	49.2	19	M18	**UCTU209-500**	UC209	22	34.1	21.3	14.0	UCTU209C-500	UCTU209CD-500	68	22	UCTU209FC-500	UCTU209FCD-500	88	23
	102	44	200	980	920	22	600	160	49.2	19	M18	**UCTU209-600**	UC209	24	34.1	21.3	14.0	UCTU209C-600	UCTU209CD-600	68	24	UCTU209FC-600	UCTU209FCD-600	88	25
	102	44	200	1,080	1,020	22	700	160	49.2	19	M18	**UCTU209-700**	UC209	25	34.1	21.3	14.0	UCTU209C-700	UCTU209CD-700	68	25	UCTU209FC-700	UCTU209FCD-700	88	26
	102	44	200	1,180	1,120	22	800	160	49.2	19	M18	**UCTU209-800**	UC209	27	34.1	21.3	14.0	UCTU209C-800	UCTU209CD-800	68	27	UCTU209FC-800	UCTU209FCD-800	88	28
	102	44	200	1,280	1,220	22	900	160	49.2	19	M18	**UCTU209-900**	UC209	29	34.1	21.3	14.0	UCTU209C-900	UCTU209CD-900	68	29	UCTU209FC-900	UCTU209FCD-900	88	30
50	107	44	210	890	830	22	500	165	51.6	19	M18	**UCTU210-500**	UC210	23	35.1	23.3	14.4	UCTU210C-500	UCTU210CD-500	73	23	UCTU210FC-500	UCTU210FCD-500	97	24
	107	44	210	990	930	22	600	165	51.6	19	M18	**UCTU210-600**	UC210	25	35.1	23.3	14.4	UCTU210C-600	UCTU210CD-600	73	25	UCTU210FC-600	UCTU210FCD-600	97	26
	107	44	210	1,090	1,030	22	700	165	51.6	19	M18	**UCTU210-700**	UC210	27	35.1	23.3	14.4	UCTU210C-700	UCTU210CD-700	73	27	UCTU210FC-700	UCTU210FCD-700	97	28
	107	44	210	1,190	1,130	22	800	165	51.6	19	M18	**UCTU210-800**	UC210	28	35.1	23.3	14.4	UCTU210C-800	UCTU210CD-800	73	28	UCTU210FC-800	UCTU210FCD-800	97	29
	107	44	210	1,290	1,230	22	900	165	51.6	19	M18	**UCTU210-900**	UC210	30	35.1	23.3	14.4	UCTU210C-900	UCTU210CD-900	73	30	UCTU210FC-900	UCTU210FCD-900	97	31
55	115	44	230	910	850	22	500	175	55.6	22.2	M18	**UCTU211-500**	UC211	25	43.4	29.4	14.4	UCTU211C-500	UCTU211CD-500	75	25	UCTU211FC-500	UCTU211FCD-500	99	26
	115	44	230	1,010	950	22	600	175	55.6	22.2	M18	**UCTU211-600**	UC211	27	43.4	29.4	14.4	UCTU211C-600	UCTU211CD-600	75	27	UCTU211FC-600	UCTU211FCD-600	99	28
	115	44	230	1,110	1,050	22	700	175	55.6	22.2	M18	**UCTU211-700**	UC211	28	43.4	29.4	14.4	UCTU211C-700	UCTU211CD-700	75	28	UCTU211FC-700	UCTU211FCD-700	99	29
	115	44	230	1,210	1,150	22	800	175	55.6	22.2	M18	**UCTU211-800**	UC211	30	43.4	29.4	14.4	UCTU211C-800	UCTU211CD-800	75	30	UCTU211FC-800	UCTU211FCD-800	99	31
	115	44	230	1,310	1,250	22	900	175	55.6	22.2	M18	**UCTU211-900**	UC211	32	43.4	29.4	14.4	UCTU211C-900	UCTU211CD-900	75	32	UCTU211FC-900	UCTU211FCD-900	99	33
60	120	44	240	920	860	22	500	180	65.1	25.4	M18	**UCTU212-500**	UC212	26	52.4	36.2	14.4	UCTU212C-500	UCTU212CD-500	88	26	UCTU212FC-500	UCTU212FCD-500	114	28
	120	44	240	1,020	960	22	600	180	65.1	25.4	M18	**UCTU212-600**	UC212	28	52.4	36.2	14.4	UCTU212C-600	UCTU212CD-600	88	28	UCTU212FC-600	UCTU212FCD-600	114	30
	120	44	240	1,120	1,060	22	700	180	65.1	25.4	M18	**UCTU212-700**	UC212	30	52.4	36.2	14.4	UCTU212C-700	UCTU212CD-700	88	30	UCTU212FC-700	UCTU212FCD-700	114	32
	120	44	240	1,220	1,160	22	800	180	65.1	25.4	M18	**UCTU212-800**	UC212	31	52.4	36.2	14.4	UCTU212C-800	UCTU212CD-800	88	31	UCTU212FC-800	UCTU212FCD-800	114	33
	120	44	240	1,320	1,260	22	900	180	65.1	25.4	M18	**UCTU212-900**	UC212	33	52.4	36.2	14.4	UCTU212C-900	UCTU212CD-900	88	33	UCTU212FC-900	UCTU212FCD-900	114	35
65	145	55	285	940	880	22	500	190	75	30	M18	**UCTU313-500**	UC313	40	92.7	59.9	13.2	–	–	–	–	UCTU313C-500	UCTU313CD-500	122	42
	145	55	285	1,040	980	22	600	190	75	30	M18	**UCTU313-600**	UC313	43	92.7	59.9	13.2	–	–	–	–	UCTU313C-600	UCTU313CD-600	122	45
	145	55	285	1,140	1,080	22	700	190	75	30	M18	**UCTU313-700**	UC313	46	92.7	59.9	13.2	–	–	–	–	UCTU313C-700	UCTU313CD-700	122	48
	145	55	285	1,240	1,180	22	800	190	75	30	M18	**UCTU313-800**	UC313	49	92.7	59.9	13.2	–	–	–	–	UCTU313C-800	UCTU313CD-800	122	51
	145	55	285	1,340	1,280	22	900	190	75	30	M18	**UCTU313-900**	UC313	51	92.7	59.9	13.2	–	–	–	–	UCTU313C-900	UCTU313CD-900	122	53
70	150	55	295	960	900	22	500	200	78	33	M18	**UCTU314-500**	UC314	44	104	68.2	13.2	–	–	–	–	UCTU314C-500	UCTU314CD-500	124	46
	150	55	295	1,060	1,000	22	600	200	78	33	M18	**UCTU314-600**	UC314	46	104	68.2	13.2	–	–	–	–	UCTU314C-600	UCTU314CD-600	124	48
	150	55	295	1,160	1,100	22	700	200	78	33	M18	**UCTU314-700**	UC314	48	104	68.2	13.2	–	–	–	–	UCTU314C-700	UCTU314CD-700	124	50
	150	55	295	1,260	1,200	22	800	200	78	33	M18	**UCTU314-800**	UC314	51	104	68.2	13.2	–	–	–	–	UCTU314C-800	UCTU314CD-800	124	53
	150	55	295	1,360	1,300	22	900	200	78	33	M18	**UCTU314-900**	UC314	53	104	68.2	13.2	–	–	–	–	UCTU314C-900	UCTU314CD-900	124	55
75	155	55	305	980	920	22	500	210	82	32	M18	**UCTU315-500**	UC315	54	113	77.2	13.2	–	–	–	–	UCTU315C-500	UCTU315CD-500	134	57
	155	55	305	1,080	1,020	22	600	210	82	32	M18	**UCTU315-600**	UC315	57	113	77.2	13.2	–	–	–	–	UCTU315C-600	UCTU315CD-600	134	60
	155	55	305	1,180	1,120	22	700	210	82	32	M18	**UCTU315-700**	UC315	59	113	77.2	13.2	–	–	–	–	UCTU315C-700	UCTU315CD-700	134	62
	155	55	305	1,280	1,220	22	800	210	82	32	M18	**UCTU315-800**	UC315	61	113	77.2	13.2	–	–	–	–	UCTU315C-800	UCTU315CD-800	134	64
	155	55	305	1,380	1,320	22	900	210	82	32	M18	**UCTU315-900**	UC315	64	113	77.2	13.2	–	–	–	–	UCTU315C-900	UCTU315CD-900	134	67
80	160	55	315	1,000	940	22	500	220	86	34	M18	**UCTU316-500**	UC316	57	123	86.7	13.3	–	–	–	–	UCTU316C-500	UCTU316CD-500	138	60
	160	55	315	1,100	1,040	22	600	220	86	34	M18	**UCTU316-600**	UC316	60	123	86.7	13.3	–	–	–	–	UCTU316C-600	UCTU316CD-600	138	63
	160	55	315	1,200	1,140	22	700	220	86	34	M18	**UCTU316-700**	UC316	62	123	86.7	13.3	–	–	–	–	UCTU316C-700	UCTU316CD-700	138	65
	160	55	315	1,300	1,240	22	800	220	86	34	M18	**UCTU316-800**	UC316	64	123	86.7	13.3	–	–	–	–	UCTU316C-800	UCTU316CD-800	138	67
	160	55	315	1,400	1,340	22	900	220	86	34	M18	**UCTU316-900**	UC316	67	123	86.7	13.3	–	–	–	–	UCTU316C-900	UCTU316CD-900	138	70

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
C-1/4-28UNF..... 208~210
C-R1/8..... 211, 212, 313~318
3. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing.
(Example of Part No. : UCTU208JL3-500, UC208L3)
4. The unit should be mounted so that load is applied to the frame mounting surface vertically and downward.
5. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.
6. Tapered bore (with adapter) type bearing units are also available. (Example of Part No. : UKTU208J-500 + H308X, UK208 + H308X)
7. If frame parts need to be corrosion resistant, contact with FYH.
8. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

UCTU
Cylindrical bore (with set screws)
d 85 ~ 90 mm

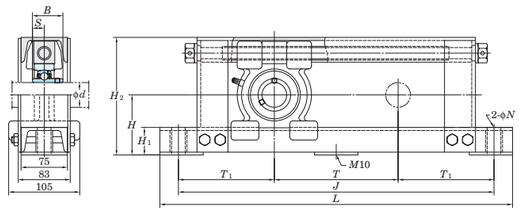

With Pressed Steel Cover



With Cast Iron Cover



UCTU200

With Cast Iron Cover

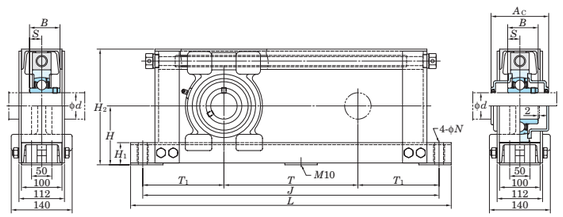

UCTU300

Variations of tolerance of distance from mounting bottom to center of spherical bore (Δ_{Hs}) and variations of tolerance of distance between centers of bolt holes (Δ_{Js})

Unit: mm

Nominal unit code	Δ_{Hs}	Δ_{Js}
UCTU208~212 UCTU313~315	±2	±0.8
UCTU316~318		±1.2

Shaft Dia. d mm	Dimensions mm H	H_1	H_2	L	J	N	T	T_1	B	S	Bolt Size mm	Standard Unit No.	Bearing No.	Mass kg	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	With Pressed Steel Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_s	Mass kg	With Cast Iron Cover Unit No. Open Type	One Side Closed Type	Dimension mm A_c	Mass kg
85	165	55	325	1,020	960	22	500	230	96	40	M18	**UCTU317-500**	UC317	62	133	96.8	13.3	–	–	–	–	UCTU317C-500	UCTU317CD-500	146	65
	165	55	325	1,120	1,060	22	600	230	96	40	M18	**UCTU317-600**	UC317	64	133	96.8	13.3	–	–	–	–	UCTU317C-600	UCTU317CD-600	146	67
	165	55	325	1,220	1,160	22	700	230	96	40	M18	**UCTU317-700**	UC317	67	133	96.8	13.3	–	–	–	–	UCTU317C-700	UCTU317CD-700	146	70
	165	55	325	1,320	1,260	22	800	230	96	40	M18	**UCTU317-800**	UC317	69	133	96.8	13.3	–	–	–	–	UCTU317C-800	UCTU317CD-800	146	72
	165	55	325	1,420	1,360	22	900	230	96	40	M18	**UCTU317-900**	UC317	71	133	96.8	13.3	–	–	–	–	UCTU317C-900	UCTU317CD-900	146	74
90	170	55	335	1,050	990	22	500	245	96	40	M18	**UCTU318-500**	UC318	65	143	107	13.3	–	–	–	–	UCTU318C-500	UCTU318CD-500	150	68
	170	55	335	1,150	1,090	22	600	245	96	40	M18	**UCTU318-500**	UC318	67	143	107	13.3	–	–	–	–	UCTU318C-600	UCTU318CD-600	150	70
	170	55	335	1,250	1,190	22	700	245	96	40	M18	**UCTU318-500**	UC318	70	143	107	13.3	–	–	–	–	UCTU318C-700	UCTU318CD-700	150	73
	170	55	335	1,350	1,290	22	800	245	96	40	M18	**UCTU318-500**	UC318	72	143	107	13.3	–	–	–	–	UCTU318C-800	UCTU318CD-800	150	75
	170	55	335	1,450	1,390	22	900	245	96	40	M18	**UCTU318-500**	UC318	74	143	107	13.3	–	–	–	–	UCTU318C-900	UCTU318CD-900	150	77

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
C-1/4-28UNF..... 208~210
C-R1/8..... 211, 212, 313~318
3. As for the triple seal type product, accessory code L3 follows the Part No. of unit or bearing.
(Example of Part No. : UCTU208JL3-500, UC208L3)
4. The unit should be mounted so that load is applied to the frame mounting surface vertically and downward.
5. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.
6. Tapered bore (with adapter) type bearing units are also available. (Example of Part No. : UKTU208J-500 + H308X, UK208 + H308X)
7. If frame parts need to be corrosion resistant, contact with FYH.
8. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

SBPTH
Cylindrical bore (with set screws)
d 12 ~ 25 mm

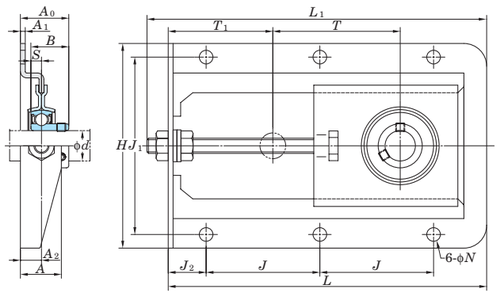

Variations of tolerance of distance between centers of bolt holes (Δ_{Js}, Δ_{J1s})

Unit: mm

Nominal unit code	Δ_{Js}	Δ_{J1s}
SBPTH201~SBPTH205	±0.7	±0.7

Shaft Dia. mm	Dimensions inch / mm															Bolt Size inch / mm	Unit No.		Bearing No.	Basic Load Ratings kN		Factor	Mass
d	H	L	L_1	A	J	J_1	J_2	N	T	T_1	A_1	A_2	A_0	B	S					C_r	C_{0r}	f_0	kg
12	5 5/16	8 9/32	8 21/32	1 1/16	2 61/64	4 39/64	31/32	11/32	3 15/32	2 23/32	1/8	35/64	1 3/16	0.866	0.236	5/16	SBPTH201-90		SB201	9.55	4.80	13.2	0.91
	135	210	220	27	75	117	25	9	88	69	3.2	13.9	29.9	22	6	M8							
15	5 5/16	8 9/32	8 21/32	1 1/16	2 61/64	4 39/64	31/32	11/32	3 15/32	2 23/32	1/8	35/64	1 3/16	0.866	0.236	5/16	SBPTH202-90		SB202	9.55	4.80	13.2	0.91
	135	210	220	27	75	117	25	9	88	69	3.2	13.9	29.9	22	6	M8							
17	5 5/16	8 9/32	8 21/32	1 1/16	2 61/64	4 39/64	31/32	11/32	3 15/32	2 23/32	1/8	35/64	1 3/16	0.866	0.236	5/16	SBPTH203-90		SB203	9.55	4.80	13.2	0.91
	135	210	220	27	75	117	25	9	88	69	3.2	13.9	29.9	22	6	M8							
20	5 5/16	8 9/32	8 21/32	1 1/16	2 61/64	4 39/64	31/32	11/32	3 15/32	2 23/32	1/8	35/64	1 1/4	0.984	0.276	5/16	SBPTH204-90		SB204	12.8	6.65	13.2	0.91
	135	210	220	27	75	117	25	9	88	69	3.2	13.9	31.9	25	7	M8							
25	5 5/16	8 9/32	8 21/32	1 1/16	2 61/64	4 39/64	31/32	11/32	3 15/32	2 23/32	1/8	35/64	1 5/16	1.063	0.295	5/16	SBPTH205-90		SB205	14.0	7.85	13.9	0.91
	135	210	220	27	75	117	25	9	88	69	3.2	13.9	33.4	27	7.5	M8							

Remarks 1. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
2. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.

SBNPTH
Cylindrical bore (with set screws)
d 12 ~ 25 mm

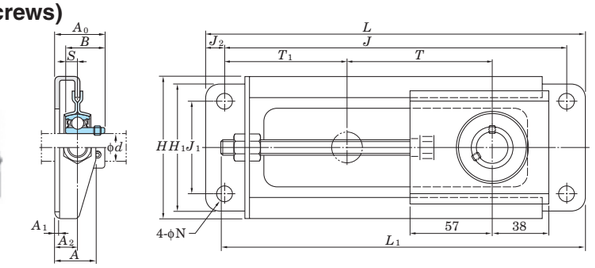

Variations of tolerance of distance between centers of bolt holes (Δ_{Js}, Δ_{J1s})

Unit: mm

Nominal unit code	Δ_{Js}	Δ_{J1s}
SBNPTH201~SBNPTH205	±0.7	±0.7

Shaft Dia. mm	Dimensions inch / mm																Bolt Size inch	Unit No.		Bearing No.	Basic Load Ratings kN		Factor	Mass
d	H	H_1	L	L_1	A	J	J_1	J_2	N	T	T_1	A_1	A_2	A_0	B	S	mm				C_r	C_{0r}	f_0	kg
12	3 15/16	3 17/32	10 1/4	9 11/16	1 1/16	9 1/4	2 9/16	1/2	7/16	3 15/16	3 9/32	1/8	19/32	1 7/32	0.866	0.236	5/16	SBNPTH201-100		SB201	9.55	4.80	13.2	0.93
	100	90	260	246	27	235	65	12.5	11	100	83.5	3.2	15	31	22	6	M8							
15	3 15/16	3 17/32	10 1/4	9 11/16	1 1/16	9 1/4	2 9/16	1/2	7/16	3 15/16	3 9/32	1/8	19/32	1 7/32	0.866	0.236	5/16	SBNPTH202-100		SB202	9.55	4.80	13.2	0.93
	100	90	260	246	27	235	65	12.5	11	100	83.5	3.2	15	31	22	6	M8							
17	3 15/16	3 17/32	10 1/4	9 11/16	1 1/16	9 1/4	2 9/16	1/2	7/16	3 15/16	3 9/32	1/8	19/32	1 7/32	0.866	0.236	5/16	SBNPTH203-100		SB203	9.55	4.80	13.2	0.93
	100	90	260	246	27	235	65	12.5	11	100	83.5	3.2	15	31	22	6	M8							
20	3 15/16	3 17/32	10 1/4	9 11/16	1 1/16	9 1/4	2 9/16	1/2	7/16	3 15/16	3 9/32	1/8	19/32	1 5/16	0.984	0.276	5/16	SBNPTH204-100		SB204	12.8	6.65	13.2	0.93
	100	90	260	246	27	235	65	12.5	11	100	83.5	3.2	15	33	25	7	M8							
25	3 15/16	3 17/32	10 1/4	9 11/16	1 1/16	9 1/4	2 9/16	1/2	7/16	3 15/16	3 9/32	1/8	19/32	1 11/32	1.063	0.295	5/16	SBNPTH205-100		SB205	14.0	7.85	13.9	0.93
	100	90	260	246	27	235	65	12.5	11	100	83.5	3.2	15	34.5	27	7.5	M8							

Remarks 1. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.
2. If heavy load ($P_r/C_r > 0.12$), vibration, or impact occurs, contact with FYH.

UCC
Cylindrical bore (with set screws)
d 12 ~ (45) mm





Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	r	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
12							**UCC201**		UC201				0.52
	1/2						**UCC201-8**		UC201-8				
15		2.835	25/32	0.06	1.220	0.500	**UCC202**		UC202				0.50
	5/8	72	20	1.5	31	12.7	**UCC202-10**	C204	UC202-10	12.8	6.65	13.2	
17							**UCC203**		UC203				0.49
	3/4						**UCC204-12**		UC204-12				0.47
20							**UCC204**		UC204				
25	7/8						**UCC205-14**		UC205-14				
	15/16	3.150	55/64	0.06	1.343	0.563	**UCC205-15**	C205	UC205-15	14.0	7.85	13.9	0.64
		80	22	1.5	34.1	14.3	**UCC205**		UC205				
	1						**UCC205-16**		UC205-16				
		3.543	11/16	0.06	1.500	0.626	**UCCX05**	CX05	UCX05	19.5	11.3	13.9	1.0
	1	90	27	1.5	38.1	15.9	**UCCX05-16**		UCX05-16				
		3.543	11/32	0.08	1.496	0.591	**UCC305**	C305	UC305	21.2	10.9	12.6	1.5
	1	90	26	2	38	15	**UCC305-16**		UC305-16				
30	1 1/8						**UCC206-18**		UC206-18				
		3.346	11/16	0.06	1.500	0.626	**UCC206**	C206	UC206	19.5	11.3	13.9	0.81
	1 3/16	85	27	1.5	38.1	15.9	**UCC206-19**		UC206-19				
	1 1/4						**UCC206-20**		UC206-20				
		3.937	13/16	0.08	1.689	0.689	**UCCX06**		UCX06				
	1 3/16	100	30	2	42.9	17.5	**UCCX06-19**	CX06	UCX06-19	25.7	15.4	13.9	1.3
	1 1/4						**UCCX06-20**		UCX06-20				
	–	3.937	17/64	0.08	1.693	0.669	**UCC306**	C306	UC306	26.7	15.0	13.3	1.7
35	1 1/4						**UCC207-20**		UC207-20				
	1 5/16	3.543	17/64	0.08	1.689	0.689	**UCC207-21**		UC207-21				
	1 3/8	90	28	2	42.9	17.5	**UCC207-22**	C207	UC207-22	25.7	15.4	13.9	0.93
							UCC207		UC207				
	1 7/16						**UCC207-23**		UC207-23				
	1 3/8						**UCCX07-22**		UCX07-22				
		4.331	1 11/32	0.08	1.937	0.748	**UCCX07**	CX07	UCX07	29.1	17.8	14.0	1.7
	1 7/16	110	34	2	49.2	19	**UCCX07-23**		UCX07-23				
	–	4.331	1 17/64	0.12	1.890	0.748	**UCC307**	C307	UC307	33.4	19.3	13.2	2.2
40	1 1/2						**UCC208-24**		UC208-24				
	1 9/16	3.937	1 3/16	0.08	1.937	0.748	**UCC208-25**	C208	UC208-25	29.1	17.8	14.0	1.2
		100	30	2	49.2	19	**UCC208**		UC208				
	1 1/2	4.724	1 1/2	0.08	1.937	0.748	**UCCX08-24**	CX08	UCX08-24	34.1	21.3	14.0	2.3
		120	38	2	49.2	19	**UCCX08**		UCX08				
	1 1/2	4.724	1 11/32	0.12	2.047	0.748	**UCC308-24**	C308	UC308-24	40.7	24.0	13.2	2.2
		120	34	3	52	19	**UCC308**		UC308				
45	1 5/8						**UCC209-26**		UC209-26				
	1 11/16	4.331	1 7/32	0.08	1.937	0.748	**UCC209-27**	C209	UC209-27	34.1	21.3	14.0	1.5
	1 3/4	110	31	2	49.2	19	**UCC209-28**		UC209-28				
							UCC209		UC209				

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~213, X05~X12, 305~308
A-R1/8 ..... 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCC206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

d (45) ~ 85 mm

Variations of tolerance of outside diameter (Δ_{Hs}), variations of tolerance of width (Δ_{As}), and tolerance of circumferential runout of outside diameter (Y)

Unit: mm

Housing No.			Δ_{Hs}	Δ_{As}	Y
C204~C205			0 −0.030	±0.2	0.2
C206~C210	CX05~CX08	C305~C308	0 −0.035		
	CX09~CX10	C309~C310	0 −0.040	±0.3	0.3
C211~C213	CX11~CX12	C311~C314			
		C315~C318	0 −0.046		
		C319			0.4
		C320~C322	0 −0.052		
		C324~C328	0 −0.057		

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	r	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
45	1 3/4	4.724	1 1/2	0.08	2.031	0.748	**UCCX09-28**	CX09	UCX09-28	35.1	23.3	14.4	2.3
		120	38	2	51.6	19	**UCCX09**		UCX09				
	1 3/4	5.118	1 1/2	0.12	2.244	0.866	**UCC309-28**	C309	UC309-28	48.9	29.5	13.3	2.8
		130	38	3	57	22	**UCC309**		UC309				
50	1 7/8						**UCC210-30**		UC210-30				
	1 15/16	4.724	1 19/64	0.08	2.031	0.748	**UCC210-31**	C210	UC210-31	35.1	23.3	14.4	2.0
		120	33	2	51.6	19	**UCC210**		UC210				
	2						**UCC210-32**		UC210-32				
	1 15/16						**UCCX10-31**		UCX10-31				
		5.118	1 37/64	0.1	2.189	0.874	**UCCX10**	CX10	UCX10	43.4	29.4	14.4	2.8
		130	40	2.5	55.6	22.2	**UCCX10-32**		UCX10-32				
	–	5.512	1 37/64	0.12	2.402	0.866	**UCC310**	C310	UC310	62.0	38.3	13.2	3.2
		140	40	3	61	22							
55	2						**UCC211-32**		UC211-32				
	2 1/8	4.921	1 3/8	0.1	2.189	0.874	**UCC211-34**	C211	UC211-34	43.4	29.4	14.4	2.2
		125	35	2.5	55.6	22.2	**UCC211**		UC211				
	2 3/16						**UCC211-35**		UC211-35				
							UCCX11		UCX11				
	2 3/16	5.906	1 21/32	0.1	2.563	1.000	**UCCX11-35**	CX11	UCX11-35	52.4	36.2	14.4	4.0
	2 1/4	150	42	2.5	65.1	25.4	**UCCX11-36**		UCX11-36				
	2						**UCC311-32**		UC311-32				
		5.906	1 47/64	0.12	2.598	0.984	**UCC311**	C311	UC311	71.6	45.0	13.2	3.9
	2 3/16	150	44	3	66	25	**UCC311-35**		UC311-35				
60	2 1/4						**UCC212-36**		UC212-36				
		5.118	1 1/2	0.1	2.563	1.000	**UCC212**	C212	UC212	52.4	36.2	14.4	2.6
	2 3/8	130	38	2.5	65.1	25.4	**UCC212-38**		UC212-38				
	2 7/16						**UCC212-39**		UC212-39				
		6.299	1 47/64	0.1	2.563	1.000	**UCCX12**	CX12	UCX12	57.2	40.1	14.4	4.6
	2 7/16	160	44	2.5	65.1	25.4	**UCCX12-39**		UCX12-39				
		6.299	1 13/16	0.12	2.795	1.024	**UCC312**	C312	UC312	81.9	52.2	13.2	4.8
	2 7/16	160	46	3	71	26	**UCC312-39**		UC312-39				
65	2 1/2	5.512	1 37/64	0.1	2.563	1.000	**UCC213-40**	C213	UC213-40	57.2	40.1	14.4	3.0
		140	40	2.5	65.1	25.4	**UCC213**		UC213				
	2 1/2	6.693	1 31/32	0.12	2.953	1.181	**UCC313-40**	C313	UC313-40	92.7	59.9	13.2	5.7
		170	50	3	75	30	**UCC313-40**		UC313				
70	2 3/4	7.087	2 3/64	0.12	3.071	1.299	**UCC314-44**	C314	UC314-44	104	68.2	13.2	6.7
		180	52	3	78	33	**UCC314**		UC314				
75	2 15/16	7.480	2 11/64	0.16	3.228	1.260	**UCC315-47**	C315	UCC315-47	113	77.2	13.2	7.8
		190	55	4	82	32	**UCC315**		UCC315				
	3						**UCC315-48**		UCC315-48				
80	–	7.874	2 23/64	0.16	3.386	1.339	**UCC316**	C316	UC316	123	86.7	13.3	9.2
		200	60	4	86	34							
85	–	8.465	2 33/64	0.16	3.780	1.575	**UCC317**	C317	UC317	133	96.8	13.3	11.7
		215	64	4	96	40							

UCC
Cylindrical bore (with set screws)
d 90 ~ 140 mm





Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	r	B	S	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Mass kg
90	3 1/2	8.858 225	2 19/32 66	0.16 4	3.780 96	1.575 40	**UCC318-56** **UCC318**	C318	UC318-56 UC318	143	107	13.3	13.1
95	–	9.449 240	2 53/64 72	0.16 4	4.055 103	1.614 41	**UCC319**	C319	UC319	153	119	13.3	15.8
100	3 15/16 4	10.236 260	2 61/64 75	0.16 4	4.252 108	1.654 42	**UCC320** **UCC320-63** **UCC320-64**	C320	UC320 UC320-63 UC320-64	173	141	13.2	19.6
105	–	10.236 260	2 61/64 75	0.16 4	4.409 112	1.732 44	**UCC321**	C321	UC321	184	153	13.2	27.0
110	–	11.811 300	3 5/32 80	0.2 5	4.606 117	1.811 46	**UCC322**	C322	UC322	205	180	13.2	29.2
120	–	12.598 320	3 35/64 90	0.2 5	4.961 126	2.008 51	**UCC324**	C324	UC324	207	185	13.5	35.9
130	–	13.386 340	3 15/16 100	0.24 6	5.315 135	2.126 54	**UCC326**	C326	UC326	229	214	13.6	43.0
140	–	14.173 360	3 15/16 100	0.24 6	5.709 145	2.323 59	**UCC328**	C328	UC328	253	246	13.6	52.9

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~213, X05~X12, 305~308
A-R1/8 ..... 309~328
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (L2) follows the Part No. of unit or bearing. (Example of Part No. : UCC206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings, see the dimensional tables of ball bearing for unit.

Variations of tolerance of outside diameter (Δ_{Hs}), variations of tolerance of width (Δ_{As}), and tolerance of circumferential runout of outside diameter (Y)

Unit: mm

Housing No.			Δ_{Hs}	Δ_{As}	Y
C204~C205			0 −0.030	±0.2	0.2
C206~C210	CX05~CX08	C305~C308	0 −0.035		
	CX09~CX10	C309~C310	0 −0.040	±0.3	0.3
C211~C213	CX11~CX12	C311~C314			
		C315~C318	0 −0.046		
		C319			0.4
		C320~C322	0 −0.052		
		C324~C328	0 −0.057		

UKC
Tapered bore (with adapter)
d_1 20 ~ (50) mm





Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	r	B_1 1)	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Adapter 1) No.	Mass 1) kg
20	3/4	3.150 80	55/64 22	0.06 1.5	1 5/32(1 3/8) 29(35)	**UKC205**	C205	UK205	14.0	7.85	13.9	HE305X(HE2305X) H305X(H2305X)	0.68(0.70)
	3/4	3.543 90	11/16 27	0.06 1.5	1 3/8 35	**UKCX05**	CX05	UKX05	19.5	11.3	13.9	HE2305X H2305X	0.99
	3/4	3.543 90	11/32 26	0.08 2	1 3/8 35	**UKC305**	C305	UK305	21.2	10.9	12.6	HE2305X H2305X	1.6
25	1	3.346 85	11/16 27	0.06 1.5	1 7/32(1 1/2) 31(38)	**UKC206**	C206	UK206	19.5	11.3	13.9	H306X(H2306X) HE306X(HE2306X)	0.85(0.89)
	1	3.937 100	13/16 30	0.08 2	1 1/2 38	**UKCX06**	CX06	UKX06	25.7	15.4	13.9	H2306X HE2306X	1.3
	1	3.937 100	13/16 28	0.08 2	1 1/2 38	**UKC306**	C306	UK306	26.7	15.0	13.3	H2306X HE2306X	1.8
30	1 1/8	3.543 90	17/64 28	0.08 2	1 3/8(1 11/16) 35(43)	**UKC207**	C207	UK207	25.7	15.4	13.9	HS307X(HS2307X) H307X(H2307X)	0.97(1.0)
	1 1/8	4.331 110	1 11/32 34	0.08 2	1 11/16 43	**UKCX07**	CX07	UKX07	29.1	17.8	14.0	HS2307X H2307X	1.7
	1 1/8	4.331 110	1 17/64 32	0.12 3	1 11/16 43	**UKC307**	C307	UK307	33.4	19.3	13.2	HS2307X H2307X	2.2
35	1 1/4 1 3/8	3.937 100	1 3/16 30	0.08 2	1 13/32(1 13/16) 36(46)	**UKC208**	C208	UK208	29.1	17.8	14.0	HE308X(HE2308X) HS308X(HS2308X) H308X(H2308X)	1.3(1.4)
	1 1/4 1 3/8	4.724 120	1 1/2 38	0.08 2	1 13/16 46	**UKCX08**	CX08	UKX08	34.1	21.3	14.0	HE2308X HS2308X H2308X	2.3
	1 1/4 1 3/8	4.724 120	1 11/32 34	0.12 3	1 13/16 46	**UKC308**	C308	UK308	40.7	24.0	13.2	HE2308X HS2308X H2308X	2.2
40	1 1/2	4.331 110	1 7/32 31	0.08 2	1 17/32(1 31/32) 39(50)	**UKC209**	C209	UK209	34.1	21.3	14.0	HE309X(H2309X) H309X(H2309X)	1.6(1.7)
	1 1/2	4.724 120	1 1/2 38	0.08 2	1 31/32 50	**UKCX09**	CX09	UKX09	35.1	23.3	14.4	HE2309X H2309X	2.3
	1 1/2	5.118 130	1 1/2 38	0.12 3	1 31/32 50	**UKC309**	C309	UK309	48.9	29.5	13.3	HE2309X H2309X	2.8
45	1 3/4	4.724 120	1 19/64 33	0.08 2	1 21/32(2 5/32) 42(55)	**UKC210**	C210	UK210	35.1	23.3	14.4	HE310X(HE2310X) H310X(H2310X)	2.0(2.1)
	1 3/4	5.118 130	1 37/64 40	0.1 2.5	2 5/32 55	**UKCX10**	CX10	UKX10	43.4	29.4	14.4	HE2310X H2310X	2.8
	1 3/4	5.512 140	1 37/64 40	0.12 3	2 5/32 55	**UKC310**	C310	UK310	62.0	38.3	13.2	HE2310X H2310X	3.2
50	1 7/8 2	4.921 125	1 3/8 35	0.1 2.5	1 25/32(2 5/16) 45(59)	**UKC211**	C211	UK211	43.4	29.4	14.4	HS311X(HS2311X) H311X(H2311X) HE311X(HE2311X)	2.3(2.6)

Note 1) Numerals shown in parentheses indicate the dimensions, Part No. of applicable adapters (H2300X series), and the unit weight of UK200L3 series (triple seal type).

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 205~213, X05~X12, 305~308
A-R1/8 ..... 309~328
3. In Part No. of unit with adapters and bearing with adapters, Part No. of applicable adapter follow the Part No. shown in the dimensional tables. (Example of Part No. : UKC206J + H306X, UK206 + H306X)
4. As for the triple seal type product (205 is the double seal type product), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UKC206JL3 + H2306X, UK206L3 + H2306X)
5. As for the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.

d_1 (50) ~ 125 mm

Variations of tolerance of outside diameter (Δ_{Hs}), variations of tolerance of width (Δ_{As}), and tolerance of circumferential runout of outside diameter (Y)

Unit: mm

Housing No.			Δ_{Hs}	Δ_{As}	Y
C205			0 −0.030	±0.2	0.2
C206~C210	CX05~CX08	C305~C308	0 −0.035		
	CX09~CX10	C309~C310	0 −0.040	±0.3	0.3
C211~C213	CX11~CX12	C311~C314			
		C315~C318	0 −0.046		
		C319			0.4
		C320~C322	0 −0.052		
		C324~C328	0 −0.057		

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	r	B_1 1)	Unit No.	Housing No.	Bearing No.	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Adapter 1) No.	Mass 1) kg
50	1 7/8 2	5.906 150	1 21/32 42	0.1 2.5	2 5/16 59	**UKCX11**	CX11	UKX11	52.4	36.2	14.4	HS2311X H2311X HE2311X	3.8
	1 7/8 2	5.906 150	1 47/64 44	0.12 3	2 5/16 59	**UKC311**	C311	UK311	71.6	45.0	13.2	HS2311X H2311X HE2311X	4.1
55	2 1/8	5.118 130	1 1/2 38	0.1 2.5	1 27/32(2 7/16) 47(62)	**UKC212**	C212	UK212	52.4	36.2	14.4	HS312X(HS2312X) H312X(H2313X)	2.5(2.9)
	2 1/8	6.299 160	1 47/64 44	0.1 2.5	2 7/16 62	**UKCX12**	CX12	UKX12	57.2	40.1	14.4	HS2312X H2312X	4.4
	2 1/8	6.299 160	1 13/16 46	0.12 3	2 7/16 62	**UKC312**	C312	UK312	81.9	52.2	13.2	HS2312X H2312X	4.7
60	2 1/4 2 3/8	5.512 140	1 37/64 40	0.1 2.5	1 31/32(2 9/16) 50(65)	**UKC213**	C213	UK213	57.2	40.1	14.4	HE313X(HE2313X) H313X(H2313X) HS313X(HS2313X)	3.0(3.3)
	2 1/4 2 3/8	6.693 170	1 31/32 50	0.12 3	2 9/16 65	**UKC313**	C313	UK313	92.7	59.9	13.2	HE2313X H2313X HS2313X	5.8
65	2 1/2	7.480 190	2 11/64 55	0.16 4	2 7/8 73	**UKC315**	C315	UK315	113	77.2	13.2	HE2315X H2315X	8.0
70	2 3/4	7.874 200	2 23/64 60	0.16 4	3 1/16 78	**UKC316**	C316	UK316	123	86.7	13.3	HE2316X H2316X	9.2
75	3	8.465 215	2 33/64 64	0.16 4	3 7/32 82	**UKC317**	C317	UK317	133	96.8	13.3	H2317X HE2317X	11.6
80	–	8.858 225	2 19/32 66	0.16 4	3 3/8 86	**UKC318**	C318	UK318	143	107	13.3	H2318X	13.1
85	3 1/4	9.449 240	2 53/64 72	0.16 4	3 17/32 90	**UKC319**	C319	UK319	153	119	13.3	HE2319X H2319X	16.1
90	3 1/2	10.236 260	2 61/64 75	0.16 4	3 13/16 97	**UKC320**	C320	UK320	173	141	13.2	HE2320X H2320X	19.2
100	4	11.811 300	3 5/32 80	0.2 5	4 1/8 105	**UKC322**	C322	UK322	205	180	13.2	H2322X HE2322X	29.1
110	–	12.598 320	3 35/64 90	0.2 5	4 13/32 112	**UKC324**	C324	UK324	207	185	13.5	H2324	36.2
115	4 1/2	13.386 340	3 15/16 100	0.24 6	4 3/4 121	**UKC326**	C326	UK326	229	214	13.6	HE2326 H2326	42.8
125	–	14.173 360	3 15/16 100	0.24 6	5 5/32 131	**UKC328**	C328	UK328	253	246	13.6	H2328	52.9

UCHA
Cylindrical bore (with set screws)
d 12 ~ 75 mm





Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm H	A	L	H1	H2	N	C	B	S	Unit No.	Housing No.	Bearing No.		Basic Load Ratings kN Cr	C0r	Factor f0	Mass kg
12											UCHA201		UC201					0.77
	1/2										UCHA201-8		UC201-8					
15											UCHA202		UC202					0.75
	5/8	2 17/32	1 9/16	2 17/32	3 25/32	3/4		–	1.220	0.500	UCHA202-10	HA204	UC202-10		12.8	6.65	13.2	
17		64	40	64	96	19	Rp 3/4	–	31	12.7	UCHA203		UC203					0.74
	3/4										UCHA204-12		UC204-12					0.72
20											UCHA204		UC204					
	7/8										UCHA205-14		UC205-14					
25	15/16	2 17/32	1 9/16	3 1/16	4 1/16	3/4		–	1.343	0.563	UCHA205-15	HA205	UC205-15		14.0	7.85	13.9	0.87
		64	40	78	103	19	Rp 3/4	–	34.1	14.3	UCHA205		UC205					
	1										UCHA205-16		UC205-16					
	1 1/8										UCHA206-18		UC206-18					
30		2 17/32	1 9/16	3 1/16	4 1/16	3/4		–	1.500	0.626	UCHA206	HA206	UC206		19.5	11.3	13.9	0.83
	1 3/16	64	40	78	103	19	Rp 3/4	–	38.1	15.9	UCHA206-19		UC206-19					
	1 1/4										UCHA206-20		UC206-20					
	1 1/4										UCHA207-20		UC207-20					
	1 5/16										UCHA207-21		UC207-21					
35	1 3/8	2 3/4	1 9/16	3 5/8	4 9/16	3/4		–	1.689	0.689	UCHA207-22	HA207	UC207-22		25.7	15.4	13.9	1.2
		70	40	92	116	19	Rp 3/4	–	42.9	17.5	UCHA207		UC207					
	1 7/16										UCHA207-23		UC207-23					
40	1 1/2	2 7/8	1 9/16	3 25/32	4 3/4	3/4		5/64	1.937	0.748	UCHA208-24	HA208	UC208-24		29.1	17.8	14.0	1.3
	1 9/16	73	40	96	121	19	Rp 3/4	2	49.2	19	UCHA208-25		UC208-25					
											UCHA208		UC208					
45	1 5/8										UCHA209-26	HA209	UC209-26		34.1	21.3	14.0	1.7
	1 11/16	3 7/32	1 7/8	4 1/4	5 11/32	13/16		13/64	1.937	0.748	UCHA209-27		UC209-27					
	1 3/4	82	48	108	136	21	Rp 1	5	49.2	19	UCHA209-28		UC209-28					
											UCHA209		UC209					
50	1 7/8										UCHA210-30	HA210	UC210-30		35.1	23.3	14.4	2.1
	1 15/16	3 9/32	1 7/8	4 21/32	5 19/32	13/16		13/64	2.031	0.748	UCHA210-31		UC210-31					
		83	48	118	142	21	Rp 1	5	51.6	19	UCHA210		UC210					
											UCHA210-32		UC210-32					
	2										UCHA211-32	HA211	UC211-32		43.4	29.4	14.4	2.8
55	2 1/8	3 7/16	2 3/8	4 31/32	5 29/32	31/32		9/32	2.189	0.874	UCHA211-34		UC211-34					
		87	60	126	150	25	Rp 1 1/4	7	55.6	22.2	UCHA211		UC211					
	2 3/16										UCHA211-35		UC211-35					
	2 1/4										UCHA212-36	HA212	UC212-36		52.4	36.2	14.4	3.9
60		4 1/32	2 3/8	5 19/32	6 13/16	1 3/32		23/64	2.563	1.000	UCHA212		UC212					
	2 3/8	102	60	142	173	28	Rp 1 1/4	9	65.1	25.4	UCHA212-38		UC212-38					
	2 7/16										UCHA212-39		UC212-39					
65	2 1/2	4 19/32	2 3/4	6 17/32	7 7/8	1 1/4		3/8	2.563	1.000	UCHA213-40	HA213	UC213-40		57.2	40.1	14.4	5.8
		117	70	166	200	32	Rp 1 1/2	9.5	65.1	25.4	UCHA213		UC213					
70	2 3/4	4 19/32	2 3/4	6 17/32	7 7/8	1 1/4		3/8	2.937	1.189	UCHA214-44	HA214	UC214-44		62.2	44.1	14.5	5.9
		117	70	166	200	32	Rp 1 1/2	9.5	74.6	30.2	UCHA214		UC214					
75	2 15/16	4 19/32	2 3/4	6 17/32	7 7/8	1 1/4		3/8	3.063	1.311	UCHA215-47	HA215	UC215-47		67.4	48.3	14.5	5.6
	3	117	70	166	200	32	Rp 1 1/2	9.5	77.8	33.3	UCHA215		UC215					
											UCHA215-48		UC215-48					

Remarks 1. In Part No. of unit and units with covers, fitting codes follow bore diameter numbers. (See **Table 10.5** in P.51.)
2. Part No. of applicable grease fittings are shown below.
A-1/4-28UNF ..... 201~210
A-R1/8 ..... 211~215
3. As for the triple seal type product (from 201 to 205 are the double seal type products), accessory code L3 (or L2) follows the Part No. of unit or bearing. (Example of Part No. : UCHA206JL3, UC206L3)
4. For the dimensions and forms of applicable bearings and adapters, see the dimensional tables of ball bearing for unit and adapter.
5. Tapered bore (with adapter) type products are also available. (Example of Part No. : UKHA205J + H305X, UK205 + H305X)

UC, SB, SU
Cylindrical bore (with set screws)
d 8 ~ (30) mm

UC SB SU



UC



UC-L3



SB



SU

Shaft Dia. mm d	Shaft Dia. inch d	Dimensions D mm	D inch	B mm	B inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. Standard	L3 Type	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_1 mm	S_1 inch	S_2 mm	S_2 inch	Set Screw Brg. Bore G mm	G inch	Mass kg
8	–	22	0.866	12	0.472	7	0.276	0.3	0.012	3.27	1.37	12.4	SU08	–	–	–	3.5	0.138	8.5	0.335	2.8	0.110	M3×0.35	–	0.012
10	–	26	1.024	15	0.591	8	0.315	0.3	0.012	4.55	1.95	12.3	SU000	–	–	–	5	0.197	10	0.394	3	0.118	M3×0.35	–	0.024
12	–	28	1.102	15	0.591	8	0.315	0.3	0.012	5.10	2.40	13.2	SU001	–	–	–	5	0.197	10	0.394	3	0.118	M3×0.35	–	0.026
		40	1.575	22	0.866	12	0.472	0.6	0.024	9.55	4.80	13.2	SB201	–	–	–	6	0.236	16	0.630	4	0.157	M5×0.5	–	0.10
		47	1.850	31	1.220	16	0.630	0.6	0.024	12.8	6.65	13.2	UC201	UC201L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	–	0.21
–	1/2	40	1.575	22	0.866	12	0.472	0.6	0.024	9.55	4.80	13.2	SB201-8	–	–	–	6	0.236	16	0.630	4	0.157	–	No.10-32UNF	0.10
		47	1.850	31	1.220	16	0.630	0.6	0.024	12.8	6.65	13.2	UC201-8	UC201-8L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	–	1/4-28UNF	0.21
15	–	32	1.260	16.5	0.650	9	0.354	0.3	0.012	5.60	2.85	13.9	SU002	–	–	–	5.5	0.217	11	0.433	3.3	0.130	M4×0.5	–	0.038
		40	1.575	22	0.866	12	0.472	0.6	0.024	9.55	4.80	13.2	SB202	–	–	–	6	0.236	16	0.630	4	0.157	M5×0.5	–	0.10
		47	1.850	31	1.220	16	0.630	0.6	0.024	12.8	6.65	13.2	UC202	UC202L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	–	0.19
–	5/8	40	1.575	22	0.866	12	0.472	0.6	0.024	9.55	4.80	13.2	SB202-10	–	–	–	6	0.236	16	0.630	4	0.157	–	No.10-32UNF	0.10
		47	1.850	31	1.220	16	0.630	0.6	0.024	12.8	6.65	13.2	UC202-10	UC202-10L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	–	1/4-28UNF	0.19
17	–	35	1.378	17.5	0.689	10	0.394	0.3	0.012	6.00	3.25	14.4	SU003	–	–	–	6	0.236	11.5	0.453	3.3	0.130	M4×0.5	–	0.050
		40	1.575	22	0.866	12	0.472	0.6	0.024	9.55	4.80	13.2	SB203	–	–	–	6	0.236	16	0.630	4	0.157	M5×0.5	–	0.10
		47	1.850	31	1.220	16	0.630	0.6	0.024	12.8	6.65	13.2	UC203	UC203L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	–	0.18
–	3/4	47	1.850	25	0.984	14	0.551	1	0.039	12.8	6.65	13.2	SB204-12	–	–	–	7	0.276	18	0.709	5	0.197	–	1/4-28UNF	0.15
		47	1.850	31	1.220	16	0.630	1	0.039	12.8	6.65	13.2	UC204-12	UC204-12L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	–	1/4-28UNF	0.16
20	–	42	1.654	21	0.827	12	0.472	0.6	0.024	9.40	5.05	13.9	SU004	–	–	–	7	0.276	14	0.551	4	0.157	M5×0.5	–	0.080
		47	1.850	25	0.984	14	0.551	1	0.039	12.8	6.65	13.2	SB204	–	–	–	7	0.276	18	0.709	5	0.197	M6×0.75	–	0.15
		47	1.850	31	1.220	16	0.630	1	0.039	12.8	6.65	13.2	UC204	UC204L2	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	–	0.16
–	7/8	52	2.047	27	1.063	15	0.591	1	0.039	14.0	7.85	13.9	SB205-14	–	–	–	7.5	0.295	19.5	0.768	5.5	0.217	–	1/4-28UNF	0.18
		52	2.047	34.1	1.343	17	0.669	1	0.039	14.0	7.85	13.9	UC205-14	UC205-14L2	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	–	1/4-28UNF	0.23
–	15/16	52	2.047	27	1.063	15	0.591	1	0.039	14.0	7.85	13.9	SB205-15	–	–	–	7.5	0.295	19.5	0.768	5.5	0.217	–	1/4-28UNF	0.18
		52	2.047	34.1	1.343	17	0.669	1	0.039	14.0	7.85	13.9	UC205-15	UC205-15L2	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	–	1/4-28UNF	0.21
25	–	47	1.850	22	0.866	12	0.472	0.6	0.024	10.1	5.85	14.5	SU005	–	–	–	7	0.276	15	0.591	4.5	0.177	M5×0.5	–	0.10
		52	2.047	27	1.063	15	0.591	1	0.039	14.0	7.85	13.9	SB205	–	–	–	7.5	0.295	19.5	0.768	5.5	0.217	M6×0.75	–	0.18
		52	2.047	34.1	1.343	17	0.669	1	0.039	14.0	7.85	13.9	UC205	UC205L2	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	M6×0.75	–	0.20
		62	2.441	38	1.496	22	0.866	1.1	0.043	21.2	10.9	12.6	UC305	–	6	0.236	15	0.591	23	0.906	6	0.236	M6×0.75	–	0.45
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UCX05	UCX05L3	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	–	0.39
–	1	52	2.047	27	1.063	15	0.591	1	0.039	14.0	7.85	13.9	SB205-16	–	–	–	7.5	0.295	19.5	0.768	5.5	0.217	–	1/4-28UNF	0.18
		52	2.047	34.1	1.343	17	0.669	1	0.039	14.0	7.85	13.9	UC205-16	UC205-16L2	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	–	1/4-28UNF	0.20
		62	2.441	38	1.496	22	0.866	1.1	0.043	21.2	10.9	12.6	UC305-16	–	6	0.236	15	0.591	23	0.906	6	0.236	M6×0.75	–	0.44
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UCX05-16	UCX05-16L3	5	0.197	15.9	0.626	22.2	0.874	6	0.236	–	1/4-28UNF	0.38
–	1 1/8	62	2.441	30	1.181	16	0.630	1	0.039	19.5	11.3	13.9	SB206-18	–	–	–	8	0.315	22	0.866	6	0.236	–	1/4-28UNF	0.27
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UC206-18	UC206-18L2	5	0.197	15.9	0.626	22.2	0.874	6	0.236	–	1/4-28UNF	0.34
30	–	55	2.165	24.5	0.965	13	0.512	1	0.039	13.2	8.25	14.7	SU006	–	–	–	7.5	0.295	17	0.669	5.5	0.217	M5×0.5	–	0.15
		62	2.441	30	1.181	16	0.630	1	0.039	19.5	11.3	13.9	SB206	–	–	–	8	0.315	22	0.866	6	0.236	M6×0.75	–	0.27
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UC206	UC206L3	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	–	0.32
		72	2.835	42.9	1.689	20	0.787	1	0.039	25.7	15.4	13.9	UCX06	UCX06L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	–	0.58
		72	2.835	43	1.693	24	0.945	1.1	0.043	26.7	15.0	13.3	UC306	–	6.5	0.256	17	0.669	26	1.024	6	0.236	M6×0.75	–	0.56
–	1 3/16	62	2.441	30	1.181	16	0.630	1	0.039	19.5	11.3	13.9	SB206-19	–	–	–	8	0.315	22	0.866	6	0.236	–	1/4-28UNF	0.27
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UC206-19	UC206-19L2	5	0.197	15.9	0.626	22.2	0.874	6	0.236	–	1/4-28UNF	0.32
		72	2.835	42.9	1.689	20	0.787	1	0.039	25.7	15.4	13.9	UCX06-19	UCX06-19L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-28UNF	0.58
–	1 1/4	62	2.441	30	1.181	16	0.630	1	0.039	19.5	11.3	13.9	SB206-20	–	–	–	8	0.315	22	0.866	6	0.236	–	1/4-28UNF	0.27
		62	2.441	38.1	1.500	19	0.748	1	0.039	19.5	11.3	13.9	UC206-20	UC206-20L2	5	0.197	15.9	0.626	22.2	0.874	6	0.236	–	1/4-28UNF	0.30
		72	2.835	42.9	1.689	20	0.787	1	0.039	25.7	15.4	13.9	UCX06-20	UCX06-20L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-24UNF	0.55
–	1 1/4	72	2.835	32	1.260	17	0.669	1.1	0.043	25.7	15.4	13.9	SB207-20	–	–	–	8.5	0.335	23.5	0.925	6	0.236	–	1/4-28UNF	0.42
		72	2.835	42.9	1.689	20	0.787	1.1	0.043	25.7	15.4	13.9	UC207-20	UC207-20L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-24UNF	0.54
–	1 5/16	72	2.835	42.9	1.689	20	0.787	1.1	0.043	25.7	15.4	13.9	UC207-21	UC207-21L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-24UNF	0.51

Remarks 1. SU type product is the clean series ball bearing for unit.
2. From UC201 to 205 are the double seal type products (L2).

UC, SB, SU
Cylindrical bore (with set screws)
d (30) ~ (60) mm

UC SB SU



UC



UC-L3



SB



SU

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions D mm	D inch	B mm	B inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. Standard	L3 Type	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_1 mm	S_1 inch	S_2 mm	S_2 inch	Set Screw Brg. Bore G mm	G inch	Mass kg
–	1 3/8	72	2.835	32	1.260	17	0.669	1.1	0.043	25.7	15.4	13.9	SB207-22	–	–	–	8.5	0.335	23.5	0.925	6	0.236	–	1/4-28UNF	0.42
		72	2.835	42.9	1.689	20	0.787	1.1	0.043	25.7	15.4	13.9	UC207-22	UC207-22L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-24UNF	0.48
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UCX07-22	UCX07-22L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-28UNF	0.75
35	–	72	2.835	32	1.260	17	0.669	1.1	0.043	25.7	15.4	13.9	SB207	–	–	–	8.5	0.335	23.5	0.925	6	0.236	M6×0.75	–	0.42
		72	2.835	42.9	1.689	20	0.787	1.1	0.043	25.7	15.4	13.9	UC207	UC207L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	–	0.48
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UCX07	UCX07L3	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	–	0.75
		80	3.150	48	1.890	26	1.024	1.5	0.059	33.4	19.3	13.2	UC307	UC307L3	7.5	0.295	19	0.748	29	1.142	8	0.315	M8×1	–	0.71
–	1 7/16	72	2.835	32	1.260	17	0.669	1.1	0.043	25.7	15.4	13.9	SB207-23	–	–	–	8.5	0.335	23.5	0.925	6	0.236	–	1/4-28UNF	0.42
		72	2.835	42.9	1.689	20	0.787	1.1	0.043	25.7	15.4	13.9	UC207-23	UC207-23L3	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	–	5/16-28UNF	0.45
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UCX07-23	UCX07-23L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-28UNF	0.72
–	1 1/2	80	3.150	34	1.339	18	0.709	1.1	0.043	29.1	17.8	14.0	SB208-24	–	–	–	9	0.354	25	0.984	8	0.315	–	5/16-24UNF	0.60
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UC208-24	UC208-24L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-24UNF	0.68
		85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UCX08-24	UCX08-24L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-28UNF	0.87
		90	3.543	52	2.047	28	1.102	1.5	0.059	40.7	24.0	13.2	UC308-24	UC308-24L3	8	0.315	19	0.748	33	1.299	10	0.394	M10×1.25	–	1.05
–	1 9/16	80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UC208-25	UC208-25L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-24UNF	0.60
40	–	80	3.150	34	1.339	18	0.709	1.1	0.043	29.1	17.8	14.0	SB208	–	–	–	9	0.354	25	0.984	8	0.315	M8×1	–	0.60
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	29.1	17.8	14.0	UC208	UC208L3	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	–	0.64
		85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UCX08	UCX08L3	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	–	0.83
		90	3.543	52	2.047	28	1.102	1.5	0.059	40.7	24.0	13.2	UC308	UC308L3	8	0.315	19	0.748	33	1.299	10	0.394	M10×1.25	–	1.00
–	1 5/8	85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UC209-26	UC209-26L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-24UNF	0.78
–	1 11/16	85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UC209-27	UC209-27L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-24UNF	0.74
–	1 3/4	85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UC209-28	UC209-28L3	6	0.236	19	0.748	30.2	1.189	8	0.315	–	5/16-24UNF	0.70
		90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UCX09-28	UCX09-28L3	6	0.236	19	0.748	32.6	1.283	9	0.354	–	3/8-24UNF	0.97
		100	3.937	57	2.244	30	1.181	1.5	0.059	48.9	29.5	13.3	UC309-28	UC309-28L3	8.5	0.335	22	0.866	35	1.378	10	0.394	M10×1.25	–	1.35
45	–	85	3.346	49.2	1.937	22	0.866	1.1	0.043	34.1	21.3	14.0	UC209	UC209L3	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	–	0.68
		90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UCX09	UCX09L3	6	0.236	19	0.748	32.6	1.283	9	0.354	M10×1.25	–	0.95
		100	3.937	57	2.244	30	1.181	1.5	0.059	48.9	29.5	13.3	UC309	UC309L3	8.5	0.335	22	0.866	35	1.378	10	0.394	M10×1.25	–	1.33
–	1 7/8	90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UC210-30	UC210-30L3	6	0.236	19	0.748	32.6	1.283	9	0.354	–	3/8-24UNF	0.87
–	1 15/16	90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UC210-31	UC210-31L3	6	0.236	19	0.748	32.6	1.283	9	0.354	–	3/8-24UNF	0.82
		100	3.937	55.6	2.189	25	0.984	1.1	0.043	43.4	29.4	14.4	UCX10-31	UCX10-31L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	–	3/8-24UNF	1.32
50	–	90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UC210	UC210L3	6	0.236	19	0.748	32.6	1.283	9	0.354	M10×1.25	–	0.80
		100	3.937	55.6	2.189	25	0.984	1.1	0.043	43.4	29.4	14.4	UCX10	UCX10L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	–	1.29
		110	4.331	61	2.402	32	1.260	2	0.079	62.0	38.3	13.2	UC310	UC310L3	9	0.354	22	0.866	39	1.535	12	0.472	M12×1.5	–	1.69
–	2	90	3.543	51.6	2.031	24	0.945	1.1	0.043	35.1	23.3	14.4	UC210-32	UC210-32L3	6	0.236	19	0.748	32.6	1.283	9	0.354	–	3/8-24UNF	0.78
		100	3.937	55.6	2.189	25	0.984	1.1	0.043	43.4	29.4	14.4	UCX10-32	UCX10-32L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	–	3/8-24UNF	1.26
–	2	100	3.937	55.6	2.189	25	0.984	1.5	0.059	43.4	29.4	14.4	UC211-32	UC211-32L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	–	3/8-24UNF	1.26
		120	4.724	66	2.598	34	1.339	2	0.079	71.6	45.0	13.2	UC311-32	UC311-32L3	10	0.394	25	0.984	41	1.614	12	0.472	M12×1.5	–	2.08
–	2 1/8	100	3.937	55.6	2.189	25	0.984	1.5	0.059	43.4	29.4	14.4	UC211-34	UC211-34L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	–	3/8-24UNF	1.15
55	–	100	3.937	55.6	2.189	25	0.984	1.5	0.059	43.4	29.4	14.4	UC211	UC211L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	–	1.11
		110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UCX11	UCX11L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	–	1.80
		120	4.724	66	2.598	34	1.339	2	0.079	71.6	45.0	13.2	UC311	UC311L3	10	0.394	25	0.984	41	1.614	12	0.472	M12×1.5	–	1.90
–	2 3/16	100	3.937	55.6	2.189	25	0.984	1.5	0.059	43.4	29.4	14.4	UC211-35	UC211-35L3	7	0.276	22.2	0.874	33.4	1.315	9	0.354	–	3/8-24UNF	1.09
		110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UCX11-35	UCX11-35L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	–	3/8-24UNF	1.78
		120	4.724	66	2.598	34	1.339	2	0.079	71.6	45.0	13.2	UC311-35	UC311-35L3	10	0.394	25	0.984	41	1.614	12	0.472	M12×1.5	–	1.67
–	2 1/4	110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UCX11-36	UCX11-36L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	–	3/8-24UNF	1.7
–	2 1/4	110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UC212-36	UC212-36L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	–	3/8-24UNF	1.67
60	–	110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UC212	UC212L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	–	1.54
		120	4.724	65.1	2.563	28	1.102	1.5	0.059	57.2	40.1	14.4	UCX12	UCX12L3	7.5	0.295	25.4	1.000	39.7	1.563	12	0.472	M12×1.5	–	2.05
		130	5.118	71	2.795	36	1.417	2.1	0.083	81.9	52.2	13.2	UC312	UC312L3	11.5	0.453	26	1.024	45	1.772	12	0.472	M12×1.5	–	2.60
–	2 3/8	110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	UC212-38	UC212-38L3	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	–	3/8-24UNF	1.52

Remarks 1. SU type product is the clean series ball bearing for unit.
2. From UC201 to 205 are the double seal type products (L2).

UC, SB, SU
Cylindrical bore (with set screws)
d (60) ~ 140 mm

UC SB SU



UC



UC-L3



SB



SU

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions D mm	D inch	B mm	B inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. Standard	L3 Type	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_1 mm	S_1 inch	S_2 mm	S_2 inch	Set Screw Brg. Bore G mm	G inch	Mass kg
		110	4.331	65.1	2.563	27	1.063	1.5	0.059	52.4	36.2	14.4	**UC212-39**	**UC212-39L3**	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	–	3/8-24UNF	1.45
–	2 7/16	120	4.724	65.1	2.563	28	1.102	1.5	0.059	57.2	40.1	14.4	**UCX12-39**	**UCX12-39L3**	7.5	0.295	25.4	1.000	39.7	1.563	12	0.472	–	1/2-20UNF	1.95
		130	5.118	71	2.795	36	1.417	2.1	0.083	81.9	52.2	13.2	**UC312-39**	**UC312-39L3**	11.5	0.453	26	1.024	45	1.772	12	0.472	M12×1.5	–	2.50
		120	4.724	65.1	2.563	28	1.102	1.5	0.059	57.2	40.1	14.4	**UC213-40**	**UC213-40L3**	7.5	0.295	25.4	1.000	39.7	1.563	12	0.472	–	1/2-20UNF	1.94
–	2 1/2	125	4.921	74.6	2.937	30	1.181	1.5	0.059	62.2	44.1	14.5	**UCX13-40**	**UCX13-40L3**	9	0.354	30.2	1.189	44.4	1.748	12	0.472	–	1/2-20UNF	2.61
		140	5.512	75	2.953	38	1.496	2.1	0.083	92.7	59.9	13.2	**UC313-40**	**UC313-40L3**	12	0.472	30	1.181	45	1.772	12	0.472	M12×1.5	–	3.24
		120	4.724	65.1	2.563	28	1.102	1.5	0.059	57.2	40.1	14.4	**UC213**	**UC213L3**	7.5	0.295	25.4	1.000	39.7	1.563	12	0.472	M12×1.5	–	1.86
65	–	125	4.921	74.6	2.937	30	1.181	1.5	0.059	62.2	44.1	14.5	**UCX13**	**UCX13L3**	9	0.354	30.2	1.189	44.4	1.748	12	0.472	M12×1.5	–	2.52
		140	5.512	75	2.953	38	1.496	2.1	0.083	92.7	59.9	13.2	**UC313**	**UC313L3**	12	0.472	30	1.181	45	1.772	12	0.472	M12×1.5	–	3.16
		125	4.921	74.6	2.937	30	1.181	1.5	0.059	62.2	44.1	14.5	**UC214-44**	**UC214-44L3**	9	0.354	30.2	1.189	44.4	1.748	12	0.472	–	1/2-20UNF	2.06
–	2 3/4	130	5.118	77.8	3.063	32	1.260	1.5	0.059	67.4	48.3	14.5	**UCX14-44**	**UCX14-44L3**	9	0.354	33.3	1.311	44.5	1.752	12	0.472	–	1/2-20UNF	2.75
		150	5.906	78	3.071	40	1.575	2.1	0.083	104	68.2	13.2	**UC314-44**	**UC314-44L3**	12.5	0.492	33	1.299	45	1.772	12	0.472	M12×1.5	–	3.91
		125	4.921	74.6	2.937	30	1.181	1.5	0.059	62.2	44.1	14.5	**UC214**	**UC214L3**	9	0.354	30.2	1.189	44.4	1.748	12	0.472	M12×1.5	–	2.05
70	–	130	5.118	77.8	3.063	32	1.260	1.5	0.059	67.4	48.3	14.5	**UCX14**	**UCX14L3**	9	0.354	33.3	1.311	44.5	1.752	12	0.472	M12×1.5	–	2.74
		150	5.906	78	3.071	40	1.575	2.1	0.083	104	68.2	13.2	**UC314**	**UC314L3**	12.5	0.492	33	1.299	45	1.772	12	0.472	M12×1.5	–	3.90
		130	5.118	77.8	3.063	32	1.260	1.5	0.059	67.4	48.3	14.5	**UC215-47**	**UC215-47L3**	9	0.354	33.3	1.311	44.5	1.752	12	0.472	–	1/2-20UNF	2.23
–	2 15/16	140	5.512	82.6	3.252	33	1.299	1.5	0.059	72.7	53.0	14.6	**UCX15-47**	**UCX15-47L3**	9	0.354	33.3	1.311	49.3	1.941	14	0.551	–	1/2-20UNF	3.43
		160	6.299	82	3.228	42	1.654	2.1	0.083	113	77.2	13.2	**UC315-47**	**UC315-47L3**	14.5	0.571	32	1.260	50	1.969	14	0.551	M14×1.5	–	4.72
		130	5.118	77.8	3.063	32	1.260	1.5	0.059	67.4	48.3	14.5	**UC215**	**UC215L3**	9	0.354	33.3	1.311	44.5	1.752	12	0.472	M12×1.5	–	2.21
75	–	140	5.512	82.6	3.252	33	1.299	1.5	0.059	72.7	53.0	14.6	**UCX15**	**UCX15L3**	9	0.354	33.3	1.311	49.3	1.941	14	0.551	M12×1.5	–	3.41
		160	6.299	82	3.228	42	1.654	2.1	0.083	113	77.2	13.2	**UC315**	**UC315L3**	14.5	0.571	32	1.260	50	1.969	14	0.551	M14×1.5	–	4.70
		130	5.118	77.8	3.063	32	1.260	1.5	0.059	67.4	48.3	14.5	**UC215-48**	**UC215-48L3**	9	0.354	33.3	1.311	44.5	1.752	12	0.472	–	1/2-20UNF	2.12
–	3	140	5.512	82.6	3.252	33	1.299	1.5	0.059	72.7	53.0	14.6	**UCX15-48**	**UCX15-48L3**	9	0.354	33.3	1.311	49.3	1.941	14	0.551	–	1/2-20UNF	3.32
		160	6.299	82	3.228	42	1.654	2.1	0.083	113	77.2	13.2	**UC315-48**	**UC315-48L3**	14.5	0.571	32	1.260	50	1.969	14	0.551	M14×1.5	–	4.61
–	3 1/8	140	5.512	82.6	3.252	33	1.299	2	0.079	72.7	53.0	14.6	**UC216-50**	**UC216-50L3**	9	0.354	33.3	1.311	49.3	1.941	14	0.551	–	1/2-20UNF	2.84
		140	5.512	82.6	3.252	33	1.299	2	0.079	72.7	53.0	14.6	**UC216**	**UC216L3**	9	0.354	33.3	1.311	49.3	1.941	14	0.551	M12×1.5	–	2.79
80	–	150	5.906	85.7	3.374	35	1.378	2	0.079	84.0	61.9	14.5	**UCX16**	**UCX16L3**	10	0.394	34.1	1.343	51.6	2.031	14	0.551	M12×1.5	–	3.87
		170	6.693	86	3.386	44	1.732	2.1	0.083	123	86.7	13.3	**UC316**	**UC316L3**	15	0.591	34	1.339	52	2.047	14	0.551	M14×1.5	–	5.60
–	3 1/4	150	5.906	85.7	3.374	35	1.378	2	0.079	84.0	61.9	14.5	**UC217-52**	**UC217-52L3**	10	0.394	34.1	1.343	51.6	2.031	14	0.551	–	1/2-20UNF	3.66
		150	5.906	85.7	3.374	35	1.378	2	0.079	84.0	61.9	14.5	**UC217**	**UC217L3**	10	0.394	34.1	1.343	51.6	2.031	14	0.551	M12×1.5	–	3.45
85	–	160	6.299	96	3.780	38	1.496	2	0.079	96.1	71.5	14.5	**UCX17**	**UCX17L3**	11	0.433	39.7	1.563	56.3	2.217	15	0.591	M12×1.5	–	5.05
		180	7.087	96	3.780	46	1.811	3	0.118	133	96.8	13.3	**UC317**	**UC317L3**	15	0.591	40	1.575	56	2.205	16	0.630	M16×1.5	–	6.90
–	3 7/16	160	6.299	96	3.780	38	1.496	2	0.079	96.1	71.5	14.5	**UCX17-55**	**UCX17-55L3**	11	0.433	39.7	1.563	56.3	2.217	15	0.591	–	1/2-20UNF	4.80
–	3 1/2	160	6.299	96	3.780	38	1.496	2	0.079	96.1	71.5	14.5	**UC218-56**	**UC218-56L3**	11	0.433	39.7	1.563	56.3	2.217	15	0.591	–	1/2-20UNF	4.46
		190	7.480	96	3.780	48	1.890	3	0.118	143	107	13.3	**UC318-56**	**UC318-56L3**	15.5	0.610	40	1.575	56	2.205	16	0.630	M16×1.5	–	8.03
		160	6.299	96	3.780	38	1.496	2	0.079	96.1	71.5	14.5	**UC218**	**UC218L3**	11	0.433	39.7	1.563	56.3	2.217	15	0.591	M12×1.5	–	4.35
90	–	170	6.693	104	4.094	40	1.575	2	0.079	109	81.9	14.4	**UCX18**	–	11.5	0.453	42.9	1.689	61.1	2.406	16	0.630	M14×1.5	–	6.00
		190	7.480	96	3.780	48	1.890	3	0.118	143	107	13.3	**UC318**	**UC318L3**	15.5	0.610	40	1.575	56	2.205	16	0.630	M16×1.5	–	7.87
95	–	200	7.874	103	4.055	50	1.969	3	0.118	153	119	13.3	**UC319**	**UC319L3**	16.5	0.650	41	1.614	62	2.441	18	0.709	M16×1.5	–	8.91
100	–	190	7.480	117.5	4.626	43	1.693	2.1	0.083	133	105	14.4	**UCX20**	–	13	0.512	49.2	1.937	68.3	2.689	18	0.709	M16×1.5	–	8.56
		215	8.465	108	4.252	54	2.126	3	0.118	173	141	13.2	**UC320**	**UC320L3**	18	0.709	42	1.654	66	2.598	20	0.787	M18×1.5	–	11.2
–	3 15/16	190	7.480	117.5	4.626	43	1.693	2.1	0.083	133	105	14.4	**UCX20-63**	–	13	0.512	49.2	1.937	68.3	2.689	18	0.709	–	5/8-18UNF	8.56
		215	8.465	108	4.252	54	2.126	3	0.118	173	141	13.2	**UC320-63**	**UC320-63L3**	18	0.709	42	1.654	66	2.598	20	0.787	M18×1.5	–	11.2
–	4	190	7.480	117.5	4.626	43	1.693	2.1	0.083	133	105	14.4	**UCX20-64**	–	13	0.512	49.2	1.937	68.3	2.689	18	0.709	–	5/8-18UNF	8.33
		215	8.465	108	4.252	54	2.126	3	0.118	173	141	13.2	**UC320-64**	**UC320-64L3**	18	0.709	42	1.654	66	2.598	20	0.787	M18×1.5	–	11.0
105		225	8.858	112	4.409	56	2.205	3	0.118	184	153	13.2	**UC321**	–	19	0.748	44	1.732	68	2.677	20	0.787	M18×1.5	–	12.7
110		240	9.449	117	4.606	60	2.362	3	0.118	205	180	13.2	**UC322**	**UC322L3**	20	0.787	46	1.811	71	2.795	20	0.787	M18×1.5	–	15.1
120	–	260	10.236	126	4.961	64	2.520	3	0.118	207	185	13.5	**UC324**	**UC324L3**	21	0.827	51	2.008	75	2.953	20	0.787	M18×1.5	–	19.0
130		280	11.024	135	5.315	68	2.677	4	0.157	229	214	13.6	**UC326**	**UC326L3**	22	0.866	54	2.126	81	3.189	20	0.787	M20×1.5	–	23.6
140		300	11.811	145	5.709	72	2.835	4	0.157	253	246	13.6	**UC328**	**UC328L3**	23	0.906	59	2.323	86	3.386	20	0.787	M20×1.5	–	29.4

Remarks 1. SU type product is the clean series ball bearing for unit.
2. From UC201 to 205 are the double seal type products (L2).

UC-S6, SU-S6 (Stainless steel series)
Cylindrical bore (with set screws)
d 10 ~ 60 mm

UC-S6

SU-S6



UC-S6



SU-S6

Shaft Dia. mm d	Shaft Dia. inch d	Dimensions D mm	D inch	B mm	B inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. Standard	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_1 mm	S_1 inch	S_2 mm	S_2 inch	Set Screw Brg. Bore G mm	Mass kg
10	–	26	1.024	15	0.591	8	0.315	0.3	0.012	3.9	1.55	12.3	SU000S6	–	–	5	0.197	10	0.394	3	0.118	M3×0.35	0.024
12		28	1.102	15	0.591	8	0.315	0.3	0.012	4.3	1.9	13.2	SU001S6	–	–	5	0.197	10	0.394	3	0.118	M3×0.35	0.026
		40	1.575	27.4	1.079	13	0.512	0.6	0.024	8.15	3.85	13.2	UC201XS6	3.5	0.138	11.5	0.453	15.9	0.626	4	0.158	M5×0.5	0.10
	1/2	40	1.575	27.4	1.079	13	0.512	0.6	0.024	8.15	3.85	13.2	UC201-8XS6	3.5	0.138	11.5	0.453	15.9	0.626	4	0.158	M5×0.5	0.10
15		32	1.260	16.5	0.650	9	0.354	0.3	0.012	4.7	2.25	13.9	SU002S6	–	–	5.5	0.217	11	0.433	3.3	0.130	M4×0.5	0.038
		40	1.575	27.4	1.079	13	0.512	0.6	0.024	8.15	3.85	13.2	UC202XS6	3.5	0.138	11.5	0.453	15.9	0.626	4	0.158	M5×0.5	0.10
	5/8	40	1.575	27.4	1.079	13	0.512	0.6	0.024	8.15	3.85	13.2	UC202-10S6	3.5	0.138	11.5	0.453	15.9	0.626	4	0.158	M5×0.5	0.10
17	–	35	1.378	17.5	0.689	10	0.394	0.3	0.012	5.1	2.6	14.4	SU003S6	–	–	6	0.236	11.5	0.453	3.3	0.130	M4×0.5	0.050
		40	1.575	27.4	1.079	13	0.512	0.6	0.024	8.15	3.85	13.2	UC203XS6	3.5	0.138	11.5	0.453	15.9	0.626	4	0.158	M5×0.5	0.10
20	3/4	47	1.850	31	1.220	16	0.630	1	0.039	10.9	5.35	13.2	UC204-12S6	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	0.16
		42	1.654	21	0.827	12	0.472	0.6	0.024	7.9	4	13.9	SU004S6	–	–	7	0.276	14	0.551	4	0.157	M5×0.5	0.080
		47	1.850	31	1.220	16	0.630	1	0.039	10.9	5.35	13.2	UC204S6	4	0.157	12.7	0.500	18.3	0.720	5	0.197	M6×0.75	0.16
25	7/8	52	2.047	34.1	1.343	17	0.669	1	0.039	11.9	6.3	13.9	UC205-14S6	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	M6×0.75	0.23
	15/16	52	2.047	34.1	1.343	17	0.669	1	0.039	11.9	6.3	13.9	UC205-15S6	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	M6×0.75	0.21
		47	1.850	22	0.866	12	0.472	0.6	0.024	8.5	4.65	14.5	SU005S6	–	–	7	0.276	15	0.591	4.5	0.177	M5×0.5	0.10
		52	2.047	34.1	1.343	17	0.669	1	0.039	11.9	6.3	13.9	UC205S6	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	M6×0.75	0.20
	1	52	2.047	34.1	1.343	17	0.669	1	0.039	11.9	6.3	13.9	UC205-16S6	5	0.197	14.3	0.563	19.8	0.780	5.5	0.217	M6×0.75	0.20
30	1 1/8	62	2.441	38.1	1.500	19	0.748	1	0.039	16.5	9.05	13.9	UC206-18S6	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	0.34
		55	2.165	24.5	0.965	13	0.512	1	0.039	11.2	6.6	14.7	SU006S6	–	–	7.5	0.295	17	0.669	5.5	0.217	M5×0.5	0.15
		62	2.441	38.1	1.500	19	0.748	1	0.039	16.5	9.05	13.9	UC206S6	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	0.32
	1 3/16	62	2.441	38.1	1.500	19	0.748	1	0.039	16.5	9.05	13.9	UC206-19S6	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	0.32
	1 1/4	62	2.441	38.1	1.500	19	0.748	1	0.039	16.5	9.05	13.9	UC206-20S6	5	0.197	15.9	0.626	22.2	0.874	6	0.236	M6×0.75	0.30
35	1 1/4	72	2.835	42.9	1.689	20	0.787	1.1	0.043	21.8	12.3	13.9	UC207-20S6	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	0.54
	1 5/16	72	2.835	42.9	1.689	20	0.787	1.1	0.043	21.8	12.3	13.9	UC207-21S6	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	0.51
	1 3/8	72	2.835	42.9	1.689	20	0.787	1.1	0.043	21.8	12.3	13.9	UC207-22S6	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	0.48
		72	2.835	42.9	1.689	20	0.787	1.1	0.043	21.8	12.3	13.9	UC207S6	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	0.48
	1 7/16	72	2.835	42.9	1.689	20	0.787	1.1	0.043	21.8	12.3	13.9	UC207-23S6	5.5	0.217	17.5	0.689	25.4	1.000	6.5	0.256	M8×1	0.45
40	1 1/2	80	3.150	49.2	1.937	21	0.827	1.1	0.043	24.8	14.3	14.0	UC208-24S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.68
	1 9/16	80	3.150	49.2	1.937	21	0.827	1.1	0.043	24.8	14.3	14.0	UC208-25S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.60
		80	3.150	49.2	1.937	21	0.827	1.1	0.043	24.8	14.3	14.0	UC208S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.64
45	1 5/8	85	3.346	49.2	1.937	22	0.866	1.1	0.043	27.8	16.2	14.0	UC209-26S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.78
	1 11/16	85	3.346	49.2	1.937	22	0.866	1.1	0.043	27.8	16.2	14.0	UC209-27S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.74
	1 3/4	85	3.346	49.2	1.937	22	0.866	1.1	0.043	27.8	16.2	14.0	UC209-28S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.70
		85	3.346	49.2	1.937	22	0.866	1.1	0.043	27.8	16.2	14.0	UC209S6	6	0.236	19	0.748	30.2	1.189	8	0.315	M8×1	0.68
50	1 7/8	90	3.543	51.6	2.031	24	0.945	1.1	0.043	29.8	18.6	14.4	UC210-30S6	6	0.236	19	0.748	32.6	1.283	9	0.354	M8×1	0.87
	1 15/16	90	3.543	51.6	2.031	24	0.945	1.1	0.043	29.8	18.6	14.4	UC210-31S6	6	0.236	19	0.748	32.6	1.283	9	0.354	M8×1	0.82
		90	3.543	51.6	2.031	24	0.945	1.1	0.043	29.8	18.6	14.4	UC210S6	6	0.236	19	0.748	32.6	1.283	9	0.354	M8×1	0.80
	2	90	3.543	51.6	2.031	24	0.945	1.1	0.043	29.8	18.6	14.4	UC210-32S6	6	0.236	19	0.748	32.6	1.283	9	0.354	M8×1	0.78
55	2	100	3.937	55.6	2.189	25	0.984	1.5	0.059	36.8	23.5	14.4	UC211-32S6	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	1.26
	2 1/8	100	3.937	55.6	2.189	25	0.984	1.5	0.059	36.8	23.5	14.4	UC211-34S6	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	1.15
		100	3.937	55.6	2.189	25	0.984	1.5	0.059	36.8	23.5	14.4	UC211S6	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	1.11
	2 3/16	100	3.937	55.6	2.189	25	0.984	1.5	0.059	36.8	23.5	14.4	UC211-35S6	7	0.276	22.2	0.874	33.4	1.315	9	0.354	M10×1.25	1.09
60	2 1/4	110	4.331	65.1	2.563	27	1.063	1.5	0.059	44.5	29	14.4	UC212-36S6	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	1.67
		110	4.331	65.1	2.563	27	1.063	1.5	0.059	44.5	29.	14.4	UC212S6	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	1.54
	2 3/8	110	4.331	65.1	2.563	27	1.063	1.5	0.059	44.5	29	14.4	UC212-38S6	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	1.52
	2 7/16	110	4.331	65.1	2.563	27	1.063	1.5	0.059	44.5	29	14.4	UC212-39S6	7.5	0.295	25.4	1.000	39.7	1.563	10.5	0.413	M10×1.25	1.45

Remark S6 series product is the stainless steel series ball bearing for unit.

SA, SA-F, NA
Cylindrical bore
(with eccentric locking collar)
d 12 ~ (30) mm

SA SA-F NA



SA



SA-F



NA

Shaft Dia d mm	Shaft Dia d inch	Dimensions D mm	D inch	B mm	B inch	B1 mm	B1 inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN Cr	C0r	Factor f0	Bearing No.	Dimensions C1 mm	C1 inch	S mm	S inch	S2 mm	S2 inch	d1 mm	d1 inch	Set Screw Brg.Bore mm	inch	Mass kg
12	–	40	1.575	19	0.784	28.5	1.122	12	0.472	0.6	0.024	9.55	4.80	13.2	SA201	–	–	6	0.236	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SA201F	3.4	0.134	6.5	0.256	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA201	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	M6×0.75	–	0.29
–	1/2	40	1.575	19	0.784	28.5	1.122	12	0.472	0.6	0.024	9.55	4.80	13.2	SA201-8	–	–	6	0.236	4.8	0.189	28.6	1.126	–	1/4-28UNF	0.13
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SA201-8F	3.4	0.134	6.5	0.256	4.8	0.189	28.6	1.126	–	1/4-28UNF	0.13
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA201-8	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	–	1/4-28UNF	0.29
15	–	40	1.575	19	0.784	28.5	1.122	12	0.472	0.6	0.024	9.55	4.80	13.2	SA202	–	–	6	0.236	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SA202F	3.4	0.134	6.5	0.256	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA202	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	M6×0.75	–	0.27
–	5/8	40	1.575	19	0.784	28.5	1.122	12	0.472	0.6	0.024	9.55	4.80	13.2	SA202-10	–	–	6	0.236	4.8	0.189	28.6	1.126	–	1/4-28UNF	0.13
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA202-10	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	–	1/4-28UNF	0.26
17	–	40	1.575	19	0.784	28.5	1.122	12	0.472	0.6	0.024	9.55	4.80	13.2	SA203	–	–	6	0.236	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SA203F	3.4	0.134	6.5	0.256	4.8	0.189	28.6	1.126	M6×0.75	–	0.13
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA203	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	M6×0.75	–	0.25
–	3/4	47	1.850	20	0.787	29.5	1.161	14	0.551	1	0.039	12.8	6.65	13.2	SA204-12	–	–	7	0.276	4.8	0.189	33.3	1.311	–	1/4-28UNF	0.15
		47	1.850	21.5	0.846	31	1.220	15	0.591	1	0.039	12.8	6.65	13.2	SA204-12F	3.7	0.146	7.5	0.295	4.8	0.189	33.3	1.311	–	1/4-28UNF	0.19
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA204-12	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	–	1/4-28UNF	0.23
20	–	47	1.850	20	0.787	29.5	1.161	14	0.551	1	0.039	12.8	6.65	13.2	SA204	–	–	7	0.276	4.8	0.189	33.3	1.311	M6×0.75	–	0.15
		47	1.850	21.5	0.846	31	1.220	15	0.591	1	0.039	12.8	6.65	13.2	SA204F	3.7	0.146	7.5	0.295	4.8	0.189	33.3	1.311	M6×0.75	–	0.19
		47	1.850	34.2	1.346	43.7	1.720	16	0.630	1	0.039	12.8	6.65	13.2	NA204	4	0.157	17.1	0.673	4.8	0.189	33.3	1.311	M6×0.75	–	0.22
–	7/8	52	2.047	21	0.827	30.5	1.201	15	0.591	1	0.039	14.0	7.85	13.9	SA205-14	–	–	7.5	0.295	4.8	0.189	38.1	1.311	–	1/4-28UNF	0.22
		52	2.047	34.9	1.374	44.4	1.748	17	0.669	1	0.039	14.0	7.85	13.9	NA205-14	5	0.197	17.5	0.689	4.8	0.189	38.1	1.500	–	1/4-28UNF	0.27
–	15/16	52	2.047	21	0.827	30.5	1.201	15	0.591	1	0.039	14.0	7.85	13.9	SA205-15	–	–	7.5	0.295	4.8	0.189	38.1	1.311	–	1/4-28UNF	0.22
		52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SA205-15F	3.7	0.146	7.5	0.295	4.8	0.189	38.1	1.311	–	1/4-28UNF	0.23
		52	2.047	34.9	1.374	44.4	1.748	17	0.669	1	0.039	14.0	7.85	13.9	NA205-15	5	0.197	17.5	0.689	4.8	0.189	38.1	1.500	–	1/4-28UNF	0.29
25	–	52	2.047	21	0.827	30.5	1.201	15	0.591	1	0.039	14.0	7.85	13.9	SA205	–	–	7.5	0.295	4.8	0.189	38.1	1.311	M6×0.75	–	0.22
		52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SA205F	3.7	0.146	7.5	0.295	4.8	0.189	38.1	1.311	M6×0.75	–	0.23
		52	2.047	34.9	1.374	44.4	1.748	17	0.669	1	0.039	14.0	7.85	13.9	NA205	5	0.197	17.5	0.689	4.8	0.189	38.1	1.500	M6×0.75	–	0.25
–	1	52	2.047	21	0.827	30.5	1.201	15	0.591	1	0.039	14.0	7.85	13.9	SA205-16	–	–	7.5	0.295	4.8	0.189	38.1	1.311	–	1/4-28UNF	0.22
		52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SA205-16F	3.7	0.146	7.5	0.295	4.8	0.189	38.1	1.311	–	1/4-28UNF	0.23
		52	2.047	34.9	1.374	44.4	1.748	17	0.669	1	0.039	14.0	7.85	13.9	NA205-16	5	0.197	17.5	0.689	4.8	0.189	38.1	1.500	–	1/4-28UNF	0.25
–	1 1/8	62	2.441	22	0.866	33.9	1.335	16	0.630	1	0.039	19.5	11.3	13.9	SA206-18	–	–	8	0.315	6	0.236	44.5	1.752	–	5/16-24UNF	0.3
		62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SA206-18F	4.7	0.185	9	0.354	6	0.236	44.5	1.752	–	5/16-24UNF	0.34
		62	2.441	36.5	1.437	48.4	1.906	19	0.748	1	0.039	19.5	11.3	13.9	NA206-18	5	0.197	18.3	0.720	6	0.236	44.5	1.752	–	5/16-24UNF	0.43
30	–	62	2.441	22	0.866	33.9	1.335	16	0.630	1	0.039	19.5	11.3	13.9	SA206	–	–	8	0.315	6	0.236	44.5	1.752	M8×1	–	0.3
		62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SA206F	4.7	0.185	9	0.354	6	0.236	44.5	1.752	M8×1	–	0.34
		62	2.441	36.5	1.437	48.4	1.906	19	0.748	1	0.039	19.5	11.3	13.9	NA206	5	0.197	18.3	0.720	6	0.236	44.5	1.752	M8×1	–	0.41
–	1 3/16	62	2.441	22	0.866	33.9	1.335	16	0.630	1	0.039	19.5	11.3	13.9	SA206-19	–	–	8	0.315	6	0.236	44.5	1.752	–	5/16-24UNF	0.3
		62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SA206-19F	4.7	0.185	9	0.354	6	0.236	44.5	1.752	–	5/16-24UNF	0.34
		62	2.441	36.5	1.437	48.4	1.906	19	0.748	1	0.039	19.5	11.3	13.9	NA206-19	5	0.197	18.3	0.720	6	0.236	44.5	1.752	–	5/16-24UNF	0.41
		72	2.835	36.5	1.437	50	1.969	24	0.945	1.1	0.043	26.7	15.0	13.3	NA306-19	6.5	0.256	17.5	0.689	6.8	0.268	49.2	1.937	–	5/16-24UNF	0.66
–	1 1/4	62	2.441	22	0.866	33.9	1.335	16	0.630	1	0.039	19.5	11.3	13.9	SA206-20	–	–	8	0.315	6	0.236	44.5	1.752	–	5/16-24UNF	0.3
		62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SA206-20F	4.7	0.185	9	0.354	6	0.236	44.5	1.752	–	5/16-24UNF	0.34
		62	2.441	36.5	1.437	48.4	1.906	19	0.748	1	0.039	19.5	11.3	13.9	NA206-20	5	0.197	18.3	0.720	6	0.236	44.5	1.752	–	5/16-24UNF	0.38
–	1 1/4	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	SA207-20	–	–	8.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.5
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SA207-20F	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	NA207-20	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.68
–	1 5/16	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	SA207-21	–	–	8.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.5
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SA207-21F	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	NA207-21	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.65

SA, SA-F, NA
Cylindrical bore
(with eccentric locking collar)
d (30) ~ 60 mm

SA SA-F NA



SA



SA-F



NA

Shaft Dia d mm	Shaft Dia d inch	Dimensions D mm	D inch	B mm	B inch	B_1 mm	B_1 inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No.	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_2 mm	S_2 inch	d_1 mm	d_1 inch	Set Screw Brg.Bore mm	inch	Mass kg
–	1 3/8	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	**SA207-22**	–	–	8.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.5
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	**SA207-22F**	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	**NA207-22**	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.61
35	–	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	**SA207**	–	–	8.5	0.335	6.8	0.268	55.6	2.189	M8×1	–	0.5
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	**SA207F**	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	M8×1	–	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	**NA207**	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	M8×1	–	0.61
–	1 7/16	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	**SA207-23**	–	–	8.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.5
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	**SA207-23F**	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	**NA207-23**	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.58
		80	3.150	38.1	1.500	51.6	2.031	26	1.024	1.5	0.059	33.4	19.3	13.2	**NA307-23**	7.5	0.295	18.3	0.720	6.8	0.268	55.5	2.185	–	5/16-24UNF	0.81
–	1 1/2	80	3.150	27	1.063	40.5	1.595	18	0.709	1.1	0.043	29.1	17.8	14.0	**SA208-24**	–	–	9	0.354	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.67
		80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	**SA208-24F**	6.4	0.252	11	0.433	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.75
		80	3.150	42.8	1.685	56.3	2.217	21	0.827	1.1	0.043	29.1	17.8	14.0	**NA208-24**	6	0.236	21.4	0.843	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.83
		90	3.543	41.3	1.626	57.1	2.248	28	1.102	1.5	0.059	40.7	24.0	13.2	**NA308-24**	8	0.315	19.8	0.780	8	0.315	63.5	2.500	–	3/8-24UNF	1.19
–	1 9/16	80	3.150	27	1.063	40.5	1.595	18	0.709	1.1	0.043	29.1	17.8	14.0	**SA208-25**	–	–	9	0.354	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.67
		80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	**SA208-25F**	6.4	0.252	11	0.433	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.75
		80	3.150	42.8	1.685	56.3	2.217	21	0.827	1.1	0.043	29.1	17.8	14.0	**NA208-25**	6	0.236	21.4	0.843	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.79
40	–	80	3.150	27	1.063	40.5	1.595	18	0.709	1.1	0.043	29.1	17.8	14.0	**SA208**	–	–	9	0.354	6.8	0.268	60.3	2.374	M8×1	–	0.67
		80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	**SA208F**	6.4	0.252	11	0.433	6.8	0.268	60.3	2.374	M8×1	–	0.75
		80	3.150	42.8	1.685	56.3	2.217	21	0.827	1.1	0.043	29.1	17.8	14.0	**NA208**	6	0.236	21.4	0.843	6.8	0.268	60.3	2.374	M8×1	–	0.78
–	1 5/8	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	**SA209-26F**	6	0.236	11	0.433	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
		85	3.346	42.8	1.685	56.3	2.217	22	0.866	1.1	0.043	34.1	21.3	14.0	**NA209-26**	6	0.236	21.4	0.843	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.96
–	1 11/16	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	**SA209-27F**	6	0.236	11	0.433	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
		85	3.346	42.8	1.685	56.3	2.217	22	0.866	1.1	0.043	34.1	21.3	14.0	**NA209-27**	6	0.236	21.4	0.843	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.91
		100	3.937	42.9	1.689	58.7	2.311	30	1.181	1.5	0.059	48.9	29.5	13.3	**NA309-27**	8.5	0.335	19.8	0.780	8	0.315	69.8	2.748	–	3/8-24UNF	1.47
–	1 3/4	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	**SA209-28F**	6	0.236	11	0.433	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
		85	3.346	42.8	1.685	56.3	2.217	22	0.866	1.1	0.043	34.1	21.3	14.0	**NA209-28**	6	0.236	21.4	0.843	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.87
45	–	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	**SA209F**	6	0.236	11	0.433	6.8	0.268	63.5	2.500	M8×1	–	0.82
		85	3.346	42.8	1.685	56.3	2.217	22	0.866	1.1	0.043	34.1	21.3	14.0	**NA209**	6	0.236	21.4	0.843	6.8	0.268	63.5	2.500	M8×1	–	0.85
–	1 7/8	90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	**SA210-30F**	6.6	0.260	11	0.433	6.8	0.268	69.9	2.752	–	5/16-24UNF	0.85
		90	3.543	49.2	1.937	62.7	2.469	24	0.945	1.1	0.043	35.1	23.3	14.4	**NA210-30**	6	0.236	24.6	0.969	6.8	0.268	69.9	2.752	–	5/16-24UNF	1.08
–	1 15/16	90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	**SA210-31F**	6.6	0.260	11	0.433	6.8	0.268	69.9	2.752	–	5/16-24UNF	0.85
		90	3.543	49.2	1.937	62.7	2.469	24	0.945	1.1	0.043	35.1	23.3	14.4	**NA210-31**	6	0.236	24.6	0.969	6.8	0.268	69.9	2.752	–	5/16-24UNF	1.04
		110	4.331	49.2	1.937	66.6	2.622	32	1.260	2	0.079	62.0	38.3	13.2	**NA310-31**	9	0.354	24.6	0.969	8.7	0.343	76.2	3.000	–	3/8-24UNF	1.95
50	–	90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	**SA210F**	6.6	0.260	11	0.433	6.8	0.268	69.9	2.752	M8×1	–	0.85
		90	3.543	49.2	1.937	62.7	2.469	24	0.945	1.1	0.043	35.1	23.3	14.4	**NA210**	6	0.236	24.6	0.969	6.8	0.268	69.9	2.752	M8×1	–	1.01
–	2	90	3.543	49.2	1.937	62.7	2.469	24	0.945	1.1	0.043	35.1	23.3	14.4	**NA210-32**	6	0.236	24.6	0.969	6.8	0.268	69.9	2.752	–	5/16-24UNF	0.99
		100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	**SA211-32F**	7	0.276	12	0.472	8	0.315	76.2	3.000	–	3/8-24UNF	1.2
		100	3.937	55.5	2.185	71.4	2.811	25	0.984	1.5	0.059	43.4	29.4	14.4	**NA211-32**	7	0.276	27.8	1.094	8	0.315	76.2	3.000	–	3/8-24UNF	1.58
–	2 1/8	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	**SA211-34F**	7	0.276	12	0.472	8	0.315	76.2	3.000	–	3/8-24UNF	1.2
		100	3.937	55.5	2.185	71.4	2.811	25	0.984	1.5	0.059	43.4	29.4	14.4	**NA211-34**	7	0.276	27.8	1.094	8	0.315	76.2	3.000	–	3/8-24UNF	1.49
55	–	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	**SA211F**	7	0.276	12	0.472	8	0.315	76.2	3.000	M10×1.25	–	1.2
		100	3.937	55.5	2.185	71.4	2.811	25	0.984	1.5	0.059	43.4	29.4	14.4	**NA211**	7	0.276	27.8	1.094	8	0.315	76.2	3.000	M10×1.25	–	1.39
–	2 3/16	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	**SA211-35F**	7	0.276	12	0.472	8	0.315	76.2	3.000	–	3/8-24UNF	1.2
		100	3.937	55.5	2.185	71.4	2.811	25	0.984	1.5	0.059	43.4	29.4	14.4	**NA211-35**	7	0.276	27.8	1.094	8	0.315	76.2	3.000	–	3/8-24UNF	1.36
		120	4.724	55.6	2.189	73	2.874	34	1.339	2	0.079	71.6	45.0	13.2	**NA311-35**	10	0.394	27.8	1.094	8.7	0.343	82.5	3.248	–	3/8-24UNF	2.2
60	2 1/4	110	4.331	61.9	2.437	77.8	3.063	27	1.063	1.5	0.059	52.4	36.2	14.4	**NA212-36**	7.5	0.295	31	1.220	8	0.315	84.2	3.315	–	3/8-24UNF	2.03
		110	4.331	61.9	2.437	77.8	3.063	27	1.063	1.5	0.059	52.4	36.2	14.4	**NA212**	7.5	0.295	31	1.220	8	0.315	84.2	3.315	M10×1.25	–	1.87
	2 7/16	130	5.118	61.9	2.437	79.4	3.126	36	1.417	2.1	0.083	81.9	52.2	13.2	**NA312-39**	11.5	0.453	31	1.220	8.7	0.343	88.9	3.500	–	3/8-24UNF	3

SA, SA-F, NA
Cylindrical bore
(with eccentric locking collar)
d 65 ~ 75 mm

SA

SA-F

NA



SA



SA-F



NA

Shaft Dia d mm	Shaft Dia d inch	Dimensions D mm	D inch	B mm	B inch	B_1 mm	B_1 inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No.	Dimensions C_1 mm	C_1 inch	S mm	S inch	S_2 mm	S_2 inch	d_1 mm	d_1 inch	Set Screw Brg.Bore mm	inch	Mass kg
	2 1/2	120	4.724	68.2	2.685	85.7	3.374	28	1.102	1.5	0.059	57.2	40.1	14.4	**NA213-40**	7.5	0.295	34.1	1.343	8.5	0.335	92	3.622	–	3/8-24UNF	2.51
65		120	4.724	68.2	2.685	85.7	3.374	28	1.102	1.5	0.059	57.2	40.1	14.4	**NA213**	7.5	0.295	34.1	1.343	8.5	0.335	92	3.622	M10×1.25	–	2.45
	2 3/4	125	4.921	68.2	2.685	85.7	3.374	30	1.181	1.5	0.059	62.2	44.1	14.5	**NA214-44**	9	0.354	34.1	1.343	8.5	0.335	97	3.819	–	3/8-24UNF	2.94
70		125	4.921	68.2	2.685	85.7	3.374	30	1.181	1.5	0.059	62.2	44.1	14.5	**NA214**	9	0.354	34.1	1.343	8.5	0.335	97	3.819	M10×1.25	–	2.92
	2 11/16	150	5.906	68.3	2.689	92.1	3.626	40	1.575	2.1	0.083	104	68.2	13.2	**NA314-43**	12.5	0.492	34.1	1.343	11.9	0.469	101.6	4.000	–	1/2-20UNF	4.7
75		130	5.118	74.6	2.937	92.1	3.626	32	1.260	1.5	0.059	67.4	48.3	14.5	**NA215**	9	0.354	37.3	1.469	8.5	0.335	102	4.016	M10×1.25	–	2.74
	3	130	5.118	74.6	2.937	92.1	3.626	32	1.260	1.5	0.059	67.4	48.3	14.5	**NA215-48**	9	0.354	37.3	1.469	8.5	0.335	102	4.016	–	3/8-24UNF	2.72
	2 15/16	160	6.299	74.6	2.937	100	3.937	42	1.654	2.1	0.083	113	77.2	13.2	**NA315-47**	14.5	0.571	37.3	1.469	12.7	0.500	112.7	4.437	–	5/8-18UNF	5.8

NC2
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm



Shaft Dia. d mm	Shaft Dia. d inch	Dimensions D mm	D inch	B1 mm	B1 inch	C mm	C inch	r mm	r inch	Basic Load Ratings kN Cr	Basic Load Ratings kN C0r	Factor f0	Bearing No.	Collar No.	Dimensions C1 mm	C1 inch	S mm	S inch	S3 mm	S3 inch	d1 mm	d1 inch	Cap Screw inch / mm	Mass kg
20	3/4	47	1.850	32.5	1.280	16	0.630	1	0.039	12.8	6.65	13.2	NC204-12 NC204	UCL204B UCL204B	4	0.157	12.7	0.500	19.8	0.780	44.5	1.752	No.8-32UNC M4×0.7	0.30
25	7/8 15/16 1	52	2.047	36.5	1.437	17	0.669	1	0.039	14.0	7.85	13.9	NC205-14 NC205-15 NC205 NC205-16	UCL205A UCL205A UCL205A UCL205A	5	0.197	14.3	0.563	22.2	0.874	49.2	1.937	No.8-32UNC No.8-32UNC M4×0.7 No.8-32UNC	0.40
30	1 1/8 1 3/16 1 1/4	62	2.441	39.7	1.563	19	0.748	1	0.039	19.5	11.3	13.9	NC206-18 NC206 NC206-19 NC206-20	UCL206A UCL206A UCL206A UCL206A	5	0.197	15.9	0.626	23.8	0.937	55.6	2.189	No.8-32UNC M4×0.7 No.8-32UNC No.8-32UNC	0.50
35	1 1/4	72	2.835	44.5	1.752	20	0.787	1.1	0.043	25.7	15.4	13.9	NC207-20	UCL207A	5.5	0.217	17.5	0.689	27	1.063	61.9	2.437	No.10-24UNC	0.80
	1 3/8 1 7/16	72	2.835	44.5	1.752	20	0.787	1.1	0.043	25.7	15.4	13.9	NC207-22 NC207 NC207-23	UCL207B UCL207B UCL207B	5.5	0.217	17.5	0.689	27	1.063	65.1	2.563	No.10-24UNC M5×0.8 No.10-24UNC	0.80
40	1 1/2	80	3.150	50.8	2.000	21	0.827	1.1	0.043	29.1	17.8	14.0	NC208-24 NC208	UCL208A UCL208A	6	0.236	19	0.748	31.8	1.252	68.3	2.689	No.10-24UNC M5×0.8	1.0
45	1 5/8	85	3.346	50.8	2.000	22	0.866	1.1	0.043	34.1	21.3	14.0	NC209-26	UCL209A	6	0.236	19	0.748	31.8	1.252	71.4	2.811	No.10-24UNC	1.1
	1 11/16 1 3/4	85	3.346	50.8	2.000	22	0.866	1.1	0.043	34.1	21.3	14.0	NC209-27 NC209-28 NC209	UCL209B UCL209B UCL209B	6	0.236	19	0.748	31.8	1.252	74.6	2.937	No.10-24UNC No.10-24UNC M5×0.8	1.1
50	1 15/16 2	90	3.543	53.1	2.091	24	0.945	1.1	0.043	35.1	23.3	14.4	NC210-31 NC210 NC210-32	UCL210A UCL210A UCL210A	6	0.236	19	0.748	34.1	1.343	85.7	3.374	1/4-20UNC M6×1 1/4-20UNC	1.4
55	2	100	3.937	57.1	2.248	25	0.984	1.5	0.059	43.4	29.4	14.4	NC211-32	UCL211A	7	0.276	22.2	0.874	34.9	1.374	88.9	3.500	1/4-20UNC	1.5
	2 3/16	100	3.937	57.1	2.248	25	0.984	1.5	0.059	43.4	29.4	14.4	NC211 NC211-35	UCL211B UCL211B	7	0.276	22.2	0.874	34.9	1.374	92.1	3.626	M6×1 1/4-20UNC	1.5
60	2 1/4	110	4.331	66.7	2.626	27	1.063	1.5	0.059	52.4	36.2	14.4	NC212-36	UCL212A	7.5	0.295	25.4	1.000	41.3	1.626	103.2	4.063	5/16-18UNC	2.2
	2 7/16	110	4.331	66.7	2.626	27	1.063	1.5	0.059	52.4	36.2	14.4	NC212 NC212-39	UCL212B UCL212B	7.5	0.295	25.4	1.000	41.3	1.626	104.8	4.126	M8×1.25 5/16-18UNC	2.2

ERC
Cylindrical bore
(with concentric locking collar)
d 20 ~ 60 mm



Shaft Dia. d mm	Shaft Dia. d inch	Dimensions D mm	D inch	B_1 mm	B_1 inch	C mm	C inch	r mm	r inch	r_1 (min.) mm	r_1 (min.) inch	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No.	Collar No.	Dimensions C_c mm	C_c inch	S mm	S inch	S_3 mm	S_3 inch	a mm	a inch	f mm	f inch	d_1 mm	d_1 inch	D_2 mm	D_2 inch	Cap Screw inch / mm	Mass kg
20	3/4	47	1.850	32.5	1.280	16	0.630	1	0.039	0.5	0.020	12.8	6.65	13.2	**ERC204-12** **ERC204**	UCL204B UCL204B	4	0.157	12.7	0.500	19.8	0.780	2.38	0.094	1.07	0.042	44.5	1.752	52.5	2.067	No.8-32UNC M4×0.7	0.36
25	7/8 15/16 1	52	2.047	36.5	1.437	19	0.748	1	0.039	0.5	0.020	14.0	7.85	13.9	**ERC205-14** **ERC205-15** **ERC205** **ERC205-16**	UCL205A UCL205A UCL205A UCL205A	5	0.197	14.3	0.563	22.2	0.874	2.38	0.094	1.07	0.042	49.2	1.937	57.7	2.272	No.8-32UNC No.8-32UNC M4×0.7 No.8-32UNC	0.47
30	1 1/8 1 3/16 1 1/4	62	2.441	39.7	1.563	22	0.866	1	0.039	0.5	0.020	19.5	11.3	13.9	**ERC206-18** **ERC206** **ERC206-19** **ERC206-20**	UCL206A UCL206A UCL206A UCL206A	5.5	0.217	15.9	0.626	23.8	0.937	3.18	0.125	1.65	0.065	55.6	2.189	67.5	2.657	No.8-32UNC M4×0.7 No.8-32UNC No.8-32UNC	0.57
35	1 1/4	72	2.835	44.5	1.752	24	0.945	1.1	0.043	0.5	0.020	25.7	15.4	13.9	**ERC207-20**	UCL207A	5.5	0.217	17.5	0.689	27	1.063	3.18	0.125	1.65	0.065	61.9	2.437	78.4	3.087	No.10-24UNC	0.95
	1 3/8 1 7/16	72	2.835	44.5	1.752	24	0.945	1.1	0.043	0.5	0.020	25.7	15.4	13.9	**ERC207-22** **ERC207** **ERC207-23**	UCL207B UCL207B UCL207B	5.5	0.217	17.5	0.689	27	1.063	3.18	0.125	1.65	0.065	65.1	2.563	78.4	3.087	No.10-24UNC M5×0.8 No.10-24UNC	0.95
40	1 1/2	80	3.150	50.8	2.000	28	1.102	1.1	0.043	0.5	0.020	29.1	17.8	14.0	**ERC208-24** **ERC208**	UCL208A UCL208A	6	0.236	19	0.748	31.8	1.252	3.18	0.125	1.65	0.065	68.3	2.689	86.4	3.402	No.10-24UNC M5×0.8	1.2
45	1 5/8	85	3.346	50.8	2.000	28	1.102	1.1	0.043	0.5	0.020	34.1	21.3	14.0	**ERC209-26**	UCL209A	6	0.236	19	0.748	31.8	1.252	3.18	0.125	1.65	0.065	71.4	2.811	91.4	3.598	No.10-24UNC	1.3
	1 11/16 1 3/4	85	3.346	50.8	2.000	28	1.102	1.1	0.043	0.5	0.020	34.1	21.3	14.0	**ERC209-27** **ERC209-28** **ERC209**	UCL209B UCL209B UCL209B	6	0.236	19	0.748	31.8	1.252	3.18	0.125	1.65	0.065	74.6	2.937	91.4	3.598	No.10-24UNC No.10-24UNC M5×0.8	1.3
50	1 15/16 2	90	3.543	53.1	2.091	28	1.102	1.1	0.043	0.5	0.020	35.1	23.3	14.4	**ERC210-31** **ERC210** **ERC210-32**	UCL210A UCL210A UCL210A	7.5	0.295	19	0.748	34.1	1.343	3.18	0.125	2.41	0.095	85.7	3.374	96.3	3.791	1/4-20UNC M6×1 1/4-20UNC	1.6
55	2	100	3.937	57.1	2.248	30	1.181	1.5	0.059	0.5	0.020	43.4	29.4	14.4	**ERC211-32**	UCL211A	7.5	0.295	22.2	0.874	34.9	1.374	3.18	0.125	2.41	0.095	88.9	3.500	106.3	4.185	1/4-20UNC	1.8
	2 3/16	100	3.937	57.1	2.248	30	1.181	1.5	0.059	0.5	0.020	43.4	29.4	14.4	**ERC211** **ERC211-35**	UCL211B UCL211B	7.5	0.295	22.2	0.874	24.9	1.375	3.18	0.125	2.41	0.095	92.1	3.626	106.3	4.185	M6×1 1/4-20UNC	1.8
60	2 1/4	110	4.331	66.7	2.626	32	1.260	1.5	0.059	0.5	0.020	52.4	36.2	14.4	**ERC212-36**	UCL212A	7.5	0.295	25.4	1.000	41.3	1.626	3.18	0.125	2.41	0.095	103.2	4.063	116.4	4.583	5/16-18UNC	2.5
	2 7/16	110	4.331	66.7	2.626	32	1.260	1.5	0.059	0.5	0.020	52.4	36.2	14.4	**ERC212** **ERC212-39**	UCL212B UCL212B	7.5	0.295	25.4	1.000	41.3	1.626	3.18	0.125	2.41	0.095	104.8	4.126	116.4	4.583	M8×1.25 5/16-18UNC	2.5

UK
Tapered bore (with adapter)
d_1 20 ~ (50) mm

UK

UK+H



UK



UK-L3

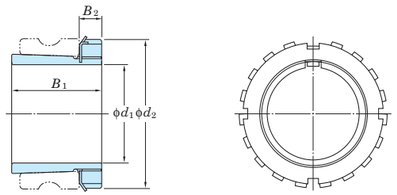

Adapter

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm d	D	B	B_L	C	C_1	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. Standard	Bearing No. L3 Type	Mass kg Standard	Mass kg L3 Type	H3 Series Adapter Adapter No.	H3 Dimensions inch / mm B_1	B_2	d_2	Mass kg	Sleeve No.	H23 Series Adapter Adapter No.	H23 Dimensions inch / mm B_1	B_2	d_2	Mass kg	Sleeve No.
20	3/4	0.984 25	2.047 52	0.827 21	0.945 24	0.669 17	0.197 5	14.0	7.85	13.9	**UK205**	**UK205L2**	0.16	0.18	HE305X H305X	1.142 29	0.315 8	1.496 38	0.075	AE305X A305X	HE2305X H2305X	1.378 35	0.315 8	1.496 38	0.095	AE2305X A2305X
	3/4	0.984 25	2.441 62	0.906 23	– –	0.748 19	0.197 5	19.5	11.3	13.9	**UKX05**	–	0.27	–	–	– –	– –	– –	–	–	HE2305X H2305X	1.378 35	0.315 8	1.496 38	0.095	AE2305X A2305X
	3/4	0.984 25	2.441 62	1.063 27	– –	0.866 22	0.236 6	21.2	10.9	12.6	**UK305**	–	0.40	–	–	– –	– –	– –	–	–	HE2305X H2305X	1.378 35	0.315 8	1.496 38	0.095	AE2305X A2305X
25	1	1.181 30	2.441 62	0.906 23	1.063 27	0.748 19	0.197 5	19.5	11.3	13.9	**UK206**	**UK206L3**	0.25	0.29	H306X HE306X	1.220 31	0.315 8	1.772 45	0.11	A306X AE306X	H2306X HE2306X	1.496 38	0.315 8	1.772 45	0.13	A2306X HE2306X
	1	1.181 30	2.835 72	1.024 26	– –	0.787 20	0.217 5.5	25.7	15.4	13.9	**UKX06**	–	0.43	–	–	– –	– –	– –	–	–	H2306X HE2306X	1.496 38	0.315 8	1.772 45	0.13	A2306X HE2306X
	1	1.181 30	2.835 72	1.181 30	– –	0.945 24	0.256 6.5	26.7	15.0	13.3	**UK306**	–	0.47	–	–	– –	– –	– –	–	–	H2306X HE2306X	1.496 38	0.315 8	1.772 45	0.13	A2306X HE2306X
30	1 1/8	1.378 35	2.835 72	1.024 26	1.181 30	0.787 20	0.217 5.5	25.7	15.4	13.9	**UK207**	**UK207L3**	0.37	0.43	HS307X H307X	1.378 35	0.354 9	2.047 52	0.14	AS307X A307X	HS2307X H2307X	1.693 43	0.354 9	2.047 52	0.17	AS2307X A2307X
	1 1/8	1.378 35	3.150 80	1.063 27	– –	0.827 21	0.236 6	29.1	17.8	14.0	**UKX07**	–	0.53	–	–	– –	– –	– –	–	–	HS2307X H2307X	1.693 43	0.354 9	2.047 52	0.17	AS2307X A2307X
	1 1/8	1.378 35	3.150 80	1.299 33	1.299 33	1.024 26	0.295 7.5	33.4	19.3	13.2	**UK307**	**UK307L3**	0.60	0.60	–	– –	– –	– –	–	–	HS2307X H2307X	1.693 43	0.354 9	2.047 52	0.17	AS2307X A2307X
35	1 1/4 1 3/8	1.575 40	3.150 80	1.063 27	1.339 34	0.827 21	0.236 6	29.1	17.8	14.0	**UK208**	**UK208L3**	0.47	0.58	HE308X HS308X H308X	1.417 36	0.394 10	2.283 58	0.19	AE308X AS308X A308X	HE2308X HS2308X H2308X	1.811 46	0.394 10	2.283 58	0.22	AE2308X AS2308X A2308X
	1 1/4 1 3/8	1.575 40	3.346 85	1.142 29	– –	0.866 22	0.236 6	34.1	21.3	14.0	**UKX08**	–	0.58	–	–	– –	– –	– –	–	–	HE2308X HS2308X H2308X	1.811 46	0.394 10	2.283 58	0.22	AE2308X AS2308X A2308X
	1 1/4 1 3/8	1.575 40	3.543 90	1.378 35	1.378 35	1.102 28	0.315 8	40.7	24.0	13.2	**UK308**	**UK308L3**	0.80	0.80	–	– –	– –	– –	–	–	HE2308X HS2308X H2308X	1.811 46	0.394 10	2.283 58	0.22	AE2308X AS2308X A2308X
40	1 1/2	1.772 45	3.346 85	1.142 29	1.417 36	0.866 22	0.236 6	34.1	21.3	14.0	**UK209**	**UK209L3**	0.52	0.65	HE309X H309X	1.535 39	0.433 11	2.559 65	0.25	AE309X A309X	HE2309X H2309X	1.969 50	0.433 11	2.559 65	0.28	AE2309X A2309X
	1 1/2	1.772 45	3.543 90	1.142 29	– –	0.945 24	0.236 6	35.1	23.3	14.4	**UKX09**	–	0.67	–	–	– –	– –	– –	–	–	HE2309X H2309X	1.969 50	0.433 11	2.559 65	0.28	AE2309X A2309X
	1 1/2	1.772 45	3.937 100	1.496 38	1.496 38	1.181 30	0.335 8.5	48.9	29.5	13.3	**UK309**	**UK309L3**	1.08	1.08	–	– –	– –	– –	–	–	HE2309X H2309X	1.969 50	0.433 11	2.559 65	0.28	AE2309X A2309X
45	1 3/4	1.969 50	3.543 90	1.142 29	1.417 36	0.945 24	0.236 6	35.1	23.3	14.4	**UK210**	**UK210L3**	0.59	0.65	HE310X H310X	1.654 42	0.472 12	2.756 70	0.30	AE310X A310X	HE2310X H2310X	2.165 55	0.472 12	2.756 70	0.36	AE2310X A2310X
	1 3/4	1.969 50	3.937 100	1.220 31	– –	0.984 25	0.276 7	43.4	29.4	14.4	**UKX10**	–	0.89	–	–	– –	– –	– –	–	–	HE2310X H2310X	2.165 55	0.472 12	2.756 70	0.36	AE2310X A2310X
	1 3/4	1.969 50	4.331 110	1.575 40	1.575 40	1.260 32	0.354 9	62.0	38.3	13.2	**UK310**	**UK310L3**	1.38	1.38	–	– –	– –	– –	–	–	HE2310X H2310X	2.165 55	0.472 12	2.756 70	0.36	AE2310X A2310X
50	1 7/8 2	2.165 55	3.937 100	1.220 31	1.575 40	0.984 25	0.276 7	43.4	29.4	14.4	**UK211**	**UK211L3**	0.80	1.09	HS311X H311X HE311X	1.772 45	0.472 12	2.953 75	0.35	AS311X A311X AE311X	HS2311X H2311X HE2311X	2.323 59	0.4921 12.5	2.953 75	0.42	AS2311X A2311X AE2311X
	1 7/8 2	2.165 55	4.331 110	1.299 33	– –	1.063 27	0.295 7.5	52.4	36.2	14.4	**UKX11**	–	1.15	–	–	– –	– –	– –	–	–	HS2311X H2311X HE2311X	2.323 59	0.4921 12.5	2.953 75	0.42	AS2311X A2311X AE2311X

Remarks 1. In Part No. of unit with adapters, Part No. of applicable adapters follow the Part No. shown in the dimensional tables.
(Example of Part No. : UK206 + 306X, UK206L3 + H2306X)

2. Adapter series applicable to UK200 series
UK200..... H300X series
UK200L3 (or L2) ..... H2300X series
3. UK205 is the double seal type product (L2).
4. Inch bore diameter series adapters are also available (see the dimensional tables of adapters).

UK
Tapered bore (with adapter)
d_1 (50) ~ (90) mm

UK

UK+H



UK



UK-L3

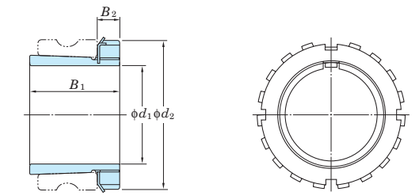

Adapter

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm						Basic Load Ratings kN		Factor	Bearing No.		Bearing Mass kg		H3 Series Adapter						H23 Series Adapter					
															Adapter No.	Dimensions inch / mm			Mass	Sleeve No.	Adapter No.	Dimensions inch / mm			Mass	Sleeve No.
d_1		d	D	B	B_L	C	C_1	C_r	C_{0r}	f_0	Standard	L3 Type	Standard	L3 Type		B_1	B_2	d_2	kg			B_1	B_2	d_2	kg	
50	1 7/8	2.165	4.724	1.693	1.693	1.339	0.394	71.6	45.0	13.2	UK311	UK311L3	1.78	1.78	–	–	–	–	–	–	HS2311X	2.323	0.4921	2.953	0.42	AS2311X
		55	120	43	43	34	10									–	–	–			H2311X	59	12.5	75		A2311X
	2																				HE2311X					AE2311X
55	2 1/8	2.362	4.331	1.299	1.850	1.063	0.295	52.4	36.2	14.4	UK212	UK212L3	1.02	1.41	HS312X	1.850	0.512	3.150	0.43	AS312X	HS2312X	2.441	0.512	3.150	0.48	AS2312X
		60	110	33	47	27	7.5								H312X	47	13	80		A312X	H2312X	62	13	80		A2312X
	2 1/8	2.362	4.724	1.417	–	1.102	0.295	57.2	40.1	14.4	UKX12	–	1.45	–	–	–	–	–	–	–	HS2312X	2.441	0.512	3.150	0.48	AS2312X
		60	120	36	–	28	7.5									–	–	–			H2312X	62	13	80		A2312X
	2 1/8	2.362	5.118	1.850	1.850	1.417	0.453	81.9	52.2	13.2	UK312	UK312L3	2.06	2.06	–	–	–	–	–	–	HS2312X	2.441	0.512	3.150	0.48	AS2312X
		60	130	47	47	36	11.5									–	–	–			H2312X	62	13	80		A2312X
60	2 1/4	2.559	4.724	1.417	1.850	1.102	0.295	57.2	40.1	14.4	UK213	UK213L3	1.34	1.67	HE313X	1.969	0.551	3.346	0.46	AE313X	HE2313X	2.559	0.551	3.346	0.56	AE2313X
		65	120	36	47	28	7.5								H313X	50	14	85		A313X	H2313X	65	14	85		A2313X
	2 3/8														HS313X					AS313X	HS2313X					AS2313X
	2 1/4	2.559	4.921	1.575	–	1.181	0.354	62.2	44.1	14.5	UKX13	–	1.62	–	–	–	–	–	–	–	HE2313X	2.559	0.551	3.346	0.56	AE2313X
		65	125	40	–	30	9									–	–	–			H2313X	65	14	85		A2313X
	2 3/8																				HS2313X					AS2313X
	2 1/4	2.559	5.512	1.929	1.929	1.496	0.472	92.7	59.9	13.2	UK313	UK313L3	2.71	2.71	–	–	–	–	–	–	HE2313X	2.559	0.551	3.346	0.56	AE2313X
		65	140	49	49	38	12									–	–	–			H2313X	65	14	85		A2313X
	2 3/8																				HS2313X					AS2313X
65	2 1/2	2.953	5.118	1.575	2.008	1.260	0.354	67.4	48.3	14.5	UK215	UK215L3	1.50	1.99	HE315X	2.165	0.591	3.858	0.83	AE315X	HE2315X	2.874	0.591	3.858	1.05	AE2315X
		75	130	40	51	32	9								H315X	55	15	98		A315X	H2315X	73	15	98		A2315X
	2 1/2	2.953	5.512	1.654	–	1.299	0.354	72.7	53.0	14.6	UKX15	–	2.10	–	–	–	–	–	–	–	HE2315X	2.874	0.591	3.858	1.05	AE2315X
		75	140	42	–	33	9									–	–	–			H2315X	73	15	98		A2315X
	2 1/2	2.953	6.299	2.165	2.165	1.654	0.571	113	77.2	13.2	UK315	UK315L3	3.80	3.80	–	–	–	–	–	–	HE2315X	2.874	0.591	3.858	1.05	AE2315X
		75	160	55	55	42	14.5									–	–	–			H2315X	73	15	98		A2315X
70	2 3/4	3.150	5.512	1.654	2.165	1.299	0.354	72.7	53.0	14.6	UK216	UK216L3	1.96	2.56	HE316X	2.323	0.669	4.134	1.05	AE316X	HE2316X	3.071	0.669	4.134	1.3	AE2316X
		80	140	42	55	33	9								H316X	59	17	105		A316X	H2316X	78	17	105		A2316X
	2 3/4	3.150	5.906	1.732	–	1.378	0.394	84.0	61.9	14.5	UKX16	–	2.64	–	–	–	–	–	–	–	HE2316X	3.071	0.669	4.134	1.3	AE2316X
		80	150	44	–	35	10									–	–	–			H2316X	78	17	105		A2316X
	2 3/4	3.150	6.693	2.165	2.165	1.732	0.591	123	86.7	13.3	UK316	UK316L3	4.39	4.39	–	–	–	–	–	–	HE2316X	3.071	0.669	4.134	1.3	AE2316X
		80	170	55	55	44	15									–	–	–			H2316X	78	17	105		A2316X
75		3.346	5.906	1.732	2.244	1.378	0.394	84.0	61.9	14.5	UK217	UK217L3	2.42	3.10	H317X	2.480	0.709	4.331	1.2	A317X	H2317X	3.228	0.709	4.331	1.45	A2317X
	3	85	150	44	57	35	10								HE317X	63	18	110		AE317X	HE2317X	82	18	110		AE2317X
	3.346	6.299	1.890	–	1.496	0.433	96.1	71.5	14.5	UKX17	–	3.25	–	–	–	–	–	–	–	H2317X	3.228	0.709	4.331	1.45	A2317X
	3	85	160	48	–	38	11									–	–	–			HE2317X	82	18	110		AE2317X
	3.346	7.087	2.362	2.362	1.811	0.591	133	96.8	13.3	UK317	UK317L3	5.30	5.30	–	–	–	–	–	–	H2317X	3.228	0.709	4.331	1.45	A2317X
	3	85	180	60	60	46	15									–	–	–			HE2317X	82	18	110		AE2317X
80	–	3.543	6.299	1.890	2.480	1.496	0.433	96.1	71.5	14.5	UK218	UK218L3	2.90	3.77	H318X	2.559	0.709	4.724	1.4	A318X	H2318X	3.386	0.709	4.724	1.7	A2318X
		90	160	48	63	38	11									65	18	120				86	18	120		
	–	3.543	6.693	1.969	–	1.575	0.453	109	81.9	14.4	UKX18	–	3.80	–	–	–	–	–	–	–	H2318X	3.386	0.709	4.724	1.7	A2318X
		90	170	50	–	40	11.5									–	–	–				86	18	120		
	–	3.543	7.480	2.362	2.362	1.890	0.610	143	107	13.3	UK318	UK318L3	6.20	6.20	–	–	–	–	–	–	H2318X	3.386	0.709	4.724	1.7	A2318X
		90	190	60	60	48	15.5									–	–	–				86	18	120		
85	3 1/4	3.740	7.874	2.598	2.598	1.969	0.650	153	119	13.3	UK319	UK319L3	7.31	7.31	–	–	–	–	–	–	H2319X	3.543	0.748	4.921	1.95	A2319X
		95	200	66	66	50	16.5									–	–	–				90	19	125		
90	3 1/2	3.937	7.480	2.126	–	1.693	0.512	133	105	14.4	UKX20	–	5.36	–	–	–	–	–	–	–	HE2320X	3.819	0.787	5.118	2.2	AE2320X
		100	190	54	–	43	13									–	–	–			H2320X	97	20	130		A2320X

Remarks 1. In Part No. of unit with adapters, Part No. of applicable adapters follow the Part No. shown in the dimensional tables.
(Example of Part No. : UK206 + 306X, UK206L3 + H2306X)

2. Adapter series applicable to UK200 series
UK200..... H300X series
UK200L3 (or L2) ..... H2300X series
3. UK205 is the double seal type product (L2).
4. Inch bore diameter series adapters are also available (see the dimensional tables of adapters).

UK
Tapered bore (with adapter)
d_1 (90) ~ 125 mm

UK

UK+H



UK



UK-L3

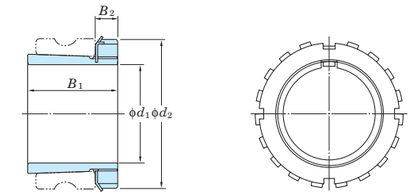

Adapter

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm						Basic Load Ratings kN		Factor	Bearing No.		Bearing Mass kg		H3 Series Adapter						H23 Series Adapter					
															Adapter No.	Dimensions inch / mm			Mass	Sleeve No.	Adapter No.	Dimensions inch / mm			Mass	Sleeve No.
d_1		d	D	B	B_L	C	C_1	C_r	C_{0r}	f_0	Standard	L3 Type	Standard	L3 Type		B_1	B_2	d_2	kg			B_1	B_2	d_2	kg	
90	3 1/2	3.937	8.465	2.677	2.677	2.126	0.709	173	141	13.2	UK320	UK320L3	8.70	8.70	–	–	–	–	–	–	HE2320X	3.819	0.787	5.118	2.2	AE2320X
		100	215	68	68	54	18									–	–	–			H2320X	97	20	130		A2320X
100	4	4.331	9.449	3.071	3.071	2.362	0.787	205	180	13.2	UK322	UK322L3	12.2	12.2	–	–	–	–	–	–	H2322X	4.134	0.827	5.709	2.75	A2322X
		110	240	78	78	60	20									–	–	–			HE2322X	105	21	145		AE2322X
110	–	4.724	10.236	3.425	3.425	2.520	0.827	207	185	13.5	UK324	UK324L3	16.1	16.1	–	–	–	–	–	–	H2324	4.409	0.866	6.102	3.2	A2324
		120	260	87	87	64	21									–	–	–				112	22	155		
115	4 1/2	5.118	11.024	3.425	3.425	2.677	0.866	229	214	13.6	UK326	UK326L3	18.8	18.8	–	–	–	–	–	–	HE2326	4.764	0.906	6.496	4.6	AE2326
		130	280	87	87	68	22									–	–	–			H2326	121	23	165		A2326
125	–	5.512	11.811	3.819	3.819	2.835	0.906	253	246	13.6	UK328	UK328L3	23.9	23.9	–	–	–	–	–	–	H2328	5.157	0.945	7.087	5.5	A2328
		140	300	97	97	72	23									–	–	–				131	24	180		

Remarks 1. In Part No. of unit with adapters, Part No. of applicable adapters follow the Part No. shown in the dimensional tables.
(Example of Part No. : UK206 + 306X, UK206L3 + H2306X)

2. Adapter series applicable to UK200 series
UK200 ..... H300X series
UK200L3 (or L2) ..... H2300X series
3. UK205 is the double seal type product (L2).
4. Inch bore diameter series adapters are also available (see the dimensional tables of adapters).

ER, RB
Cylindrical bore (with set screws), Cylindrical O. D.
d 12 ~ 60 mm

ER RB



ER



RB

Shaft Dia. mm	Shaft Dia. inch	Dimensions inch / mm D	B	C	r (min.)	r_1 (min.)	Basic Load Ratings kN C_r	C_{0r}	Factor f_0	Bearing No. (ER)	(RB)	Dimensions inch / mm S	S_1	S_2	C_c	a	f	D_2	Set Screw Brg. Bore G mm	inch	Mass kg (ER)	(RB)
12										ER201	RB201								M6×0.75	–	0.27	0.27
	1/2	1.850	1.220	0.630	0.024	0.020	12.8	6.65	13.2	ER201-8	RB201-8	0.500	0.720	0.197	0.157	0.094	0.042	2.067	–	1/4-28UNF	0.27	0.27
15		47	31	16	0.6	0.5				ER202	RB202	12.7	18.3	5	4	2.38	1.07	52.5	M6×0.75	–	0.25	0.25
	5/8									ER202-10	RB202-10								–	1/4-28UNF	0.25	0.25
17										ER203	RB203								M6×0.75	–	0.24	0.24
20	3/4	1.850	1.220	0.630	0.039	0.020	12.8	6.65	13.2	ER204-12	RB204-12	0.500	0.720	0.197	0.157	0.094	0.042	2.067	–	1/4-28UNF	0.22	0.22
		47	31	16	1	0.5				ER204	RB204	12.7	18.3	5	4	2.38	1.07	52.5	M6×0.75	–	0.22	0.22
25	7/8									ER205-14	RB205-14								–	1/4-28UNF	0.3	0.29
	15/16	2.047	1.343	0.748	0.039	0.020	14.0	7.85	13.9	ER205-15	RB205-15	0.563	0.780	0.217	0.197	0.094	0.042	2.272	–	1/4-28UNF	0.28	0.27
		52	34.1	19	1	0.5				ER205	RB205	14.3	19.8	5.5	5	2.38	1.07	57.7	M6×0.75	–	0.27	0.26
	1									ER205-16	RB205-16								–	1/4-28UNF	0.27	0.26
30	1 1/8									ER206-18	RB206-18								–	1/4-28UNF	0.41	0.4
		2.441	1.500	0.866	0.039	0.020	19.5	11.3	13.9	ER206	RB206	0.626	0.874	0.236	0.217	0.125	0.065	2.657	M6×0.75	–	0.39	0.38
	1 3/16	62	38.1	22	1	0.5				ER206-19	RB206-19	15.9	22.2	6	5.5	3.18	1.65	67.5	–	1/4-28UNF	0.39	0.38
	1 1/4									ER206-20	RB206-20								–	1/4-28UNF	0.37	0.36
35	1 1/4									ER207-20	RB207-20								–	5/16-24UNF	0.69	0.68
	1 5/16									ER207-21	RB207-21								–	5/16-24UNF	0.66	0.65
	1 3/8	2.835	1.689	0.945	0.043	0.020	25.7	15.4	13.9	ER207-22	RB207-22	0.689	1.000	0.256	0.217	0.125	0.065	3.087	–	5/16-24UNF	0.64	0.63
		72	42.9	24	1.1	0.5				ER207	RB207	17.5	25.4	6.5	5.5	3.18	1.65	78.4	M8×1	–	0.63	0.62
	1 7/16									ER207-23	RB207-23								–	5/16-24UNF	0.61	0.6
40	1 1/2									ER208-24	RB208-24								–	5/16-24UNF	0.85	0.84
	1 9/16	3.150	1.937	1.102	0.043	0.020	29.1	17.8	14.0	ER208-25	RB208-25	0.748	1.189	0.315	0.236	0.125	0.065	3.402	–	5/16-24UNF	0.82	0.81
		80	49.2	28	1.1	0.5				ER208	RB208	19	30.2	8	6	3.18	1.65	86.4	M8×1	–	0.81	0.78
45	1 5/8									ER209-26	–								–	5/16-24UNF	1.0	–
	1 11/16	3.346	1.937	1.102	0.043	0.020	34.1	21.3	14.0	ER209-27	–	0.748	1.189	0.315	0.236	0.125	0.065	3.598	–	5/16-24UNF	0.96	–
	1 3/4	85	49.2	28	1.1	0.5				ER209-28	–	19	30.2	8	6	3.18	1.65	91.4	–	5/16-24UNF	0.92	–
										ER209	–								M8×1	–	0.90	–
50	1 7/8									ER210-30	–								–	3/8-24UNF	1.05	–
	1 15/16	3.543	2.031	1.102	0.043	0.020	35.1	23.3	14.4	ER210-31	–	0.748	1.283	0.354	0.295	0.125	0.095	3.791	–	3/8-24UNF	1.0	–
		90	51.6	28	1.1	0.5				ER210	–	19	32.6	9	7.5	3.18	2.41	96.3	M10×1.25	–	0.98	–
	2									ER210-32	–								–	3/8-24UNF	0.96	–
55	2									ER211-32	–								–	3/8-24UNF	1.56	–
	2 1/8	3.937	2.189	1.181	0.059	0.020	43.4	29.4	14.4	ER211-34	–	0.874	1.315	0.354	0.295	0.125	0.095	4.185	–	3/8-24UNF	1.45	–
		100	55.6	30	1.5	0.5				ER211	–	22.2	33.4	9	7.5	3.18	2.41	106.3	M10×1.25	–	1.41	–
	2 3/16									ER211-35	–								–	3/8-24UNF	1.39	–
60	2 1/4									ER212-36	–								–	3/8-24UNF	2.02	–
		4.331	2.563	1.260	0.059	0.020	52.4	36.2	14.4	ER212	–	1.000	1.563	0.413	0.295	0.125	0.095	4.583	M10×1.25	–	1.89	–
	2 3/8	110	65.1	32	1.5	0.5				ER212-38	–	25.4	39.7	10.5	7.5	3.18	2.41	116.4	–	3/8-24UNF	1.87	–
	2 7/16									ER212-39	–								–	3/8-24UNF	1.8	–

SAA-F, SBB-RK
Cylindrical bore
(with eccentric locking collar)
Cylindrical O. D.
d 12 ~ 55 mm

SAA-F SBB-RK



SAA-F



SBB-RK

Shaft Dia. d mm	Shaft Dia. d inch	Dimensions D mm	D inch	B mm	B inch	B1 mm	B1 inch	C mm	C inch	r (min.) mm	r (min.) inch	Basic Load Ratings kN C0	C0r	Factor f0	Bearing No.	Dimensions S mm	S inch	S1 mm	S1 inch	S2 mm	S2 inch	d1 mm	d1 inch	Set Screw Brg. Bore mm	inch	Mass kg
12	–	40	1.575	22	0.866	–	–	12	0.472	0.6	0.024	9.55	4.80	13.2	SBB201RK	6	0.236	16	0.630	4	0.157	–	–	M5×0.5	–	0.10
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SAA201FP7	6.5	0.256			4.8	0.189	28.6	1.126	M6×0.75	–	0.13
–	1/2	40	1.575	22	0.866	–	–	12	0.472	0.6	0.024	9.55	4.80	13.2	SBB201-8RK	6	0.236	16	0.630	4	0.157	–	–	–	No.10-32UNF	0.10
	1/2	40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SAA201-8FP7	6.5	0.256			4.8	0.189	28.6	1.126	–	1/4-28UNF	0.13
15	–	40	1.575	22	0.866	–	–	12	0.472	0.6	0.024	9.55	4.80	13.2	SBB202RK	6	0.236	16	0.630	4	0.157	–	–	M5×0.5	–	0.10
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SAA202FP7	6.5	0.256			4.8	0.189	28.6	1.126	M6×0.75	–	0.13
–	5/8	40	1.575	22	0.866	–	–	12	0.472	0.6	0.024	9.55	4.80	13.2	SBB202-10RK	6	0.236	16	0.630	4	0.157	–	–	–	No.10-32UNF	0.10
17	–	40	1.575	22	0.866	–	–	12	0.472	0.6	0.024	9.55	4.80	13.2	SBB203RK	6	0.236	16	0.630	4	0.157	–	–	M5×0.5	–	0.10
		40	1.575	19.1	0.752	28.6	1.126	13	0.512	0.6	0.024	9.55	4.80	13.2	SAA203FP7	6.5	0.256			4.8	0.189	28.6	1.126	M6×0.75	–	0.13
–	3/4	47	1.850	25	0.984	–	–	14	0.551	1	0.039	12.8	6.65	13.2	SBB204-12RK	7	0.276	18	0.709	5	0.197	–	–	–	1/4-28UNF	0.15
	3/4	47	1.850	21.5	0.846	31	1.220	15	0.591	1	0.039	12.8	6.65	13.2	SAA204-12FP7	7.5	0.295			4.8	0.189	33.3	1.311	–	1/4-28UNF	0.19
20	–	47	1.850	25	0.984	–	–	14	0.551	1	0.039	12.8	6.65	13.2	SBB204RK	7	0.276	18	0.709	5	0.197	–	–	M6×0.75	–	0.15
		47	1.850	21.5	0.846	31	1.220	15	0.591	1	0.039	12.8	6.65	13.2	SAA204FP7	7.5	0.295			4.8	0.189	33.3	1.311	M6×0.75	–	0.19
–	7/8	52	2.047	27	1.063	–	–	15	0.591	1	0.039	14.0	7.85	13.9	SBB205-14RK	7.5	0.295	19.5	0.768	5.5	0.217	–	–	–	1/4-28UNF	0.18
–	15/16	52	2.047	27	1.063	–	–	15	0.591	1	0.039	14.0	7.85	13.9	SBB205-15RK	7.5	0.295	19.5	0.768	5.5	0.217	–	–	–	1/4-28UNF	0.18
	15/16	52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SAA205-15FP7	7.5	0.295			4.8	0.189	38.1	1.500	–	1/4-28UNF	0.23
25	–	52	2.047	27	1.063	–	–	15	0.591	1	0.039	14.0	7.85	13.9	SBB205RK	7.5	0.295	19.5	0.768	5.5	0.217	–	–	M6×0.75	–	0.18
		52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SAA205FP7	7.5	0.295			4.8	0.189	38.1	1.500	M6×0.75	–	0.23
–	1	52	2.047	27	1.063	–	–	15	0.591	1	0.039	14.0	7.85	13.9	SBB205-16RK	7.5	0.295	19.5	0.768	5.5	0.217	–	–	–	1/4-28UNF	0.18
	1	52	2.047	21.5	0.846	31	1.220	15	0.591	1	0.039	14.0	7.85	13.9	SAA205-16FP7	7.5	0.295			4.8	0.189	38.1	1.500	–	1/4-28UNF	0.23
–	1 1/8	62	2.441	30	1.181	–	–	16	0.630	1	0.039	19.5	11.3	13.9	SBB206-18RK	8	0.315	22	0.866	6	0.236	–	–	–	1/4-28UNF	0.27
	1 1/8	62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SAA206-18FP7	9	0.354			6	0.236	44.5	1.752	–	5/16-24UNF	0.34
30	–	62	2.441	30	1.181	–	–	16	0.630	1	0.039	19.5	11.3	13.9	SBB206RK	8	0.315	22	0.866	6	0.236	–	–	M6×0.75	–	0.27
		62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SAA206FP7	9	0.354			6	0.236	44.5	1.752	M8×1	–	0.34
–	1 3/16	62	2.441	30	1.181	–	–	16	0.630	1	0.039	19.5	11.3	13.9	SBB206-19RK	8	0.315	22	0.866	6	0.236	–	–	–	1/4-28UNF	0.27
	1 3/16	62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SAA206-19FP7	9	0.354			6	0.236	44.5	1.752	–	5/16-24UNF	0.34
–	1 1/4	62	2.441	30	1.181	–	–	16	0.630	1	0.039	19.5	11.3	13.9	SBB206-20RK	8	0.315	22	0.866	6	0.236	–	–	–	1/4-28UNF	0.27
	1 1/4	62	2.441	23.8	0.937	35.7	1.406	18	0.709	1	0.039	19.5	11.3	13.9	SAA206-20FP7	9	0.354			6	0.236	44.5	1.752	–	5/16-24UNF	0.34
–	1 1/4	72	2.835	32	1.260	–	–	17	0.669	1.1	0.043	25.7	15.4	13.9	SBB207-20RK	8.5	0.335	23.5	0.925	6	0.236	–	–	–	1/4-28UNF	0.42
	1 1/4	72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SAA207-20FP7	9.5	0.374			6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
–	1 5/16	72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SAA207-21FP7	9.5	0.374	–	–	6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
–	1 3/8	72	2.835	32	1.260	–	–	17	0.669	1.1	0.043	25.7	15.4	13.9	SBB207-22RK	8.5	0.335	23.5	0.925	6	0.236	–	–	–	1/4-28UNF	0.42
	1 3/8	72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SAA207-22FP7	9.5	0.374			6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
35	–	72	2.835	32	1.260	–	–	17	0.669	1.1	0.043	25.7	15.4	13.9	SBB207RK	8.5	0.335	23.5	0.925	6	0.236	–	–	M6×0.75	–	0.42
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SAA207FP7	9.5	0.374			6.8	0.268	55.6	2.189	M8×1	–	0.57
–	1 7/16	72	2.835	32	1.260	–	–	17	0.669	1.1	0.043	25.7	15.4	13.9	SBB207-23RK	8.5	0.335	23.5	0.925	6	0.236	–	–	–	1/4-28UNF	0.42
	1 7/16	72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SAA207-23FP7	9.5	0.374			6.8	0.268	55.6	2.189	–	5/16-24UNF	0.57
–	1 1/2	80	3.150	34	1.339	–	–	18	0.709	1.1	0.043	29.1	17.8	14.0	SBB208-24RK	9	0.354	25	0.984	8	0.315	–	–	–	5/16-24UNF	0.60
	1 1/2	80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	SAA208-24FP7	11	0.433			6.8	0.268	60.3	2.374	–	5/16-24UNF	0.75
–	1 9/16	80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	SAA208-25FP7	11	0.433	–	–	6.8	0.268	60.3	2.374	–	5/16-24UNF	0.75
40	–	80	3.150	34	1.339	–	–	18	0.709	1.1	0.043	29.1	17.8	14.0	SBB208RK	9	0.354	25	0.984	8	0.315	–	–	M8×1	–	0.60
		80	3.150	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	29.1	17.8	14.0	SAA208FP7	11	0.433			6.8	0.268	60.3	2.374	M8×1	–	0.75
–	1 5/8	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	SAA209-26FP7	11	0.433	–	–	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
–	1 11/16	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	SAA209-27FP7	11	0.433	–	–	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
45	1 3/4	85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	SAA209-28FP7	11	0.433	–	–	6.8	0.268	63.5	2.500	–	5/16-24UNF	0.82
		85	3.346	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	34.1	21.3	14.0	SAA209FP7	11	0.433	–	–	6.8	0.268	63.5	2.500	M8×1	–	0.82
–	1 7/8	90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	SAA210-30FP7	11	0.433	–	–	6.8	0.268	69.9	2.752	–	5/16-24UNF	0.85
50	1 15/16	90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	SAA210-31FP7	11	0.433	–	–	6.8	0.268	69.9	2.752	–	5/16-24UNF	0.85
		90	3.543	30.2	1.189	43.7	1.720	22	0.866	1.1	0.043	35.1	23.3	14.4	SAA210FP7	11	0.433	–	–	6.8	0.268	69.9	2.752	M8×1	–	0.85
–	2	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	SAA211-32FP7	12	0.472	–	–	8	0.315	76.2	3.000	–	3/8-24UNF	1.2
–	2 1/8	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	SAA211-34FP7	12	0.472	–	–	8	0.315	76.2	3.000	–	3/8-24UNF	1.2
55	–	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	SAA211FP7	12	0.472	–	–	8	0.315	76.2	3.000	M10×1.25	–	1.2
–	2 3/16	100	3.937	32.4	1.276	48.4	1.906	24	0.945	1.5	0.059	43.4	29.4	14.4	SAA211-35FP7	12	0.472	–	–	8	0.315	76.2	3.000	–	3/8-24UNF	1.2

SC
Cylindrical bore
d 17 ~ 40 mm





Shaft Dia. mm	Dimensions								Basic Load Ratings kN		Factor	Bearing No.	Mass
d	D		B		C		r (min.)		C_0	C_{0r}	f_0		kg
	mm	inch	mm	inch	mm	inch	mm	inch					
17	40	1.575	12	0.472	12	0.472	0.6	0.024	9.55	4.80	13.2	**SC203**	0.10
20	47	1.850	14	0.551	14	0.551	1	0.039	12.8	6.65	13.2	**SC204**	0.15
25	52	2.047	15	0.591	15	0.591	1	0.039	14.0	7.85	13.9	**SC205**	0.18
30	62	2.441	16	0.630	16	0.630	1	0.039	19.5	11.3	13.9	**SC206**	0.27
35	72	2.835	17	0.669	17	0.669	1.1	0.043	25.7	15.4	13.9	**SC207**	0.42
40	80	3.150	18	0.709	18	0.709	1.1	0.043	29.1	17.8	14.0	**SC208**	0.60

H300X, H2300X
d_1 **20 ~ 55 mm**





Shaft Dia. d_1 mm (H)	inch (HE)	inch (HS)	inch (HA)	Dimensions inch mm B_1	B_2	d_2	Adapter No. (H)	(HE)	(HS)	(HA)	Sleeve No. (H)	(HE)	(HS)	(HA)	Lock Nut No.	Washer No.	Mass kg (H)	(HE)	(HS)	(HA)
20	–	–	–	1.142	0.315	1.496	**H305X**	–	–	–	A305X	–	–	–	AN05	AW05X	0.075	–	–	–
	3/4	–	–	29	8	38	–	**HE305X**	–	–	–	AE305X	–	–	AN05	AW05X	–	0.08	–	–
20	–	–	–	1.378	0.315	1.496	**H2305X**	–	–	–	A2305X	–	–	–	AN05	AW05X	0.095	–	–	–
	3/4	–	–	35	8	38	–	**HE2305X**	–	–	–	AE2305X	–	–	AN05	AW05X	–	0.085	–	–
25	–	–	–				**H306X**	–	–	–	A306X	–	–	–	AN06	AW06X	0.11	–	–	–
	1	–	–	1.220	0.315	1.772	–	**HE306X**	–	–	–	AE306X	–	–	AN06	AW06X	–	0.105	–	–
	–	7/8	–	31	8	45	–	–	**HS306X**	–	–	–	AS306X	–	–	–	–	–	0.13	–
	–	–	15/16				–	–	–	**HA306X**	–	–	–	AA306X	–	–	–	–	–	0.12
25	–	–	–				**H2306X**	–	–	–	A2306X	–	–	–	AN06	AW06X	0.13	–	–	–
	1	–	–	1.496	0.315	1.772	–	**HE2306X**	–	–	–	AE2306X	–	–	AN06	AW06X	–	0.12	–	–
	–	7/8	–	38	8	45	–	–	**HS2306X**	–	–	–	AS2306X	–	–	–	–	–	0.16	–
	–	–	15/16				–	–	–	**HA2306X**	–	–	–	AA2306X	–	–	–	–	–	0.14
30	–	–	–				**H307X**	–	–	–	A307X	–	–	–	AN07	AW07X	0.14	–	–	–
	–	1 1/8	–	1.378	0.354	2.047	–	–	**HS307X**	–	–	–	AS307X	–	AN07	AW07X	–	–	0.15	–
	–	–	1 3/16	35	9	52	–	–	–	**HA307X**	–	–	–	AA307X	–	–	–	–	–	0.14
30	–	–	–	1.693	0.354	2.047	**H2307X**	–	–	–	A2307X	–	–	–	AN07	AW07X	0.17	–	–	–
	–	–	1 3/16	43	9	52	–	–	–	**HA2307X**	–	–	–	AA2307X	–	–	–	–	–	0.17
35	–	–	–				**H308X**	–	–	–	A308X	–	–	–	AN08	AW08X	0.19	–	–	–
	1 1/4	–	–	1.417	0.394	2.283	–	**HE308X**	–	–	–	AE308X	–	–	AN08	AW08X	–	0.23	–	–
	–	1 3/8	–	36	10	58	–	–	**HS308X**	–	–	–	AS308X	–	AN08	AW08X	–	–	0.19	–
35	–	–	–	1.811	0.394	2.283	**H2308X**	–	–	–	A2308X	–	–	–	AN08	AW08X	0.22	–	–	–
	1 1/4	–	–	46	10	58	–	**HE2308X**	–	–	–	AE2308X	–	–	AN08	AW08X	–	0.28	–	–
40	–	–	–				**H309X**	–	–	–	A309X	–	–	–	AN09	AW09X	0.25	–	–	–
	1 1/2	–	–	1.535	0.433	2.559	–	**HE309X**	–	–	–	AE309X	–	–	AN09	AW09X	–	0.28	–	–
	–	–	1 7/16	39	11	65	–	–	–	**HA309X**	–	–	–	AA309X	–	–	–	–	–	0.31
40	–	–	–				**H2309X**	–	–	–	A2309X	–	–	–	AN09	AW09X	0.28	–	–	–
	1 1/2	–	–	1.969	0.433	2.559	–	**HE2309X**	–	–	–	AE2309X	–	–	AN09	AW09X	–	0.32	–	–
	–	–	1 7/16	50	11	65	–	–	–	**HA2309X**	–	–	–	AA2309X	–	–	–	–	–	0.35
45	–	–	–				**H310X**	–	–	–	A310X	–	–	–	AN10	AW10X	0.30	–	–	–
	1 3/4	–	–	1.654	0.472	2.756	–	**HE310X**	–	–	–	AE310X	–	–	AN10	AW10X	–	0.31	–	–
	–	1 5/8	–	42	12	70	–	–	**HS310X**	–	–	–	AS310X	–	–	–	–	–	0.38	–
	–	–	1 11/16				–	–	–	**HA310X**	–	–	–	AA310X	–	–	–	–	–	0.35
45	–	–	–				**H2310X**	–	–	–	A2310X	–	–	–	AN10	AW10X	0.36	–	–	–
	1 3/4	–	–	2.165	0.472	2.756	–	**HE2310X**	–	–	–	AE2310X	–	–	AN10	AW10X	–	0.37	–	–
	–	1 5/8	–	55	12	70	–	–	**HS2310X**	–	–	–	AS2310X	–	–	–	–	–	0.46	–
	–	–	1 11/16				–	–	–	**HA2310X**	–	–	–	AA2310X	–	–	–	–	–	0.42
50	–	–	–				**H311X**	–	–	–	A311X	–	–	–	AN11	AW11X	0.35	–	–	–
	2	–	–	1.772	0.4921	2.953	–	**HE311X**	–	–	–	AE311X	–	–	AN11	AW11X	–	0.33	–	–
	–	1 7/8	–	45	12.5	75	–	–	**HS311X**	–	–	–	AS311X	–	AN11	AW11X	–	–	0.41	–
	–	–	1 15/16				–	–	–	**HA311X**	–	–	–	AA311X	–	–	–	–	–	0.37
50	–	–	–				**H2311X**	–	–	–	A2311X	–	–	–	AN11	AW11X	0.42	–	–	–
	2	–	–	2.323	0.4921	2.953	–	**HE2311X**	–	–	–	AE2311X	–	–	AN11	AW11X	–	0.40	–	–
	–	1 7/8	–	59	12.5	75	–	–	**HS2311X**	–	–	–	AS2311X	–	AN11	AW11X	–	–	0.50	–
	–	–	1 15/16				–	–	–	**HA2311X**	–	–	–	AA2311X	–	–	–	–	–	0.45
55	–	–	–	1.850	0.512	3.150	**H312X**	–	–	–	A312X	–	–	–	AN12	AW12X	0.43	–	–	–
	–	2 1/8	–	47	13	80	–	–	**HS312X**	–	–	–	AS312X	–	AN12	AW12X	–	–	0.40	–
55	–	–	–	2.441	0.512	3.150	**H2312X**	–	–	–	A2312X	–	–	–	AN12	AW12X	0.48	–	–	–
	–	2 1/8	–	62	13	80	–	–	**HS2312X**	–	–	–	AS2312X	–	AN12	AW12X	–	–	0.52	–

H300X, H2300X
d_1 60 ~ 125 mm





Shaft Dia. d_1 mm (H)	inch (HE)	inch (HS)	inch (HA)	Dimensions inch / mm B_1	B_2	d_2	Adapter No. (H)	(HE)	(HS)	(HA)	Sleeve No. (H)	(HE)	(HS)	(HA)	Lock Nut No.	Washer No.	Mass kg (H)	(HE)	(HS)	(HA)
60	–	–	–				**H313X**	–	–	–	A313X	–	–	–	AN13	AW13X	0.46	–	–	–
	2 1/4	–	–	1.969	0.551	3.346	–	**HE313X**	–	–	–	AE313X	–	–	AN13	AW13X	–	0.56	–	–
	–	2 3/8	–	50	14	85	–	–	**HS313X**	–	–	–	AS313X	–	AN13	AW13X	–	–	0.45	–
	–	–	2 3/16				–	–	–	**HA313X**	–	–	–	AA313X	–	–	–	–	–	0.51
60	–	–	–				**H2313X**	–	–	–	A2313X	–	–	–	AN13	AW13X	0.56	–	–	–
	2 1/4	–	–	2.559	0.551	3.346	–	**HE2313X**	–	–	–	AE2313X	–	–	AN13	AW13X	–	0.69	–	–
	–	2 3/8	–	65	14	85	–	–	**HS2313X**	–	–	–	AS2313X	–	AN13	AW13X	–	–	0.55	–
	–	–	2 3/16				–	–	–	**HA2313X**	–	–	–	AA2313X	–	–	–	–	–	0.76
65	–	–	–				**H315X**	–	–	–	A315X	–	–	–	AN15	AW15X	0.83	–	–	–
	2 1/2	–	–	2.165	0.591	3.858	–	**HE315X**	–	–	–	AE315X	–	–	AN15	AW15X	–	0.89	–	–
	–	–	2 7/16	55	15	98	–	–	–	**HA315X**	–	–	–	AA315X	–	–	–	–	–	0.96
	–	2 5/8	–				–	–	**HS315X**	–	–	–	AS315X	–	–	–	–	–	0.71	–
65	–	–	–				**H2315X**	–	–	–	A2315X	–	–	–	AN15	AW15X	1.05	–	–	–
	2 1/2	–	–	2.874	0.591	3.858	–	**HE2315X**	–	–	–	AE2315X	–	–	AN15	AW15X	–	1.15	–	–
	–	–	2 7/16	73	15	98	–	–	–	**HA2315X**	–	–	–	AA2315X	–	–	–	–	–	1.15
	–	2 5/8	–				–	–	**HS2315X**	–	–	–	AS2315X	–	–	–	–	–	0.9	–
70	–	–	–				**H316X**	–	–	–	A316X	–	–	–	AN16	AW16X	1.05	–	–	–
	2 3/4	–	–	2.323	0.669	4.134	–	**HE316X**	–	–	–	AE316X	–	–	AN16	AW16X	–	1.05	–	–
	–	–	2 11/16	59	17	105	–	–	–	**HA316X**	–	–	–	AA316X	–	–	–	–	–	1.13
70	–	–	–				**H2316X**	–	–	–	A2316X	–	–	–	AN16	AW16X	1.3	–	–	–
	2 3/4	–	–	3.071	0.669	4.134	–	**HE2316X**	–	–	–	AE2316X	–	–	AN16	AW16X	–	1.3	–	–
	–	–	2 11/16	78	17	105	–	–	–	**HA2316X**	–	–	–	AA2316X	–	–	–	–	–	1.41
75	–	–	–				**H317X**	–	–	–	A317X	–	–	–	AN17	AW17X	1.2	–	–	–
	3	–	–	2.480	0.709	4.331	–	**HE317X**	–	–	–	AE317X	–	–	AN17	AW17X	–	1.1	–	–
	–	–	2 15/16	63	18	110	–	–	–	**HA317X**	–	–	–	AA317X	–	–	–	–	–	1.22
75	–	–	–				**H2317X**	–	–	–	A2317X	–	–	–	AN17	AW17X	1.45	–	–	–
	3	–	–	3.228	0.709	4.331	–	**HE2317X**	–	–	–	AE2317X	–	–	AN17	AW17X	–	1.35	–	–
	–	–	2 15/16	82	18	110	–	–	–	**HA2317X**	–	–	–	HA2317X	–	–	–	–	–	1.48
80	–	–	–				**H318X**	–	–	–	A318X	–	–	–	AN18	AW18X	1.4	–	–	–
	3 1/4	–	–	2.559	0.709	4.724	–	**HE318X**	–	–	–	AE318X	–	–	–	–	–	1.24	–	–
	–	–	3 3/16	65	18	120	–	–	–	**HA318X**	–	–	–	AA318X	–	–	–	–	–	1.34
80	–	–	–				**H2318X**	–	–	–	A2318X	–	–	–	AN18	AW18X	1.7	–	–	–
	3 1/4	–	–	3.386	0.709	4.724	–	**HE2318X**	–	–	–	AE2318X	–	–	–	–	–	1.49	–	–
	–	–	3 3/16	86	18	120	–	–	–	**HA2318X**	–	–	–	AA2318X	–	–	–	–	–	1.62
85	–	–	–	3.543	0.748	4.921	**H2319X**	–	–	–	A2319X	–	–	–	AN19	AW19X	1.95	–	–	–
	3 1/4	–	–	90	19	125	–	**HE2319X**	–	–	–	AE2319X	–	–	AN19	AW19X	–	2.15	–	–
90	–	–	–				**H2320X**	–	–	–	A2320X	–	–	–	AN20	AW20X	2.2	–	–	–
	3 1/2	–	–	3.819	0.787	5.118	–	**HE2320X**	–	–	–	AE2320X	–	–	AN20	AW20X	–	2.3	–	–
	–	–	3 7/16	97	20	130	–	–	–	**HA2320X**	–	–	–	AA2320X	–	–	–	–	–	2.47
100	–	–	–	4.134	0.827	5.709	**H2322X**	–	–	–	A2322X	–	–	–	AN22	AW22X	2.75	–	–	–
	4	–	–	105	21	145	–	**HE2322X**	–	–	–	AE2322X	–	–	AN22	AW22X	–	2.55	–	–
110	–	–	–				**H2324**	–	–	–	A2324	–	–	–	AN24	AW24	3.2	–	–	–
	4 1/4	–	–	4.409	0.866	6.102	–	**HE2324**	–	–	–	AE2324	–	–	–	–	–	3.5	–	–
	–	–	4 3/16	112	22	155	–	–	–	**HA2324**	–	–	–	AA2324	–	–	–	–	–	3.79
115	–	–	–				**H2326**	–	–	–	A2326	–	–	–	AN26	AW26	4.6	–	–	–
	4 1/2	–	–	4.764	0.906	6.496	–	**HE2326**	–	–	–	AE2326	–	–	AN26	AW26	–	4.7	–	–
	–	–	4 7/16	121	23	165	–	–	–	**HA2326**	–	–	–	AA2326	–	–	–	–	–	4.23
125	–	–	–				**H2328**	–	–	–	A2328	–	–	–	AN28	AW28	5.5	–	–	–
	5	–	–	5.157	0.945	7.087	–	**HE2328**	–	–	–	AE2328	–	–	–	–	–	5.1	–	–
	–	–	4 15/16	131	24	180	–	–	–	**HA2328**	–	–	–	AA2328	–	–	–	–	–	5.42

16 Parts and accessories

16.1 Part No. of steel plate covers

Table 16.1 Part No. of steel plate cover for UC type bearing

Bearing No.	Shaft dia. (mm)	Steel plate cover No.	
		Open type	Sealed type
UC201	12	C– 4×12	D– 4
UC202	15	C– 4×15	D– 4
UC203	17	C– 4×17	D– 4
UC204	20	C– 4×20	D– 4
UC205	25	C– 5×25	D– 5
UC206	30	C– 6×30	D– 6
UC207	35	C– 7×35	D– 7
UC208	40	C– 8×40	D– 8
UC209	45	C– 9×45	D– 9
UC210	50	C–10×50	D–10
UC211	55	C–11×55	D–11
UC212	60	C–12×60	D–12
UC213	65	C–13×65	D–13
UC214	70	C–14×70	D–14
UC215	75	C–15×75	D–15
UC216	80	C–16×80	D–16
UC217	85	C–17×85	D–17
UC218	90	C–18×90	D–18
UCX05	25	C– 6×25	D– 6
UCX06	30	C– 7×30	D– 7
UCX07	35	C– 8×35	D– 8
UCX08	40	C– 9×40	D– 9
UCX09	45	C–10×45	D–10
UCX10	50	C–11×50	D–11
UCX11	55	C–12×55	D–12
UCX12	60	C–13×60	D–13
UCX13	65	C–14×65	D–14
UCX14	70	C–15×70	D–15
UCX15	75	C–16×75	D–16
UCX16	80	C–17×80	D–17
UCX17	85	C–18×85	D–18

Remark In the Part No. of the steel plate covers for shouldered shaft, shaft diameter follows the basic code of the cover. For example, Part No. of the cover for a shaft with 35 mm diameter for UC207 is C–7×35.

Table 16.2 Part No. of steel plate cover for UK type bearing

Bearing No.	Shaft dia. (mm)	Steel plate cover No.	
		Open type	Sealed type
–			
–			
–			
–			
UK205	20	C– 5×20	D– 5
UK206	25	C– 6×25	D– 6
UK207	30	C– 7×30	D– 7
UK208	35	C– 8×35	D– 8
UK209	40	C– 9×40	D– 9
UK210	45	C–10×45	D–10
UK211	50	C–11×50	D–11
UK212	55	C–12×55	D–12
UK213	60	C–13×60	D–13
–			
UK215	65	C–15×65	D–15
UK216	70	C–16×70	D–16
UK217	75	C–17×75	D–17
UK218	80	C–18×80	D–18
UKX05	20	C– 6×20	D– 6
UKX06	25	C– 7×25	D– 7
UKX07	30	C– 8×30	D– 8
UKX08	35	C– 9×35	D– 9
UKX09	40	C–10×40	D–10
UKX10	45	C–11×45	D–11
UKX11	50	C–12×50	D–12
UKX12	55	C–13×55	D–13
UKX13	60	C–14×60	D–14
–			
UKX15	65	C–16×65	D–16
UKX16	70	C–17×70	D–17
UKX17	75	C–18×75	D–18

16.2 Part No. of cast iron covers

Table 16.3 Part No. of cast iron cover for UC type bearing

Bearing No.	Shaft dia. (mm)	Cast iron cover No.		Mounting bolt (reference)
		Open type	Closed type	
UC204	20	204FC×20 (204FC3×20)[1]	204FD (204FD3)[1]	M3 (M4)
UC205	25	205FC×25 (205FC3×25)[1]	205FD (205FD3)[1]	M3 (M4)
UC206	30	206FC×30	206FD	M4
UC207	35	207FC×35	207FD	M4
UC208	40	208FC×40	208FD	
UC209	45	209FC×45	209FD	
UC210	50	210FC×50	210FD	M4
UC211	55	211FC×55	211FD	
UC212	60	212FC×60	212FD	
UC213	65	213FC×65	213FD	M4
UC214	70	214FC×70	214FD	
UC215	75	215FC×75	215FD	
UC216	80	216FC×80	216FD	M5
UC217	85	217FC×85	217FD	
UC218	90	218FC×90	218FD	
UCX18	90	X18C×90 (X18C3×90)[2]	X18D (X18D3)[2]	M5
UCX20	100	X20C×100 (X20C3×100)[2]	X20D (X20D3)[2]	
UC305	25	305C×25	305D	M4
UC306	30	306C×30	306D	
UC307	35	307C×35	307D	
UC308	40	308C×40	308D	M5
UC309	45	309C×45	309D	
UC310	50	310C×50	310D	
UC311	55	311C×55	311D	M5
UC312	60	312C×60	312D	
UC313	65	313C×65	313D	
UC314	70	314C×70	314D	M5
UC315	75	315C×75	315D	
UC316	80	316C×80	316D	
UC317	85	317C×85	317D	M5
UC318	90	318C×90	318D	
UC319	95	319C×95	319D	
UC320	100	320C×100	320D	M5
UC321	105	321C×105	321D	
UC322	110	322C×110	322D	
UC324	120	324C×120	324D	M5
UC326	130	326C×130	326D	M8
UC328	140	328C×140	328D	

Table 16.4 Part No. of cast iron cover for UK type bearing

Bearing No.	Shaft dia. (mm)	Cast iron cover No.		Mounting bolt (reference)
		Open type	Closed type	
–				
UK205	20	205FC×20 (205FC3×20)[1]	205FD (205FD3)[1]	M3 (M4)
UK206	25	206FC×25	206FD	M4
UK207	30	207FC×30	207FD	M4
UK208	35	208FC×35	208FD	
UK209	40	209FC×40	209FD	
UK210	45	210FC×45	210FD	M4
UK211	50	211FC×50	211FD	
UK212	55	212FC×55	212FD	
UK213	60	213FC×60	213FD	M4
–				
UK215	65	215FC×65	215FD	
UK216	70	216FC×70	216FD	M5
UK217	75	217FC×75	217FD	
UK218	80	218FC×80	218FD	
UKX18	80	X18C×80 (X18C3×80)[2]	X18D (X18D3)[2]	M5
UKX20	90	X20C×90 (X20C3×90)[2]	X20D (X20D3)[2]	
UK305	20	305C×20	305D	M4
UK306	25	306C×25	306D	
UK307	30	307C×30	307D	
UK308	35	308C×35	308D	M5
UK309	40	309C×40	309D	
UK310	45	310C×45	310D	
UK311	50	311C×50	311D	M5
UK312	55	312C×55	312D	
UK313	60	313C×60	313D	
–				
UK315	65	315C×65	315D	M5
UK316	70	316C×70	316D	
UK317	75	317C×75	317D	M5
UK318	80	318C×80	318D	
UK319	85	319C×85	319D	
UK320	90	320C×90	320D	M5
–				
UK322	100	322C×100	322D	
UK324	110	324C×110	324D	M5
UK326	115	326C×115	326D	M8
UK328	125	328C×125	328D	

Note [1] Items in parentheses are applicable to the pillow type (P), square four-bolt flange type (F), oval flange type (FL), and the take-up type (T) bearings, and can be mounted to housings with three hexagon socket head cap screws (use four to mount other items).

[2] Items in parentheses are applicable to the round flange cartridge type bearing (FC), and can be mounted to housings with three hexagon socket head cap screws (use four to mount other items).

Remark In the nominal codes of the cast iron covers for shouldered shaft, shaft diameter follows the basic code of the cover. For example, Part No. of the cover for a shaft with 60 mm diameter for UC210 is 210FC×60.

16.3 Nominal code and dimensions of grease fittings and reducing socket

Table 16.5 Nominal code and dimensions of grease fitting

(1) Nominal code and dimensions of A type grease fitting

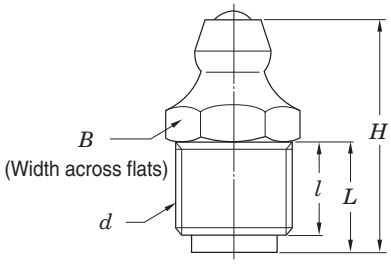

Unit: mm

Nominal grease fitting code	Nominal screw code d	B	H	L	l
A–1/4-28UNF type	1/4-28UNF	7	13.5	5.4	4
A–R1/8 type	R1/8	10	20	9.5	8

(2) Nominal code and dimensions of B and C type grease fittings

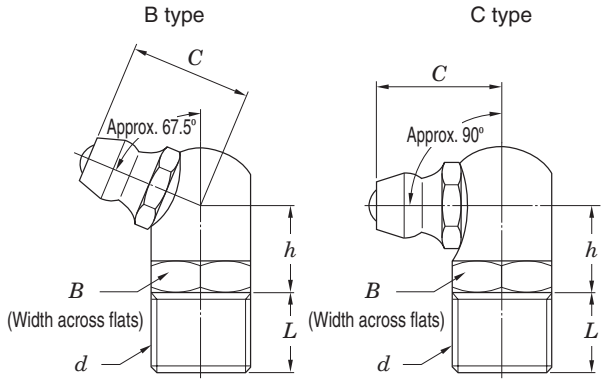

Unit: mm

Nominal grease fitting code	Nominal screw code d	B	C	h	L
B–1/4-28UNF type C–1/4-28UNF type	1/4-28UNF	8	9.5	6.5	5
B–R1/8 type C–R1/8 type	R1/8	10	12.5	8.5	8

Table 16.6 Nominal code and dimensions of reducing socket code

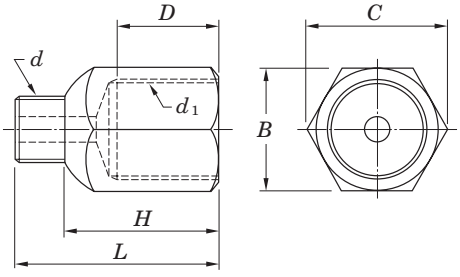

Unit: mm

Nominal code of reducing socket	Nominal male thread code d	Nominal female thread code d_1	B	C	D	H	L
1/4-28UNF–Rc1/8 1/4-28UNF–Rp1/8	1/4-28UNF	Rc1/8 Rp1/8	12	13.8	10	15	20
1/4-28UNF–Rc1/4 1/4-28UNF–Rp1/4	1/4-28UNF	Rc1/4 Rp1/4	17	19.6	11	17	22
PT1/8–Rc1/4 PT1/8–Rp1/4	R1/8	Rc1/4 Rp1/4	17	19.6	11	19	26

16.4 Nominal code and dimensions of Allen key wrench

Table 16.7 Nominal code and dimensions of Allen key wrench

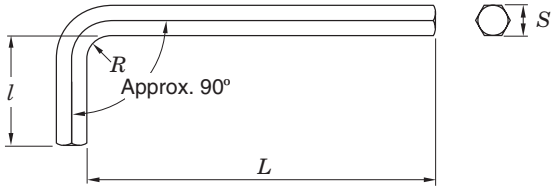

Unit: mm

Nominal code of Allen key wrench	S	L (Approx.)	l (Approx.)	R (Approx.)	Applicable set screw
2.5	2.5	56	18	2.5	M5
3	3	63	20	3	M6
4	4	70	25	4	M8
5	5	80	28	5	M10
6	6	90	32	6	M12, M14
8	8	100	36	8	M16, M18
10	10	112	40	10	M20

17 Example of use

Carrier line

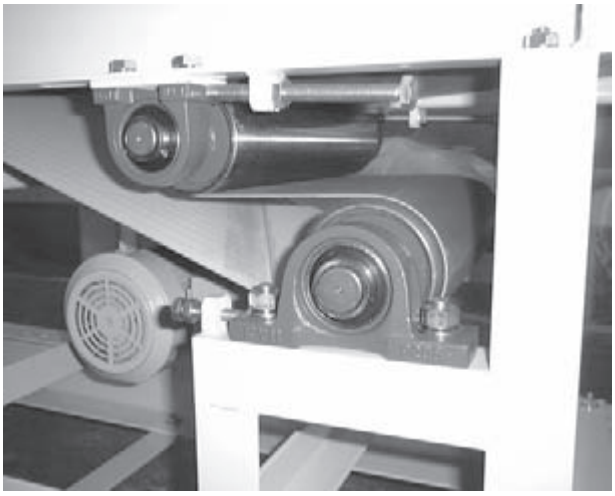

Corrugated plate molding machine

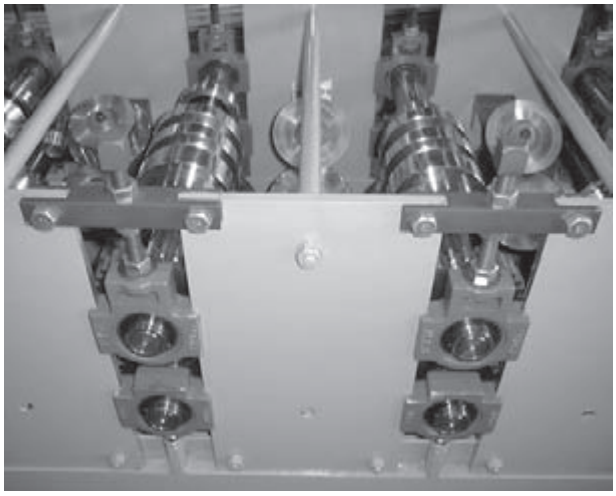

Compost treatment tank

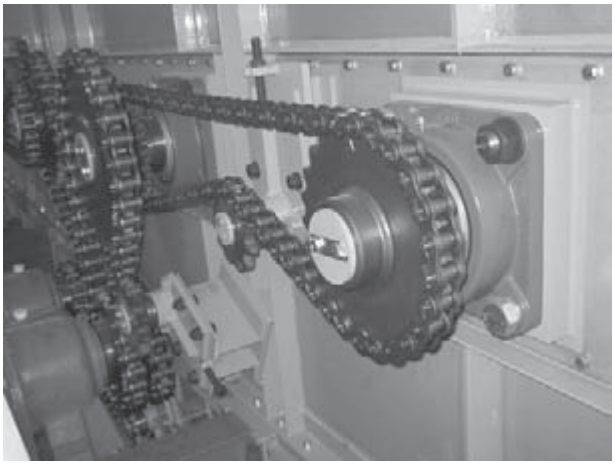

Ash removal conveyor in garbage incineration plant

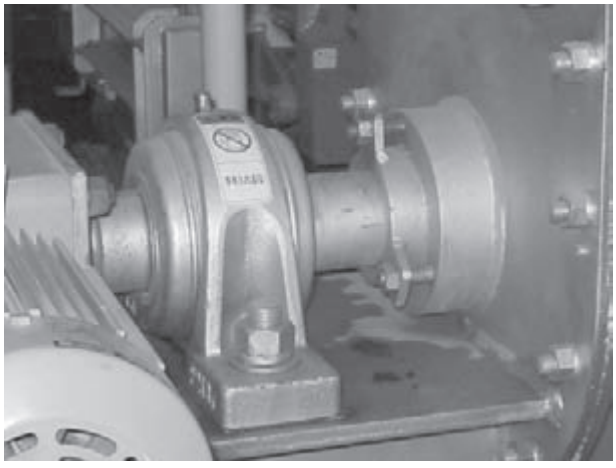

Discharge feeder

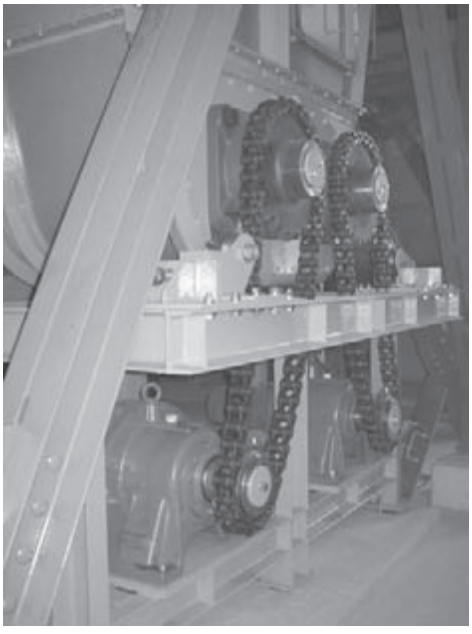

Example of use

FYH ball bearing units are used in various locations depending on applications and specifications.

Conveyors in pickup and delivery center
Wood working machine
Blower
Textile machine
Agricultural machine
Construction machine
Packing machine
Heat treatment equipment
Wastewater treatment facility

Appendix table (contents)

1 Simplified chart of ball bearing unit combinations 306

2 Tightening torques of housings and cast iron cover mounting bolts 308

3 Tightening torques of inner rings and eccentric locking collar set screws ... 308

4 Tightening torques of adapter lock nuts (reference) 309

5 Machining dimensions of holes of housing dowel pins 310

6 Ceraball selection chart 312

7 Dimensional tolerances of shafts 314

8 Dimensional tolerances of housing bores 316

9 Basic tolerance values 318

10 SI unit conversion charts 319

11 Inch-meter conversion chart 320

12 Hardness conversion chart 321

13 Viscosity conversion chart 322

14 Mechanical properties of metal materials (reference)..... 323

15 Hexagon socket head cap screws (abstract from JIS B 1176) 324

16 Hexagon head bolts (abstract from JIS B 1180) 326

17 Hexagon head nuts (abstract from JIS B 1181) 328

18 Comparison table of Part No. by manufacturers (cylindrical bore type) 329

Appendix table 1 Simplified chart of ball bearing unit combinations

Type	Housing for units	Insert bearing units							
		Cylindrical bore (with set screws)					Tapered bore (with adapter)		
		UC200	UCX00	UC300	Stainless steel UC200S6	Plated UC200S7	UK200	UKX00	UK300
Pillow type	P200, PX00, P300, P300E PK200 P200sc, P300sc P200H4, PX00H4, P300H4	UCP200 UCP200sc UCP200H4	UCPX00 UCPX00H4	UCP300 UCP300sc UCP300H4			UKP200 UKP200sc UKP200H4	UKPX200 UKPX200H4	UKP300 UKP300sc UKP300H4
	IP200, IP300 IP200H4, IP300H4	UCIP200 UCIP200H4		UCIP300 UCIP300H4			UKIP200 UKIP200H4		UKIP300 UKIP300H4
	PA200 PA200H4 PAN200	UCPA200 UCPA200H4 UCPAN200					UKPA200 UKPA200H4		
	PH200	UCPH200					UKPH200		
	PH200H4	UCPH200H4					UKPH200H4		
	LP200								
	SP200H1 SPA200H1 P000, SP000				UCSP200H1S6 UCSPA200H1S6				
	VP200 VP200E				UCVP200S6	 UCVP200ES7			
	PP200								
Square four-bolt flange type	F200, FX00, F300 F200E, FX00E NF200 F200H4, FX00H4, F300H4	UCF200 UCF200E UCF200H4	UCFX00 UCFX00E UCFX00H4	UCF300 UCF300H4			UKF200 UKF200H4	UKFX00 UKFX00H4	UKF300 UKF300H4
	FS300 FS300H4			UCFS300 UCFS300H4					UKFS300 UKFS300H4
	SF200H1 SF200EH1 VF200 VF200E				UCSF200H1S6 UCSF200EH1S6 UCVF200S6	 UCVF200ES7			
Oval flange type	FL200, FLX00, FL300 FL200E FL200H4, FLX00H4, FL300H4	UCFL200 UCFL200E UCFL200H4	UCFLX00 UCFLX00H4	UCFL300 UCFL300H4			UKFL200 UKFL200H4	UKFLX00 UKFLX00H4	UKFL300 UKFL300H4
	LF200								
	FL000, SFL200 SFL200H1 SFL200EH1 VFL200 VFL200E				UCSFL200H1S6 UCSFL200EH1S6 UCVFL200S6	 UCVFL200ES7			
	TFD200								
	FA200	UCFA200					UKFA200		
	FB200	UCFB200					UKFB200		
	PFL200								
Round flange cartridge type	FC200, FCX00 FC200H4, FCX00H4 FCX00E FCF200	UCFC200 UCFC200H4 UCFCF200	UCFCX00 UCFCX00H4 UCFCX00E				UKFC200 UKFC200H4	UKFCX00 UKFCX00H4	UKFC300 UKFC300H4
Stamped steel plate flange type	PF200								
Take-up type	T200, TX00, T300 T200E, TX00E T200H4, TX00H4, T300H4	UCT200 UCT200E UCT200H4	UCTX00 UCTX00E UCTX00H4	UCT300 UCT300H4			UKT200 UKT200H4	UKTX00 UKTX00H4	UKT300 UKT300H4
	ST200H1 VT200 VT200E				UCST200H1S6 UCVT200S6	 UCVT200ES7			
	T200+H	UCTH200							
	TL200 TU200, TU300	UCTL200 UCTU200		 UCTU300			(UKTL200) (UKTU200)		 (UKTU300)
	PTH200 NPTH200								
Cartridge type	C200, CX00, C300	UCC200	UCCX00	UCC300			UKC200	UKCX00	UKC300
Hanger type	HA200	UCHA200					UKHA200		

	Insert bearing units								Housing for units	Type
	Cylindrical bore									
	NU-LOC	with set screws			with eccentric looking collar					
	NC200	SU000	Stainless steel SU000S6	SB200	SA200	SA200F	NA200	NA300		
	NCP200						NAP200 NAPK200	NAP300E	P200, PX00, P300, P300E PK200 P200sc, P300sc P200H4, PX00H4, P300H4	Pillow type
									IP200, IP300 IP200H4, IP300H4	
	NCPA200 NCPAN200								PA200 PA200H4 PAN200	
	NCPH200								PH200	
									PH200H4	
				BLP200	ALP200				LP200	
		UP000	SUP000S6						SP200H1 SPA200H1 P000, SP000	
									VP200 VP200E	
				SBPP200	SAPP200				PP200	
	NCF200 NCF200E						NAF200 NANF200		F200, FX00, F300 F200E, FX00E NF200 F200H4, FX00H4, F300H4	Square four-bolt flange type
									FS300 FS300H4	
									SF200H1 SF200EH1 VF200 VF200E	
	NCFL200 NCFL200E						NAFL200		FL200, FLX00, FL300 FL200E FL200H4, FLX00H4, FL300H4	Oval flange type
				BLF205	ALF200				LF200	
		UFL000	SUFL000S6						FL000, SFL200 SFL200H1 SFL200EH1 VFL200 VFL200E	
						SATFD200FP9			TFD200	
	NCFA200								FA200	
	NCFB200								FB200	
				SBPFL200	SAPFL200				PFL200	
	NCFC200						NAFC200		FC200, FCX00 FC200H4, FCX00H4 FCX00E FCF200	Round flange cartridge type
				SBPF200	SAPF200				PF200	Stamped steel plate flange type
	NCT200 NCT200E						NAT200 NAT200E		T200, TX00, T300 T200E, TX00E T200H4, TX00H4, T300H4	Take-up type
									ST200H1 VT200 VT200E	
									T200+H	
									TL200 TU200, TU300	
				SBPTH200 SBNPTH200					PTH200 NPTH200	
	NCC200						NAC200		C200, CX00, C300	Cartridge type
	NCHA200								HA200	Hanger type

Appendix table 2 Tightening torques of housings and cast iron cover mounting bolts

(1) Tightening torques of housings mounting bolts (recommended)

Nominal size of screws	Tightening torques N · m
M 6	2.6– 4.7
M 8	6 – 10
M10	12 – 21
M12	21 – 37
M14	34 – 60
M16	53 – 93
M18	77 – 137
M20	104 – 186
M22	143 – 256
M27	266 – 478
M30	360 – 645
M33	494 – 886
M36	631 –1,130

(2) Tightening torques of plastic housings mounting bolts (recommended)

Nominal size of screws	Tightening torques N · m
M10	17.7–24.5
M12	29.4–44.1

(3) Tightening torques of cast iron cover mounting bolts (recommended)

Nominal size of screws	Tightening torques, N · m	Part No. of applicable cast iron covers (reference)		
		200 series	X00 series	300 series
M3	0.3– 0.6	204, 205	–	–
M4	0.8– 1.4	204FC3 (FD3), 205FC3 (FD3), 206–215	–	305–307
M5	1.5– 2.8	216–218	X18, X20	308–324
M8	6 –10	–	–	326, 328

Appendix table 3 Tightening torques of inner rings and eccentric locking collar set screws

(1) Tightening torques of inner rings and eccentric locking collar set screws (metric series) (recommended)

Nominal size of screws	Tightening torques, N · m	Part No. of applicable bearings						
		UC2, RB	UCX	UC3	NA	SB	SU	ER
M 3X0.35	0.7						08, 000, 001	
M 4X0.5	1.8	–				–	002, 003	
M 5X0.5	3	201X–203X	–	–		201–203	004–006	–
M 6X0.75	4	201–206	X05	305, 306	204, 205	204–207	–	201–206
M 8X1	8.5	207–209	X06–X08	307	206–210	208		207–209
M10X1.25	17.5	210–212	X09–X11	308, 309	211, 212	–		210–212
M12X1.5	28	213–218	X12–X17	310–314	–			–
M14X1.5	35	–	X18	315, 316				
M16X1.5	56		X20	317–319				
M18X1.5	62		–	320–324				
M20X1.5	83			326, 328				

Remark Tightening torques of set screws for UC2-S6 are identical to that of UC2. As for UC210S6, tightening torque of the set screw M8 × 1 should be applied.

(2) Tightening torques of inner rings and eccentric locking collar set screws (inch series) (recommended)

Nominal size of screws	Tightening torques, N · m	Part No. of applicable bearings		
		UC2-, ER2-, RB2-	UCX-	SB-
10-32UNF	3	–	–	201, 202
1/4-28UNF	4	201–206	X05	204–207
5/16-24UNF	8.5	207–209	X06–X08	208
3/8-24UNF	17.5	210–212	X09–X11	–
1/2-20UNF	28	213–218	X12–X18	
5/8-18UNF	56	–	X20	

(3) NU concentric cap screw tightening torque

Nominal size of screws	Tightening torques, N · m
M4	7.4– 8.2
M5	10.2–11.2
M6	17.6–19.4
M8	41.6–46
No.8-32UNC	7.4– 8.2
No.10-24UNC	10.2–11.2
1/4-20UNC	17.6–19.4
5/16-18UNC	41.6–46

Appendix table 4 Tightening torques of adapter lock nuts (reference)

Bore code	Tightening torques, N · m								
	UK200			UKX00			UK300		
	Standard load		Heavy load	Standard load		Heavy load	Standard load		Heavy load
	min.	Max.	(Max. × 1.5)	min.	Max.	(Max. × 1.5)	min.	Max.	(Max. × 1.5)
05	25	38	56	35	53	79	30	45	68
06	30	45	68	40	60	90	45	68	101
07	40	60	90	50	75	113	60	90	135
08	50	75	113	75	113	169	80	120	180
09	60	90	135	75	113	169	120	180	270
10	75	113	169	110	165	248	150	225	338
11	100	150	225	140	210	315	180	270	405
12	130	195	293	165	248	371	225	338	506
13	150	225	338	195	293	439	265	398	596
15	170	255	383	215	323	484	375	563	844
16	200	300	450	255	383	574	450	675	1,013
17	220	330	495	295	443	664	530	795	1,193
18	260	390	585	340	510	765	610	915	1,373
19	–	–	–	–	–	–	710	1,065	1,598
20	–	–	–	490	735	1,103	885	1,328	1,991
22	–	–	–	–	–	–	1,220	1,830	2,745
24	–	–	–	–	–	–	1,470	2,205	3,308
26	–	–	–	–	–	–	1,770	2,655	3,983
28	–	–	–	–	–	–	2,150	3,225	4,838

Appendix table 5 Machining dimensions of holes of housing dowel pins

(1) Machining dimensions of holes of pillow type housing (P) dowel pins (recommended)

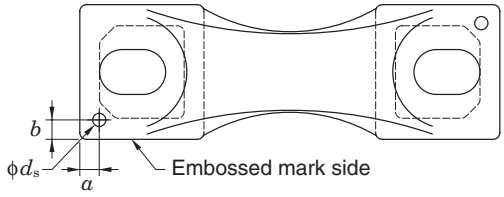

Unit: mm

Nominal code	a	b	d_s (reference)	Pin seat thickness
P203	6	6	4	12
P204	6	6	4	13
P205	6	6	4	13
P206	6	6	4	15
P207	8	8	5	16
P208	8	8	5	17
P209	8	8	5	17
P210	10	10	5	19
P211	10	10	6	19
P212	10	10	6	22
P213	10	10	6	25
P214	12	12	8	28
P215	12	12	8	28
P216	12	12	8	32
P217	12	12	8	32
P218	15	15	8	34
PX05	7	7	5	16
PX06	8	8	5	17
PX07	8	8	5	19
PX08	8	8	5	21
PX09	8	8	5	21
PX10	9	9	6	22
PX11	9	9	6	28
PX12	9	9	6	28
PX13	10	10	8	28
PX14	10	10	8	32
PX15	10	10	8	32
PX16	12	12	8	34
PX17	12	12	8	34
PX18	15	15	10	38
PX20	19	19	10	45
P305	8	8	5	16
P306	10	10	5	17
P307	10	10	5	19
P308	11	11	6	19
P309	11	11	6	21
P310	11	11	6	24
P311	12	12	8	27
P312	12	12	8	29
P313	12	12	8	32
P314	12	12	10	35
P315	14	14	10	35
P316	15	15	10	35
P317	15	15	10	40
P318	15	15	10	40
P319	15	15	10	46
P320	17	17	13	46
P321	17	17	13	46
P322	17	17	13	50
P324	17	17	13	50
P326	20	20	13	50
P328	20	20	13	60

(2) Machining dimensions of holes of cast steel pillow type housing (PSC) dowel pins (recommended)

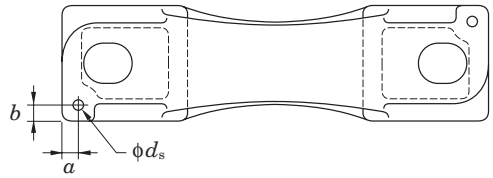

Unit: mm

Nominal code	a	b	d_s (reference)	Pin seat thickness
P205SC	7.5	6	4	16
P206SC	8.5	6	4	18
P207SC	10	6	5	19
P208SC	12	7	5	19
P209SC	10.5	8	5	20
P210SC	10	8	5	22
P211SC	12	8	6	24
P212SC	15	10	6	25
P213SC	12.5	10	6	28
P214SC	10	10	8	28
P215SC	11.5	10	8	29
P216SC	10	11	8	31
P217SC	12.5	11	8	33
P218SC	12.5	11	8	35
P310SC	14	7	6	27
P311SC	18	10	8	30
P312SC	18	10	8	32
P313SC	18	10	8	35
P314SC	17	10	10	38
P315SC	25	13	10	38
P316SC	30	13	10	38
P317SC	27	15	10	45
P318SC	27	15	10	45
P319SC	30	17	10	51
P320SC	30	18	13	51
P322SC	33	20	13	57
P324SC	33	20	13	57
P326SC	33	20	13	57
P328SC	33	20	13	70

(3) Machining dimensions of holes of square flange type housing (F) dowel pins (recommended)



Unit: mm

Nominal code	a	b	d_s (reference)	Pin seat thickness
F204	6	43	4	11
F205	6	47.5	4	13
F206	7.5	54	4	13
F207	7.5	58.5	5	15
F208	7.5	65	5	15
F209	7.5	68.5	5	16
F210	7.5	71.5	5	16
F211	9	81	6	18
F212	9	87.5	6	18
F213	9	93.5	6	22
F214	10	96.5	8	22
F215	10	100	8	22
F216	10	104	8	22
F217	10	110	8	24
F218	10	117.5	8	25
FX05	7.5	54	5	13
FX06	7.5	58.5	5	14
FX07	7.5	65	5	14
FX08	7.5	68.5	5	14
FX09	7.5	71.5	5	14
FX10	9	81	6	20
FX11	9	87.5	6	20
FX12	9	93.5	6	21
FX13	10	93.5	8	21
FX14	10	98.5	8	22
FX15	10	142	8	24
FX16	10	107	8	24
FX17	10	155	8	24
FX18	12	155	10	24
FX20	12	134	10	28
F305	7.5	55	5	13
F306	7.5	62.5	5	15
F307	7.5	67.5	5	16
F308	9	75	6	17
F309	9	80	6	18
F310	9	87.5	6	19
F311	10	92.5	8	20
F312	10	97.5	8	22
F313	10	104	8	22
F314	12	113	10	25
F315	12	118	10	25
F316	12	125	10	27
F317	12	130	10	27
F318	12	140	10	30
F319	12	145	10	30
F320	16	155	13	32
F321	16	155	13	32
F322	16	170	13	35
F324	16	185	13	40
F326	16	205	13	45
F328	16	225	13	55

(4) Machining dimensions of holes of oval flange type housing (FL) dowel pins (recommended)



Unit: mm

Nominal code	a	b	d_s (reference)	Pin seat thickness
FL204	26	9	4	11
FL205	32	10	4	13
FL206	34	12	4	13
FL207	34	14	5	14
FL208	35	15	5	14
FL209	40	15	5	15
FL210	41	16	5	15
FL211	43	19	6	18
FL212	52	22	6	18
FL213	50	21	6	20
FL214	52	22	8	20
FL215	53	23	8	20
FL216	56	23	8	20
FL217	57	25	8	22
FL218	57	26	8	23
FLX05	27	12	5	13
FLX06	30	14	5	14
FLX07	32	15	5	14
FLX08	33	15	5	14
FLX09	35	16	5	14
FLX10	37	19	6	20
FL305	32	12	5	13
FL306	46	14	5	15
FL307	44	14	5	16
FL308	45	17	6	17
FL309	53	19	6	18
FL310	53	19	6	19
FL311	52	20	8	20
FL312	60	21	8	22
FL313	60	25	8	25
FL314	68	26	10	28
FL315	64	26	10	30
FL316	74	29	10	32
FL317	75	31	10	32
FL318	74	32	10	36
FL319	80	32	10	40
FL320	86	34	13	40
FL322	86	36	13	42
FL324	94	41	13	48
FL328	103	45	13	60

Appendix table 6 Ceraball selection chart

Bearing units



Y1 type

Y2 type

Y3 type

Bearings

Operating Environment		Type	Bearing Suffix Code	Specifications				
				Inner/Outer Ring	Ball	Retainer	Lubricant Type	
High Temp	Max Operating Temperature 180 °C (356 °F)	Y1	D9K6Y1	High-carbon chromium bearing steel	FYH-SN Silicon nitride ceramic	Stainless steel or Steel Corrugated retainer	Grease fluorochemical	
	Max Operating Temperature 230 °C (446 °F)	Y2	D9K6S6Y2	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Stainless steel Corrugated retainer	Grease fluorochemical	
	Max Operating Temperature 260 °C (500 °F)	Y2	D9P4S6Y2					
	Max Operating Temperature 450 °C (842 °F)	Y3	S6Y3	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Self-lubricating material		
High Speed	Ambient Atmospheric Conditions	Y1	D7(LS)S5Y1	High-carbon chromium bearing steel	FYH-SN Silicon nitride ceramic	Stainless steel or Steel Corrugated retainer	Grease for High speed	
	High Temp 260 °C (500 °F)	Y2	D9K3.6S6C3Y2	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Stainless steel Corrugated retainer	Grease fluorochemical	
Vacuum	Normal to High-temp Conditions Max 200 °C (392 °F)	Y2	D9K6S6Y2	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Stainless steel Corrugated retainer	Grease fluorochemical	
	High-temp Max 400 °C (752 °F)	Y3	S6Y3	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Self-lubricating material		
Corrosion Resistance	Acid / alkali liquid or vapor atmosphere	Y7	Y7	Precipitation hardening Stainless steel	FYH-SN Silicon nitride ceramic	Fluororesin or Stainless steel Corrugated retainer	–	
	Water, pure water, high humidity	Y8	Y8	PEEK plastic	FYH-SN Silicon nitride ceramic	Fluororesin	–	
Clean	Normal temp - Mid temp	Y2	D9K6S6Y2	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Stainless steel Corrugated retainer	Grease fluorochemical	
	High temp	Y3	S6Y3	Martensitic stainless steel	FYH-SN Silicon nitride ceramic	Self-lubricating material		

∗ If your application is not specified above or if you require different specifications, please use the attached form to detail your application and additional requests.



Y7 type

Y8 type

◎Part Number for Ordering

Bearing Units	Unit No. UCP206	+	Bearing Suffix Code D9K6S6Y2

Deep Groove Ball Bearings	Bearing No. 6206ZZ	+	Bearing Suffix Code D9S6Y2

	Seal	Slinger	Housing	Feature	Example Application
	Fluoroelastomer	Austenitic Stainless steel or Steel	Cast iron	Standard bearings operating in excessively high/low-temperature conditions, or in environments where liquids or gasses are present, require a great deal of maintenance and monitoring, and they are often subject to sudden failure. Ceraball bearings incorporating fluorinated grease (operating range: –60 to 260 °C (–76 to 500 °F)) allow for extended lubrication intervals and longer life.	Heat-resistant blower Spray granulating machine Press & rewinding light torque
	Fluoroelastomer	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel	When liquids or gasses are present in higher concentrations, standard bearings operating in temperatures above 180 °C (356 °F) can deteriorate from surface oxidation rather quickly. The Ceraball series can be incorporated into stainless steel bearings to prevent rapid corrosion. If the operating temperature exceeds 230 °C (446 °F) then seals are omitted and only slingers (Z-seal) are utilized.	**Food equipment** **Wash-down** **Heat treatment furnace** **With a low reactor** **Drying Furnace** **Glass Production Line**
	–				
	–	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel	Standard bearings utilizing grease as a lubricant cannot function well above 260 °C (500 °F). FYH has developed a solid self-lubricating lubricant which can operate in temperatures over 450 °C (842 °F) particularly at lower RPM's > dn 5,000.	
	Nitrile	Austenitic Stainless steel or Steel	Cast iron	High speed applications produce a great deal of centrifugal force which is further increased by standard steel balls. The specific gravity of the Ceraball is 3.2 which is less than half of a steel ball's specific gravity of 7.8. With about 40% of the load, the effects of centrifugal force are reduced and the life of the Ceraball bearing is greatly extended.	**Heat-resistant blower**
	Fluoroelastomer	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel		
	Fluoroelastomer	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel	When operating in a vacuum, base oils often evaporate from the grease and deterioration of the lubricant occurs. Because high-quality fluorinated grease is used, which is enclosed by fluorine seals within the ball path, this problem is eliminated. The Ceraball provides stable performance to 10^{-5} Pa under normal atmospheric temperatures.	**Vacuum Equipment**
	–	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel	The self-lubricating solid lubrication system functions very well at a wide range of temperatures, and it is well-suited to vacuum-based machinery.	**Sputtering system**
	–	–	Stainless steel	For particularly strong solid, liquid, or vapor based acids and bases, FYH has adopted a separation hardened stainless steel for the inner and outer rings as well as the Y7 ceramic series that incorporates a special corrosion resistant ceramic ball originally developed by FYH.	Film / chemical production
	–	–	–	Where severe corrosion, metal abrasion, and rust are concerns, polyetheretherketone (PEEK) plastic inner and outer rings are employed as well as the Y8 ceramic series that incorporates a special corrosion resistant ceramic ball. It is usually used in the condition of a very light load.	**Silicon wafer production** **Ultrapure water**
	Fluoroelastomer	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel	Special contaminate-free environments require clean-operating components. Because it needs less grease, the Ceraball can meet these requirements and, through a wide range of temperatures, it releases much less debris than conventional bearings. High-temperature applications requiring solid graphite lubricant may discharge only a small amount of graphite.	IC manufacturing-related equipment Food Equipment
	–	Austenitic Stainless steel	Cast iron (heat-resistant paint) or Stainless steel		

Dimensional data subject to change without notice. Please confirm all dimensions and specifications before ordering.

Appendix table 7 Dimensional tolerances of shafts

Classification of shaft (mm)		Tolerance range class of shaft															
Over	Incl.	d 6	e 6	f 6	g 5	g 6	h 5	h 6	h 7	h 8	h 9	h 10	js 5	js 6	js 7	j 5	j 6
3	6	−30 −38	−20 −28	−10 −18	−4 −9	−4 −12	0 −5	0 −8	0 −12	0 −18	0 −30	0 −48	±2.5	±4	±6	+3 −2	+6 −2
6	10	−40 −49	−25 −34	−13 −22	−5 −11	−5 −14	0 −6	0 −9	0 −15	0 −22	0 −36	0 −58	±3	±4.5	±7.5	+4 −2	+7 −2
10	18	−50 −61	−32 −43	−16 −27	−6 −14	−6 −17	0 −8	0 −11	0 −18	0 −27	0 −43	0 −70	±4	±5.5	±9	+5 −3	+8 −3
18	30	−65 −78	−40 −53	−20 −33	−7 −16	−7 −20	0 −9	0 −13	0 −21	0 −33	0 −52	0 −84	±4.5	±6.5	±10.5	+5 −4	+9 −4
30	50	−80 −96	−50 −66	−25 −41	−9 −20	−9 −25	0 −11	0 −16	0 −25	0 −39	0 −62	0 −100	±5.5	±8	±12.5	+6 −5	+11 −5
50	80	−100 −119	−60 −79	−30 −49	−10 −23	−10 −29	0 −13	0 −19	0 −30	0 −46	0 −74	0 −120	±6.5	±9.5	±15	+6 −7	+12 −7
80	120	−120 −142	−72 −94	−36 −58	−12 −27	−12 −34	0 −15	0 −22	0 −35	0 −54	0 −87	0 −140	±7.5	±11	±17.5	+6 −9	+13 −9
120	180	−145 −170	−85 −110	−43 −68	−14 −32	−14 −39	0 −18	0 −25	0 −40	0 −63	0 −100	0 −160	±9	±12.5	±20	+7 −11	+14 −11
180	250	−170 −199	−100 −129	−50 −79	−15 −35	−15 −44	0 −20	0 −29	0 −46	0 −72	0 −115	0 −185	±10	±14.5	±23	+7 −13	+16 −13
250	315	−190 −222	−110 −142	−56 −88	−17 −40	−17 −49	0 −23	0 −32	0 −52	0 −81	0 −130	0 −210	±11.5	±16	±26	+7 −16	±16
315	400	−210 −246	−125 −161	−62 −98	−18 −43	−18 −54	0 −25	0 −36	0 −57	0 −89	0 −140	0 −230	±12.5	±18	±28.5	+7 −18	±18
400	500	−230 −270	−135 −175	−68 −108	−20 −47	−20 −60	0 −27	0 −40	0 −63	0 −97	0 −155	0 −250	±13.5	±20	±31.5	+7 −20	±20
500	630	−260 −304	−145 −189	−76 −120	−22 −54	−22 −66	0 −32	0 −44	0 −70	0 −110	0 −175	0 −280	±16	±22	±35	–	–
630	800	−290 −340	−160 −210	−80 −130	−24 −60	−24 −74	0 −36	0 −50	0 −80	0 −125	0 −200	0 −320	±18	±25	±40	–	–
800	1,000	−320 −376	−170 −226	−86 −142	−26 −66	−26 −82	0 −40	0 −56	0 −90	0 −140	0 −230	0 −360	±20	±28	±45	–	–

*Δ_{dmp}: Variation of tolerance of average bore diameter in plane

Unit: μm

k 5	k 6	k 7	m 5	m 6	m 7	n 5	n 6	p 6	r 6	r 7	Classification of shaft (mm) Over	Incl.	(Reference) Δ_{dmp}* of bearing (class 0)
+ 6 + 1	+ 9 + 1	+13 + 1	+ 9 + 4	+12 + 4	+ 16 + 4	+13 + 8	+ 16 + 8	+ 20 + 12	+ 23 + 15	+ 27 + 15	3	6	0 − 8
+ 7 + 1	+10 + 1	+16 + 1	+12 + 6	+15 + 6	+ 21 + 6	+16 +10	+ 19 + 10	+ 24 + 15	+ 28 + 19	+ 34 + 19	6	10	0 − 8
+ 9 + 1	+12 + 1	+19 + 1	+15 + 7	+18 + 7	+ 25 + 7	+20 +12	+ 23 + 12	+ 29 + 18	+ 34 + 23	+ 41 + 23	10	18	0 − 8
+11 + 2	+15 + 2	+23 + 2	+17 + 8	+21 + 8	+ 29 + 8	+24 +15	+ 28 + 15	+ 35 + 22	+ 41 + 28	+ 49 + 28	18	30	0 − 10
+13 + 2	+18 + 2	+27 + 2	+20 + 9	+25 + 9	+ 34 + 9	+28 +17	+ 33 + 17	+ 42 + 26	+ 50 + 34	+ 59 + 34	30	50	0 − 12
+15 + 2	+21 + 2	+32 + 2	+24 +11	+30 +11	+ 41 + 11	+33 +20	+ 39 + 20	+ 51 + 32	+ 60 + 41	+ 71 + 41	50	65	0 − 15
									+ 62 + 43	+ 73 + 43	65	80	
+18 + 3	+25 + 3	+38 + 3	+28 +13	+35 +13	+ 48 + 13	+38 +23	+ 45 + 23	+ 59 + 37	+ 73 + 51	+ 86 + 51	80	100	0 − 20
									+ 76 + 54	+ 89 + 54	100	120	
+21 + 3	+28 + 3	+43 + 3	+33 +15	+40 +15	+ 55 + 15	+45 +27	+ 52 + 27	+ 68 + 43	+ 88 + 63	+103 + 63	120	140	0 − 25
									+ 90 + 65	+105 + 65	140	160	
									+ 93 + 68	+108 + 68	160	180	
+24 + 4	+33 + 4	+50 + 4	+37 +17	+46 +17	+ 63 + 17	+51 +31	+ 60 + 31	+ 79 + 50	+106 + 77	+123 + 77	180	200	0 − 30
									+109 + 80	+126 + 80	200	225	
									+113 + 84	+130 + 84	225	250	
+27 + 4	+36 + 4	+56 + 4	+43 +20	+52 +20	+ 72 + 20	+57 +34	+ 66 + 34	+ 88 + 56	+126 + 94	+146 + 94	250	280	0 − 35
									+130 + 98	+150 + 98	280	315	
+29 + 4	+40 + 4	+61 + 4	+46 +21	+57 +21	+ 78 + 21	+62 +37	+ 73 + 37	+ 98 + 62	+144 +108	+165 +108	315	355	0 − 40
									+150 +114	+171 +114	355	400	
+32 + 5	+45 + 5	+68 + 5	+50 +23	+63 +23	+ 86 + 23	+67 +40	+ 80 + 40	+108 + 68	+166 +126	+189 +126	400	450	0 − 45
									+172 +132	+195 +132	450	500	
+32 0	+44 0	+70 0	+58 +26	+70 +26	+ 96 + 26	+76 +44	+ 88 + 44	+122 + 78	+194 +150	+220 +150	500	560	0 − 50
									+199 +155	+225 +155	560	630	
+36 0	+50 0	+80 0	+66 +30	+80 +30	+110 + 30	+86 +50	+100 + 50	+138 + 88	+225 +175	+255 +175	630	710	0 − 75
									+235 +185	+265 +185	710	800	
+40 0	+56 0	+90 0	+74 +34	+90 +34	+124 + 34	+96 +56	+112 + 56	+156 +100	+266 +210	+300 +210	800	900	0 −100
									+276 +220	+310 +220	900	1,000	

Appendix table 8 Dimensional tolerances of housing bores

Classification of shaft (mm)		Tolerance range class of bore														
Over	Incl.	E 6	F 6	F 7	G 6	G 7	H 6	H 7	H 8	H 9	H 10	JS 5	JS 6	JS 7	J 6	J 7
10	18	+ 43 + 32	+ 27 + 16	+ 34 + 16	+17 + 6	+ 24 + 6	+11 0	+ 18 0	+ 27 0	+ 43 0	+ 70 0	± 4	± 5.5	± 9	+ 6 − 5	+10 − 8
18	30	+ 53 + 40	+ 33 + 20	+ 41 + 20	+20 + 7	+ 28 + 7	+13 0	+ 21 0	+ 33 0	+ 52 0	+ 84 0	± 4.5	± 6.5	±10.5	+ 8 − 5	+12 − 9
30	50	+ 66 + 50	+ 41 + 25	+ 50 + 25	+25 + 9	+ 34 + 9	+16 0	+ 25 0	+ 39 0	+ 62 0	+100 0	± 5.5	± 8	±12.5	+10 − 6	+14 −11
50	80	+ 79 + 60	+ 49 + 30	+ 60 + 30	+29 +10	+ 40 + 10	+19 0	+ 30 0	+ 46 0	+ 74 0	+120 0	± 6.5	± 9.5	±15	+13 − 6	+18 −12
80	120	+ 94 + 72	+ 58 + 36	+ 71 + 36	+34 +12	+ 47 + 12	+22 0	+ 35 0	+ 54 0	+ 87 0	+140 0	± 7.5	±11	±17.5	+16 − 6	+22 −13
120	180	+110 + 85	+ 68 + 43	+ 83 + 43	+39 +14	+ 54 + 14	+25 0	+ 40 0	+ 63 0	+100 0	+160 0	± 9	±12.5	±20	+18 − 7	+26 −14
180	250	+129 +100	+ 79 + 50	+ 96 + 50	+44 +15	+ 61 + 15	+29 0	+ 46 0	+ 72 0	+115 0	+185 0	±10	±14.5	±23	+22 − 7	+30 −16
250	315	+142 +110	+ 88 + 56	+108 + 56	+49 +17	+ 69 + 17	+32 0	+ 52 0	+ 81 0	+130 0	+210 0	±11.5	±16	±26	+25 − 7	+36 −16
315	400	+161 +125	+ 98 + 62	+119 + 62	+54 +18	+ 75 + 18	+36 0	+ 57 0	+ 89 0	+140 0	+230 0	±12.5	±18	±28.5	+29 − 7	+39 −18
400	500	+175 +135	+108 + 68	+131 + 68	+60 +20	+ 83 + 20	+40 0	+ 63 0	+ 97 0	+155 0	+250 0	±13.5	±20	±31.5	+33 − 7	+43 −20
500	630	+189 +145	+120 + 76	+146 + 76	+66 +22	+ 92 + 22	+44 0	+ 70 0	+110 0	+175 0	+280 0	±16	±22	±35	–	–
630	800	+210 +160	+130 + 80	+160 + 80	+74 +24	+104 + 24	+50 0	+ 80 0	+125 0	+200 0	+320 0	±18	±25	±40	–	–
800	1,000	+226 +170	+142 + 86	+176 + 86	+82 +26	+116 + 26	+56 0	+ 90 0	+140 0	+230 0	+360 0	±20	±28	±45	–	–
1,000	1,250	+261 +195	+164 + 98	+203 + 98	+94 +28	+133 + 28	+66 0	+105 0	+165 0	+260 0	+420 0	±23.5	±33	±52.5	–	–

*Δ_{Dmp}: Variation of tolerance of average outside diameter in plate

Unit: μm

K 5	K 6	K 7	M 5	M 6	M 7	N 5	N 6	N 7	P 6	P 7	R 7	Classification of basic size (mm) Over	Incl.	(Reference) Δ_{Dmp}* of bearing (class 0)
+2 −6	+2 −9	+6 −12	−4 −12	−4 −15	0 −18	−9 −17	−9 −20	−5 −23	−15 −26	−11 −29	−16 −34	10	18	0 −8
+1 −8	+2 −11	+6 −15	−5 −14	−4 −17	0 −21	−12 −21	−11 −24	−7 −28	−18 −31	−14 −35	−20 −41	18	30	0 −9
+2 −9	+3 −13	+7 −18	−5 −16	−4 −20	0 −25	−13 −24	−12 −28	−8 −33	−21 −37	−17 −42	−25 −50	30	50	0 −11
+3 −10	+4 −15	+9 −21	−6 −19	−5 −24	0 −30	−15 −28	−14 −33	−9 −39	−26 −45	−21 −51	−30 −60	50	65	0 −13
											−32 −62	65	80	
+2 −13	+4 −18	+10 −25	−8 −23	−6 −28	0 −35	−18 −33	−16 −38	−10 −45	−30 −52	−24 −59	−38 −73	80	100	0 −15
											−41 −76	100	120	
+3 −15	+4 −21	+12 −28	−9 −27	−8 −33	0 −40	−21 −39	−20 −45	−12 −52	−36 −61	−28 −68	−48 −88	120	140	(150 max.) 0 −18 (Over 150) 0 −25
											−50 −90	140	160	
											−53 −93	160	180	
+2 −18	+5 −24	+13 −33	−11 −31	−8 −37	0 −46	−25 −45	−22 −51	−14 −60	−41 −70	−33 −79	−60 −106	180	200	0 −30
											−63 −109	200	225	
											−67 −113	225	250	
+3 −20	+5 −27	+16 −36	−13 −36	−9 −41	0 −52	−27 −50	−25 −57	−14 −66	−47 −79	−36 −88	−74 −126	250	280	0 −35
											−78 −130	280	315	
+3 −22	+7 −29	+17 −40	−14 −39	−10 −46	0 −57	−30 −55	−26 −62	−16 −73	−51 −87	−41 −98	−87 −144	315	355	0 −40
											−93 −150	355	400	
+2 −25	+8 −32	+18 −45	−16 −43	−10 −50	0 −63	−33 −60	−27 −67	−17 −80	−55 −95	−45 −108	−103 −166	400	450	0 −45
											−109 −172	450	500	
0 −32	0 −44	0 −70	−26 −58	−26 −70	−26 −96	−44 −76	−44 −88	−44 −114	−78 −122	−78 −148	−150 −220	500	560	0 −50
											−155 −225	560	630	
0 −36	0 −50	0 −80	−30 −66	−30 −80	−30 −110	−50 −86	−50 −100	−50 −130	−88 −138	−88 −168	−175 −255	630	710	0 −75
											−185 −265	710	800	
0 −40	0 −56	0 −90	−34 −74	−34 −90	−34 −124	−56 −96	−56 −112	−56 −146	−100 −156	−100 −190	−210 −300	800	900	0 −100
											−220 −310	900	1,000	
0 −47	0 −66	0 −105	−40 −87	−40 −106	−40 −145	−66 −113	−66 −132	−66 −171	−120 −186	−120 −225	−250 −355	1,000	1,120	0 −125
											−260 −365	1,120	1,250	

Appendix table 9 Basic tolerance values

Classification of basic size (mm)		Tolerance class (IT)																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14[1]	15[1]	16[1]	17[1]	18[1]
Over	Incl.	Basic tolerance value (μm)											Basic tolerance value (mm)						
–	3	0.8	1.2	2	3	4	6	10	14	25	40	60	0.10	0.14	0.26	0.40	0.60	1.00	1.40
3	6	1	1.5	2.5	4	5	8	12	18	30	48	75	0.12	0.18	0.30	0.48	0.75	1.20	1.80
6	10	1	1.5	2.5	4	6	9	15	22	36	58	90	0.15	0.22	0.36	0.58	0.90	1.50	2.20
10	18	1.2	2	3	5	8	11	18	27	43	70	110	0.18	0.27	0.43	0.70	1.10	1.80	2.70
18	30	1.5	2.5	4	6	9	13	21	33	52	84	130	0.21	0.33	0.52	0.84	1.30	2.10	3.30
30	50	1.5	2.5	4	7	11	16	25	39	62	100	160	0.25	0.39	0.62	1.00	1.60	2.50	3.90
50	80	2	3	5	8	13	19	30	46	74	120	190	0.30	0.46	0.74	1.20	1.90	3.00	4.60
80	120	2.5	4	6	10	15	22	35	54	87	140	220	0.35	0.54	0.87	1.40	2.20	3.50	5.40
120	180	3.5	5	8	12	18	25	40	63	100	160	250	0.40	0.63	1.00	1.60	2.50	4.00	6.30
180	250	4.5	7	10	14	20	29	46	72	115	185	290	0.46	0.72	1.15	1.85	2.90	4.60	7.20
250	315	6	8	12	16	23	32	52	81	130	210	320	0.52	0.81	1.30	2.10	3.20	5.20	8.10
315	400	7	9	13	18	25	36	57	89	140	230	360	0.57	0.89	1.40	2.30	3.60	5.70	8.90
400	500	8	10	15	20	27	40	63	97	155	250	400	0.63	0.97	1.55	2.50	4.00	6.30	9.70
500	630	–	–	–	–	–	44	70	110	175	280	440	0.70	1.10	1.75	2.80	4.40	7.00	11.00
630	800	–	–	–	–	–	50	80	125	200	320	500	0.80	1.25	2.00	3.20	5.00	8.00	12.50
800	1,000	–	–	–	–	–	56	90	140	230	360	560	0.90	1.40	2.30	3.60	5.60	9.00	14.00
1,000	1,250	–	–	–	–	–	66	105	165	260	420	660	1.05	1.65	2.60	4.20	6.60	10.50	16.50
1,250	1,600	–	–	–	–	–	78	125	195	310	500	780	1.25	1.95	3.10	5.00	7.80	12.50	19.50
1,600	2,000	–	–	–	–	–	92	150	230	370	600	920	1.50	2.30	3.70	6.00	9.20	15.00	23.00
2,000	2,500	–	–	–	–	–	110	175	280	440	700	1,100	1.75	2.80	4.40	7.00	11.00	17.50	28.00
2,500	3,150	–	–	–	–	–	135	210	330	540	860	1,350	2.10	3.30	5.40	8.60	13.50	21.00	33.00

Note [1] Tolerance classes from IT14 to IT18 can not be applied to basic size 1 mm or less.

Appendix table 10 SI unit conversion charts

Force

N	dyn	kgf
1	1×10^{5}	$1.019\ 72\times10^{-1}$
1×10^{-5}	1	$1.019\ 72\times10^{-6}$
9.806 65	$9.806\ 65\times10^{5}$	1

Moment of force (torque)

N · m	mN · m	μN · m	kgf · m	kgf · cm	gf · cm
1	1×10^{3}	1×10^{6}	$1.019\ 72\times10^{-1}$	$1.019\ 72\times10$	$1.019\ 72\times10^{4}$
1×10^{-3}	1	1×10^{3}	$1.019\ 72\times10^{-4}$	$1.019\ 72\times10^{-2}$	$1.019\ 72\times10$
1×10^{-6}	1×10^{-3}	1	$1.019\ 72\times10^{-7}$	$1.019\ 72\times10^{-5}$	$1.019\ 72\times10^{-2}$
9.806 65	$9.806\ 65\times10^{3}$	$9.806\ 65\times10^{6}$	1	1×10^{2}	1×10^{5}
$9.806\ 65\times10^{-2}$	$9.806\ 65\times10$	$9.806\ 65\times10^{4}$	1×10^{-2}	1	1×10^{3}
$9.806\ 65\times10^{-5}$	$9.806\ 65\times10^{-2}$	$9.806\ 65\times10$	1×10^{-5}	1×10^{-3}	1

Stress

Pa or N/m^2	MPa or N/mm^2	kgf/mm^2	kgf/cm^2
1	1×10^{-6}	$1.019\ 72\times10^{-7}$	$1.019\ 72\times10^{-5}$
1×10^{6}	1	$1.019\ 72\times10^{-1}$	$1.019\ 72\times10$
$9.806\ 65\times10^{6}$	9.806 65	1	1×10^{2}
$9.806\ 65\times10^{4}$	$9.806\ 65\times10^{-2}$	1×10^{-2}	1

Remark 1 Pa = 1 N/m^2, 1 MPa = 1 N/mm^2

Pressure

Pa	kPa	MPa	bar	kgf/cm^2	atm	mmH$_2$O	mmHg or Torr
1	1×10^{-3}	1×10^{-6}	1×10^{-5}	$1.019\ 72\times10^{-5}$	$9.869\ 23\times10^{-6}$	$1.019\ 72\times10^{-1}$	$7.500\ 62\times10^{-3}$
1×10^{3}	1	1×10^{-3}	1×10^{-2}	$1.019\ 72\times10^{-2}$	$9.869\ 23\times10^{-3}$	$1.019\ 72\times10^{2}$	7.500 62
1×10^{6}	1×10^{3}	1	1×10	$1.019\ 72\times10$	9.869 23	$1.019\ 72\times10^{5}$	$7.500\ 62\times10^{3}$
1×10^{5}	1×10^{2}	1×10^{-1}	1	1.019 72	$9.869\ 23\times10^{-1}$	$1.019\ 72\times10^{4}$	$7.500\ 62\times10^{2}$
$9.806\ 65\times10^{4}$	$9.806\ 65\times10$	$9.806\ 65\times10^{-2}$	$9.806\ 65\times10^{-1}$	1	$9.678\ 41\times10^{-1}$	1×10^{4}	$7.355\ 59\times10^{2}$
$1.013\ 25\times10^{5}$	$1.013\ 25\times10^{2}$	$1.013\ 25\times10^{-1}$	1.013 25	1.033 23	1	$1.033\ 23\times10^{4}$	$7.600\ 00\times10^{2}$
9.806 65	$9.806\ 65\times10^{-3}$	$9.806\ 65\times10^{-6}$	$9.806\ 65\times10^{-5}$	1×10^{-4}	$9.678\ 41\times10^{-5}$	1	$7.355\ 59\times10^{-2}$
$1.333\ 22\times10^{2}$	$1.333\ 22\times10^{-1}$	$1.333\ 22\times10^{-4}$	$1.333\ 22\times10^{-3}$	$1.359\ 51\times10^{-3}$	$1.315\ 79\times10^{-3}$	$1.359\ 51\times10$	1

Remark 1 Pa = 1 N/m^2

Kinematic viscosity

m^2/s	cSt	St
1	1×10^{6}	1×10^{4}
1×10^{-6}	1	1×10^{-2}
1×10^{-4}	1×10^{2}	1

Remark 1 cSt = 1 mm^2/s, 1 St = 1 cm^2/s

Appendix table 11 Inch-meter conversion chart

Inch		Inches										
		0	1	2	3	4	5	6	7	8	9	10
		mm										
0	0	**0**	**25.4000**	**50.8000**	**76.2000**	**101.6000**	**127.0000**	**152.4000**	**177.8000**	**203.2000**	**228.6000**	**254.0000**
1/64	0.015625	0.3969	25.7969	51.1969	76.5969	101.9969	127.3969	152.7969	178.1969	203.5969	228.9969	254.3969
1/32	0.03125	0.7938	26.1938	51.5938	76.9938	102.3938	127.7938	153.1938	178.5938	203.9938	229.3938	254.7938
3/64	0.046875	1.1906	26.5906	51.9906	77.3906	102.7906	128.1906	153.5906	178.9906	204.3906	229.7906	255.1906
1/16	0.0625	1.5875	26.9875	52.3875	77.7875	103.1875	128.5875	153.9875	179.3875	204.7875	230.1875	255.5875
5/64	0.078125	1.9844	27.3844	52.7844	78.1844	103.5844	128.9844	154.3844	179.7844	205.1844	230.5844	255.9844
3/32	0.09375	2.3812	27.7812	53.1812	78.5812	103.9812	129.3812	154.7812	180.1812	205.5812	230.9812	256.3812
7/64	0.109375	2.7781	28.1781	53.5781	78.9781	104.3781	129.7781	155.1781	180.5781	205.9781	231.3781	256.7781
1/8	0.125	**3.1750**	**28.5750**	**53.9750**	**79.3750**	**104.7750**	**130.1750**	**155.5750**	**180.9750**	**206.3750**	**231.7750**	**257.1750**
9/64	0.140625	3.5719	28.9719	54.3719	79.7719	105.1719	130.5719	155.9719	181.3719	206.7719	232.1719	257.5719
5/32	0.15625	3.9688	29.3688	54.7688	80.1688	105.5688	130.9688	156.3688	181.7688	207.1688	232.5688	257.9688
11/64	0.171875	4.3656	29.7656	55.1656	80.5656	105.9656	131.3656	156.7656	182.1656	207.5656	232.9656	258.3656
3/16	0.1875	4.7625	30.1625	55.5625	80.9625	106.3625	131.7625	157.1625	182.5625	207.9625	233.3625	258.7625
13/64	0.203125	5.1594	30.5594	55.9594	81.3594	106.7594	132.1594	157.5594	182.9594	208.3594	233.7594	259.1594
7/32	0.21875	5.5562	30.9562	56.3562	81.7562	107.1562	132.5562	157.9562	183.3562	208.7562	234.1562	259.5562
15/64	0.234375	5.9531	31.3531	56.7531	82.1531	107.5531	132.9531	158.3531	183.7531	209.1531	234.5531	259.9531
1/4	0.25	**6.3500**	**31.7500**	**57.1500**	**82.5500**	**107.9500**	**133.3500**	**158.7500**	**184.1500**	**209.5500**	**234.9500**	**260.3500**
17/64	0.265625	6.7469	32.1469	57.5469	82.9469	108.3469	133.7469	159.1469	184.5469	209.9469	235.3469	260.7469
9/32	0.28125	7.1438	32.5438	57.9438	83.3438	108.7438	134.1438	159.5438	184.9438	210.3438	235.7438	261.1438
19/64	0.296875	7.5406	32.9406	58.3406	83.7406	109.1406	134.5406	159.9406	185.3406	210.7406	236.1406	261.5406
5/16	0.3125	7.9375	33.3375	58.7375	84.1375	109.5375	134.9375	160.3375	185.7375	211.1375	236.5375	261.9375
21/64	0.328125	8.3344	33.7344	59.1344	84.5344	109.9344	135.3344	160.7344	186.1344	211.5344	236.9344	262.3344
11/32	0.34375	8.7312	34.1312	59.5312	84.9312	110.3312	135.7312	161.1312	186.5312	211.9312	237.3312	262.7312
23/64	0.359375	9.1281	34.5281	59.9281	85.3281	110.7281	136.1281	161.5281	186.9281	212.3281	237.7281	263.1281
3/8	0.375	**9.5250**	**34.9250**	**60.3250**	**85.7250**	**111.1250**	**136.5250**	**161.9250**	**187.3250**	**212.7250**	**238.1250**	**263.5250**
25/64	0.390625	9.9219	35.3219	60.7219	86.1219	111.5219	136.9219	162.3219	187.7219	213.1219	238.5219	263.9219
13/32	0.40625	10.3188	35.7188	61.1188	86.5188	111.9188	137.3188	162.7188	188.1188	213.5188	238.9188	264.3188
27/64	0.421875	10.7156	36.1156	61.5156	86.9156	112.3156	137.7156	163.1156	188.5156	213.9156	239.3156	264.7156
7/16	0.4375	11.1125	36.5125	61.9125	87.3125	112.7125	138.1125	163.5125	188.9125	214.3125	239.7125	265.1125
29/64	0.453125	11.5094	36.9094	62.3094	87.7094	113.1094	138.5094	163.9094	189.3094	214.7094	240.1094	265.5094
15/32	0.46875	11.9062	37.3062	62.7062	88.1062	113.5062	138.9062	164.3062	189.7062	215.1062	240.5062	265.9062
31/64	0.484375	12.3031	37.7031	63.1031	88.5031	113.9031	139.3031	164.7031	190.1031	215.5031	240.9031	266.3031
1/2	0.5	**12.7000**	**38.1000**	**63.5000**	**88.9000**	**114.3000**	**139.7000**	**165.1000**	**190.5000**	**215.9000**	**241.3000**	**266.7000**
33/64	0.515625	13.0969	38.4969	63.8969	89.2969	114.6969	140.0969	165.4969	190.8969	216.2969	241.6969	267.0969
17/32	0.53125	13.4938	38.8938	64.2938	89.6938	115.0938	140.4938	165.8938	191.2938	216.6938	242.0938	267.4938
35/64	0.546875	13.8906	39.2906	64.6906	90.0906	115.4906	140.8906	166.2906	191.6906	217.0906	242.4906	267.8906
9/16	0.5625	14.2875	39.6875	65.0875	90.4875	115.8875	141.2875	166.6875	192.0875	217.4875	242.8875	268.2875
37/64	0.578125	14.6844	40.0844	65.4844	90.8844	116.2844	141.6844	167.0844	192.4844	217.8844	243.2844	268.6844
19/32	0.59375	15.0812	40.4812	65.8812	91.2812	116.6812	142.0812	167.4812	192.8812	218.2812	243.6812	269.0812
39/64	0.609375	15.4781	40.8781	66.2781	91.6781	117.0781	142.4781	167.8781	193.2781	218.6781	244.0781	269.4781
5/8	0.625	**15.8750**	**41.2750**	**66.6750**	**92.0750**	**117.4750**	**142.8750**	**168.2750**	**193.6750**	**219.0750**	**244.4750**	**269.8750**
41/64	0.640625	16.2719	41.6719	67.0719	92.4719	117.8719	143.2719	168.6719	194.0719	219.4719	244.8719	270.2719
21/32	0.65625	16.6688	42.0688	67.4688	92.8688	118.2688	143.6688	169.0688	194.4688	219.8688	245.2688	270.6688
43/64	0.671875	17.0656	42.4656	67.8656	93.2656	118.6656	144.0656	169.4656	194.8656	220.2656	245.6656	271.0656
11/16	0.6875	17.4625	42.8625	68.2625	93.6625	119.0625	144.4625	169.8625	195.2625	220.6625	246.0625	271.4625
45/64	0.703125	17.8594	43.2594	68.6594	94.0594	119.4594	144.8594	170.2594	195.6594	221.0594	246.4594	271.8594
23/32	0.71875	18.2562	43.6562	69.0562	94.4562	119.8562	145.2562	170.6562	196.0562	221.4562	246.8562	272.2562
47/64	0.734375	18.6531	44.0531	69.4531	94.8531	120.2531	145.6531	171.0531	196.4531	221.8531	247.2531	272.6531
3/4	0.75	**19.0500**	**44.4500**	**69.8500**	**95.2500**	**120.6500**	**146.0500**	**171.4500**	**196.8500**	**222.2500**	**247.6500**	**273.0500**
49/64	0.765625	19.4469	44.8469	70.2469	95.6469	121.0469	146.4469	171.8469	197.2469	222.6469	248.0469	273.4469
25/32	0.78125	19.8438	45.2438	70.6438	96.0438	121.4438	146.8438	172.2438	197.6438	223.0438	248.4438	273.8438
51/64	0.796875	20.2406	45.6406	71.0406	96.4406	121.8406	147.2406	172.6406	198.0406	223.4406	248.8406	274.2406
13/16	0.8125	20.6375	46.0375	71.4375	96.8375	122.2375	147.6375	173.0375	198.4375	223.8375	249.2375	274.6375
53/64	0.828125	21.0344	46.4344	71.8344	97.2344	122.6344	148.0344	173.4344	198.8344	224.2344	249.6344	275.0344
27/32	0.84375	21.4312	46.8312	72.2312	97.6312	123.0312	148.4312	173.8312	199.2312	224.6312	250.0312	275.4312
55/64	0.859375	21.8281	47.2281	72.6281	98.0281	123.4281	148.8281	174.2281	199.6281	225.0281	250.4281	275.8281
7/8	0.875	**22.2250**	**47.6250**	**73.0250**	**98.4250**	**123.8250**	**149.2250**	**174.6250**	**200.0250**	**225.4250**	**250.8250**	**276.2250**
57/64	0.890625	22.6219	48.0219	73.4219	98.8219	124.2219	149.6219	175.0219	200.4219	225.8219	251.2219	276.6219
29/32	0.90625	23.0188	48.4188	73.8188	99.2188	124.6188	150.0188	175.4188	200.8188	226.2188	251.6188	277.0188
59/64	0.921875	23.4156	48.8156	74.2156	99.6156	125.0156	150.4156	175.8156	201.2156	226.6156	252.0156	277.4156
15/16	0.9375	23.8125	49.2125	74.6125	100.0125	125.4125	150.8125	176.2125	201.6125	227.0125	252.4125	277.8125
61/64	0.953125	24.2094	49.6094	75.0094	100.4094	125.8094	151.2094	176.6094	202.0094	227.4094	252.8094	278.2094
31/32	0.96875	24.6062	50.0062	75.4062	100.8062	126.2062	151.6062	177.0062	202.4062	227.8062	253.2062	278.6062
63/64	0.984375	25.0031	50.4031	75.8031	101.2031	126.6031	152.0031	177.4031	202.8031	228.2031	253.6031	279.0031

Appendix table 12 Hardness conversion chart

Rockwell	Vickers	Brinell		Rockwell		Shore
C scale 1,471.0 N (150 kgf)		Standard steel ball	Tungsten carbide steel ball	A scale 588.4 N (60 kgf)	B scale 980.7 N (100 kgf)	
68	940			85.6		97
67	900			85.0		95
66	865			84.5		92
65	832		739	83.9		91
64	800		722	83.4		88
63	772		705	82.8		87
62	746		688	82.3		85
61	720		670	81.8		83
60	697		654	81.2		81
59	674		634	80.7		80
58	653		615	80.1		78
57	633		595	79.6		76
56	613		577	79.0		75
55	595	–	560	78.5		74
54	577	–	543	78.0		72
53	560	–	525	77.4		71
52	544	500	512	76.8		69
51	528	487	496	76.3		68
50	513	475	481	75.9		67
49	498	464	469	75.2		66
48	484	451	455	74.7		64
47	471	442	443	74.1		63
46	458	432	432	73.6		62
45	446	421		73.1		60
44	434	409		72.5		58
43	423	400		72.0		57
42	412	390		71.5		56
41	402	381		70.9		55
40	392	371		70.4	–	54
39	382	362		69.9	–	52
38	372	353		69.4	–	51
37	363	344		68.9	–	50
36	354	336		68.4	(109.0)	49
35	345	327		67.9	(108.5)	48
34	336	319		67.4	(108.0)	47
33	327	311		66.8	(107.5)	46
32	318	301		66.3	(107.0)	44
31	310	294		65.8	(106.0)	43
30	302	286		65.3	(105.5)	42
29	294	279		64.7	(104.5)	41
28	286	271		64.3	(104.0)	41
27	279	264		63.8	(103.0)	40
26	272	258		63.3	(102.5)	38
25	266	253		62.8	(101.5)	38
24	260	247		62.4	(101.0)	37
23	254	243		62.0	100.0	36
22	248	237		61.5	99.0	35
21	243	231		61.0	98.5	35
20	238	226		60.5	97.8	34
(18)	230	219		–	96.7	33
(16)	222	212		–	95.5	32
(14)	213	203		–	93.9	31
(12)	204	194		–	92.3	29
(10)	196	187			90.7	28
(8)	188	179			89.5	27
(6)	180	171			87.1	26
(4)	173	165			85.5	25
(2)	166	158			83.5	24
(0)	160	152			81.7	24

Appendix table 13 Viscosity conversion chart

Kinematic viscosity mm^2/s	Saybolt SUS (second)		Redwood R (second)		Engler E (degree)
	100 °F	210 °F	50 °C	100 °C	
2	32.6	32.8	30.8	31.2	1.14
3	36.0	36.3	33.3	33.7	1.22
4	39.1	39.4	35.9	36.5	1.31
5	42.3	42.6	38.5	39.1	1.40
6	45.5	45.8	41.1	41.7	1.48
7	48.7	49.0	43.7	44.3	1.56
8	52.0	52.4	46.3	47.0	1.65
9	55.4	55.8	49.1	50.0	1.75
10	58.8	59.2	52.1	52.9	1.84
11	62.3	62.7	55.1	56.0	1.93
12	65.9	66.4	58.2	59.1	2.02
13	69.6	70.1	61.4	62.3	2.12
14	73.4	73.9	64.7	65.6	2.22
15	77.2	77.7	68.0	69.1	2.32
16	81.1	81.7	71.5	72.6	2.43
17	85.1	85.7	75.0	76.1	2.54
18	89.2	89.8	78.6	79.7	2.64
19	93.3	94.0	82.1	83.6	2.76
20	97.5	98.2	85.8	87.4	2.87
21	102	102	89.5	91.3	2.98
22	106	107	93.3	95.1	3.10
23	110	111	97.1	98.9	3.22
24	115	115	101	103	3.34
25	119	120	105	107	3.46
26	123	124	109	111	3.58
27	128	129	112	115	3.70
28	132	133	116	119	3.82
29	137	138	120	123	3.95
30	141	142	124	127	4.07
31	145	146	128	131	4.20
32	150	150	132	135	4.32
33	154	155	136	139	4.45
34	159	160	140	143	4.57

Kinematic viscosity mm^2/s	Saybolt SUS (second)		Redwood R (second)		Engler E (degree)
	100 °F	210 °F	50 °C	100 °C	
35	163	164	144	147	4.70
36	168	170	148	151	4.83
37	172	173	153	155	4.96
38	177	178	156	159	5.08
39	181	183	160	164	5.21
40	186	187	164	168	5.34
41	190	192	168	172	5.47
42	195	196	172	176	5.59
43	199	201	176	180	5.72
44	204	205	180	185	5.85
45	208	210	184	189	5.98
46	213	215	188	193	6.11
47	218	219	193	197	6.24
48	222	224	197	202	6.37
49	227	228	201	206	6.50
50	231	233	205	210	6.63
55	254	256	225	231	7.24
60	277	279	245	252	7.90
65	300	302	266	273	8.55
70	323	326	286	294	9.21
75	346	349	306	315	9.89
80	371	373	326	336	10.5
85	394	397	347	357	11.2
90	417	420	367	378	11.8
95	440	443	387	399	12.5
100	464	467	408	420	13.2
120	556	560	490	504	15.8
140	649	653	571	588	18.4
160	742	747	653	672	21.1
180	834	840	734	757	23.7
200	927	933	816	841	26.3
250	1,159	1,167	1,020	1,051	32.9
300	1,391	1,400	1,224	1,241	39.5

Remark 1 mm^2/s = 1 cSt (centistokes)

Appendix table 14 Mechanical properties of metal materials (reference)

(1) Modulus of longitudinal elasticity, elastic limit, and ultimate strength

Material	Main components and others	Specific gravity	Modulus of longitudinal elasticity (GPa)	Elastic limit σ_e (MPa)	Ultimate strength (MPa)		
					Tensile K_t	Compression K_c	Shear K_s
Gray cast iron (FC150)		7.1–7.3	69	29	118	590	108
(FC200)		7.1–7.3	98	88	137– 216	740	206
(FC250)		7.1–7.3	103	88	176– 314	880	206
White heart malleable cast iron	Residual carbon: 1.6% or less	7.1–7.3	158	196	314– 392	820	382
Black heart malleable cast iron		7.2–7.6	158	196	274– 392	820	382
Carbon steel	General	7.7–7.8	196–216	176–245	314– 830	–	–
Extra mild steel	C 0.05–0.15%	7.8	196	118	Over 372	Virtually identical to tensile strength, provided buckling can be ignored	0.8 K_t
Mild steel	C 0.15–0.25%	7.8	204	157	372– 392		0.75 K_t
Middle hard steel	C 0.25–0.40%	7.8	206	245–294	490– 590		0.75 K_t
Hard steel	C 0.40–0.50%	7.8	216	343	590– 690		0.7 K_t
Maximum hard steel	C 0.50–0.65%	7.8	216	372	690– 830		0.65 K_t
Mild steel	C 0.18% hot rolling	7.8	206	176	421		314
Hard steel	Oil hardening, tempering at 700 ℃	7.8	206	343	590		461
Tool steel	C 0.60–1.50% hardening	7.8	216	441	660		820
Cast steel	General	7.8–7.9	206–211	176–245	343– 600	343–600	284–382
Cast steel (mild)	C 0.15–0.22%	7.8–7.9	206	196	363– 431	363–431	284
Cast steel (middle hard)	C 0.22–0.30%	7.8–7.9	211	225	392– 490	392–490	333
Cast steel (hard)	C 0.30–0.40%	7.9	211	245	490– 590	490–590	382
Nickel steel	C 0.25–0.35% Ni 2–5%	7.85	206–216	333	640– 830	640	401
Chrome steel	C 0.13–0.48% Cr 0.9–1.2%	7.85	206–216	–	780– 980	–	–
Nickel chrome steel	C, Ni, Cr included	7.85	206–216	–	740– 980	–	382–500
Chromium molybdenum steel	C, Cr, Mo included	7.85	206–216	–	830– 980	–	–
Manganese steel	C 0.2–0.46% Mn 1–1.4%	7.85	206–216	–	440–1,080	–	–
Spring steel		7.86	216	735	1,080–1,670	1,670	–
Stainless steel	C, Cr, Ni included	7.75	206–216	–	620	–	410
Brass casting	Cu 60% Zn 40%	8.5	69	–	176– 216	108	147
Brass (forged plate)	Cu 60% Zn 40%	8.4	78– 98	–	274– 392	314	206
Brass (forged rod)	Cu 60% Zn 40%	8.4	82	–	520	314	314
Phosphor bronze casting	Cu 90% Sn 10% P 0.1%	8.8	93–103	–	196– 294	137	176
Phosphor bronze (forging)	Cu 90% Sn 10% P 0.1%	8.8	132	–	294– 980	206	382
Tin		7.28	39– 54	–	27	–	–
Lead		11.34	15– 17	–	20	–	–
Zinc		7.1	78–127	–	78– 176	–	–

(2) Allowable stress

Unit: MPa

Material	Tensile K_t			Compression K_c		Bending K_b			Shear K_s			Torsion K_d		
	a	b	c	a	b	a	b	c	a	b	c	a	b	c
Cast iron (cast)	29– 34	20– 23	10–12	88– 98	59– 65	45– 59	30– 39	15–20	29– 34	20–23	10–12	26– 34	18–23	88–118
Cast iron (machined)	29– 34	20– 23	10–12	88– 98	59– 65	55– 71	–	–	29– 34	20–23	10–12	26– 34	18–23	88–118
Malleable cast iron	44– 69	29– 46	15–23	59– 88	39– 59	44– 98	29– 46	15–23	–	–	–	29– 39	20–26	10– 13
Cast steel	59–118	39– 78	20–39	88–147	59– 98	74–118	49– 78	25–39	47– 94	31–63	16–31	47– 94	31–63	16– 31
Mild steel	98–157	66–105	32–52	98–157	66–105	88–147	59– 98	35–49	78–127	52–85	26–42	78–137	52–91	26– 46
Middle hard steel	118–176	78–118	39–59	118–176	78–118	118–176	78–118	39–59	94–137	63–94	31–47	88–137	59–94	29– 47
Nickel steel	118–176	78–118	39–59	118–176	78–118	118–176	78–118	39–59	94–137	63–94	31–47	88–137	59–92	29– 47
Carbon steel casting	88–118	59– 78	29–39	88–118	59– 78	88–118	59– 78	29–39	71– 93	47–63	24–31	35– 47	24–31	12– 16
Brass (rolled)	10– 59	26– 35	13–20	39– 59	26– 39	39– 59	26– 39	13–20	34– 47	21–31	11–16	31– 47	21–31	11– 16
Bronze	29– 39	20– 26	10–13	29– 39	20– 26	29– 39	20– 26	10–13	–	–	–	–	–	–
Phosphor bronze	59– 88	39– 59	20–29	59– 88	39– 59	59– 88	39– 59	20–29	44– 69	29–46	15–23	44– 69	29–46	15– 23
Aluminum casting	10– 12	7– 8	2– 4	–	–	15– 20	10– 13	5– 7	–	–	–	–	–	–

Remarks 1. a is applicable in the case of static load, b is applicable in the case of dynamic load, and c is applicable to in the case of repeated load.
2. Bending allowable stress K_b and torsion allowable stress K_d of cast iron are applicable when the cross section is round and safety factor is within a range from 5 to 6.

Appendix table 15 (1) Hexagon socket head cap screws (abstract from JIS B 1176: 1988)

M 1.6 – 24

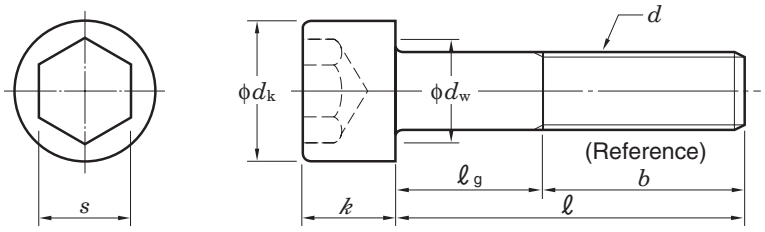

Allowance of bolt length (ℓ)

Unit: mm

Bolt length (ℓ) Over	Bolt length (ℓ) Incl.	Allowance of length
–	3	±0.2
3	6	±0.24
6	10	±0.29
10	16	±0.35
16	30	±0.42
30	50	±0.5
50	80	±0.6
80	120	±0.7
120	180	±0.8
180	240	±0.95
240	300	±1.05

(1) Parts class A M 1.6–24

Unit: mm

Nominal size of screw d / Coarse screw thread pitch	M 1.6	M 2	M 2.5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	(M 14)	M 16	(M 18)	M 20	(M 22)	M 24
	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3
Head dia. d_k	3	3.8	4.5	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36
Head height k	1.6	2	2.5	3	4	5	6	8	10	12	14	16	18	20	22	24
Bearing surface dia. d_w (min.)	2.72	3.4	4.18	5.07	6.53	8.03	9.38	12.33	15.33	17.23	20.17	23.17	25.87	28.87	31.81	34.81
Nominal size of hexagon socket s	1.5	1.5	2	2.5	3	4	5	6	8	10	12	14	14	17	17	19
Thread length b (reference)	15	16	17	18	20	22	24	28	32	36	40	44	48	52	56	60

Nominal length ℓ	M 1.6	M 2	M 2.5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	(M 14)	M 16	(M 18)	M 20	(M 22)	M 24
	Body length ℓ_g (max.)															
2.5																
3																
4																
5																
6																
8																
10																
12																
16																
20		4														
25			8	7												
30				12	10	8										
35					15	13	11									
40					20	18	16	12								
45						23	21	17	13							
50						28	26	22	18	14						
55							31	27	23	19						
60							36	32	28	24	20	16				
65								37	33	29	25	21	17			
70								42	38	34	30	26	22	18		
80								52	48	44	40	36	32	28	24	
90									58	54	50	46	42	38	34	30
100									68	64	60	56	52	48	44	40
110										74	70	66	62	58	54	50
120										84	80	76	72	68	64	60
130											90	86	82	78	74	70
140											100	96	92	88	84	80
150												106	102	98	94	90
160												116	112	108	104	100
180													132	128	124	120
200														148	144	140

Remarks 1. Priority is given to the nominal sizes of screws without parentheses.
2. Nominal lengths (ℓ) to be recommended for the nominal sizes of screw are within the range enclosed by bold lines in the column of "Body length ℓ_g". In the column of "Body length ℓ_g", thread of the screw with length shorter than that indicated under dotted lines should be continuous. For the continuous thread stud screw, the incomplete thread portion length under the neck of the screw should be approximately three times of the thread pitch.
3. The sides of the head of screw should be single or double knurled. The d_k values in the table are the maximum values without knurls.
4. Roundness or chamfers on the bearing surface should be provided between the diameter of the head (d_k) and the diameter of bearing surface (d_w), and the surface should be free from burrs.

Appendix table 15 (2) Hexagon socket head cap screws (abstract from JIS B 1176: 1988)

M 27 – 52

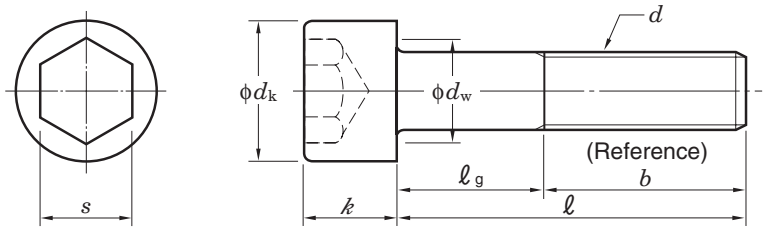

Allowance of bolt length (ℓ)

Unit: mm

Bolt length (ℓ) Over	Bolt length (ℓ) Incl.	Allowance of length
–	3	±0.2
3	6	±0.24
6	10	±0.29
10	16	±0.35
16	30	±0.42
30	50	±0.5
50	80	±0.6
80	120	±0.7
120	180	±0.8
180	240	±0.95
240	300	±1.05

(2) Parts class A M 27–52

Unit: mm

Nominal size of screw d	Coarse screw thread pitch	(M 27)	M 30	(M 33)	M 36	(M 39)	M 42	(M 45)	M 48	(M 52)
		3	3.5	3.5	4	4	4.5	4.5	5	5
Head dia. d_k		40	45	50	54	58	63	68	72	78
Head height k		27	30	33	36	39	42	45	48	52
Bearing surface dia. d_w (min.)		38.61	43.61	48.61	52.54	56.34	61.34	66.34	70.34	76.34
Nominal size of hexagon socket s		19	22	24	27	27	32	32	36	36
Thread length b (reference)		66	72	78	84	90	96	102	108	116

Nominal length ℓ	Body length ℓ_g (max.)								
45	(M 27)	M 30							
50			(M 33)	M 36					
55									
60					(M 39)	M 42			
65									
70							(M 45)	M 48	
80	(M 27)								(M 52)
90	24	M 30	(M 33)						
100	34	28	22						
110	44	38	32	M 36	(M 39)	M 42			
120	54	48	42	36	30	24	(M 45)		
130	64	58	52	46	40	34	28	M 48	
140	74	68	62	56	50	44	38	32	(M 52)
150	84	78	72	66	60	54	48	42	34
160	94	88	82	76	70	64	58	52	44
180	114	108	102	96	90	84	78	72	64
200	134	128	122	116	110	104	98	92	84
220	154	148	142	136	130	124	118	112	104
240	174	168	162	156	150	144	138	132	124
260	194	188	182	176	170	164	158	152	144
280	214	208	202	196	190	184	178	172	164
300	234	228	222	216	210	204	198	192	184

Remarks
1. Priority is given to the nominal sizes of screws without parentheses.
2. Nominal lengths (ℓ) to be recommended for the nominal sizes of screw are within the range enclosed by bold lines in the column of "Body length ℓ_g". In the column of "Body length ℓ_g", thread of the screw with length shorter than that indicated under dotted lines should be continuous. For the continuous thread stud screw, the incomplete thread portion length under the neck of the screw should be approximately three times of the thread pitch.
3. The sides of the head of screw should be single or double knurled. The d_k values in the table are the maximum values without knurls.
4. Roundness or chamfers on the bearing surface should be provided between the diameter of the head (d_k) and the diameter of bearing surface (d_w), and the surface should be free from burrs.

Appendix table 16 (1) Hexagon head bolts (abstract from JIS B 1180: 1994)

Parts class A M 1.6 – 24

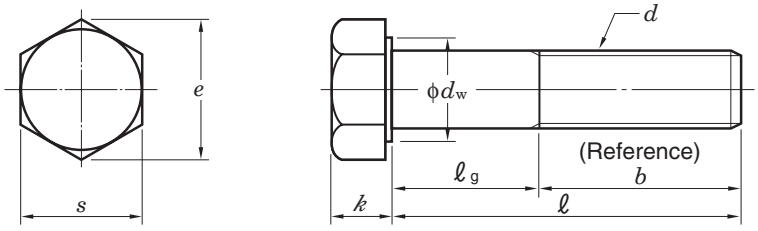

Allowance of bolt length (ℓ)

Unit: mm

Bolt length (ℓ) Over	Incl.	Allowance of length
–	20	±0.35
20	30	±0.42
30	50	±0.5
50	80	±0.6
80	120	±0.7
120	150	±0.8

(1) Parts class A M 1.6–24

Unit: mm

Nominal size of screw d		M 1.6	M 2	M 2.5	M 3	(M 3.5)	M 4	M 5	M 6	M 8	M 10	M 12	(M 14)	M 16	(M 18)	M 20	(M 22)	M 24
	Coarse screw thread pitch	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3
	Fine thread	–	–	–	–	–	–	–	–	M 8 × 1	M 10 × 1	M 12 ×1.5	–	M 16 ×1.5	–	M 20 ×1.5	–	M 24 × 2
		–	–	–	–	–	–	–	–	–	(M 10 ×1.25)	(M 12 ×1.25)	(M 14 ×1.5)	–	(M 18 ×1.5)	(M 20 × 2)	(M 22 ×1.5)	–
Bearing surface dia. d_w (min.)		2.27	3.07	4.07	4.57	5.07	5.88	6.88	8.88	11.63	14.63	16.63	19.64	22.49	25.34	28.19	31.71	33.61
Width across flats s (max.)		3.2	4	5	5.5	6	7	8	10	13	16	18	21	24	27	30	34	36
Width across corners e (min.)		3.41	4.32	5.45	6.01	6.58	7.66	8.79	11.05	14.38	17.77	20.03	23.36	26.75	30.14	33.53	37.72	39.98
Head height k (basic)		1.1	1.4	1.7	2	2.4	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15
Thread length b (reference)	$\ell \leq 125$	9	10	11	12	13	14	16	18	22	26	30	34	38	42	46	50	54
	$125 < \ell \leq 150$	–	–	–	–	–	–	–	–	–	–	–	40	44	48	52	56	60

Nominal length ℓ	M 1.6	M 2	M 2.5	M 3	(M 3.5)	M 4	M 5	M 6	M 8	M 10	M 12	(M 14)	M 16	(M 18)	M 20	(M 22)	M 24
	Body length ℓ_g (max.)																
12	3																
16	7	6	5														
20		10	9	8	7												
25			14	13	12	11	9										
30				18	17	16	14	12									
35					22	21	19	17									
40						26	24	22	18								
45							29	27	23	19							
50							34	32	28	24	20						
55								37	33	29	25						
60								42	38	34	30	26					
65									43	39	35	31	27				
70									48	44	40	36	32	28			
80									58	54	50	46	42	38	34		
90										64	60	56	52	48	44	40	36
100										74	70	66	62	58	54	50	46
110											80	76	72	68	64	60	56
120											90	86	82	78	74	70	66
130												90	86	82	78	74	70
140												100	96	92	88	84	80
150													106	102	98	94	90

As for the bolts with nominal length within this area, standards of continuous thread stud hexagon head bolt (parts class A) should be observed.

Remarks 1. Priority is given to the nominal sizes of screws without parentheses.
2. Nominal lengths (ℓ) to be recommended for the nominal sizes of screw are within the range enclosed by bold lines.
3. Body length ℓ_g (maximum) should be found by the following formula : ℓ_g (maximum) = Nominal length (ℓ) – Thread length (b)

Appendix table 16 (2) Hexagon head bolts (abstract from JIS B 1180: 1994)

Parts class B M 16 – 64

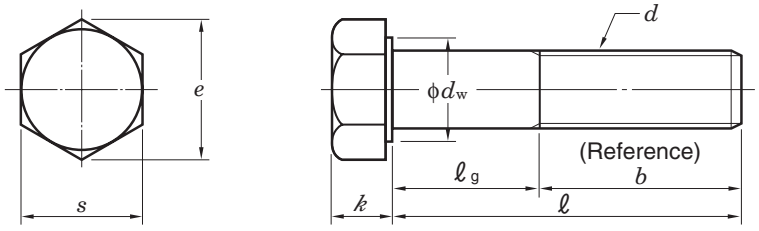

Allowance of bolt length (ℓ)

Unit: mm

Bolt length (ℓ) Over	Bolt length (ℓ) Incl.	Allowance of length
–	80	±1.5
80	90	±1.7
90	120	±1.75
120	180	±2
180	240	±2.3
240	300	±2.6
300	400	±2.85
400	500	±3.15

(2) Parts class B M 16–64

Unit: mm

Nominal size of screw d		M 16	(M 18)	M 20	(M 22)	M 24	(M 27)	M 30	(M 33)	M 36	(M 39)	M 42	(M 45)	M 48	(M 52)	M 56	(M 60)	M 64
	Coarse screw thread pitch	2	2.5	2.5	2.5	3	3	3.5	3.5	4	4	4.5	4.5	5	5	5.5	5.5	6
	Fine thread	M 16 ×1.5	–	M 20 ×1.5	–	M 24 × 2	–	M 30 × 2	–	M 36 × 3	–	M 42 × 3	–	M 48 × 3	–	M 56 × 4	–	M 64 × 4
		–	(M 18 ×1.5)	(M 20 × 2)	(M 22 ×1.5)	–	(M 27 × 2)	–	(M 33 × 2)	–	(M 39 × 3)	–	(M 45 × 3)	–	(M 52 × 4)	–	(M 60 × 4)	–
Bearing surface dia. d_w (min.)		22	24.85	27.7	31.35	33.25	38	42.75	46.55	51.11	55.86	59.95	64.7	69.45	74.2	78.66	83.41	88.16
Width across flats s (max.)		24	27	30	34	36	41	46	50	55	60	65	70	75	80	85	90	95
Width across corners e (min.)		26.17	29.56	32.95	37.29	39.55	45.2	50.85	55.37	60.79	66.44	71.3	76.95	82.6	88.25	93.56	99.21	104.86
Head height k (basic)		10	11.5	12.5	14	15	17	18.7	21	22.5	25	26	28	30	33	35	38	40
Thread length b (reference)	$\ell \leq 125$	38	42	46	50	54	60	66	–	–	–	–	–	–	–	–	–	–
	$125 < \ell \leq 200$	44	48	52	56	60	66	72	78	84	90	96	102	108	116	–	–	–
	$200 < \ell \leq 500$	–	–	–	69	73	79	85	91	97	103	109	115	121	129	137	145	153

Nominal length ℓ	M 16	(M 18)	M 20	(M 22)	M 24	(M 27)	M 30	(M 33)	M 36	(M 39)	M 42	(M 45)	M 48	(M 52)	M 56	(M 60)	M 64
	Body length ℓ_g (max.)																
65																	
70																	
80																	
90																	
100						40											
110						50	44										
120						60	54										
130						64	58	52									
140						74	68	62	56								
150						84	78	72	66	60							
160	116	112	108	104	100	94	88	82	76	70	64						
180		132	128	124	120	114	108	102	96	90	84	78	72				
200			148	144	140	134	128	122	116	110	104	98	92	84			
220				151	147	141	135	129	123	117	111	105	99	91	83		
240					167	161	155	149	143	137	131	125	119	111	103	95	
260						181	175	169	163	157	151	145	139	131	123	115	107
280							195	189	183	177	171	165	159	151	143	135	127
300							215	209	203	197	191	185	179	171	163	155	147
320								229	223	217	211	205	199	191	183	175	167
340									243	237	231	225	219	211	203	195	187
360									263	257	251	245	239	231	223	215	207
380										277	271	265	259	251	243	235	227
400											291	285	279	271	263	255	247
420											311	305	299	291	283	275	267
440												325	319	311	303	295	287
460													339	331	323	315	307
480													359	351	343	335	327
500														371	363	355	347

As for the bolts with nominal length within this area, standards of (1) parts class A should be observed.

As for the bolts with nominal length within this area, standards of continuous thread stud hexagon head bolt (parts class A or B) should be observed.

Remarks 1. Priority is given to the nominal sizes of screws without parentheses.
2. Nominal lengths (ℓ) to be recommended for the nominal sizes of screw are within the range enclosed by bold lines.
3. Body length ℓ_g (maximum) should be found by the following formula : ℓ_g (maximum) = Nominal length (ℓ) – Thread length (b)

Appendix table 17 Hexagon head nuts (abstract from JIS B 1181: 1993)

Parts class A M 1.6 – 16
Parts class B M 18 – 64

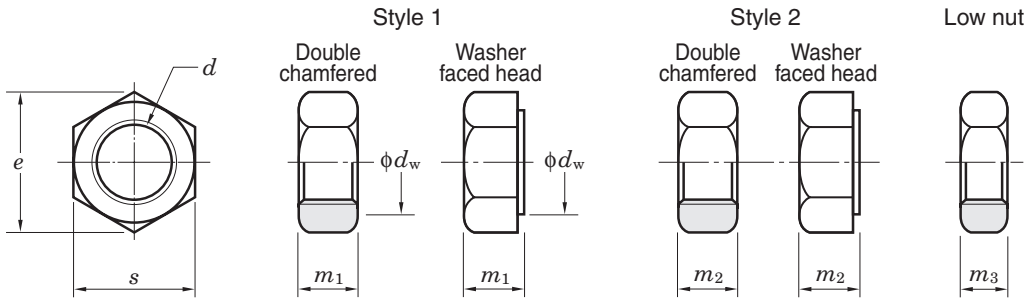

(1) Parts class A M 1.6–16

Unit: mm

Nominal size of screw d	Coarse screw thread pitch	M 1.6	M 2	M 2.5	M 3	(M 3.5)	M 4	M 5	M 6	M 8	M 10	M 12	(M 14)	M 16
		0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75	2	2
	Fine thread	–	–	–	–	–	–	–	–	M 8 × 1	M 10 × 1	M 12 × 1.5	–	M 16 × 1.5
		–	–	–	–	–	–	–	–	–	(M 10 × 1.25)	(M 12 × 1.25)	(M 14 × 1.5)	–
Bearing surface dia. d_w (min.)		2.27	3.07	4.07	4.57	5.07	5.88	6.88	8.88	11.63	14.63	16.63	19.64	22.49
Width across flats s (max.)		3.2	4	5	5.5	6	7	8	10	13	16	18	21	24
Width across corners e (min.)		3.41	4.32	5.45	6.01	6.58	7.66	8.79	11.05	14.38	17.77	20.03	23.36	26.75
Height	m_1 (max.)	1.3	1.6	2	2.4	2.8	3.2	4.7	5.2	6.8	8.4	10.8	12.8	14.8
	m_2 (max.)	–	–	–	–	–	–	5.1	5.7	7.5	9.3	12	14.1	16.4
	m_3 (max.)	1	1.2	1.6	1.8	2	2.2	2.7	3.2	4	5	6	7	8

Remark Priority is given to the nominal sizes of screws without parentheses.

(2) Parts class B M 18–64

Unit: mm

Nominal size of screw d	Coarse screw thread pitch	(M 18)	M 20	(M 22)	M 24	(M 27)	M 30	(M 33)	M 36	(M 39)	M 42	(M 45)	M 48	(M 52)	M 56	(M 60)	M 64
		2.5	2.5	2.5	3	3	3.5	3.5	4	4	4.5	4.5	5	5	5.5	5.5	6
	Fine thread	–	M 20 ×1.5	–	M 24 × 2	–	M 30 × 2	–	M 36 × 3	–	M 42 × 3	–	M 48 × 3	–	M 56 × 4	–	M 64 × 4
		(M 18 ×1.5)	(M 20 × 2)	(M 22 ×1.5)	–	(M 27 × 2)	–	(M 33 × 2)	–	(M 39 × 3)	–	(M 45 × 3)	–	(M 52 × 4)	–	(M 60 × 4)	–
Bearing surface dia. d_w (min.)		24.85	27.7	31.35	33.25	38	42.75	46.55	51.11	55.86	59.95	64.7	69.45	74.2	78.66	83.41	88.16
Width across flats s (max.)		27	30	34	36	41	46	50	55	60	65	70	75	80	85	90	95
Width across corners e (min.)		29.56	32.95	37.29	39.55	45.2	50.85	55.37	60.79	66.44	71.3	76.95	82.6	88.25	93.56	99.21	104.86
Height	m_1 (max.)	15.8	18	19.4	21.5	23.8	25.6	28.7	31	33.4	34	36	38	42	45	48	51
	m_2 (max.)	17.6	20.3	21.8	23.9	26.7	28.6	32.5	34.7	–	–	–	–	–	–	–	–
	m_3 (max.)	9	10	11	12	13.5	15	16.5	18	19.5	21	22.5	24	26	28	30	32

Remark Priority is given to the nominal sizes of screws without parentheses.

Appendix table 18 Comparison table of Part No. by manufacturers (cylindrical bore type)

18.1 Pillow type bearing units

	FYH · JTEKT	ASAHI	NTN
With pressed steel cover	UCP2··C UCP2··CD	UCP2··C UCP2··E	S-UCP2··D1 SM-UCP2··D1
With cast iron cover	UCP2··FC UCP2··FCD UCP3··C UCP3··CD	CUCP2··C CUCP2··CE CUCP3··C CUCP3··CE	C-UCP2··D1 CM-UCP2··D1 C-UCP3··D1 CM-UCP3··D1
Cast steel type	UCP2SC UCP3SC	UCPK2·· UCPK3··	
Thick type	UCIP2·· UCIP3··	UCIP2·· UCIP3··	UCIP2·· UCIP3··
Tapped-base type	UCPA2··	UCPA2··	UCUP2··D1
High centerheight type	UCPH2··	UCPH2··	UCHP2··D1
Lightweight type	BLP2·· ALP2··	BLLP··	ASPB2·· AELPB2··
Lightweight (die-cast) type	UP0··	UP0··	
Corrosion resistant type	UCSP2··H1S6 UCSPA2··H1S6 USP0··S6	MUCP2·· MUCPA2	
Steel plate type	SBPP2·· SAPP2··	BPP··	ASPP2·· AELPP2··

18.2 Flange type bearing units

	FYH · JTEKT	ASAHI	NTN
With pressed steel cover	UCF2··C UCF2··D UCFC2··C	UCF2··C UCF2··E UCFC2··C	S-UCF2··D1 SM-UCF2··D1 S-UCFC2··D1
	UCFC2··D UCFL2··C UCFL2··D	UCFC2··E UCFL2··C UCFL2··E	SM-UCFC2··D1 S-UCFL2··D1 SM-UCFL2··D1
With cast iron cover	UCF2··FC UCF2··FD UCF3··C	CUCF2··C CUCF2··CE CUCF3··C	C-UCF2··D1 CM-UCF2··D1 C-UCF3··D1
	UCF3··D UCFC2··FC UCFC2··FD	CUCF3··CE CUCFC2··C CUCFC2··CE	CM-UCF3··D1 C-UCFC2··D1 CM-UCFC2··D1
	UCFS3··C UCFS3··D UCFL2··FC	CUCFS3··C CUCFS3··CE CUCFL2··C	C-UCFS3··D1 CM-UCFS3··D1 C-UCFL2··D1
	UCFL2··FD UCFL3··C UCFL3··D	CUCFL2··CE CUCFL3··C CUCFL3··CE	CM-UCFL2··D1 C-UCFL3··D1 CM-UCFL3··D1
Adjustable type	UCFA2·· UCFB2··	UCFA2·· UCFK2··	UCFA2··D1 UCFH2··D1
Lightweight type	BLF2·· ALF2··	BLFL··	ASFB2·· AELFB2··
Lightweight (die-cast) type	UFL0··	UFL0··	
Corrosion resistant type	UCSF2··H1S6 UCSFL2··H1S6	MUCF2 MUCFL2··	
Stamped steel plate type	SBPF2·· SAPF2·· SBPFL2·· SAPFL2··	BPF·· BPFL··	ASPF2·· AELPF2·· ASPFL2·· AELPFL2··

18.3 Take-up type bearing units

	FYH · JTEKT	ASAHI	NTN
With pressed steel cover	UCT2··C UCT2··CD	UCT2··C UCT2··E	S-UCT2··D1 SM-UCT2··D1
With cast iron cover	UCT2··FC UCT2··FCD UCT3··C UCT3··CD	CUCT2··C CUCT2··CE CUCT3··C CUCT3··CE	C-UCT2··D1 CM-UCT2··D1 C-UCT3··D1 CM-UCT3··D1
Corrosion resistant type	UCST2··H1S6	MUCT2	
Take-up type with frame	UCTH2···· UCTL2···· UCTU2···· UCTU3····	UCT2···WB UCTL2··+WL·· UCTU2··+WU·· UCTU3··+WU··	UCT2···D1 UCL2··D1 UCM2··D1 UCM3··D1
Take-up type with steel plate frame	SBPTH2···· SBNPTH2····	 BTAW201,X	 ASPT2····

18.4 Other bearing units

	FYH · JTEKT	ASAHI	NTN
Hanger type	UCHA2··	UCECH2··	UCHB2··D1

18.5 Bearing

	FYH · JTEKT	ASAHI	NTN
Ball bearing inserts	UC2·· UK2·· NA2·· SB2·· SA2··	UC2·· UK2·· UG2··+ER B·· 	UC2··D1 UK2··D1 UEL2··D1 AS2·· AEL2··
Cylindrical O. D.	RB2·· ER2··	UR2·· *1 SER2·· *1	 UCS2··LN *1

*1 Width of the outer ring for these items differs from that of others.

18.6 Special specification items

	FYH · JTEKT	ASAHI	NTN
Grease (heat resistant)	D1K2	HR5	HT2
(cold resistant)	D2K2	CR2A	CT1
(heat resistant)	D9K2	HR23	
Non-contact	K3		U
Ductile cast iron	H4		N1
Lubricated type			D1
Non-lubricated type	E4	GOO	

NIPPON PILLOW BLOCK CO., LTD.

HEAD OFFICE/Main Plant

2306 Hirao Miharaku Sakai Osaka 587-0022 JAPAN
TEL: 072-361-3750 FAX: 072-361-4173 E-mail: info@fyhbearings.com

OVERSEAS DIVISION

E-mail: exports@fyh.co.jp

FYH BEARING UNITS USA INC.

FYH BEARING UNITS USA INC.

285 Industrial Drive Wauconda, Illinois 60084, USA
TEL: 847-487-9111 FAX: 847-487-9222 E-mail: sales@fyhusa.com

DOMESTIC BRANCHES IN JAPAN

Tokyo	1-3-49 Katsushima Shinagawaku Tokyo 140-0012 JAPAN TEL: 03-5767-7270 FAX: 03-5767-7280 E-mail: tokyo@fyhsales.co.jp
Nagoya	2-1-2 Niban Atsutaku Nagoya Aichi 456-0052 JAPAN TEL: 052-652-1211 FAX: 052-652-0744 E-mail: nagoya@fyhsales.co.jp
Sapporo	E-mail: sapporo@fyhsales.co.jp
Fukuoka	E-mail: kyusyuu@fyhsales.co.jp
Hiroshima	E-mail: fukuyama@fyhsales.co.jp

FYH®

NIPPON PILLOW BLOCK CO.,LTD.

CAT.No.3310
2010.07.20000DS