

WWW.PRETOOLING.COM.AU







Α

	A	
	Aluminium Cutting Lubricants	133
	Abrasive Backing Pads	131-132
NEW	Abrasive Cutting Discs Curve cut	138
	Abrasive restorers	133
	Adjustable Reamers	104
	AirMovers	137
	Aluminium Lubricants	133
	Angle Plates	
	Angle Grinder Pin Spanners	130
	Arbors, Drill Sleeves & Sockets	
	Arm and Wrist wrests	64-65

в

Backing Pads	131-132
Bearing Packer	22
Bevel sliding T handle	
Bore Gauges Telescopic	112
Boring Bars Double Ended	

С

	0	
	C-Jaw Locking Pliers	
	Calipers and Dividers	106-107
	Calipers Dial	111
	Calipers Digital	109-110
	Calipers Vernier	110-111
	Carbide Tipped Turning Tools	
	Cargo Bars [Multi-Prop]	
	Carpentry	
	Cast Iron V Blocks	
	Centering Squares	
	Chalk Engineers	
NEW	Chalk-Lines Tajima	
	Chuck Drive Adaptors	
	Chuck Keys	
	Chucks Drill	
	Chamfering Tools - NOGA	
	Circlip pliers	
	Clamps-F 4 in1 Welders	
	Clamps Piher Maxipress Piston	
	Clamps-F Ratchet Action	
	Clamps 2 and 3 axis	
	Clamps ToolMakers	
	Combination Drill & Taps	
	Combination Square/Set	
NEW	Combination Set Digital	
_	Compound Polishing	
	Cooling System NOGA	
	Corner Pliers	
	Cutting Discs Curve Cut	
	Cutting Drilling Tapping Fluid	
NEW		

D

D	
Dead Centre	123
Deburring Tools NOGA	72-75
Depth Gauges	106-107, 115
Depth Micrometres	114
Dial Calipers	111
Dial Gauges	70
Dial Gauge Holders NOGA	70-71
Dial Indicators	116
Dial Thickness Gauges	
Diamond Holesaws	20
Diamond Needle file sets MAXIGEAR	
Diamond Wheel Dressers	126
Die Stock Handles	129
Disc Brake Micrometres	
Discs Abrasive & Convertor	
Dividers	
Drifts Ejecting	
Drill Chuck Arbors	
Drill Chucks ALBRECHT	
Drill Chucks LLAMBRICH	
Drill Chucks MAXIGEAR	
Drill Chuck Accessories	38
Drill Chuck Keys	
Drill Gauge	
Drill Press Vice	
Drill & Tap Countersink	96

Е

	—	
	Earth / Grounding clamps	62
NEW	Ear Muffs TTL	154
	Edge and Centre Finder	123
	Engineers Squares	108
	Engineers Chalk	20
	Engineers Scribers	118
	Expand-O Pliers	61
	Extension Spindles	134
	Extension Sockets	46
	EZ Thread Threading Tools	136
	5	

F

F-Clamps	50-51
Feeler Gauge Strips	
Files Thread	
Flanges Angle Grinder	
Flaring Tools	21
Flexible Sockets	
Fly Cutter Holders	
Frame Levels	

G

Gas Cylinder carts - StrongHand	66
Gas Grabber - Hook	
Gauge Blocks	111
Gear Tooth Vernier Calipers	111
Grasshopper - StrongHand Welding Finger	59

н

Half Clamps Welders	65
Hand Reamer Adjustable	104
Height Gauges	115
Hex & Ball keys & In-hex Sockets	18
Hold Down Clamp	65
Holding System NOGA	
Holesaws & Core Drills	
Hook and Pick sets	30

I, J, K

In-line lubricators	
Inside Calipers	
Jenny Calipers	
Knifes Utility	
Knurling Tools & Wheels	

L

Lathe Live & Dead Centres	122-123
Lathe Tools	119-121,128
LED Work Lights	31-32
Letter Stamps	102-103
Levels Torpedo Frame & Machine	61, 111
Line tube wrenches	18
Locking pliers	56-61
Loc-Line Measurement	80-81
Loc-Line Modular Hose System	83-93
Loupe eye glass	
Lubricators In-Line	137

М

Machine Levels	
MagLevel	63
Magnetic Angle Clamps	52-53
Magnetic Dial Gauge Holders	
Magnetic Pickup tools	26
Magnetic Sockets	
Magnetic Socket Rails	19
Magnetic Tool rail	29
Magnetic Holder MINI	115
Magnetc Base HYDRAULIC	115
Magnets Earth Grounding	62
MagnetsPot	
Magnets Welders STRONGHAND	54-55
MagspringClamps	51
Magtab Magnets	
Marking Gauge Round	117
Markers - Industrial MARKAL	
Measuring Tapes Adhesive back	
Measuring Wedges	
Micrometers Inside	



Micrometers Outside	112-113
Micrometers Outside - Digital	
Micrometers Three Point	
Mig-Tig rests	64
Milling Vice	
Mirrors	

Ν

Needle File Sets	
Number Stamps	
NOGA Products	
NOGA blades	

0

Oil Filter Strap Wrench	22
Outside Calipers	107

Ρ

	•	
	Panel Clamps	60
	Paint Marker Pens	4-5
	Parting Off Tool Holders & Blades	119
	Pens Markers	4-11
	Piher Products	
	Pin Chucks	
	Pipe Alignment Clamp	53
	Pipe Live Centre	
	Pipe Fit Up Clamp	53
	Pipe Pliers	59
	Pin Chucks & Vices	
	Pin Gauge Sets	112
	Pin Spanners	
	Planer Blades	
NEW	Plaster / Drywall Tools	144-146
	Pliers & Clamps Grounding	62
	Pliers Corner - Angle Clamping Tools	60
	Pliers Circlip or Snap Ring	23-24
	Pliers Locking Chain	56
	Pliers Long Reach / Twin Fulcrum	19
	Pliers Strong Grip	56-57
	Polishing Mops	
	Polishing Compounds	133
	Pot Magnets	117
	Protractors	
	Pry Bars Multi-Angle	17

Q

Q.Max Punches	12
R	

Radius Gauge	
Ratcheting Wrenches	
Ratchet F Clamps StrongHand	
Ready Rest - MIG & TIG Gun Rest	
Reamers	104
Riveters TTL	155

NEW

	S	
	Screw Cutting Gauge	
	Screw Extractor Kit	22
	Screw driver Insert Bits	
	Screw Pitch Gauge	
	Screw Starters	29
	Scribers Engineers	
	Sheet Metal pliers	57
	Sheet Metal Punches	12
	SilverSteel	96
NEW	SmartStraps	147-152
	Socket Rails	19
	Sockets Flexible	19
	Sockets Magnetic	21
	Spark Plug Gauge	
	Squares Engineers	
	Stamps Number & Letter	
	Straight Edges	
	StrongHand Products	50-68
	Strong Grip Pliers	

т	
NEW Tajima Tools	139-146
Tap Magic Cutting Fluids	101
Tap and Die Wrenches	129
Tape Adhesive Backed	117, 146
Tapered Spindles	134
Taper Gauge	107
Telescopic Gauges	116
Tig / Mig Holder	64
Turning Tool Holders	120
Temperature Indicators - Tempil	
Texas Pneumatic Tools	
Third Hand Modular Clamp	51
Thread Restorer Kits & Files	25, 136
Thread Plug Gauge	111
Toolmakers Parallel Clamps	
Tool Steel	
ToolGripper Wrench Racks	22
Torpedo Mag-Level	61
Torque Control Screwdrivers	97
Trammels	117
NEW TTL Tools	154-160
Tungsten grit Holesaws	20
Turning Tools Carbide Tipped	
Turning Tool Holders	120
Tweezer Set	138

U

Ullman Hook & Picks & Scribers	30
Ullman Mirrors & Magnetic Pick Ups Ullman Lighting	.26-31
Universal Bevel Protractor	105

v

V Pads & Accessories	67
Vee Blocks	
Vee Blocks NOGA	69
Velcro Restorers	
Venturi Air Movers	
Vernier Calipers	
Vices Drill Press	
Vices Machine & Milling	
Vice Dual/Single STRONGHAND	68
Versa-Drive Adapters	

w

Wad Punches	
Wad Punch Set Interchangeable	
Wedges Measuring	
Welders Angle Clamps	
Welders pencils	
Welding Tables	64
Wheel Dressers	
Wiggler Centre Finder	
WIHA Products	
Wing Compass	
Work Lights	
Wrench Racks	

RETURNED GOODS MAY BE SUBJECT TO RE-STOCKING FEES AND MUST BE IN ORIGINAL PACKAGING AND QUOTING RETURN AUTHORIZATION NUMBER

GOODS RETURNED WITHOUT PRIOR AUTHORIZATION WILL NOT BE ACCEPTED





MARKING TOOLS AND TEMPERATURE INDICATORS

ABOUT: LA-CO Industries, Inc. is a family owned global manufacturing company specializing in the manufacturing of industrial hand-held markers and temperature indicators. Since 1934, LA-CO have taken pride in the design and manufacturing of high quality, performance-based products for our customers' unique applications.

Like any other tool, markers and temperature indication products are specialized to help professionals do the jobs they need to do. As the industry's leader in these categories, LA-CO continuously invest in research and development to meet the requirements of a constantly changing and advancing marketplace. Through careful product evaluation and analysis, our chemists create proprietary formulas, which are designed to meet the needs of our customers.

MARKAL

Markal[®] is the global leader in high-performance, hand-held industrial marking products. LA-CO's North American and European manufacturing locations, supporting the hardworking contractors that build the world's great bridges, ships, automobiles, homes, office towers, power plants, railways and many other engineering marvels with Markal products.

PRO-LINE HIGH PERFORMANCE MARKERS

PRO-LINE® HP is a liquid paint marker developed for superior marking performance on oily and greasy surfaces. The high performance paint penetrates through oils and greases to dry quickly and leave a bold, permanent mark that is wear, weather and fade-resistant.

PRO-LINE HP



- High performance paint penetrates through oils and greases to dry quickly and leave a bold, permanent mark
- Unique paint formula resists spreading and dries quickly through oily surfaces to leave precise, permanent marks

Marl	king	range:	-46°C	to	66	(

Colour	Part No
White	MK96960
Yellow	MK96961
Red	MK96962
Black	MK96963
Orange	MK96964
Blue	MK96965
Green	MK96966
Pink	MK96973
Replacement	MK96908
Nibs	

PRO LINE FINE & PRO LINE MICRO



- FINE TIP FOR PRECISION MARKING
- Liquid paint marker for fine line marking
- High-strength, lightweight barrel designed for industrialgrade use
- Small tip sizes provide highly-visible, sharp lines for greater mark identification.
- Marking range: -18°C to 66°C

Colour	Туре	Part No
White	Fine	MK96871
Yellow	Fine	MK96872
Black	Fine	MK96873
White	Micro	MK96888
Yellow	Micro	MK96889
Black	Micro	MK96890







HIGH QUALITY INDUSTRIAL MARKPAINT MARKERS

MARKPAINT

Markpaint is a high quality permanent paint marker. Paint offers an opaque and glossy mark on most light or dark surfaces. Perfect for indoor and outdoor use, the paint is weatherproof. Marks do not fade, for long-lasting results. This market does not contain xylene or toluene protecting users health.

Low odor			
- Made in Germa	nv	<u>Colour</u>	Part No
- Made In Germany	i iy	White	MK97520
- Smudge-proof		Yellow	MK97521
- Waterproof		Red	MK97522
- Marking Temp r	ange -16Cº TO	Black	MK97523
50Cº		Blue	MK97524
		Green	MK97525
- Light and durable barrel w/ acrylic bullet nib 2-4mm	Orange	MK97526	
	Pink	MK97527	
		Purple	MK97528



PACK OF 3 MARKERS ON HANG CARDS

3 X YELLOW 3 X WHITE 3 X BLACK



Industry Uses:

- Automotive & Other transportations
- Automotive Assembly
- Industrial Manufacturing
- Metal Fabrication
- Construction
- Welding
- Textile Industry
- Rail Industry
- Shipping Supply
- Military

Surface Uses:

- Steel, Iron, Non-ferrous Metals
- Aluminum
- Rubber/ Tyres
- Glass
- Plastic
- Cardboard
- Ceramic
- Cloth & Fabric (Textiles)
- Pipes, Tubes, & Plates
- Tiles, Concrete & Stone





PRO LINE WP



PRO MAX



PRO WASH D



STYLMARK TUBE MARKER

Markal® Stylmark® is a metal-ball tip marker for marking most surfaces. The aluminum squeeze tube and thick paint makes it suitable for rough, vertical and overhead surfaces with excellent adhesion on oily and wet surfaces. Xylene-free paint reduces user health risks.



- **METAL-BALL TIP PAINT MARKER FOR**
 - **MULTIPLE SURFACES**
- Aluminum squeeze tube and thick paint makes it suitable for rough, vertical and overhead surfaces with excellent adhesion on oily and wet surfaces.
- Marking range -20°C to 70°C

Colour	Part No
White	MK96652
Yellow	MK96653
Black	MK96655



SECURITY CHECK PAINT MARKER

Security Check Paint Marker is perfect for indicating tampering or loosening of bolts or parts, Markal Security Check paint provides an easyto-read visual indication. The non-drip formula easily applies across bolt threads and cracks when loosened.

- Paint marks crack for visual indication of loosening or
- tampering of bolts and parts
 - Each tube packed with extended plastic tip
 - Dry to touch: 15 minutes
- Full Cure: 4 days
- Larger volume tube holds 70% more paint than leading competitor
- Marking range: -4°F to 158°F, (20°C to 70°C)
- Mark temperature resistance: 392°F. (200°C)



Colour Orange

WET SURFACE MARKING

- Specially formulated paint resists running or spreading on wet or damp surfaces to leave permanent, highly-visible marks
- Marking range: -46°C to 66°C

Colour	Part No
Yellow	MK96931
Black	MK96933



THOLINA AND THE STATE

Mark Size up to 14mm

Mark Size 3mm

- **EXTRA LARGE MARKING** Extra large tip ideal for signage or safety marking where
- immediate identification is required
- Valve-actuated tip releases paint on-demand for smooth, continuous use
- Marking range: -18°C to 66°C

Colour	Part No
Yellow	MK90900
Black	MK90903

- **REMOVABLE LIQUID PAINT MARKER**
- Fast drying paint easily removes leaving surfaces free of mark ghosting or paint residue.
- Pro-Wash D marks can be removed with detergent solutions that a have pH level of 10 or above.
- Marking range:-18°C to 66°C

Colour	Part No
Yellow	MK97011
Black	MK97013

Part No

MK96674

Quik Stik® is a smooth-marking solid paint crayon that dries quickly to leave a bold, permanent mark on most surfaces. The durable plastic twist-up holder prevents breakage. Keep hands, clothing, and toolboxes clean with the industry's largest twist-up solid paint marker.

QUIK STIK TWIST UP



- FAST-DRYING SOLID PAINT IN TWIST-UP HOLDER
- Marks dry in 5 to 7 minutes
- Contains 20% more paint than other brands
- Marks on virtually any surface: wet, smooth, rough, or hot
- Airtight, self-storing cap keeps the marker clean and fresh between uses
- Weather- and UV-resistant paint for long-lasting mark
- Marking range: -18°C to 200°C

Colour	Part No
Red	MK61049
Black	MK61050
White	MK61051
Blue	MK61070

AVAILABLE IN HI-VISIBILITY YELLOW Colour Part No

Fluoro	Yellow	MK61041

MINI MARKER FOR FINE LINE MARKING

- Ideal for finer line marking on smooth or rough surfaces.
- Fast-drying, vibrant paint marks dry in 5 to 7 minutes
- Marks on virtually any surface: wet, smooth, rough, or hot
- Weather- and UV-resistant paint for long-lasting mark
- Marking range: -18°C to 200°C

Colour	Part No
White	MK61126
Yellow	MK61127
Red	MK61128
Black	MK61129



PAINTSTIK

As Markal's most versatile and economic marker, the original B® Paintstik® solid paint marker combines the durability of paint in the convenience of a crayon. The real paint formula has superior marking performance on oily, icy, wet, dry or cold surfaces and is weather and UV-resistant. This Paintstik® works on rough, rusty, smooth, or dirty surfaces.

PAINTSTIK B



MULTI-PURPOSE PERMANENT SOLID PAINT CRAYON

- Real paint for long-lasting, highly visible marks
- Solid paint marker eliminates replacement tips, sharpening or priming, increasing productivity
- Weather- and UV-resistant for long-lasting
- marks Marking range: -46°C to 66°C
- Colour Part No MK80220 White Yellow MK80221 Red MK80222 MK80223 Black Blue MK80225



Markal Lumber Crayon #500 is a harder, claybased crayon for longer marking life and is suitable for marking in hot climates. The bold, bright marks are weather and UV-resistant.

NEW

Part No MK80321





www.pretooling.com.au

7

QUIK STIK MINI



PAINTSTIK CONT.

As Markal's most versatile and economic marker, the original B® Paintstik® solid paint marker combines the durability of paint in the convenience of a crayon. The real paint formula has superior marking performance on oily, icy, wet, dry or cold surfaces and is weather and UV-resistant. This Paintstik® works on rough, rusty, smooth, or dirty surfaces.

PAINTSTIK B-L BLEED THRU



Designed to bleed through solvent- or oil-based primers or painted surfaces, the B-L Paintstik is ideal for structural steel parts or layout work where marks are required to show through a covering coat of paint or primer.

Colour Part No MK80725 Blue



Box Quantity 144 Mark Size 9.5mm

Mark Size 17mm

PAINTSTIK H - HOT SURFACE MARKER



- THE INDUSTRY ORIGINAL Writes on hot castings, forgings, coils, billets, plates and other hot metal surfaces
- Lasts up to 3X longer than the writing life of hot chalk
- Fast-drying marks are permanent and will not run, char, flow, discolor, peel or crack
- Forgings and parts can be immediately dipped into cold water baths without damaging the marks

Marking range	e: 107°C to 593°C	
Colour	Part No	
Yellow	MK81021	
Black	MK81023	
EXTRA LONG METAL HOLDER TO SUIT		
Length	Part No	
28mm	MK85700	

PAINTSTIK N - WHITE MARKER

- MARKS WILL NOT SHOW THROUGH TOP COAT OF PAINT OR PRIMER
- Ideal for ship building or other metal fabrication
- Solid paint formula designed for marking on wet, dry, oily, rusty, icy, smooth, or rough surfaces
 - Marking range: -18°C to 66°C

Colour	Part No
White	MK82120

PAINTSTIK WS - 3/8 WATER SOLUBLE

- **REMOVABLE SOLID PAINT CRAYON**
 - The fine line marks are easily wiped away with water and will not ghost.
 - Ideal for temporary marking on non-porous surfaces
 - Marking range: -18°C to 66°C

Colour	Part No
Yellow	MK82421



PAINTSTIK P - GALVANISER'S MARKER

- SUPERIOR MARKING ON ROUGH, **RUSTY, OILY, OR SMOOTH SURFACES**
- Designed for use in pickling baths or galvanizing operations.
- Marks remove in pickling baths to allow excellent adhesion
- for zinc coating compared to liquid paint markers Solid paint crayon makes wide, bold marks for instant identification

Colour White

Part No MK83420

Mark Size 17mm



www.pretooling.com.au

DURA INK - PERMANENT INK MARKERS

DURA-INK 5



DURA-INK 20



DURA-INK 55



DURA-INK 200



DURA-INK WASH AWAY



PERMANENT MARKER WITH EXTENDED MICRO TIP

- For precision marking needs and is ideal to use through drill holes, mounting brackets, or in any hard to reach areas.
- Industrial-strength ink is smear- and water-resistant for longer lasting marks

Colour	Part No
Black	MK96520

RETRACTABLE MARKER WITH FINE BULLET TIP

- Marker features a one-handed, push-button for easy opening and closing.
- Fast-drying ink formula completely washes off all nonporous surfaces
- High-visibility marks are water and detergent removable without ghosting or residue

Colour	Part No
Black	MK96575
Red	MK96576

MEDIUM CHISEL TIP

- Permanent ink marker with medium chisel tip to produce both fine and broad permanent marks.
- Industrial-strength ink is smear- and water-resistant for longer lasting marks

Colour	Part No:
Red	MK96528
Black	MK96529
Blue	MK96530
Green	MK96531

LARGE BROAD CHISEL TIP

- Can produce both extra-large or medium-sized marks
- Industrial grade tip will not spread or mush
- Jumbo ink supply for greater marking mileage

Colour	Part No:
Red	MK96916
Black	MK96917



65

9.5mm / 16mm

Mark Size 1mm

Mark Size 3mm

Mark Size

TEMPORARY INK MARKER

Colour

Blue

- Quickly and completely washes off non-porous surfaces with water or cleaning solutions without leaving a residue or ghosting on the surface.
- Engineered specially for temporary marking applications, the highly-visible ink formula dries quickly to avoid smudging or lost marks and is ideal for use on most metals and glass.

Mark Si 3mm / 8



Part No:

MK96302

TRADES MARKER - GREASE HOLDER WITH 5 REFILLS



- Trades Marker has the marking versatility of a paperwrapped grease pencil combined with simple push-button advance that helps reduce cost and waste.
- This refillable, all-surface marker leaves a wear-resistant mark and is safe for all surfaces.
- Suitable for Smooth, rough, rusty, or dirty surfaces
- Holder maximizes complete use of marker
- Marks are rub- and weather-resistant, leaving a bold, permanent mark
- Contains 5 coloured refills:
- Orange White Red Yellow Black

12 PCE REFILL PACK

Colour	Part No
Orange	MK96247
White	MK96240
Red	MK96242
Yellow	MK96241
Black	MK96243







TRADES MARKER - WATER SOLUBLE 12 PCE - YELLOW



MARKAL PRO HOLDER



- Trades Marker WS is a refillable, all-surface marker that leaves a removable mark and is safe for all surfaces.
- Marks can be wiped away easily with water. Ideal for quality control and temporary marking needs
- Suitable for Smooth, rough, rusty, or dirty surfaces Holder maximizes complete use of marker

Holder maxim	izes complete use
TRADES MAR	KER KIT
Colour	Part No
Yellow	MK961910
12 PCE REFIL	L PACK
Colour	Part No
Yellow	MK96181

- Markal Pro Holder uses a long needle-nose tip to mark in hard-to-reach spots.
- The all-metal and refillable construction, built-in sharpener, and one-click advance provide years of reliability and ease-of-use.

6 PCE REFILL PACK

Colour Part No Silver Streak Pro MK96271 Red Riter Pro MK96272 Graphite, Red & MK96276 Yellow



PRO HOLDER PART NO: MK96270



SILVER-STREAK METAL MARKER



- Highly visible marks illuminate when cutting or welding
- Superior to soapstone in markability and durability; will not rub, burn or blow off surface
- Marks on oily, wet or rusty metals, and will not scratch or abrade surfaces
- Durable, mechanical holder prevents stick breakage and features a convenient, built-in sharpener and pocket clip for easy storage.
- MARKER WITH 1 LEAD SILVER REFILL MK96006
- MARKER WITH 6 LEAD SILVER REFILLS MK96107
- SILVER STREAK REFILL PACK OF 6 MK96007



www.pretooling.com.au

WELDERS PENCIL - SILVER STREAK & RED RITER

Welders pencils for metal layout and fabrication



RED TO SUIT ALUMINUM OR OTHER BRIGHT METALS, SILVER SUITS DARKER SURFACES

- Reflective lead illuminates when cutting or welding for improved visibility
- The soapstone alternative: marks resists torch flames; will not rub, burn or blow off
- Durable marks will not scratch or abrade metal surfaces

Box of 12	Part No
Red Riter	MK96100
Silver Streak	MK96101
Pack of 3	Part No.
2 x Silver 1 x Red	MK22219
3 x Silver	MK22220



3 PCE HANG PACKS

BOX QUANTITY 12

VALVE ACTION PAINT MARKER

The UV-visible Valve Action makes an invisible paint mark that glows bright blue when viewed with a UV or black light, making it ideal for security, quality control, tamper-proofing, and anti-counterfeiting processes. The permanent invisible liquid paint dries quickly to provide long-lasting, weather- and wear-resistant marks.



UV INVISIBLE MARKER

- Ideal for security, theft-prevention and quality control.
- Fast-drying formula to reduce smearing.
- Dura-Nib medium bullet tip resists wear and tear for a longer marking life
- Marking range: -46°C to 66°C

Colour	Part No
Ultraviolet Blue	MK97054



TEMPIL

Tempil[®] is an industrial leader in advanced and accurate temperature indication technologies. From protecting NASA's Space Shuttle Orbiter to measuring critical temperatures of life saving drugs and devices, engineers and professionals rely on the accuracy of Tempil for the most vital applications.

TEMPILSTIK - TEMPERATURE INDICATING STICK

Fast, accurate surface temperature indicator.

Providing accuracy, confidence and compliance for over 80 years, Tempilstik is the original temperature-indicating stick with the best combination of precision and convenience for surface temperature measurement. Specially engineered for accurate temperature indication in pre-heating, interpass and post-weld heat treating applications, Tempilstik is the industry's leading choice for use in the most critical jobs.

Stick instantly melts at designated temperature for easy and immediate visual inspection

Accurate to within +/- 1% of Fahrenheit and +/- 3% Celsius rated

Part No:	Temperature Reading $^\circ$
TS28006	66 C / 150 F
TS28301	50 C / 122 F
TS28310	100 C / 212 F
TS28318	150 C / 302 F
TS28327	200 C / 392 F
TS28336	250 C / 482 F
TS28600	20 Piece Temperature Indicator Kit











HEAVY DUTY 3 POINT PUNCHES

- Produce holes in sheet metal up to 3mm (10 SWG) in mild steel, or 2mm (14 SWG) in Stainless Steel
- 3 Point Punches have a hexagon head bolt to facilitate use with a ratchet and socket.
- Thrust races are also available to reduce friction & make for easier use on thicker materials

Sheet Metal Punches Produce accurate Burr Free Holes in steel and brass.

Part	Hole
No.	Diameter
QMM10HD	10mm
QMM11HD	11mm
QMM12.7HD	12.7mm
QMM14HD	14mm
QMM15.2HD	15.2mm
QMM15HD	15mm
QMM16HD	16mm
QMM17.5	17.5mm
QMM18.6HD	18.6mm
QMM19HD	19mm
QMM20.4HD	20.4mm
QMM20HD	20mm
QMM21HD	21mm
QMM22.5HD	22.5mm
QMM24HD	24mm
QMM25HD	25mm
QMM27.5HD	27.5mm
QMM28.3HD	28.3mm
QMM29HD	29mm
QMM30HD	30mm
QMM31HD	31mm
QMM32HD	32mm

Part	Hole	
No.	Diameter	
QMM32.5HD	32.5mm	
QMM34HD	34mm	
QMM35HD	35mm	
QMM37.5HD	37.5mm	
QMM37HD	37mm	
QMM40HD	40mm	
QMM45HD	45mm	
QMM47HD	47mm	
QMM48HD	48mm	
QMM50HD	50mm	
QMM51HD	51mm	
QMM52HD	52mm	
QMM54HD	54mm	
QMM55HD	55mm	
QMM60HD	60mm	
QMM64HD	64mm	
QMM65HD	65mm	
QMM70HD	70mm	
QMM75HD	75mm	
QMM76.5HD	76.5mm	
QMM80HD	80mm	
Square		
QMMS19	19mm	
QMMS25.4	25.4mm	



A Demonstration video on how to use a QMAX Sheet Metal Punch is displayed on our website.

WAD PUNCHES

For cutting accurate holes in cardboard, rubber, leather and other soft materials Alloy tool steel, Precision Machine Ground Hardened & Tempered, Powder coated finish



Part No.	Size
WP02	2mm 1/16 inch
WP03	3mm 1/8 inch
WP04	4mm 5/32 inch
WP05	5mm 3/16 inch
WP06	6mm 7/32 inch
WP07	7mm 1/4 inch
WP08	8mm 5/16 inch
WP09	9mm 11/32 inch
WP10	10mm 3/8 inch
WP11	11mm 7/16 inch
WP12	12mm 15/32 inch
WP13	13mm 1/2 inch
WP14	14mm 9/16 inch
WP15	15mm 19/32 inch
WP16	16mm 5/8 inch
WP17	17mm 21/32 inch
WP18	18mm 11/16 inch
WP19	19mm 3/4 inch
WP20	20mm 25/32 inch
WP21	21mm 13/16 inch

Part No.	Size
WP22	22mm 7/8 inch
WP23	23mm 29/32 inch
WP24	24mm 15/16 inch
WP25	25mm 1 inch
WP26	26mm 1-1/32 inch
WP28	28mm 1-3/32 inch
WP29	29mm 1-1/8 inch
WP30	30mm 1-3/16 inch
WP31	31mm 1-7/32 inch
WP32	32mm 1-1/4 inch
WP33	33mm 1-9/32 inch
WP35	35mm 1-3/8 inch
WP38	38mm 1-1/2 inch
WP41	41mm 1-5/8 inch
WP42	42mm 1-21/32 inch
WP44	44mm 1-3/4 inch
WP47	47mm 1-7/8 inch
WP48	48mm 1-29/32 inch
WP50	50mm 2 inch
WP53	53mm 2-11/128 inch

Size	
55mm 2-3/16 inch	
56mm 2-13/64 inch	
57mm 2-1/4 inch	
60mm 2-3/8 inch	
63mm 2-1/2 inch	
69mm 2-23/32 inch	
70mm 2-3/4 inch	
73mm 2-7/8 inch	
75mm 3 inch	
82mm 3-1/4 inch	
100mm 4 inch	

NEW

INTERCHANGEABLE WAD PUNCH SET

SET 3mm - 20mm (3, 4, 6, 8, 10, 12, 14, 16, 18, 20 + holder)

For cutting washers, sealing rings made of foam, cardboard, leather, fibers, plastics, lead etc.

PART NO. WPIK0320





Other sizes in the range 1mm - 120mm available on special buy in terms. Conform to DIN 7200



RATCHETING WRENCHES - COMBINATION THE NEW PREMIUM IN RATCHETING WRENCHES.

Deeper Gear Teeth enables stronger torque 72 Teeth ratchet for a 5° swing arc to turn a fastener

Small head profile and professional plating for corrosion resistance.

Meets or exceeds DIN and A.N.S.I. standards

Guaranteed to be free from manufacturers and material defects for the life of the tool during normal use.

	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
6mm	MGC4006	9106	136mm
7mm	MGC4007	9107	136mm
8mm	MGC4008	9108	136mm
9mm	MGC4009	9109	143mm
10mm	MGC4010	9110	160mm
11mm	MGC4011	9111	168mm
12mm	MGC4012	9112	174mm
13mm	MGC4013	9113	180mm
14mm	MGC4014	9114	193mm
15mm	MGC4015	9115	200mm
16mm	MGC4016	9116	216mm
17mm	MGC4017	9117	233mm
18mm	MGC4018	9118	239mm
19mm	MGC4019	9119	250mm
20mm	MGC4020	9120	285mm
21mm	MGC4021	9121	285mm
22mm	MGC4022	9122	285mm
24mm	MGC4024	9124	325mm
25mm	MGC4025	9125	325mm
27mm	MGC4027	9127	359mm
30mm	MGC4030	9130	425mm
32mm	MGC4032	9132	425mm
36mm	MGC4036	9136	425mm
	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
1/4″	MGC4052	9008	136mm
5/16″	MGC4054	9010	136mm
11/32″	MGC4055	9011	143mm
3/8″	MGC4056	9012	160mm
7/16″	MGC4058	9014	168mm
1/2″	MGC4060	9016	180mm
9/16″	MGC4062	9018	193mm
5/8″	MGC4064	9020	216mm
3/4″	MGC4068	9024	250mm
13/16″	MGC4070	9026	286mm
7/8″	MGC4072	9028	286mm
15/16″	MGC4074	9030	325mm
1″	MGC4076	9032	325mm
1-1/16″	MGC4077	9034	359mm







MAXIGEAR Set No.	Equiva Sizes	lent Contents
MGC4080 12 piece	9412	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
MGC4090 16 piece		8, 9, 10, 11, 12, 13, 14, 15 16, 17, 18, 19, 20, 21, 22, 24mm
MGC4086 12 piece	9312	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4, 13/16, 7/8, 15/16, 1inch



RATCHETING WRENCHES - REVERSIBLE

Compact reversible switch enables moving from forward to reverse without removing the tool from the fastener

15° offset head for knuckle clearance and safe operation above the workpiece

	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
6mm	MGR6006	-	124mm
7mm	MGR6007		140mm
8mm	MGR6008	9608	140mm
9mm	MGR6009	9609	142mm
10mm	MGR6010	9610	158mm
11mm	MGR6011	9611	167mm
12mm	MGR6012	9612	173mm
13mm	MGR6013	9613	179mm
14mm	MGR6014	9614	189mm
15mm	MGR6015	9615	199mm
16mm	MGR6016	9616	215mm
17mm	MGR6017	9617	232mm
18mm	MGR6018	9618	238mm
19mm	MGR6019	9619	247mm
20mm	MGR6020	-	285mm
21mm	MGR6021	9621	285mm
22mm	MGR6022	9622	285mm
24mm	MGR6024	9624	325mm
	MAXIGEAR	MAXIGEAR Equivalent	
Size	No.	Size	Length
1/4″	MGR6052	-	124mm
5/16″	MGR6054	9525	135mm
3/8″	MGR6056	9526	158mm
7/16″	MGR6058	9527	167mm
1/2″	MGR6060	9528	179mm
9/16″	MGR6062	9529	189mm
5/8″	MGR6064		
11/16″	MGR6066		
3/4″	MGR6068	9532	247mm
13/16″	MGR6070	9534	285mm
7/8″	MGR6072	9538	285mm
15/16″	MGR6074	9539	325mm
1″	MGR6076	9540	325mm







MAXIGEAR	Equival	Equivalent	
Set No.	Sizes	Contents	
MGR6080	9620	8, 9, 10, 11, 12, 13,	
12 piece		14, 15, 16, 17, 18, 19mm	
MGR6090	9602	8, 9, 10, 11, 12, 13, 14, 15	
16 piece		16, 17, 18, 19, 20, 21,	
		22, 24mm	
MGR6087	9509	1/4, 5/16, 3/8, 7/16, 1/2,	
13 piece		9/16, 5/8, 11/16, 3/4,	
		13/16, 7/8, 15/16, 1inch	

MAXIGEAR TOOL ROLLS		
Set No.		
MGTR8	8 piece	
MGTR13	13 piece	
MGTRS12	12 piece Stubby	



RATCHETING WRENCHES - FLEX HEAD

Flex Head tilts 180° at any interval with continuous head tension Flex Head permits access to fasteners in difficult to access areas

	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
8mm	MGF5008	9908	136mm
9mm	MGF5009	9909	143mm
10mm	MGF5010	9910	160mm
11mm	MGF5011	9911	168mm
12mm	MGF5012	9912	174mm
13mm	MGF5013	9913	180mm
14mm	MGF5014	9914	193mm
15mm	MGF5015	9915	200mm
16mm	MGF5016	9916	216mm
17mm	MGF5017	9917	233mm
18mm	MGF5018	9918	239mm
19mm	MGF5019	9919	250mm
20mm	MGF5020	-	285mm
21mm	MGF5021	9921	285mm
22mm	MGF5022	9922	285mm
24mm	MGF5024	9924	325mm
25mm	MGF5025	9925	325mm
	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
1/4″	MGF5052	-	136mm
5/16″	MGF5054	9705	136mm
3/8″	MGF5056	9706	160mm
7/16″	MGF5058	9707	168mm
1/2″	MGF5060	9708	180mm
9/16″	MGF5062	9709	193mm
5/8″	MGF5064	9710	216mm
11/16″	MGF5066	9711	233mm
3/4″	MGF5068	9712	250mm
13/16″	MGF5070	9713	285mm
7/8″	MGF5072	9714	285mm
15/16″	MGF5074	9715	325mm
1″	MGF5076	9716	325mm





MAXIGEAR	Equivalent	
Set No.	Sizes	Contents
MGF5080	9901	8, 9, 10, 11, 12, 13,
12 piece		14, 15, 16, 17, 18, 19mm
MGF5087	9702	1/4, 5/16, 3/8, 7/16, 1/2,
13 piece		9/16, 5/8, 11/16, 3/4,
		13/16, 7/8, 15/16, 1inch



STUBBY COMBINATION RATCHETING WRENCHES

The same features as the Combination MAXIGEAR in a compact design for use in tight spaces

	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
6mm	MGS7006	-	88mm
8mm	MGS7008	-	88mm
10mm	MGS7010	9510	96mm
11mm	MGS7011	9511	100mm
12mm	MGS7012	9512	104mm
13mm	MGS7013	9513	108mm
14mm	MGS7014	9514	114mm
15mm	MGS7015	9515	118mm
16mm	MGS7016	9516	122mm
17mm	MGS7017	9517	128mm
18mm	MGS7018	9518	132mm
19mm	MGS7019	9519	138mm
	MAXIGEAR	Equivalent	Overall
Size	No.	Size	Length
3/8″	MGS7056	-	96mm
7/16″	MGS7058	-	100mm
1/2″	MGS7060	-	108mm
9/16″	MGS7062	-	118mm
5/8″	MGS7064	-	122mm
11/16″	MGS7066	-	128mm
23/4″	MGS7068	-	138mm



MAXIGEAR	Equivalent	
Set No.	Sizes	Contents
MGS7080	9520	8, 10, 11, 12, 13, 14,
11 piece	[10 piece]	15, 16, 17, 18, 19mm
MGS7089	9507	3/8, 7/16, 1/2, 9/16,
7 piece		5/8, 11/16, 3/4 inch


MAXIGEAR® MULTI ANGLE HEAD & EXTENDING BAR - ANSI TESTED

Indexing head: Pivots through 180°, adjusted by simply pressing a button on the head to move the bar into multiple locking positions allowing for close precision work in shifting, sliding, parting & aligning.

Extending variable body length: Press the locking button on the main body handle to increase / decrease the desired length required, when compacted can be stored in a tool chest

Strength is built in; Maxigear Pry Bars are manufactured & rigorously tested to ANSI standards.

Part No	Description		
MGPB1315	Pry Bar Indexing Head & Extendable 315mm - 450mm		
MGPB1620	Pry Bar Indexing Head & Extendable 620mm - 900mm		
MGPB1863	Pry Bar Indexing Head & Extendable 860mm - 1350mm		

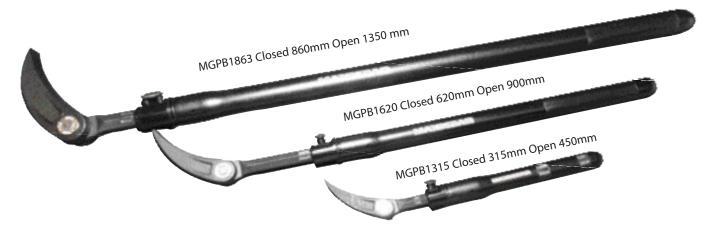





HEX KEYS

THE ONLY HEX KEY WHICH CAN DRIVE 100% ROUND HEX DRIVE SCREWS PATENTED DESIGN Insert or extract cap head screw without damaged as well as being able to remove worn or damaged heads utilising the same patented key set.

9PC METRIC HEX KEY / EXTRACTOR SET Long Arm - 1.5mm /10mm MGHK2050

9PC SAE HEX KEY / EXTRACTOR SET Long Arm - 1/16" - 3/8" MGHK2075



LINE WRENCHES

Unique patented ratcheting system

Can be opened to slip over the brake pipe & closed to fit around the brake pipe nut completely

Unique geometry that allows to work on rounded & worn nuts, and even a tighter grip on rusted nuts

Applications : brake piping, hydraulic & pneumatic connections, power assisted steering, A/C and fuel lines.

Part No.	Contents
PST-70010	8 x 9, 10 x 11, 12 x 13,
	14 x 15mm
PST-70070	5/16 x 3/8, 7/16 x 1/2
	9/16 x 5/8, 11/16 x 3/4
PST-70124	24mm flex-hd combination
PST-70132	32mm flex-hd combination







MAXIGEAR TWIN FULCRUM PLIERS

DIFFICULT TO REACH AREAS? NOT ANY MORE

Ground flush finish produces a narrow but strong profile whilst maintaining maximum reach with Twin Fulcrum Pliers allowing the jaws to be fully open in a single handed operation holding the twin-dipped comfort handles maximising grip via the serrated jaw tips, available in Straight & 45° Jaw styles with an overall length of 340mm.

Part No.	Style
MGM5800	Straight
MGM5500	TWIN PACK

Twin Pack contains 1x MGM5800 straight & 1xMGM5900 45°

FLEXIBLE SOCKET SET

3/8" Sq Dr. 10pc Metric 6 Point Sizes 10,11,12,13,14,15,16,17,18,19mm Supplied on Socket Rail

Part No. MGM8086





MAGNETIC SOCKET RAILS

Easy glide 360° rotating studs make easy work of making your socket selection. Magnetic rail makes for convenient storage. 10 turnable Square Drive Studs.

Part No:	Size
MGM7038	3/8″





VERSA-DRIVE ADAPTERS

Versa-Drive adapters allow users to easily switch between sockets and hex bits without having to switch adapters.

- Product comes in 2 1/4" Hex shank adapters
- 3/8" Drive adapter with 1/4" hex for bits
- 1/2" Drive adapter with 5/16" hex for bits

Unlike current 1/4" hex-to-square socket adapters, the Versa-Drive incorporates the hex drive into the square socket head itself allowing users to go back and forth between bit and socket without ever removing the adapter from the tool. Used with 1/4" hex drive tools like impact drivers or 1/4" drill chucks the Versa-Drive is a real time saver in a variety of applications. Enables users to easily switch between sockets and hex bits. Impact rated for use in 1/4" cordless and pneumatic impact drivers For torques up to 112.22 M/Kg or 900kg



Part No.: CV00490



DIAMOND WET & DRY CUT HOLESAWS / CORE DRILLS

Effective cutting of Ceramic, Glass, Masonry, Granite, Gypsum. Use with an Electric or Battery Powered Drill for sizes up 12mm. Sizes 14mm and over use with an Angle Grinder with M14 x 2 mount Fast and Efficient Cutting of some of the most difficult materials

Part No.	Diameter	Mount	Cut
HDW70006	6mm	1/4 Hex	Wet
HDW70008	8mm	1/4 Hex	Wet
HDW70010	10mm	1/4 Hex	Wet
HDW70012	12mm	1/4 Hex	Wet
HDW75000	4 Piece Set	1/4 Hex	Wet
HDW70014	14mm	1/4 Hex	Wet
HDD70020	20mm	M14 x 2	Dry
HDD70022	22mm	M14 x 2	Dry
HDD70035	35mm	M14 x 2	Dry
HDD70040	40mm	M14 x 2	Dry
HDD70045	45mm	M14 x 2	Dry
HDD70053	53mm	M14 x 2	Dry
HDD70068	68mm	M14 x 2	Dry

TUNGSTEN CARBIDE COATED HOLESAWS

For the easy drilling of large diameters in masonry, tiles, bricks, gypsum plaster, for wall sockets, pipe lines, cable ducts & discharge pipes.

Part No.	Diameter		
HTC80001	Arbor with Drill		
HTC80033	33mm		
HTC80043	43mm		
HTC80053	53mm		
HTC80067	67mm		
HTC80073	73mm		
HTC80083 83mm			
HTC80103 103mm			
HTC85000 6 Piece Set			
33mm, 53mm, 67mm, 73mm, 83mm & Arbor with Drill			





Suitable for Welding and fabrication for marking clear, dustless lines on metals, steel, stone and masonry

Made from first Grade mineral, and the whiteness of 93%

Dust free, high visibility. Won't run, char, discolour, peel, or crack when welding

Part No.	Description	Box Qty
EC10x10BX	10mm x 10mm x 80mm sticks	50 sticks
EC10x10CT	10mm x 10mm x 80mm sticks	1000 sticks
EC10x5BX	10mm x 5mm x 75mm sticks	100 sticks
EC10x5CT	10mm x 5mm x 75mm sticks	2000 sticks







MAGNETIC IMPACT SOCKETS

Features Deep Impact Socket and Standard Impact Socket. Magnetic for a secure hold on any fastener. Deep Series consists of a spring loaded magnet that retracts into the socket for extended bolt application.

Part No:	Drive	Size	
MGID1410	1/4DR	10mm	
MGID1412	1/4DR	12mm	
MGID1413	1/4DR	13mm	
MGID1414	1/4DR	14mm	
MGID3810	3/8DR	10mm	
MGID3812	3/8DR	12mm	
MGID3813	3/8DR	13mm	
MGID3814	3/8DR	14mm	
MGID1210	1/2DR	10mm	
MGID1212	1/2DR	12mm	
MGID1213	1/2DR	13mm	
MGID1214	1/2DR	14mm	

MAGNETIC IMPACT SOCKET 12 PIECE SETS

Set No:	Drive	Size
MGIS1400	1/4 Drive Standard	4 - 15mm
MGID1400	1/4 Drive Deep	4 - 15mm
MGIS3800	3/8 Drive Standard	8 - 19mm
MGID3800	3/8 Drive Deep	8 - 19mm
MGIS1200	1/2 Drive Standard	10 - 21mm
MGID1200	1/2 Drive Deep	10 - 21mm



This 45 degree DOUBLE FLARING TOOL set is designed to withstand the high pressure. It includes 5 double flare adapters, drop forged compressor yoke Includes bar assembly with size capacity- 4.15, 5, 6, 8 and 10mm. **PST-70153 METRIC**

IN LINE FLARING TOOL

This low profile design In Line Flaring Tool enables automotive technicians to flare copper or soft steel tubing in tight spaces using a ratchet or wrench.

The patented new flaring tool design makes perfect single or double flares easily. The double clamp and hex body keeps tube from slipping, keeps flares centred, and makes the job of flaring easier. Superior to bar type flaring tools. For flaring 3/16" and 4.75mm tubing.

Part No. PST-70161









AUTOMOTIVE SPECIALTY TOOLS



PORTABLE BEARING PACKER

The Portable Bearing Packer works on bearings up to 89mm [3-1/2"] outside diameter. The grease stays in the tool cavity, not on your hands. To pack a bearing, place the bearing on the piston Press down on the cap until the old grease is forced out and the new grease shows on top of the bearing **Part No. PST-72775**

SCREW EXTRACTOR KIT - 5 PIECE

- Forged alloy steel, this this tapered style extractor
- can be used to extract broken studs, screws, pipe and pipe fittings.
- Has gradual taper and long flutes.

Part No. PST-65000

HEAVY DUTY OIL FILTER STRAP WRENCH

- This deluxe wrench adjusts quickly to any spin-on filter.
- Features 3/8-in. and 1/2-in. forged driver and heavy duty strap for high torque requirements.

Handles filters up to 9-in. (228mm) especially high torque requirements on truck and tractors

Part No. PST-27800



TOOL GRIPPER WRENCH RACKS

Manufactured from flexible rubber as opposed to stiff plastic. The rubber flexes around the wrench to hold it in place at virtually any angle. Very durable and won't crack or split like plastic versions. Manufactured in the USA.

	Description	Part No.
2200	4 pce wrench rack - RED	PST-5040E
and the second sec	7 pce wrench rack - RED	PST-5080E
Contract of the second s	12 pce wrench rack -RED	PST-5015E
and the second s	13 pce wrench rack - RED	PST-5013E
REVERSE Wrench Rack	15 pce wrench rack - FLURO	PST-5088E
	15 pce reverse wrench rack -RED	PST-5188R
	7 pce wrench rack <u>Stubby - RED</u>	PST-5072E
	15 pce wrench rack - FLURO	PST - 5082HV
	10 pce plier organiser - RED	PST-5500E
		Wooda
STANDARD Wrench Rack	Pliers Organiser	Stubby Wrench Rack





COMBINATION INTERNAL / EXTERNAL SNAP RING PLIERS SETS ('V' SWITCH) NEW

Part No.	Тір	Angle	Part No.	Тір	Angle
LG3583	.038	0°	LG3589	.070	0°
LG3584	.038	45°	LG3590	.070	45°
LG3585	.038	90°	LG3591	.070	90°
LG3586	.047	0°	LG3592	.090	0°
LG3587	.047	45°	LG3593	.090	45°
LG3588	.047	90°	LG3594	.090	90°

Includes tip diameters of 0.038", 0.047", 0.070" and .090" at 0, 45 and 90 degree angles - Easily convert between internal and external configurations without separating the handles - cushioned grip handles for comfort - Heat treated steel for durability.

6 Piece Combination Set No. LG3597



12 Piece Combination Set No. LG3595



INTERNAL / EXTERNAL SNAP RING PLIERS SETS

Part No.	Тір	Angle	Part No.	Тір	Angle
LG3483	.038	0°	LG3489	.070	0°
LG3484	.038	45°	LG3490	.070	45°
LG3485	.038	90°	LG3491	.070	90°
LG3486	.047	0°	LG3492	.090	0°
LG3487	.047	45°	LG3493	.090	45°
LG3488	.047	90°	LG3494	.090	90°

6 Piece Combination Set No. LG3497





12 Piece





QUICK SWITCH INTERNAL & EXTERNAL REPLA(

- Convert between internal and external with a quick flip of a switch
- A once relatively time consuming and complicated process is made easy by eliminating the jaw aligning pushpin process
- Double-dipped custom grip made of low-temp, high-impact material for comfort and durability
- Spring return handles
- Each pliers includes a tip kit containing five pairs of durable alloy, colourcoded, interchanageable tips and Allen wrench, all stored in handy pouch
- Also included are a set of thumbscrews that can be screwed in quickly for lightduty applications
- Most user friendly convertible pliers on the market
- Will replace 10 or more of any single competitor's pliers



EXTERNAL


INTERNAL

Part No.	Internal	External
HT1421	1/4" - 1" 7mm - 26mm	1/8 - 1″ 3mm - 26mm
HT1434	3/8" - 2" 10mm - 51mm	1/4" - 2" 7mm - 51mm
HT75	1-13/16″ -4″ 46mm - 102mm	1-1/2" - 4" 32mm - 102mm



Contains 3 sets of Lang pliers. Made in the USA Includes the following pliers in packaging: HT1421, HT1434 & HT75

Model HT1465

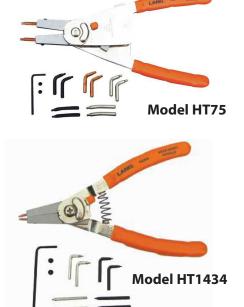







Provides safe and stable service of extra large retaining rings Compound screw lever for easy ring installation and removal Includes 6 pairs of alloy steel colour coded tips & a hex key Internal 3-1/2" - 7" / 90mm - 175mm External 3-1/2" - 7" / 90mm - 175mm

Model HT87

48 PIECE MASTER THREAD RESTORER KIT

Properly repair or renew damaged threads.

Part No LG0971

Contents-

Rethreader taps			
UNC	UNF	Metric	
1/4″ - 20	1/4″ - 28	6 x 1.00	12 x 1.25
5/16" - 18	5/16″ - 24	8 x 1.25	12 x 1.50
3/8″ - 16	3/8″ - 24	10 x 1.00	12 x 1.75
7/16″ - 14	7/16 - 20	10 x 1.25	14 x 1.50
1/2″ - 13	1/2″ - 20	10 x 1.50	
9/16″ - 12	9/16″ - 18	11 x 1.50	

Rethreader Dies

UNC	UNF	Metric	
1/4″ - 20	1/4″ - 28	6 x 1.00	12 x 1.50
5/16" - 18	5/16" - 24	8 x 1.25	12 x 1.75
3/8" - 16	3/8" - 24	10 x 1.00	14 x 1.50
7/16″ - 14	7/16″ - 20	10 x 1.25	
1/2″ - 13	1/2″ - 20	10 x 1.50	
9/16″ - 12	9/16″ - 18	11 x 1.50	

Threaded files

US Thread Pitch		Metric T	Metric Thread Pitch	
11	16	.75	1.75	
12	18	1.00	2.00	
13	20	1.25	2.50	
14	24	1.50	3.00	



Tools are colour coded in gold, black & silver for quick visual identification

15 PIECE METRIC THREAD RESTORER KIT

Properly repair or renew damaged threads.

Part No LG2584 Contents-

Rethreader taps

 Metric
 12 x 1.25

 6 x 1.00
 12 x 1.25

 8 x 1.25
 12 x 1.50

 10 x 1.25
 12 x 1.75

 10 x 1.50
 12 x 1.50

Rethreader Dies

Metric	
6 x 1.00	12 x 1.25
8 x 1.25	12 x 1.50
10 x 1.25	12 x 1.75
10 x 1.50	

Threaded files

Metric	Thread Pitch
.75	1.75
1.00	2.00
1.25	2.50
1.50	3.00

26 PIECE SAE SET

Contains 6 UNC & 6 UNF taps, plus 7 UNC & 7 UNF Dies **Part No. LG2581**





THREAD RESTORER FILES Restore damaged external threads.

Part No LG2665

Pitches include (threads per inch): 11, 12, 13, 14, 16, 18, 20, 24

Part No LG2670

Pitches include (mm per thread): 1.00, 1.25, 1.50, 1.75, 2.00, 2.50, 3.00

THREAD RESTORER TAPS

For repair of damaged internal threads on nuts. Chase out damaged threads and remove nicks and burrs without undercutting good threads. Use with standard wrench and light oil.

6 Piece Metric Set Part No LG2588

Sizes: 6 x 1.00 8 x 1.25 10 x 1.50 12 x 1.25 12 x 1.50 12 x 1.75





Super Strength High Tech

MAGNETIC PICK-UP TOOL with POWERCAP

The POWERCAP shields the sides of the magnet from attaching to unwanted surfaces, and increases lifting capacity by over 45% Stainless steel telescoping handle is strong, long & lightweight, comfortable textured cushion grip keeps handle secure even in oily hands



Part No.	Lifts	Handle Length
HT-1	900g	165-845mm
HT-2	2.2kg	165-845mm
HT-3	4.5kg	171-769mm

HIGH TECH INSPECTION MIRRORS - Longer, Stronger & Lightweight

Stainless steel telescoping handle is strong, long and lightweight comfortable textured cushion grip keeps handle secure even in oily hands. Mirror encased in rugged corrosion resistant brushed stainless steel. All-angle ball joint holds mirror firmly for 360° viewing.

Part No.	Mirror Size	Handle Length
HTE-2	32mm	165-890mm
HTC-2	57mm	165-924mm
HTC-2LM	57mm	300-1295mm
HTS-2	83mm	165-750mm
HTS-2L	83mm	300-1334mm
HTK-2	56 x 87mm	170-650mm

ULLMAN COUNTER DISPLAY



Part No. HT-DISP Eye catching counter or s

Eye catching counter or shelf display for High-tech magnetic pick-up tools & inspection mirrors.

INCLUDES:

3 x HTE-2
3 x HTC-2
3 x HTS-2

FLEXIBLE MAGNETIC PICK UP TOOL With Powercap bend to any angle.

2.2Kg Pick Up, 735mm Length Part Number: HT-2FL

CIRCULAR FLEXIBLE INSPECTION MIRROR

Bend to any angle mirror 55mm Length 810mm Part Number: HTC-2FL



www.pretooling.com.au



NEW

MG-2TELESCOPING MAGNIFYING GLASS

Shatter resistant magnifying head Comfortable textured cushion grip handle (175mm extends to 915mm).




C2-X MAGNETIC BASE INSPECTION MIRROR

With a 2-1/4" diameter round mirror and 7-1/8" overall length, the C-2X inspection mirror can be adjusted for optimal viewing and inspection. The magnetic base and adjustable arm allow hidden areas to be brought into full view in seconds.



LED LIGHTED INSPECTION MIRRORS

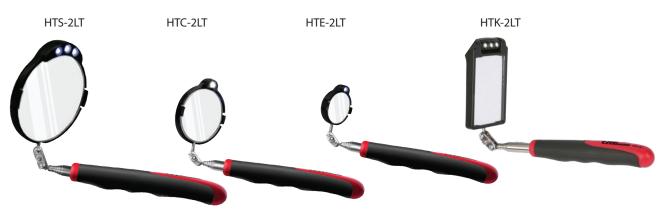

LED Light illuminates dark areas for perfect inspection


All-angle ball joint holds the round mirror head firmly at any angle for perfect viewing

Long, strong, and lightweight stainless steel shaft. Non slip cushion handle for wet or oily hands.

Rectangular model features rotating lights

Part No.	Leds	Mirror Size	Handle Length
HTE-2LT	1	35mm	170-902mm
HTC-2LT	1	60mm	170-940mm
HTS-2LT	3	86mm	170-768mm
HTK-2LT	3	57 x 89mm	171-760mm

LED LIGHTED MAGNETIC PICK UP TOOLS

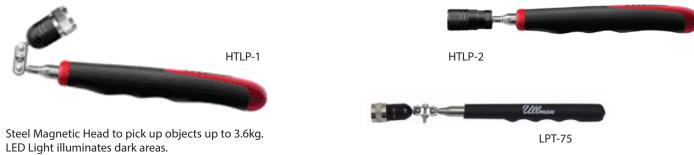

Powercap slides over magnet to shield its sides from unwanted objects.

Long, strong, and lightweight stainless steel shaft. Non slip cushion handle for wet or oily hands.

Part No.	Magnet Capacity	Handle Length
HTLP-1	3.6kg	170 - 705mm
HTLP-2	3.6kg	200 - 832mm
LPT-75	3.4kg	171- 700mm

DIGITAL INSPECTION MIRROR

VIEW & CAPTURE THOSE HARDTO SEE AREAS.

With the Ullman Digital Inspection Mirror, you can increase trust and credibility by showing diagnostic inspection images and videos to your customers.

PART NO: E-DM-1



SMART

INSPECTION

INCREASE TRUST & CREDIBILITY BY SHOWING INSPECTION IMAGES & VIDEOS TO YOUR CUSTOMERS.

LLMAN

SMARTPHONE ENABLED 720P CAMERA WITH LED ILLUMINATION

DUAL POINT 360° ROTATIONAL KNUCKLE

TELESCOPING STEEL ANTENNA

LED ILLUMINATION

TEXTURED CUSHIONED GRIP

RECHARGEABLE VIA MICRO USB PORT WITH 30 MINUTE RUNTIME

VIEW & SAVE IMAGES TO YOUR SMARTPHONE BY USING THE ULLMAN APP





DUAL POINT 360° ROTATIONAL KNUCKLE




RECHARGEABLE VIA MICRO USB PORT WITH 30 MIN-UTE RUNTIME



SMARTPHONE APP RECORDS PICTURES & VIDEOS

The Ullman Devices Digital Inspection Mirror is a smartphone enabled 720p camera with LED illumination. Users can connect this product to their phone through a downloadable app. This new device is rechargeable via micro USB port with a 30-minute run-time. Technicians can use this device to help increase trust and their credibility by showing inspection images and videos to customers that can be stored on their phones and viewed later.

www.pretooling.com.au

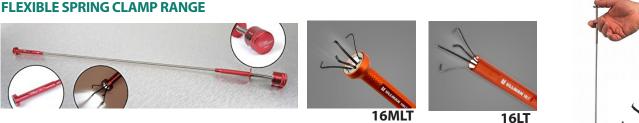

Part No.	Description	Handle Length
16 (Ullman)	Bright plated, flexible, steel spring	684mm
16LT	LED Lighted, flexible, steel spring	645mm
16MLT	LED Lighted, Magnetic, flexible steel spring Mag lifts 2.25kg	642mm

SCREW STARTERS

Suit ferous or non-ferrous screws tool releases & resets automatically. Features pocket clip & magnet

Part No.	Description
Model D-2	Suits slotted screws
Model PD-10	Suits Phillips® Head screws
Model F-2	Suits Torx [®] T-10, T-15, T-20, T-25, T-27, T-30 & most Allen Hex and Phillips [®] Head screws



16 (ULLMAN)

POCKET TELESCOPIC MAGNETIC RETRIEVING TOOLS

Powerful enough to pick up objects weighing 680g. Closes down to 150mm, extends to 650mm

Part No.	Colour
15X	Chrome
15X0R	Bright Orange
15XGR	Neon Green



MAGETIC RAIL 10-1/4"

Ullman's strong N35 magnets allow rail to be mounted to benches, toolboxes and inside of service vehicles. Mounting holes allow rails to adhere to walls and other non-magnetic surfaces. The Ullman Magnetic Rails allow you to neatly organize your tools and sockets, saving you time from sifting through cluttered drawers and tool boxes.

•	1 1		
Part No.	Colour		NEW
UMR10	Chrome]	



SOCKET HOLDERS WITH HEAVY DUTY SPRING CLIPS.

Bright, durable, plated steel rail with slide-on spring clips to hold sockets tight & rattleproof 430mm length

Part No.	Drive Clips
#25	16 x 1/4″
#35	16 x 3/8″
#50	16 x 1/2″
#75	8 x 3/4″

1. •

HOOK AND PICK SETS

PSP-4

Each hook & pick is made of high carbon polished steel and is permanently inserted into a sturdy plastic handle.



CHP4-L

Extra long hook & pick set with textured cushion grip handles. Each item 250mm long



CHP4-LT





LED Lighted Four Piece Hook & Pick Set

Ideal for separating wires, removing small fuses or o-rings, retrieving and marking metal in dark or hard to view areas.

- Includes 90 degree,
- Each tool 250mm long.

- Durable Carbon Polished Heat-Treated Steel Ergonomic Composite Handle with On/Off Button High Intensity LED Light illuminates the work area

SW-10 SWINGER

Combination reversible pick & hook. Like an extra long finger for jobs in awkward places. Just swivel out the end you want, the other tucks safely away.

1830 POCKET SCRIBER

Sharp tungsten carbide tip cuts into hard surfaces, leave clear mark on metal, glass, plastic, tools.

All in one"Push-Click" SAFETY COVER on tungsten carbide with magnetic pick up.



1810 DOUBLE POINTED SCRIBER

Scriber has straight and 90 degree angle points for marking in awkward places.

Knurled aluminium handle.

Heat treated bright polished, high carbon needle steel points

Overall length 240mm

H4W

Aluminium handle with 4 screw-in tips



UNIVERSAL SPARK PLUG GAP GAUGE

Easy to read.

Scaled from .020" to .100" (0.5mm to 2.4mm) Pewter plating makes the inches and millimetres more legible for the user to read Easy accurate spark plug adjustment **SG-2**



ULLMAN LED LIGHTING RANGE

NEW & IMPROVED

ROTATING MAGNETIC LED WORK LIGHT RT-3SMD (REPLACES RT-2LT)

The RT-3SMD's sturdy aluminum housing with 3 high-intensity SMD LEDs is rated 110 Lumens. A rotating head easily adjusts to illuminate dark spaces, while the magnetic base attaches to any metal surface in seconds for hands-free use. Three AAA batteries are included.

Part No. RT-3SMD

Part No: FL-3SMD







FLEXIBLE MAGNETIC SMD LED WORKLIGHT

Durable aluminum housing 3 x High Intensity SMD LED lights provide a brightness of 110 Lumens. Heavy duty spring adjusts light beam to required angle with limitless positions. 3 x AAA batteries included Strong magnetic base with hang hook





ROTATING MAGNETIC LED WORK LIGHT

(6) SMD LED's 375 Lumens Sturdy Aluminum Housing Head Rotates light Beam to Needed Angle Strong Magnet will Attach to Metal Surfaces Contains (3) AA Batteries


Part No: RT-6SMD





LED CLAMP WORK LIGHT

6 SMD work light with clamp for hands free use. 375 Lumens Colour anodised aluminium housing Durable dual injection grip clamp with soft grip 3" clamping jaw. Continuous 3 Hour run time. Supplied with 3 AA Alkalinebatteries







www.pretooling.com.au



LED LIGHT RANGE





3 IN 1 LED 10W SOLAR POCKET LAMP

One Tool with 3 Features: Power Bank, Work Light & Solar Panel. Features include USB Charger Port U Shaped Bracket Micro USB Capable Removable Super Strong Magnetic Attachment 4400 mAh Power Bank LED to 450 Lumens 5 Hour Run Time without Charge **Part Number MGLS75311**



PISTOL GRIP 3 WATT LED SPOT LIGHT

Impact resistant casing Dust & Splash Proof [IP44] 240V & 12V chargers Self Locking Switch Charge time 7-8 hours Work Time 3 hours **Part No. PST-75570**



LED FLASHLIGHT New MAXIGEAR torch featuring: Adjustable Beam USB Rechargeable 3 Modes - FULL, HALF, FLASHING. LED to 130 Lumens Part Number MGLF75310



SLIM LINE LED PEN TORCH

1 Watt ReChargeable with USB Charger Lithium Battery Charge time 4-5 hours Work time 3 hours Pocket Clip 160mm overall length **Part Number PST-75505**



RECHARGEABLE LED HEAD LAMP

LED 200 Lumens - Light Range up to 150 Metres IPX4 Splashproof - resistant from any direction. Battery: Built in 1200mah li-polymer battery USB Rechargeable. Net weight: 72g - Lightweight ! Multi Lighting Modes: Full Brightness, Half Brightness, Sensor & Pulse. Sensor controlled by secondary switch. Adjustable Strap Multi Angle

Part Number MGLH75020

STRAIGHT EDGES



1 01 6

....

5 0 7

a e 30

Finished precision ground on both sides & edges One edge bevelled to 35°

Carbon Steel - Ungraduated / no size markings

Part No.	Length	Width	Thickness	Markings
SE1.5M	1.5 metre	40mm	8mm	plain
SE2M	2 metre	40mm	8mm	plain
SE3M	3 metre	50mm	8mm	plain

Carbon Steel - Graduated markings every 1mm

Part No.	Length	Width	Thickness	Markings
SE500GRAD	500mm	40mm	8mm	1mm
SE1MGRAD	1 metre	40mm	8mm	1mm
SE1.5MGRAD	1.5 metre	40mm	8mm	1mm
SE2MGRAD	2 metre	40mm	8mm	1mm
SE3MGRAD	3 metre	50mm	8mm	1mm

Stainless Steel - Ungraduated / no size markings

Part No.	Length	Width	Thickness	Markings
SE1MSS	1 metre	40mm	8mm	plain
SE2MSS	2 metre	50mm	8mm	plain

Stainless Steel - Graduated markings every 1mm

Part No.	Length	Width	Thickness	Markings
SE1MGRADSS	1 metre	40mm	8mm	1mm
SE2MGRADSS	2 metre	50mm	8mm	1mm
SE500MGRADSS	500mm	40mm	8mm	1mm

Carbon Steel - Precision Straight Edge Supplied with certification to DIN 874/0 or 874/1 Lapped on all 4 square sides. Ungraduated / No size markings - CERTIFIED

Part No.	Length	Width	Thickness	Standard
SE1000GR0	1 metre	60mm	12mm	874/0
SE1000GR1	1 metre	50mm	10mm	874/1
SE1500GR1	1.5 metre	60mm	12mm	874/1
SE2000GR0	2 metre	80mm	15mm	874/0
SE2000GR1	2 metre	70mm	15mm	874/1

MEASURING WEDGES

For measuring of gap dimensions Special steel, ground on all sides, chrome plated scale laser cut, knurled handle Dimensions 153 x 12 x 8mm

Part No.	Range	Reading
MW0511	0 - 11mm	0.1mm





DRILL CHUCKS - PORTABLE POWER TOOLS

COMPLIMENTING OUR PREMIUM QUALITY LLAMBRICH RANGE OF INDUSTRIAL CHUCKS & ACCESSORIES, OUR MAXIGEAR ECONOMY DRILL CHUCKS ARE A DURABLE, RELIABLE, & COST EFFECTIVE OPTION FOR A STATIONERY EQUIPMENT SUCH AS BENCH AND PEDESTAL DRILLS.



MAXIGEAR ECONOMY KEYED CHUCKS

Model	Capacity	Mount		Sizes	mm	
No.	mm	К	Key	0	L1	L2
CK13AC6JT	1-13MM	J-6	K3	-	-	-
CK16AC3JT	1-16mm	J-3	K4	-	-	-

THESE CHUCKS COME IN A BALL BEARING CONSTRUCTION *THESE CHUCKS ARE SUPPLIED IN STURDY PLASTIC CONTAINER.

CHUCK, KEY AND ARBOR COMPLETE

Model No	Range	Mount
CK13AC2MT	1 - 13mm	2 Morse Taper
CK13AC3MT	1 - 13mm	3 Morse Taper
CK13AC4MT	1 - 13mm	4 Morse Taper
CK16AC2MT	1 - 16mm	2 Morse Taper
CK16AC3MT	1 - 16mm	3 Morse Taper
CK16AC4MT	1-16mm	4 Morse Taper



MAXIGEAR ECONOMY KEYLESS CHUCKS

Model	Capacity	Mount	Sizes	mm	
No.	mm	К	0	L1	L2
CL13AC6JT	1-13MM	J-6	-	-	-
CL16AC6JT	1-16mm	J-6	-	-	-

*THESE CHUCKS ARE SUPPLIED IN STURDY PLASTIC CONTAINER.

CHUCK AND ARBOR COMPLETE

Model No	Range	Mount
CL13AC2MT	1 - 13mm	2 Morse Taper
CL13AC3MT	1 - 13mm	3 Morse Taper
CL13AC4MT	1 - 13mm	4 Morse Taper
CL16AC2MT	1 - 16mm	2 Morse Taper
CL16AC3MT	1 - 16mm	3 Morse Taper
CL16AC4MT	1 - 16mm	4 Morse Taper

PIN CHCUKS ALSO AVAILABLE, REFERENCE PAGE 138

LLAMBRICH

ALL METAL KEYLESS CHUCKS



Manufactured in Spain



Manufactured in Spain

Keyless Drill Chuck with metal body, locking mechanism and carbide jaw-inserts. With a locking mechanism, no key is required for closing or opening, for hammer drilling and also screwdriver operations.

Carbide jaw-inserts (for 13mm capacity) reduce bit slippage and enhance wear resistance. Ergonomic and strong design with full metal sleeves in black oxide finish that eliminate the possibility of rust.

With through hole for clockwise and anticlockwise rotation.

Supplied with screw M5 (R-3/8") or M6 (R-1/2") to fix chuck to drilling machine. Fits any type of drill (up to 1000W) via UNF thread, male and female. Wide range of accessories (see more info in our Price List)

Model	Capacity	MOUNT		SIZES MM	
No.	mm	К	0	L1	L2
CPM-10 R-3/8	1-10	3/8-24	41	54.5	64.5
CPM-10 R-1/2	1-10	1/2-20	41	54.5	64.5
CPM-13 R-3/8	2-13	3/8-24	43	62.5	74.5
CPM-13 R-1/2	2-13	1/2-20	43	62.5	74.5

Light-Duty Drill Chuck with key for portable drilling machines.

Ideal for electric portable drilling machines, with or without batteries, cutting diretion reversible or non reversible.

Fits tools of up to 16mm.

Fits to machine via UNF screw fittings, male and female, DIN-238 and E-6.3.

Model	Capacity	MOUNT			SIZES MM	
No.	mm	К	Key	0	L1	L2
CL-06-ATOR	1 - 6.5	1/4 hex	LKC4	30	44	55
CL-06-R-3/8	1 - 6.5	3/8-24	LKC4	30	44	55
CL-10 R-1/2	1-10	1/2-20	K7	33	50	60
CL-10 R-3/8	1-10	3/8-24	K7	33	50	60
CL-13 B-16	1-13	B-16	S2	43	59	73
CL-13 R-1/2	1.5-13	1/2-20	S2	43	59	73
CL-13 R-3/8	1.5-13	3/8-24	S2	43	59	73
CL-16 B-16	3-16	B-16	K3	54	66	66

DRILL CHUCKS - KEYED - BALL BEARING INDUSTRIAL

KEYED CHUCKS



Ball Bearing Drill Chuck with key for production drilling equipment.

Drill chuck with key for industrial applications that require the toughest machining conditions. Equipped with ball bearings to reduce friction in the tightening mechanism and provide a better grip on the drill shaft.

All the pieces are hardened and ground.


The one piece gear ring and sleeve eliminate the possibility of tooth breakage. Fits tools of up to 25mm (1"), machine fitting via Jacobs tapers.

Model	Capacity	Mount		Sizes	mm		Equivalent
No.	mm	К	Key	0	L1	L2	size
CBB-08 J2	1-8mm	J-2S	LK30SB	47	55	70	-
CBB-10 J2	1-10mm	J-2S	LK32S9	47	55	70	11N
CBB-13 J3	1-13mm	J-3	LS3	62	75	94	14N
CBB-13 J6	1-13mm	J-6	LS3	62	75	94	-
CBB-16 J3	1-16mm	J-3	LK4S13	67	81	102	16N
CBB-19 J4	1-19mm	J-4	LK4S13	75	99	125	18N
CBB-25 J5	5-25mm	J-5	LK5	93	112	147	20N

Manufactured in Spain

DRILL CHUCKS - KEYLESS - INDUSTRIAL

INDUSTRIAL KEYLESS CHUCKS



Industrial keyless drill chuck for portable drilling machines or stationery machines.

Drill chucks for industrial use (medium duty), available with screw fittings for professional portable drilling machines and with taper fittings for stationery drilling machines.

LLAMBRICH

Automatic fitting for efficient, fast change of tools.

Self tightening mechanism automatically increases the grip in proportion to the increase in torque during the drilling and avoids the tool slipping in clockwise rotation.

Fits tools of up to 20mm in diameter.



Manufactured in Spain

Machine fitting via DIN-238 or Jacobs tapers and UNF thread fittings.

Model	Capacity	Mount		Sizes mm		Equivalent
No.	mm		0	L1	L2	size
CKS-04 J-1	0,5-4	J1	26	50	55	-
CKS-06 R-3/8	0,5-6,5	3/8-24	34	63	70	-
CKS-06 J-1	0,5-6,5	J1	34	63	70	-
CKS-08 J-2S	0,8-8	J2	37	72	78	-
CKS-10 J-2	0,8-10	J2	40	79	86	-
CKS-10 R-3/8	0,8-10	3/8-24	37	72	78	-
CKS-13 B-16	1-13mm	B-16	47	93	103	-
CKS-13 J-2	1-13mm	J2	47	93	103	-
CKS-13 J-33	1-13mm	J33	47	93	103	-
CKS-13 J-6	1-13mm	J6	47	93	103	33366
CKS-13 R-1/2	2-13 mm	1/2-20	40	76	83	33363D
CKS-13 R-3/8	2-13 mm	3/8-24	40	76	83	-
CKS-16 B-16	3-16mm	B-16	52	95	105	-
CKS-16 B-18	3-16mm	B-18	52	95	105	-
CKS-16 J-6	3-16mm	J-6	52	95	105	33370
CKS-16 R-1/2	3-16mm	1/2-20	52	95	105	-
CKS-16 R-5/8	3-16mm	5/8-16	52	95	105	-
CKS-20 J-3	5-20mm	J-3	64	121	131	-

KEYLESS CHUCKS WITH MORSE TAPER ARBORS

Model No	Range	Mount	
CKS-13-2MT	1 - 13mm	2 Morse Taper	
CKS-13-3MT	CKS-13-3MT 1 - 13mm 3		
CKS-13-4MT	1 - 13mm	4 Morse Taper	
CKS-16-2MT	3 - 16mm	2 Morse Taper	
CKS-16-3MT	3 - 16mm 3 Morse Taper		
CKS-16-4MT	3 - 16mm	4 Morse Taper	


Simplify the ordering process. Order the chuck complete with the Morse Taper arbor Manufactured in Spain





36

DRILL CHUCKS - KEYED - INDUSTRIAL





Manufactured in Spain

* Extra Heavy Duty Models

Simplify the ordering process. Order the chuck complete with the Morse Taper arbor Manufactured in Spain



CY-16 R-5/8	1-16mm	5/8-16	_LK3	57	77	
CY-19 J-3	5-20mm	J-3	LK4	65	85	
CY-19 R-3/4	5-20mm	3/4-16	LK4	68	85	Γ
CY-19 R-5/8	5-20mm	5/8-16	LK4	68	85	

KEYED INDUSTRIAL CHUCKS

Industrial drill chuck with key for stationary machines and portable drilling machines. Specially designed for stationary drilling, turning, milling and wood working machines. The one piece gear ring and sleeve eliminate the possibility of tooth breakage. The jaws, gear ring and body are all totally hardened to avoid wear and lengthen the life of the drill chuck.

Fits tools of up to 19mm in diameter. (3/4")

Machine fitting via DIN-238 or Jacobs tapers and UNF screw fittings.

Model	Capacity	MOUNT		SIZES	MM		Equivalent
No.	mm	<u> </u>	Кеу	0		L2	Size
CY-04 J-0	0,8-4	J-0	LK0	22	29	36	0
CY-06 J-1	0,8-6,5	J-1	LKC4	32	40	49	1A
CY-06 R-3/8	0,8-6,5	3/8-24	LKC4	32	42	52	1B3/8
CY-10 B-12	1-10mm	B-12	LS2	37	51	60	
CY-10 B-16	1-10mm	B-16	LS2	43	53	68	
CY-10 J-1	1-10mm	J-1	LS2	37	51	60	31-01
CY-10 J-2	1-10mm	J-2	LS2	37	51	60	2A
CY-10 R-3/8	1-10mm	3/8-24	LS2	37	51	60	41BA3/8
CY-10 R-1/2	1-10mm	1/2-20	LS2	37	51	60	41BA1/2
CY-13 B-16	1.5-13mm	B-16	LK2	46	62	77	-
CY-13 J-6	1.5-13mm	J-6	LK2	46	62	77	
CYX-13 J-6*	1-13mm	J-6	LK3	53	69	89	34-06
CY-13 J-33	1.5-13mm	J-33	LK2	46	62	77	34-33
CY-13 R-3/8	1.5-13mm	3/8-24	LK2	46	62	77	33BA3/8
CY-13 R-1/2	1.5-13mm	1/2-20	LK2	46	62	77	33BA1/2
CY-13 R-5/8	1.5-13mm	5/8-16	LK2	46	62	77	33BA5/8
CY-16 J-3	1-16mm	J-3	LK3	57	77	95	3A
CY-16 B-16	1-16mm	B-16	LK3	57	77	95	-
CY-16 B-18	1-16mm	B-18	LK3	57	77	95	-
CY-16 J-6	1-16mm	J-6	LK3	57	77	95	-
CY-16 R-1/2	1-16mm	1/2-20	LK3	57	77	95	35B1/2
CY-16 R-5/8	1-16mm	5/8-16	LK3	57	77	95	3B5/8
CY-19 J-3	5-20mm	J-3	LK4	65	85	110	36
CY-19 R-3/4	5-20mm	3/4-16	LK4	68	85	110	36B3/4
CY-19 R-5/8	5-20mm	5/8-16	LK4	68	85	110	36B5/8

KEYED CHUCKS WITH MORSE TAPER ARBORS

Model No	Range	Mount
CY-13-2MT	1 - 13mm	2 Morse Taper
CY-13-3MT	1 - 13mm	3 Morse Taper
CY-16-2MT	1 - 16mm	2 Morse Taper
CY-16-3MT	1 - 16mm	3 Morse Taper
CY-16-4MT	1 - 16mm	4 Morse Taper
CY-19-3MT	5 - 20mm	3 Morse Taper
CY-19-4MT	5 - 20mm	4 Morse Taper

Note - Chucks supplied with arbor, they are not integral mounted.

LLAMBRICH

ACCESSORIES

Chuck sold separately

SDS+ADAPTOR

To fit a chuck with a 1/2-20 mount to an SDS power tool

Part No. CBSDS-1/2



HEX ADAPTOR Adapt a chuck with 1/4" Hex to 3/8-24 Thread Part No. CB1/4HEX-3/8



CHUCK KEYS





Part No.	Description	Pilot (mm)	Pilot (inches)	Teeth
LKO	CHUCK KEY SUIT CY-04 LLAMBRICH & 0 SERIES JACOBS	3.17	1/8″	11
LKOM	CHUCK KEY STAINLESS SUIT CSS-04 LLAMBRICH & 0 SERIES JACOBS	3.17	1/8	11
LK1M	CHUCK KEY STAINLESS SUIT CSS-06 LLAMBRICH & 1 SERIES JACOBS	3.97	5/32	11
LK1S7	CHUCK KEY SUIT 1 SERIES & S7 DIN	3.97	5/32″	11
LK2S17	CHUCK KEY SUIT CY-13 & 2 SERIES JACOBS	6.35	1.4″	11
LK30S8	CHUCK KEY SUIT CBB-08 LLAMBRICH & 41 SERIES & 8-1/2N JACOBS	5.95	-	10
LK32S9	CHUCK KEY SUIT CBB-10 LLAMBRICH & 33 SERIES & 11N JACOBS	6.35	-	10
LK3S10	CHUCK KEY SUIT CL-16, CYX-13, CY-16 LLAMBRICH & 3, 34 SERIES & 14N JACOBS	7.94	5/16″	11
LK4S13	CHUCK KEY SUIT CY-19, CBB-16, CBB-19 LLAMBRICH & 36 SERIES, 16N, 18N JACOBS	9.52	3/8″	12
LK5	CHUCK KEY SUIT CBB-25 LLAMBRICH & 20N JACOBS	11.11	7/16″	12
LK7	CHUCK KEY SUIT 7 SERIES JACOBS	5.55	7/32″	11
LKC4	CHUCK KEY TO SUIT CY-06 SERIES LLAMBRICH	5.42	7/32	12
LKGS14	CHUCK KEY SUIT CL-10 LLAMBRICH & 10MM JACOBS MULTICRAFT	6.5	9/32″	11
LKK	CHUCK KEY SUIT 22BA, 24BA, SERIES JACOBS	7.14	11/32″	10
LS1	CHUCK KEY SUIT ROHM PRIMA SERIES & LFA 4mm 6mm & 8mm	4.00	-	10
LS2	CHUCK KEY SUIT CL-13, CY-10 LLAMBRICH & ROHM PRIMA SERIES 8MM, 10MM, 13MM	6.00	-	12
LS3	CHUCK KEY DIN SERIES S3 8mm PILOT	8.00	-	12
LS4	CHUCK KEY SUIT ROHM PRIMA SERIES 20MM	9.00	-	14

INOX STAINLESS STEEL DRILL CHUCKS

The most complete Stainless Steel Drill Chuck Program, available in Keyed, Keyless, and also in Hybrid model types. For use in the medical, dental, and food industries

Manufactured from stainless steel to withstand corrosion. All FGE & GE models are bead blasted with glass balls and have passivation by a electro-polishing technique. This adds additional protection against all types of corrosion, eliminates undesirable residual contaminants, and improves the finish of the surface profile.

Model	Capacity	Mount		Sizes mm		
No.	mm	К	01	02	L1	Key
KEYED						
CSS-04-J0-GE	0.5 - 4mm	JO	22	28	35	LK0M
CSS-06R3/8-GE-DS	0.5 - 7.4mm	3/8-24	28.4	40	50.3	LK1M

Manufactured in Spain

SP SUPER PRECISION KEYLESS DRILL CHUCK

Model	Capacity	Mount		Sizes mm	
No.	mm		0	L1	L2
SP-13-J6	1-13mm	6JT	49	91	103
SP-16-J6	3-16mm	6JT	55	95	107

Manufactured in Spain

SPS-SOLID SUPER PRECISION KEYLESS DRILL CHUCK WITH INTEGRATED SHANK (MORSE TAPER)

Model	Capacity	Mount		Sizes mm	
No.	mm		0	L1	L2
SPS-13-MT2	1-13mm	2MT	48	80	92
SPS-13-MT3	1-13mm	3MT	48	80	92
SPS-16-MT3	3-16mm	3MT	54	85	96
SPS-16-MT4	3-16mm	4MT	54	85	96

Manufactured in Spain

ASL & AKL WRENCH LOCK & KEY LOCK SUPER PRECISION KEYLESS CHUCKS

Albrecht offers two drill chuck models designed specifically for CNC machining centres.

ASL models have a wrench lock facility to allow extra tightening force to be applied

AKL models have a non-rotating hood - the chuck is opened & closed via a hex key inserted into the side of the body. Key-Lock models can be run forward & reverse and are the most accurate chucks available.

Key-Lock models are excellent for use on CNC maching centres because sudden braking will not cause chuck to open.



Model No	Capacity	Mount
ASL130-ISO40	1 - 13mm	ISO40
ASL130-BT40	1 - 13mm	BT40
ASL160-ISO40	1.5 - 16mm	ISO40
ASL160-BT40	1.5 - 16mm	BT40
AKL130-BT40	1 - 13mm	BT40
AKL160-ISO50 1.5 - 16mm		ISO50
AKL160-BT40	1.5 - 16mm	BT40










LLAMBRICH



SBF SUPER PRECISION KEYLESS CHUCKS

- Albrecht chucks incorporate a unique self-tightening feature, which causes them to grip drills tighter as more torque is applied.
- Even when high torque is applied, the chucks can be easily opened by hand.
- All parts exposed to wear are hardened and ground for accuracy and long life.



Manufactured in Germany



SBF SUPER DRILL CHUCK

Model	Capacity		Balanced	Unbalanced
No.	Range	Mount	max RPM	max RPM
SBFC30-J0	0.2 - 3mm	JO	35,000	7,500
SBFC30-J1	0.2 - 3mm	J1	35,000	7,500
SBFC65-J1	0 - 6.5mm	J1	25,000	4,000
SBFC100-J2	0 - 10mm	J2	12,000	3,000
SBFC130-J6	1 - 13mm	JG	7,000	2,800
SBFC130-B16	1 - 13mm	B16	7,000	2,800
SBFC160-J6	3 - 16mm	JG	4,000	2,500
SBFC160-B16	3 - 16mm	B16	4,000	2,500

SBF-PLUS SUPER DRILL CHUCK

- Integral shank design is more compact than a combined drill chuck and arbor resulting in: GREATER ACCURACY GREATER RIGIDITY
 - LARGER WORK ENVELOPE
- Integral shank eliminates the possibility of a chuck slipping on its arbor

Model	Capacity	Shank	Open	Closed	Sleeve
No.	Range	Туре	L1	L2	D
SBFP130-MT2	1 - 13mm	MT2	86mm	98.5mm	50mm
SBFP130-MT3	1 - 13mm	MT3	86mm	98.5mm	50mm
SBFP130-R8	1 - 13mm	R8	88mm	97mm	50mm
SBFP160-MT3	3 - 16mm	MT3	90mm	104mm	57mm
SBFP160-MT4	3 - 16mm	MT4	92mm	104mm	57mm
SBFP160-R8	3 - 16mm	R8	89mm	100mm	57mm

REPLACEMENT PARTS

Description	Part No.
Jaw set 13mm	1060130 000
Jaw set 16mm	1060160 000
Body & spindle 13mm J6	1240130 J06
Body & spindle 16mm J6	1240160 J06

Other spares are carried ex-stock. Price on application



Collar Shell Body Balls

Drive Pin Spindle Jaw Guide Hood Jaws

INDUSTRIAL TOOLHOLDERS

ARBORS

Features

- Precision machined and ground for maximum performance.
- Ideal for use with custom tool and work holder designs.



MORSE TAPERS

Morse			
Taper No.	D-1 mm	D-2 mm	L-1 mm
1	12.065	9.70	65.5
2	17.780	14.90	80
3	23.825	20.20	99
4	31.267	26.50	124
5	44.399	38.20	156
6	63.348	54.60	218

JACOBS TAPERS

Jacobs			
Taper No.	D-3 mm	D-4 mm	L-2 mm
0	6.350	5.802	11.112
1	9.754	8.469	16.669
2 short	13.940	12.386	19.050
2	14.199	12.386	22.225
33	15.850	14.237	25.400
6	17.170	15.582	25.400
3	20.599	18.951	30.956
4	28.550	26.346	42.069
5	35.890	33.422	47.625

DIN (METRIC) TAPERS

DIN			
Taper No.	D-3 mm	D-4 mm	L-2 mm
B10	10.094	9.40	14.50
B12	12.065	11.10	18.50
B16	15.733	14.50	24.00
B18	17.780	16.20	32.00
B22	21.793	19.80	40.50
B24	23.825	21.30	50.50

MORSE TO JACOBS & DIN (B) TAPERS

SIOLI

Part	Equivalent		Overall
No.	Size	Description	Length mm
MT0JT0	-	0 Morse x 0JT	75mm
MT1JT0	-	1 Morse x 0JT	80mm
MT1JT1	-	1 Morse x 1JT	84mm
MT1JT2	A0102	1 Morse x 2JT	91mm
MT1JT6	A0106	1 Morse x 6JT	95mm
MT1JT33	-	1 Morse x 33JT	95mm
MT2JT1	A0201	2 Morse x 1JT	101mm
MT2JT2	A0202	2 Morse x 2JT	106mm
MT2JT3	A0203	2 Morse x 3JT	113mm
MT2JT4	A0204	2 Morse x 4JT	125mm
MT2JT6	A0206	2 Morse x 6JT	107mm
MT2JT33	-	2 Morse x 33JT	109mm
MT3JT1	-	3 Morse x 1JT	119mm
MT3JT2	A0302	3 Morse x 2JT	125mm
MT3JT3	A0303	3 Morse x 3JT	134mm
MT3JT4	A0304	3 Morse x 4JT	145mm
MT3JT5	A0305	3 Morse x 5JT	151mm
MT3JT6	A0306	3 Morse x 6JT	129mm
MT3JT33	-	3 Morse x 33JT	129mm
MT4JT2	-	4 Morse x 2JT	150mm
MT4JT3	-	4 Morse x 3JT	159mm
MT4JT4	A0404	4 Morse x 4JT	170mm
MT4JT5	-	4 Morse x 5JT	175mm
MT4JT6	A0406	4 Morse x 6JT	153mm
MT4JT33	-	4 Morse x 33JT	154mm
MT5JT3	A0503	5 Morse x 3JT	191mm
MT5JT4	A0504	5 Morse x 4JT	202mm
MT5JT5	-	5 Morse x 5JT	207mm
MT5JT6	-	5 Morse x 6JT	187mm
MT1B10	-	1 Morse x B10	85mm
MT1B12	-	1 Morse x B12	88mm
MT1B16	-	1 Morse x B16	93mm
MT2B10	-	2 Morse x B10	98mm
MT2B12	-	2 Morse x B12	102mm
MT2B16	-	2 Morse x B16	108mm
MT2B18	-	2 Morse x B18	116mm
MT3B12	-	3 Morse x B12	121mm
MT3B16	-	3 Morse x B16	127mm
MT3B18	-	3 Morse x B18	135mm
MT3B22	-	3 Morse x B22	143mm
MT4B16	-	4 Morse x B16	152mm
MT4B18	-	4 Morse x B18	160mm
MT4B22	-	4 Morse x B22	168mm
MT5B16	-	5 Morse x B16	184mm
		5 Morse x B18	192mm

INDUSTRIAL TOOLHOLDERS



EXTENSION SOCKETS - MORSE TAPER

Hardened Tang, accurately ground externally.

Part	Equivalent	Morse	Taper
No.	Size	Outside	Inside
XMT1MT1	-	1	1
XMT1MT2	-	1	2
XMT2MT1	821	2	1
XMT2MT2	-	2	2
XMT2MT3	-	2	3
XMT3MT1	831	3	1
XMT3MT2	832	3	2
XMT3MT3	-	3	3
XMT3MT4	-	3	4
XMT4MT1	-	4	1
XMT4MT2	842	4	2
XMT4MT3	843	4	3
XMT4MT4	-	4	4
XMT4MT5	-	4	5
XMT5MT1	-	5	1
XMT5MT2	-	5	2
XMT5MT3	853	5	3
XMT5MT4	854	5	4
XMT5MT5		5	5

EJECTING DRIFTS

To eject Morse Tapers from sleeves, sockets and machine spindles.

✓ Hardened and tempered

Part		
No.	To Eject	
EDMT0	0 Morse Taper	
EDMT12	1 & 2 Morse Taper	
EDMT34	3 & 4 Morse Taper	
EDMT45	4 & 5 Morse Taper	
EDMT6	6 Morse Taper	
DD1MTA	1 Morse Taper	
DD2MTA	2 Morse Taper	
DD3MTA	3 Morse Taper	
DD4MTA	4 Morse Taper	
DD5MTA	5 Morse Taper	
DD1-2MTEA	1 & 2 Morse Taper	
DD2-3MTEA	2 & 3 Morse Taper	
DD3-4MTEA	3 & 4 Morse Taper	





Length mm 46mm

> 79mm 79mm 84mm 90mm 93mm 93mm 90mm 93mm 93mm

111mm

106mm

111mm

106mm

106mm

122mm



	No.	Size	Description
	SS6JT0	-	6mm x 0JT
	SS3/8JT0	-	3/8 x 0JT
	SS1/2JT0	-	1/2 x 0JT
3	SS1/2JT1	-	1/2 x 1JT
	SS1/2JT2	-	1/2 x 2JT
	SS1/2JT3	-	1/2 x 3JT
	SS1/2JT33	-	1/2 x 33JT
	SS1/2JT6	-	1/2 x 6JT
	SS5/8JT1	-	5/8 x 1JT
	SS5/8JT2	-	5/8 x 2JT
	SS5/8JT3	-	5/8 x 3JT
	SS5/8JT33	-	5/8 x 33JT
	SS5/8JT6	-	5/8 x 6JT
	SS3/4JT2	-	3/4 x 2JT

ARBORS - CONTINUED

Part

SS3/4JT3

SS3/4JT6

SS1JT3

SS1JT6

MT2T3/4

MT3T1/2

Straight Shank to Jacobs Taper

Equivalent

Overall

3/4 x 3JT

3/4 x 6JT

1 x 3JT

1x 6JT

2 Morse x

3/4-16

3 Morse x

1/2-20





130mm SS32JT6 32mm x 6JT -**Morse Taper to Threaded Shank** Part Equivalent Overall No. Size Description Length mm 2 Morse x MT2T3/8 A0261 94mm 3/8-24 MT2T1/2 A0264 2 Morse x 103mm 1/2-20 MT2T5/8 A0268 2 Morse x 106mm 5/8-16

_

_

-

_

Bridgeport (R-8) Taper to Jacobs Taper

_

_

	_		
Part	Equivalent		Overall
No.	Size	Description	Length mm
R8JT2	-	R-8 Bridgeport x 2JT	132mm
R8JT3	-	R-8 Bridgeport x 3JT	140mm
R8JT6	-	R-8 Bridgeport x 6JT	135mm
R8B16	-	R-8 Bridgeport x B16	135mm

DRILL CHUCK ARBORS ECONOMY RANGE Manufactured in India

MORSE TAPER TO JACOBS TAPER			
Part No.	Morse Taper	Jacobs Taper	
CAOMTOJT	0	0	
CA1MT0JT	1	0	
CA1MT0JT	1	1	
CA1MT2JT	1	2	
CA1MT3JT	1	3	
CA1MT6JT	1	6	
CA1MT031	1	33	
CA1MT333	2	0	
CA2MT0JT CA2MT1JT	2	1	
CA2MT1JT CA2MT2JT	2	2	
	2	3	
CA2MT3JT CA2MT4JT	2	4	
	2		
CA2MT5JT	2	5	
CA2MT6JT		6	
CA2MT33J	2	33	
CA3MT1JT	3	1	
CA3MT2JT	3	2	
CA3MT3JT	3	3	
CA3MT4JT	3	4	
CA3MT5JT	3	5	
CA3MT6JT	3	6	
CA3MT33T	3	33	
CA4MT2JT	4	2	
CA4MT3JT	4	3	
CA4MT4JT	4	4	
CA4MT5JT	4	5	
CA4MT6JT	4	6	
CA4MT33J	4	33	
CA5MT3JT	5	3	
CA5MT4JT	5	4	
CA5MT5JT	5	5	
CA5MT6JT	5	6	
CA6MT3JT	6	3	
CA6MT6JT	6	6	
	SHANK TO JAC	-	
Part No.	Diameter	Jacobs Taper	
CA1/2-0J	1/2"	0	
CA1/2-1J	1/2″	1	
CA1/2-2J	1/2"	2	
CA1/2-3J	1/2″	3	
	Î	6	
CA1/2-6J CA1/2-33J	1/2″ 1/2″		
		33	
CA5/8-1J	5/8″	1	
CA5/8-2J	5/8″	2	
CA5/8-3J	5/8″	3	
CA5/8-4J	5/8″	4	
CA5/8-6J	5/8″	6	
CA5/8-33J	5/8″	33	
CA3/4-2J	3/4″	2	
CA3/4-3J	3/4″	3	
CA3/4-4J	3/4″	4	
CA3/4-6J	3/4"	6	
CA3/4-33J	3/4"	33	
CA1-3J	1″	3	
CA1-4J	1″	4	
		<u> </u>	

MORSE TAPER TO BLANK END			
Part No. Morse Taper Blank End Dimensions			
CA1MTBLANK	1	22mm x 29mm	
CA2MTBLANK 2 25mm x 36mm			
CA3MTBLANK 3 25mm x 36mm			

MORSE TAPER TO DIN TAPER			
Part No.	Morse Taper	DIN Taper	
CA1MTB10A	1	B10	
CA1MTB12A	1	B12	
CA1MTB16A	1	B16	
CA1MTB18A	1	B18	
CA2MTB10A	2	B10	
CA2MTB12A	2	B12	
CA2MTB16A	2	B16	
CA2MTB18A	2	B18	
CA2MTB22A	2	B22	
CA3MTB12A	3	B12	
CA3MTB16A	3	B16	
CA3MTB18A	3	B18	
CA3MTB22A	3	B22	
CA3MTB24A	3	B24	
CA4MTB16A	4	B16	
CA4MTB18A	4	B18	
CA4MTB22A	4	B22	
CA4MTB24A	4	B24	
CA5MTB16A	5	B16	
CA5MTB18A	5	B18	
CA5MTB22A	5	B22	
CA5MTB24A	5	B24	





ROUND SHANK TO DIN TAPER			
Part No. Diameter DIN Taper			
CA1/2-B16	1/2″	B16	
CA1/2-B18	1/2″	B18	
CA5/8-B16	5/8″	B16	

Discontinued when current stocks depleted



MORSE TAPER TO THREADED SHANK			
Part No.	Morse Taper	Thread	Comment
CA1MT3/8TA	1	3/8-24	
CA1MT1/2TA	1	1/2-20	
CA1MT5/8TA	1	5/8-16	
CA2MT3/8TA	2	3/8-24	
CA2MT1/2TA	2	1/2-20	
CA2MT5/8TA	2	5/8-16	
CA3MT3/8TA	3	3/8-24	
CA3MT1/2TA	3	1/2-20	
CA3MT5/8TA	3	5/8-16	

R-8 (BRIDGEPORT) TO JACOBS AND DIN TAPERS

Part No.	Bridgeport	Taper	Drawbar Thread
CAR82JTA	R-8	2 Jacobs	7/16 UNF
CAR83JTA	R-8	3 Jacobs	7/16 UNF
CAR86JTA	R-8	6 Jacobs	7/16 UNF
CAR8B16	R-8	B16 DIN	7/16 UNF
CAR8B18	R-8	B18 DIN	7/16 UNF

TURRET SOCKETS					
Part No.	Morse Taper	Diameter			
SOC1MTX1	1	1″			
SOC1MTX1.5	1	1-1/2″			
SOC2MTX1	2	1″			
SOC2MTX1.25	2	1-1/4″			
SOC2MTX1.5	2	1-1/2″			
SOC2MTX2	2	2″			
SOC3MTX1.25	3	1-1/4″			
SOC3MTX1.5	3	1-1/2″			
SOC3MTX2	3	2″			
SOC4MTX1.5	4	1-1/2″			
SOC4MTX2	4	2″			



lision





DRILL SLEEVES ECONOMY RANGE Manufactured in India

Pecision

MORSE TAPER GROUND INSIDE AND OUT					
Outside	Inside				
Morse Taper	Morse Taper				
1	0				
2	1				
3	1				
3	2				
4	1				
4	2				
4	3				
5	2				
5	3				
5	4				
6	2				
6	3				
6	4				
6	5				
	Outside Morse Taper 1 2 3 3 4 4 5 5 5 6 6 6 6				

E) 0	
5	

EXTENSION SOCKETS MORSE TAPER					
	Outside	Inside			
Part No.	Morse Taper	Morse Taper	Length		
ESMT1M-1F	1	1	145mm		
ESMT1M-2F	1	2	159mm		
ESMT1M-3F	1	3	180mm		
ESMT2M-1F	2	1	160mm		
ESMT2M-2F	2	2	176mm		
ESMT2M-3F	2	3	195mm		
ESMT2M-4F	2	4	220mm		
ESMT3M-1F	3	1			
ESMT3M-2F	3	2	194mm		
ESMT3M-3F	3	3	215mm		
ESMT3M-4F	3	4	239mm		
ESMT3M-5F	3	5	270mm		
ESMT4M-2F	4	2	215mm		
ESMT4M-3F	4	3	240mm		
ESMT4M-4F	4	4	265mm		
ESMT4M-5F	4	5	300mm		
ESMT4M-6F	4	6	375mm		
ESMT5M-3F	5	3	295mm		
ESMT5M-4F	5	4	295mm		
ESMT5M-5F	5	5	335mm		
ESMT5M-6F	5	6	400mm		
ESLMT1-300	1	1	300mm		
ESLMT2-300	2	2	300mm		
ESLMT3-350	3	3	350mm		
ESLMT4-350	4	4	350mm		

NT (ISO) & BT DRILL CHUCK ARBORS





Part		Drawbar	Overall
No.	Description	Thread	Length
SY81512	NT30 x B16	M12 x 1.75	111
SY81533	SY81533 NT30 x JT3		111
SY81536 NT30 x JT6		M12 x 1.75	111
SY81513 NT40 x B16		M16 x 2.0	139
SY81543	SY81543 NT40 x JT3		138
SY81546	SY81546 NT40 x JT6		138
SY81514 NT50 x B16		M24 x 3.0	175
SY16506 BT30 x JT6		M12 x 1.75	117
SY16524 BT40 x JT6		M16 x 2.0	175

DRILL SLEEVES R-8 (BRIDGEPORT TAPER)

To enable the use of Morse taper shank tools on Bridgeport taper milling machines

Part No.	Description	Overall length	
SY81201	R8 x MT1	124mm 136.5mm	
SY81202	R8 x MT2		
SY81203	R8 x MT3	150mm	



MILLING MACHINE ADAPTORS

Used to permit the use of Morse taper shank tools in machines with NT (ISO) tapers

Part No.	Description	Drawbar Thread	Overall length
SY82900	NT30 x MT2	M12 x 1.75	124mm
SY82901	NT30 x MT3	M12 x 1.75	142mm
SY82902	NT40 x MT2	M16 x 2.0	118mm
SY82903	NT40 x MT3	M16 x 2.0	140mm



MAXIPRESS PISTON CLAMPS

Ergonomically shaped handle interchangeable & multi positionable Concealed and protected threads and piston system. Grooved fixed jaw for optimum grip of tubes, profiles, etc.Curved jaw heads which allow work around edges and protrusions. Positioning system to hold and prevent free fall of moving jaw

Covered screwthread fully protected against all outside contact welding & concrete blobs etc. Double threaded screw enhancing both pressure & speed

Part No.	Capacity	Throat Depth	Bar	Clamp Force
PH60025	25cm	12cm	35 x 8mm	9000N
PH60030	30cm	12cm	35 x 8mm	9000N
PH60040	40cm	12cm	35 x 8mm	9000N
PH60060	60cm	12cm	35 x 8mm	9000N
PH60080	80cm	12cm	35 x 8mm	9000N



PISTON CLAMPS E-F-R

Cast Iron Jaws Extra resistant rolled steel bar (90kg/mm2) Nonslip brake on moving jaw Anti rust coated bar New loss prevention brake system in models F & R

Part No.	Capacity	Throat Depth	Bar	Clamp Force	Range
PH03020	20cm	8.5cm	30 x 8mm	9000N	E
PH03025	25cm	8.5cm	30 x 8mm	9000N	E
PH03030	30cm	8.5cm	30 x 8mm	9000N	E
PH04025	25cm	12cm	35 x 8mm	9000N	F
PH04030	30cm	12cm	35 x 8mm	9000N	F
PH04060	60cm	12cm	35 x 8mm	9000N	F
PH05025	25cm	15cm	40 X 10mm	10000N	R
PH05050	50cm	15cm	40 X 10mm	10000N	R
PH05060	60cm	15cm	40 X 10mm	10000N	R
PH05100	100cm	15cm	40 X 10mm	10000N	R
PH05150	150cm	15cm	40 X 10mm	10000N	R



DEEP THROAT CLAMPS K SERIES

NEW

Cast Iron Jaws Special deep throat jaw 30 cm Extra resistant rolled steel bar 35x 8 mm Maximum pressure 5000N Throat deep 30 cm Nonslip brake on moving jaw. New fall prevention brake system





Part No.	Capacity	Throat Depth	Bar	Clamp Force
PH06030	30cm	30cm	30 x 10mm	5000N
PH06040	40cm	30cm	40 x 10mm	5000N
PH06050	50cm	30cm	50 x 10mm	5000N



CLAMP Z SERIES

Zinc coated gauged steel bar Nonslip brake on moving jaw Covered screw thread for longer life Malleable cast iron jaws



Part No.	Capacity	Throat Depth	Bar	Clamp Force
PH22015	15cm	7cm	18 x 7mm	4000N
PH22020	20cm	7cm	18 x 7mm	4000N



PIHER PROPS MULTI PROP CARGO BARS

Tilting non-slip pads adjustable to any angle. 1mm thick steel tubes. Completely weatherproof. Nylon fibreglass reinforced handle

AVAILABLE UNTIL STOCK RUNS OUT

Part No.	Contracted	Extended
PH30012	155cm	290cm



4-IN-1[™] UTILITY CLAMPING SYSTEM

V-Pad

Extender Block

StrongHandTools


ONE CLAMP - FOUR FUNCTIONS

The most versatile & economical sliding arm clamp available Each clamp comes complete with V-Pad and Extender Block Threaded hole on the base for mounting attachments Removable, reversible arm for spreading






Standard Sliding Arm Clamps are 10x faster than a C-Clamp!





Pipe Add the exclusive V-Pad to create a Pipe Clamp!



Spreader

Reverse the clamp arm and create a Spreader Clamp. Step-Over Add the Extender Block to create a Step-Over Clamp.

Part No.	Capacity	Throat Depth	Clamp Force	Pads	Tapped Hole	Weight
UD45M-C3	115 mm	80 mm	230 kg	Standard	M8	0.6 kg
UF65M-C3	165 mm	120 mm	460 kg	Standard	M10	1.3 kg
UG85M-C3	215 mm	120 mm	550 kg	Standard	M10	1.9 kg
UM105PM-C3	265 mm	140 mm	1,100 kg	Standard	M10	3.4 kg
UM125M-C3	320 mm	140 mm	1,100 kg	Heavy Duty	M10	3.5 kg
UM205M-C3	520 mm	140 mm	1,100 kg	Heavy Duty	M10	4.5 kg

LIGHT DUTY SERIES

Part No.	Capacity	Throat Depth	Clamp Force	Pads	Tapped Hole	Weight
UG1257M	320mm	180mm	350kg	Standard	M10	2.7kg
UG1657M	420mm	180mm	350kg	Standard	M10	3.0kg
UG2057M	520mm	180mm	350kg	Standard	M10	3.2kg

SUPER HEAVY DUTY SERIES

Extra Large, Extra Strong, Sliding Arm Clamps Oversize, heavy duty swivel pad Durable 42 x 20mm cross section Hex head to allow extra tightening V-Pads & Extension Blocks sold separately



Part No.	Capacity	Throat Depth	Clamp Force	Pads	Tapped Hole	Weight
UP125M	320 mm	180 mm	2,200 kg	Heavy Duty	M10	5.6 kg
UP165M	420 mm	180 mm	2,200 kg	Heavy Duty	M10	6.2 kg
UP205M	520 mm	180 mm	2,200 kg	Heavy Duty	M10	6.8 kg
UP245M	620 mm	180 mm	2,200 kg	Heavy Duty	M10	7.5 kg
UP315M	800 mm	180 mm	2,200 kg	Heavy Duty	M10	7.6 kg
UP405M	1,020 mm	180 mm	2,200 kg	Heavy Duty	M10	10.0kg
UP605M	1,540 mm	180 mm	2,200 kg	Heavy Duty	M10	10.0kg

RATCHET ACTION CLAMPS

Ratchet mechanism ensures rapid, vibration and torsion resistant clamping.



Part No.	Capacity	Clamp Force
UF65RM	178 mm	450 kg
UF100RM	254 mm	450 kg
UF100JRM#	254 mm	450 kg

J Shaped for stepover applications





MAGSPRING CLAMPS

The spring-loaded, onehanded clamp with quick-set magnetic V-Pad. The Spring Loaded Arm allows users to free up one hand to position the workpiece.



Part No	Capacity	Throat Depth	Pull Force
UDV45M	90mm	83mm	230kg
UDV65M	140mm	83mm	230kg









THIRD HAND MODULAR CLAMP

Fully Articulated. Fully Adjustable.

"Third Hand" positions your workpiece at any angle for full weld access. Use your THIRD HAND to elevate and firmly hold stock at the ideal angle and height while you weld, cut, sand or paint. Securely hold stock at any position with ball joint adjustment and locking.

Slotted Adaptor Head accepts Pliers or Clamps to hold round, flat, square or angled stock. Two screws securely hold parts or clamps in position.

Part No.	Description
HAS40	Universal Clamp Welding Table Base
HAS42	Universal Clamp Base Mount

WELDERS ANGLE CLAMPS - TWO AND THREE AXIS

2-AXIS CLAMPS


The best, secure, right angle clamping vise. Manufactured from machined cast iron.

Machined outside faces - usable for upright joints


Quick acting screw button for faster set up

Stand-Off increases access



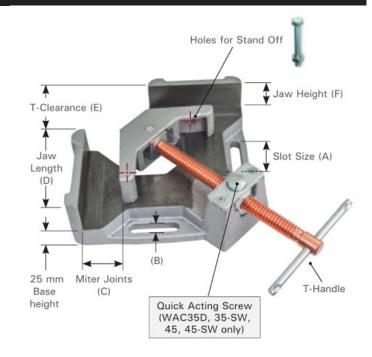


Part No.	Mitre Joints (A)	Jaw Length (B)	T-Clearance	Jaw Height (D)
WAC35D	95 mm	122 mm	62 mm	35 mm
WAC45	121 mm	135 mm	100 mm	57 mm

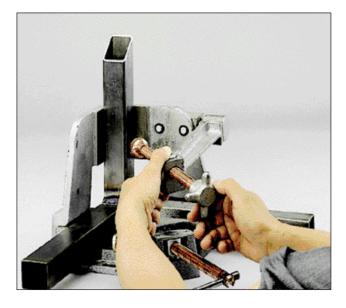

3-AXIS CLAMPS

All the features of the 2-axis clamp, plus a third arm which swings out to allow quick and easy removal.

Holds a three axis workpiece in position for welding and leave clamped during cool down to minimize distortion due to contraction.

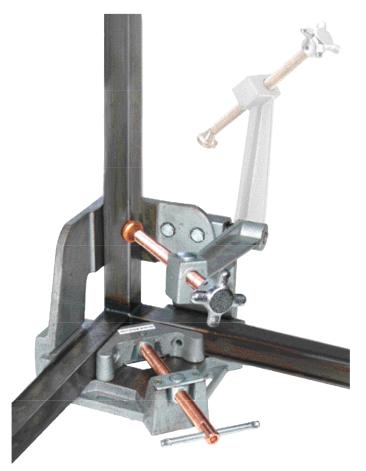

Part No.	Mitre Joints (A)	Jaw Length (B)	T-Clearance	Jaw Height (D)
WAC35-SW	95 mm	122 mm	62 mm	35 mm
WAC45-SW	121 mm	135 mm	100 mm	57 mm

Magnet Rest Blocks to Suit 3-Axis Clamps (Pair)





Clamp stock of different thicknesses at multiple angles. Patented Quick Acting Button for FAST setup! Magnetic Blocks (included) to support long stock.

- Jaw Opening: 4" / 100 mm
- Jaw Height: 1-3/8" / 35 mm


• Clamp round and square tubing, angled and flat stock at 5° to 180°.

• Copper plated screws with Quick Acting Buttons.

• Individual Angle Clamps easily swivel on the fixture base






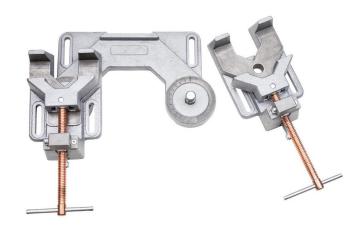

NEW

WAV 200 DUAL VICE






Part No.	Description
WAV200	Stronghand Dual/Duo Vice
WAS100	Stronghand Single Vice

MORE STRONGHAND PRODUCTS TO COME!

INSIDE / OUTSIDE ADJUSTABLE MAGNETS

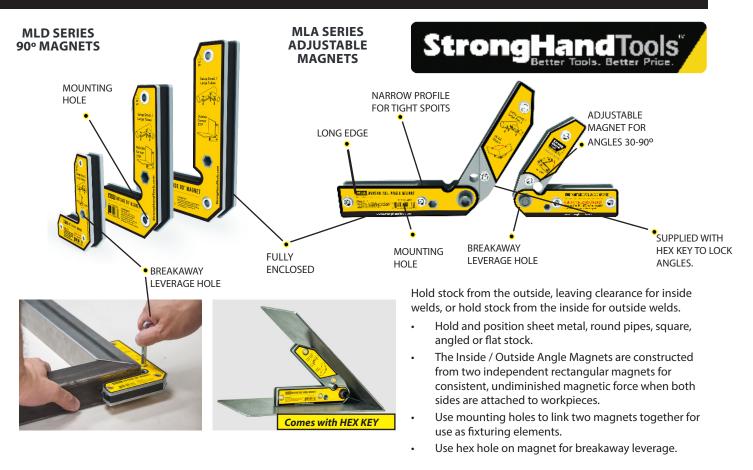

Part No.	Angles	Height	Width	Thickness	Mag. Pull Force	Weight
MLDT350:		Set of 2 : Contai	ns MLD300 + MLE	0500 (1 of each)		2.31 lbs. (1 kg)
1pc MLD300	90° (30°, 60°)	3″ (75.5 mm)	2" (52 mm)	0.55″ (14 mm)	20 lbs. (9 kg)	
1pc MLD500	90° (30°, 60°)	5″ (125 mm)	3.35″ (85 mm)	0.55″ (14 mm)	33 lbs. (15 kg)	
MLD600	90° (30°, 60°)	6" (165 mm)	4.33" (110 mm)	0.79″ (20 mm)	40 lbs. (18 kg)	1.61 lbs. (0.7 kg)
MLA450	30-270°	4.7″ (120 mm)	4.7″ (120 mm)	0.72″ (18 mm)	26 lbs. (12 kg)	0.86 lb. (0.4 kg)
MLA600	30-270°	6″ (156 mm)	6″ (156 mm)	0.79″ (20 mm)	33 lbs. (15 kg)	1.5 lbs. (0.7 kg)

MAGTAB MAGNETS

The better, faster way to hold tabs in place for tack welding! Hold tabs, or any small metal pieces,

parallel or perpendicular to the substructure.

The Adjustable Magnetic V-shape base adjusts for different shapes: round, flat, angle metal surfaces MagTab JUMBO MNT15.



		A REAL PROPERTY AND A REAL
Part No.	Dimension	Pull Force
MFT10	100 mm x 76 x 32	8 kg
MFT17	111 mm x 73 x 38	8 kg
MNT15	132 mm x 114 x 71	16 kg
MFT12	Symmetric Mag tabs	(L&R Facing)
MTH20	Combo Pack	Square / Round

MAG-HOLD & MAG-REST V-PAD KITS

Handy accessories for holding of round, flat, and square parts in light duty substructure applications. Each V-Pad contains 4 magnets. MVDF44 - Mag Hold Kit Magnets on both pad face and the bottom. MVDF42 - Mag Rest Kit Magnets on the bottom only.





Part No.	Pull Force
MVDF44	8 kg
MVDF42	4 kg

DUAL SWITCH MAGNET SQUARES & ADJUST-O MAGNET SQUARES

The fast & easy way to hold metal workpieces at 45° & 90°.

Turn the magnet Off when setting up, turn On when you're ready to work. Fast and safe set-up!

Ideal for round and square tubing, angle, and flat stock.

Part No.

MSA46-HD

MSA48-HD

MSA53 multi angle: 30°, 45°, 60° & 90 °



Dimension

111 mm x 95 x 29

152 mm x 130 x 35

For professional jobs that demand strong hold down forces. Hold flat and round metal work pieces. Two On/Off switches for independent

operation. Precision machined flat and V-surfaces are ideal for round and

square tubing, angle, and flat stock.



Part No.	Pull Force	Dimension
MS2-80	55 kg	152 mm x 152 x 38
MS2-90	120 kg	197 mm x 197 x 48

MSA53-HD 65kg 152 mm x 130 x 35

Pull Force

40 kg

75 kg

Adjustable from 30° - 275° with two On/Off switches.

Precision machined flat surfaces and nickel/chrome body.

V-Groove surfaces securely hold round and square tubing, angle, and flat stock.

Part No.

MAV120



STANDARD MAGNET SQUARES

For professional jobs that demand strong hold down forces. Hold flat and round metal work pieces.

Precision machined flat and V-surfaces are ideal for round and square tubing, angle, and flat stock.



Pull Force

40 kg

Dimension	Part No.
197 mm x 197 x 95	MS346C

MINI MAGNET SQUARES

Pull Force

50kg

Holding at multiple angles while soldering, brazing, and welding at 30°, 45°, 60°, and 90°.

The compact size makes it easy to pack, store, and carry.

Dimensions 59 x 51 x 16mm



Part No.	Description	Pull Force
MS346AT	Twin Pack	10 kg
MS346AK	6-Pack	10 kg

CORNER MAGNET

Create 90° corners by holding from the outside, providing you with an unobstructed area for inside tack welds. One side corner "relief" provides clearance for tall lips. Use the outer edges of the Corner Magnet for setting up materials at 60°.

XYZ MINI MAGNETS

Angles

30°, 60° 45°, 90°

Quickly and easily set-up 2 or 3-Axis workpieces.

Re-position, while holding. Tap or slide workpieces to fix positioning, without removing the magnet.

Magnetic face plate features two rare earth disc magnets for 3rd axis holding.




Part No.	Description	Pull Force
MST348	Twin Pack	10 kg



STRONG GRIP PLIERS

The Easiest to GRIP, ADJUST & RELEASE.

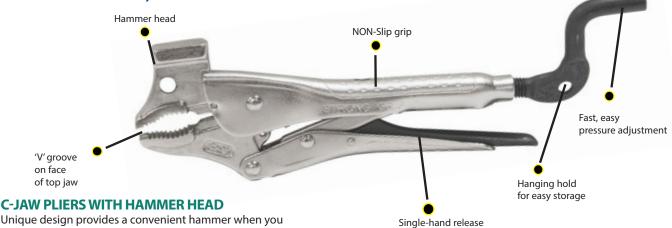

trigger

Unique design provides a convenient hammer when you need it, where you need it!

Part No.	Opening	OAL	Weight
PCH10	40 mm	300 mm	0.6 kg

ADJUSTABLE, LARGE CAPACITY BIG-MOUTH PLIERS

4 Adjustment Slots

- Adjust instantly to hold large or small workpieces.
- Unique crank handle for FAST opening, closing, adjusting. .
- Serrated jaw surfaces for extra gripping power. •
- V-Notch on top jaw for holding small parts.
- Long jaw [2-1/4" / 64 mm] for extra capacity and greater versatility in workhold • Keep this versatile tool on hand for fast clamping in a variety of jobs!

BIG MOUTH PLIERS

Part No.	Max. Opening	Throat Depth	OAL	Weight
PAJ100	80 mm	64 mm	250 mm	0.7 kg
PAJ207 Copper Grounding	80 mm	64 mm	250 mm	1 kg

C-JAW PLIERS

Machined curved jaws with serrated teeth tightly grip round stock as well as a variety of shapes.

Part No.	Opening	OAL	Weight
PCJ50	1"(26 mm)	7"(180 mm)	0.4 lb.(0.2 kg)
PCJ70	1.6"(40 mm)	9.6"(245 mm)	0.8 lb.(0.4 kg)
PCJ100	1.6"(41 mm)	12"(300 mm)	1.2 lbs.(0.6 kg)
PCJ120*	2.2"(55 mm)	14"(360 mm)	2.0 lbs.(0.9 kg)

LOCKING CHAIN PLIERS

Clamp odd shaped multiple items. Adjust tightness with crank handle. Replaceable chain available in 24", 36", and 48" lengths.

Part No.	Chain Length	Holds Pipes	Weight
PFC1024	600 mm	165 mm	0.9 kg


REPLACEMENT CHAIN

Part No.	Chain Length
PXC36	910mm
PXC48	112cm






COPPER Grounding Big Mouth pliers with copper jaw and ribbon

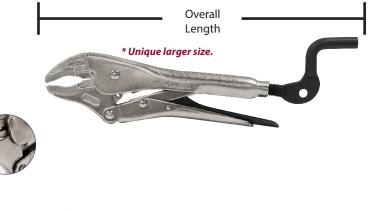



STRONG GRIP PLIERS

StrongHandTools

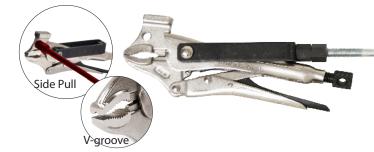



Unique!


DUAL AXIS PULL PLIERS WITH HAMMER HEAD

An essential pulling, pushing, ramming tool for the die-maker, maintenance craftsman, and auto repair shop mechanic. Pull Rod mounts in the swing handle, or in the threaded hole for 2-axis pulling or pushing.

Part No.	Opening	OAL	Weight
PPD100	1.6″ (40 mm)	28″ (715 mm)	1.7 lbs. (3.8 kg)



SELF ALIGNING PULL BAR



Unique!

ECONOMY PIPE PLIERS

Large Capacity (3"/75 mm)! Holds round, square, flat or angled. The large (1.5" / 38 mm dia.) swivel pad clamps at multiple angles.

Part No.	Opening Round / Square	OAL	Weight
PVS100	up to 3″ (75 mm)	14″ (360 mm)	2.2 lbs. (1.0 kg)



U-PRONG PLIERS

Wide U-Shaped jaw for workpiece visibility, weld access, secure holding.

Part	t No.	Opening	OAL	Weight
PU	P90	2″ (50 mm)	11″ (275 mm)	1.3 lbs. (0.6 kg)
PUF	P100	3″ (80 mm)	13.4″ (340 mm)	1.9 lbs. (0.9 kg)



SHEET METAL PLIERS

Wide, robust contact plates for getting a firm hold on sheet metal.

Part No.	Parallel Opening	OAL	Weight
PDB80	0.4″ (10	10″ (250	1.2 lbs.
	mm)	mm)	(0.5 kg)
PDB90	0.6″ (15	12.6″ (320	1.7 lbs.
	mm)	mm)	(0.8 kg)



LONG NOSE PLIERS Long, slim nose for access in tight, narrow, hard to reach areas.

Part No.	Parallel Opening	OAL	Weight
PLN50	0.2″ (5 mm)	8″ (205 mm)	0.4 lb. (0.2 kg)
PLN90	0.2″ (6 mm)	10.6″ (270 mm)	0.9 lb. (0.4 kg)

LOCKING CLAMPS

Made of heat treated steel and nickel/chrome plated for strength and durability. Updated features help you work quickly, safely and efficiently.

Round Tip



Swivel Tip






Part No.	OAL	Throat Depth	Opening
Round Tips			
PR6	165 mm	46 mm	56 mm
PR115	280 mm	83 mm	102 mm
PR18	450 mm	254 mm	114 mm
Swivel Tips			
PR6S	165 mm	46 mm	56 mm
PR115S	280 mm	83 mm	102 mm
PR18S	450 mm	254 mm	114 mm

MULTI-PURPOSE PLIERS

One swivel pad spindle and a fixed head spindle for flexible clamping. Threaded jaw holes allow addition of accessories.

Swivel pad

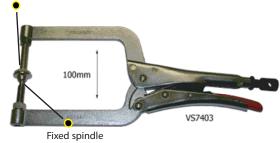

Part No.	OAL	Throat Depth	Opening	Thread
PG622	150mm	50mm	64mm	M8
PG114M	280mm	89mm	102mm	M10
PG134	330mm	140mm	102mm	M10

PGA20M

ADJUSTABLE REACH ARMS WITH TOP AND BOTTOM ADJUSTABLE SPINDLES



PGA20S

ADJUSTABLE REACH ARMS WITH TOP AND BOTTOM FIXED JAW



Part No.	OAL	Throat Depth
PGA20M	585-740mm	350mm, 405, 460, 510
PGA20S	585-740mm	350mm, 405, 460, 510

PIPE PLIERS

The convenient way to hold round or square tubes for butt welding.





Part No.	Description	OAL	Throat Depth	Min/Max Dia	Thread
PG622V	6" pliers, fixed V pads (2 x XDV)	152 mm	50 mm	25 mm - 50	M8
PG634V	8-12" pliers fixed pads (2 x XDV)	215 mm	76 mm	50 mm - 80	M8
PG635V	Adjustable Top V-Pad Spindle large V pads (XFV & XFV2)	215 mm	76 mm	40 mm - 64	M8
PG114VM	11" pliers fixed larged V pads	280 mm	89 mm	40 mm - 64	M10

THE GRASSHOPPER - WELDING FINGER CLAMP

- Use the "Welding Finger" to steady parts for tack welding! Safe and convenient!
- Steady small parts, such as: bolts, nuts, and thin plates for tack welding at odd angles with full welding clearance.
- No other devtice can do what the Grasshopper does!

MAGNETIC GRASSHOPPER

- One-piece, fully adjustable clamp is easy to place and remove.
- Hold steel stock in the vertical position with self-adjusting holding pressure
- Use in tight, hard-to reach spaces with no obstruction for tack welding.
- Place the adjustable magnetic base on round, square, flat or angled surfaces.





N	
UCEU	



Part No.	Includes	Max OAL	Width x Height	Weight
AGH130P	Spring Clip, Grounding Ribbon & 3 Brass Tips	300mm	114-102mm	.69kg
AGH200	Small Magnetic V-Pad, Spring Clip, Brass Tip	190mm	64-89mm	.23kg
AGH230	Large Magnetic V-Pad, Spring Clip, Brass Tip	200mm	102-102mm	.45kg

CORNER PLIERS - ANGLE CLAMPING TOOLS

Fast, Precise and Affordable Clamping Tools for corners and T-Joints

Throat

Depth

76mm



Part

No.

PL634

PL Series

Ideal for quick hold & release on wood, metal & synthetic materials.

A helping hand to stock firmly at right angles while creating or repairing permanent joints



PT Series

Retractable plate for edge alignment V-Grooves for holding round pieces.

Ideal for holding two pieces of different thicknesses that require individual adjustments.

Part	Throat	Max
No.	Depth	Capacity
PT634	76mm	76mm



90° Corner Clamp The adjustable top bracket is affixed to a Spring-Loaded arm for quick set ups.

Max

Capacity

32mm

Large opening accepts 50mm tubes.

Can be used with PG634V Pipe Pliers for holding 3-axis workpiece

Part	Throat	Max
No.	Depth	Capacity
UDL365	76mm	50mm



PA Series


Adjustable from 30° - 275° using the locking handle.


Join round & flat workpieces, or materials with different thicknesses.

Part	Throat	Max
No.	Depth	Capacity
PA622	51mm	32mm
PA634	76mm	76mm

BENCH-MOUNT PLIERS HOLDER

Convenient storage, or Hands free use Holds in Vertical & Horizontal positions Wing Nuts on both Vertical and Horizontal positions lock pliers in place








PANEL CLAMPS

Magnets hold clamp parts and panels together. Magnets in the keeper plate and the clamp body hold your panels in position for a

speedier, & more efficient setup. Turn the Spring-loaded screw to adjust the opening to accept panels of different thicknessess [max 5mm]

Part No	Description
MPC12	Twin Pack



EXPAND-O PLIERS

Unique, Reverse action clamping pliers, The jaws move in the opposite direction to push against two surfaces

Ā	Clamping				
	Part No.	OAL	Pressure	Min	Stroke
Min.	PE6M	165mm	230kg	25mm	19mm
	PE10M	255mm	410kg	35mm	35mm
PE10		Pipe Adaptors.			
PEIO			Part	For	
Optional Pipe Adaptors			No.	Clamps	
Attach 1/2" NPT pipes for wide spreading		MLDX	Suits PE6M		
🛉 🥌 jobs.			XFJM	Suits PE10N	1

TABLE MOUNT LOCKING C-CLAMPS

Mounts directly to any work bench, drill press and fixtures ,Mounting base hole accepts standard M8 bolts and uses push down action to hold your workpiece securely.

Use the Crank-Handle for pressure adjustment, Rapid lock and release. Ideal for repititious clamping.

Part No	
PT09	

DRILL PRESS CLAMP

Drill Press Clamps quickly lock and release, making them ideal for repetitious clamping. Secure the Drill Press Clamp to any surface, up to 25.4 mm thick.

M12 x 38 mm Stud and convenient, ergonomic zinc plated knob.

Use the handy crank handle to: increase torque; pre-set the Pliers opening for repetitious clamping applications and loosen the Pliers before unlocking.

- A - THREAD	

Part No	
PTD09	

Part Number

MFC312

SNAKE MAGNET

The Third Hand—Holds, Bends, Twists Comes complete with 2 magnetic pads and 1 spring clamp 450mm Flex Cable links the magnet and spring clamp Can be used to hold small parts, tools, & lights

Pull Force

8kg

TORPEDO MAG-LEVELS

The use-anywhere, view anywhere compact magnetic level 4 strong magnets allow hands-free use on metal surfaces V-Groove on one side for pipe and conduit work Robust, solid anodized aluminium body Dimensions 178mm x 32mm x 25mm

Dimensions 176mm x 52mm x 25mm		
Part No.	Angles	
LM3723	0°, 45°, 90°	





POWERBASE GROUNDING MAGNET

Power through your grounding applications

The Powerbase Grounding Magnet sets up quickly and easily. Start grounding instantly! Powerful rare earth magnet delivers heavy duty holding power

The "V" machined surface grips round parts

The copper connector stud is located on top and allows for a full 360° cable rotation. Rugged, compact steel housing for a fast and safe ground, even in tight spots!

Part		Dimension	Magnetic
No.	Amperage	mm	Force
GM203	300A @ 60% Duty Cycle	50x50x64	34kg
GM205	500A @ 60% Duty Cycle	50x70x64	50kg

GROUND HOG CLAMPS & PLIERS

High clamping pressure improves arc stability and reduces power consumption Prevents current restriction and allows a complete transfer of the electrical current Controls the electrical current by isolating the contact surface and the cable connection Get a smooth, continuous arc with no fade, and no heat transfer while improving cable life, and reducing power consumption.

The Ground Hog

The groove design on the copperhead seals out weld spatter and reduces particle buildup. Side screw provides a secure cable connection

Ground Hog body rotates for cable positioning

Part	Max	Throat	AMPS
No.	Opening	Depth	Rating
CLAMPS			
GF1751	135mm	120mm	550
PLIERS			
GP1530	55mm	70mm	300
GP950 (GP2850)	70mm	80mm	450
GC5010	Ground Hog Spare Contact		

GROUNDING CLAMPS

Clamping & Grounding at the same time

Consistently rated at 300 AMPS

Solid, insulated copper U-channel rotates for easy access and can attach to round / odd shaped parts

Part No	Amperage	Clamping Pressure
GB428	300A	100kg

STRONG GRIP GROUND CLAMP

The most efficient Ground Clamp on the market

Exclusive design copper contact grips round or flat section

Insulation prevents shorting to plier frame

Threaded stud at the side for attaching ground cable fitted with 8mm field lug

Speed crank & adjustable clamp spindle

Suitable for welding applications up to 350 amps

Part N	0
GP628	3









MAGTAB MAGNETS

The better, faster way to hold tabs in place for tack welding! Hold tabs, or any small metal pieces, parallel or perpendicular to the substructure.

The Adjustable Magnetic V-shape base adjusts for different shapes: round, flat, angle metal surfaces MagTab JUMBO MNT15.




Part No.	Dimension	Pull Force
MFT10	100 mm x 76 x 32	8 kg
MFT17	111 mm x 73 x 38	8 kg
MNT15	132 mm x 114 x 71	16 kg
MFT12	Symmetric Mag tabs	(L&R Facing)
MTH20	Combo Pack	Square / Round

MAG LEVEL

The only magnetic level with the On/Off switch. Holds securely to round and flat surfaces.

Three vials for 0°, 45°, 90° reading.

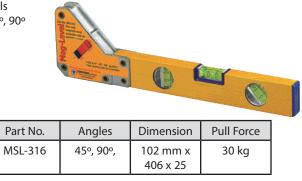

HANDI-HAMMER

The unique dead blow tapper. One steel end and one soft face. Eliminates bounce back and increases impact.



Part No.	Dimension	Weight
CH-10	40 mm x 127	10 oz
CH-14	45 mm x 133	14 oz

MAG-HOLD EXTENDABLE ARM

Position and hold steel stock in welding and fabrication. Telescoping mounting bar adjusts from 178 to 254mm in length. Loosen the center joint in the mounting bar to "fold up" the MagHold™ for different workholding configurations.

Adjustable magnetic v-pads at each end hold stock of different shapes: round, flat, angled.

Part No.	Pull Force	Weight
MHF608	8 kg	0.6 kg



NOMAD ECONOMY WELDING TABLE

Fully Adjustable. Easily Movable. Very Affordable.

Three 28mm slots in the tabletop allow for insertion of clamps to reach any point on the table.

Tabletop tilts to three positions: Horizontal, 30°, and folded.

Two retractable, perpendicular steel guide rails can be used as guides, stops, or clamping edges.

Height can be adjusted from 66cm to 81cm.

Tabletop size 760mm x 510mm

Kit includes : 2 x MagSpring Clamps UBV45, 1 x Multi-Angle Magnet MS346C,

1 x Mini-Magnet MS346A, and 2 x Adjustable Magnetic V-Pads XDV4

Part No.	Description	Load Capacity	Weight
TS3020	Table	160 kg	20 kg
TSK104M	7 piece kit		22kg
TSL30	Connector Plate	160 kg	7.4 kg

www.pretooling.com.au



READY REST

You don't work in one fixed position, so neither should your torch rest.

The height and angle adjustable ReadyRests attach securely to any steel surface for safe and convenient holding of your torch and cable for full access while you work. The unique adjustable cable hanger provides cable control for safety, and ease of handling. Store your torch on the ReadyRest to prevent damage and create a clean, organized work area.

"Ready When You Are"

MIG GUN RESTS

MRM200 is Height & Angle Adjustable and features an angled anti-spatter Gel Pot

Part No.	Description	Height	Weight
MRM100	MIG Torch Rest with Cable Hanger & Accessory Plate	150 mm	0.95kg
MRM200	MIG Torch Rest with Cable Hanger & Accessory Plate, Adjustable Height	180 - 310mm	1.6kg



DEEP BEND for extra-secure torch holding.

Rounded Edges prevent scratching.

Adjustable Cable Hanger holds cable "slack" for safety and reduced wrist fatigue.

MRT200 is Height Adjustable

MRT50 is the unique table edge mount model.

Part No.	Description	Height	Weight
MRT100	TIG Torch Rest with Cable Hanger	190 mm	0.95kg
MRT200	TIG Torch Rest with Cable Hanger & Adjustable Height	180 - 310mm	1.3kg
MRT50	Table Edge Mount TIG Torch Rest with Cable Hanger	140mm	0.50kg

UNIVERSAL REST

The Universal Rests hold your MIG or TIG Torch, or Electrode Holder. The Stainless Steel housing is angle-adjustable, with an adjustable keeper plate inside for secure, customizable holding.

Part No.	Description	Height	Weight
MRD80	Universal Rest with Cable Hanger	151 mm	1.1kg
MRD90	Adjustable Height Universal Rest with Cable Hanger & Accessory Plate	178 - 305mm	1.8kg

POWER GRINDER RESTS, C-CLAMP BASE MODEL W/ VERTICAL MOUNTING PLATE

Store your Grinder and all accessories on one convenient, compact, portable rest for easy access. No more searching for wrench or spare discs. Holds most 5" Grinders. Also holds keys & spare discs.

Part No.	Description	Weight
MGK53	Grinder rest C-clamp	1 kg
MGH45	Grinder rest magnetic base	1.1kg















MGH43



ARM & WRIST REST

ARA18 -Fully articulated Arm Rest.

Fully adjustable Arm Rest with fully articulated arm, supports your extended arm while working. Steady your arm or hand, for greater weld control and reduced fatigue. The 2-section Articulated Arm is height adjustable [slide up or down the support column] and swivels quickly and easily for work in precise locations.

The comfortable, generously sized arm cup turns in a 360° arc for complete freedom in positioning, and instant re-positioning. Place the sturdy, anti-tipping, magnetic base plate on any steel surface and level by adjusting the two leveling bolts.

ARW16 - Fully Adjustable Wrist Rest

The Rest Bar is height adjustable [slide up or down the support column].Place the sturdy, anti-tipping, magnetic base plate on any steel surface and level by adjusting the two leveling bolts. For space-saving storage, remove the Rest Bar from the adjustment column for vertical docking. An important addition to any welding setup. Steady your wrist for accurate welding and greater work quality with less fatigue.

Part No	Description	Arm Height Range	Arm Reach	Weight
ARA18	Articulated Arm Rest	150 - 380mm	0 - 320mm	2.2kg
Part No	Description	Rest Bar Height Range	Rest Bar Length	Weight
ARW16	Adjustable Wrist Rest	0 - 470mm	280mm	2.6kg





A-FRAME HD MAGNET

New for sheet metal and large stock holding

Hold large workpieces in the upright position.

Each magnet has an independent ON / OFF switch

Machined flat and V-faces hold round, square, flat, and angled stock.

330 mm x 330 mm x 32mm

Maximum Pull Force 120 Kg

Part No MS2-300

HALF CLAMPS

The Efficient, Safe Way to Align Materials

The DOG & WEDGE methods of material alignment are messy, time consuming and unsafe. Align materials in the fabrication of water tanks, bulkheads, deck sections, flat plates, etc Ideal for fabricators, repairmen, ship and barge builders

<u> </u>	
	Part No
	VHC15

SIDE CLAMPS

Build push-action clamp to custom heights.

Fit standard 38mm pipe or cut any length to the clamp body and base Base can be bolt-mounted to the table

Part No	
VSC15	

NEW

HOLD DOWN CLAMP

Part No.	Capacity	Weight
VDG30	2-3/4" (70mm)	2LB / .9Kg

The 1/2" copper plated ACME spindle resists weld spatter, and the swivel tip makes quick contact with your workpiece.

Hold pipes by adding our Clip-On V-Pad (XDA2).




www.pretooling.com.au



*For further specifications please visit our website








GAS CYLINDER RANGE







GAS CYLINDER CART

This new CYLINDER CART allows you to safely lift, move, place and store heavy cylinders. The sliding Stainless Steel Keeper Bar holds the cylinder securely in place without the use of chains or straps.

Rugged round steel tube welded construction for strength and durability, with powder coated finish.

Wheels: 8" pneumatic wheels + 3" locking wheels for mobility and storage.

Part	Load	Cylinder	Unit
No.	Capacity	Size	Weight
GCC200	180kg / 400lb	215-230 (mm)	22kg / 48lb

GAS GRABBER

-Two handles for safe, two-person team lifting.

- 8-point cylinder contact and friction pads provide a positive, safe hold.

- Scissor-action handles automatically engage for secure lifting.

TO SUIT CYLINDERS 215-230mm or 8.5-9" diameter

Part	Product	Net
No.	Dimensions	Weight
GCL230	20" x 11" x 4"	3.17 kg





GAS HOOK

Part	Product	Net
No.	Dimensions	Weight
GCH140	9′ x 7″ x 4″	.70 kg

ACCESSORIES

Standard V-Pads. Attach to pliers or clamps to hold round & angled workpieces

Part No	For Clamps	For Pliers
XDV	UD	PG622
		PG634
XFV	UE, UF, UG	PG114, PG134
		PG204, PGA20
XMV	UM, UP	-
XDVS [SS]	UD	PG622
		PG634
XFVS [SS]	UE, UF, UG	PG114, PG134
		PG204, PGA20
XMVS [SS]	UM, UP	-

Clip On V-Pads


Part No	For Clamps
XDA2	UD
XFA2	UE, UF, UG
XMA2	UM, UP
XFA2S [SS]	UE, UF, UG
XMA2S [SS]	UM, UP



Screw-On V-Pads

Part No	For Clamps
XMA	UM, UP
XMAS [SS]	UM, UP













Extender Blocks. Attach to U-Clamps for Step over & Spreading applications

Part No	For Clamps	Size Thread D.L
XFBM	UE, UF, UG	M10. 30mm. 51mm
XMB2M	UM, UP	M10. 30mm. 51mm

Sidekicks. Mount to U-Clamps for 2 axis horizontal clamping

Part No	For Clamps	Length & Stroke
XFSM	UF	111mm & 35mm
XGSM	UG	111mm & 35mm
XMSM	UM	111mm & 35mm

Bench Rests. Supports U-Clamps in standing position

Part No	For Clamps
XMU2	UM

Heavy Duty replaceable pads

Part No	Description
XMJ	Swivel pad assembly HD

PIPE ALIGNMENT CLAMP

TWO SIZES, THREE SIMPLE INSTRUCTIONS

PRESS - SLIDE - SET

The New Pipe Alignment Clamp with Quick-Acting Screw is a fast, accurate fit-up clamp with a rugged frame for use in the shop, or at the job site.


Get a well-balanced hold on the Pipe Alignment Clamp with the two wide Grip Plates while pressing the Quick-Acting Button. The threaded screw smoothly glides up and down for fast jaw opening and clamp removal after welding.

The long life clamp is made of double-walled powder coated steel. Align pipe for joining pipe to elbow, pipe to tee, or pipe to flange.

Part No.	Capacity	Weight
CPA60	2" ~ 6" (50 ~ 152 mm)	11 lbs. (5 kg)
CPA120	4.5" ~ 12" (114 ~ 305 mm)	17 lbs. (8 kg)






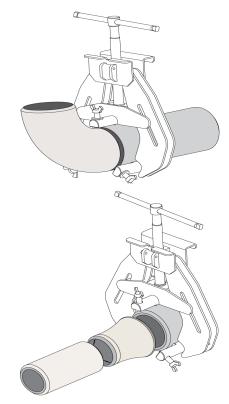

PIPE FIT UP CLAMP

A compact, light weight, portable clamp for the quick fit-up of round pipes and flanges for butt welding.


Easy-to-Use design for the rapid, repeated loading and unloading of workpieces.



1. Set clamp screws for your pipe diameter.



2. Move clamp forward.



3. Place second pipe and tighten.



Part No.	Pipe Diameter Capacity	Clamp Rods Width	Overall Length	Weight
CPL45	50 ~ 100 mm	89 mm	241 mm	1.3 kg
CPL75	100 ~ 140 mm	89 mm	305 mm	2.1 kg

www.pretooling.com.au





NOGA GRANITE BASE STAND

NOGA Granite Base Stand and articulated holders with fine adjustment on top. NOGA Granite Base Stands are made with high quality and hardened granite. Due to its stability and ease of use, NOGA's articulated holders have become the most sought-after in the industry.

• Solid 3D articulated holder with central locking system with NOGA designed spring loaded bearing mechanism.

- Fine adjustment on top with universal swivel clamp.
- Holds 6mm, 8mm, 3/8" and dovetail.
- Fast and easy to set up gauges into required position.
- Black finished arms.

NEW

Part No.	Description
MT2000	Granite Base Stand & DG Articulated Holder
MT2100	Granite Base Stand & MG Articulated Holder



NOGA V BLOCKS

NOGA Heavy Duty V Block Magnet Sets, including a choice of Noga holders, can help with the numerous challenges of the skilled operator of machine tools.

Utilized for general shop applications: securing & layout of items with various shapes, holding

stock securely in place during light-duty operations such as boring, tapping, milling, drilling and grinding.

Noga is offering a selection of V Block Magnet sizes with either a NF or PH Holder.

Designed to hold dial and test indicators as well as other components.



Part No.	Description
VB1300	V Block Magnet (VB1002) 60x73x100 with Noga NF Holders (NF60103)
VB1100	V Block Magnet (VB1002) 60x73x100 with Noga PH Holders (PH3101)
VB1400	V Block Magnet (VB1004) 70x95x120 with Noga NF Holders (NF60103)
VB1200	V Block Magnet (VB1004) 70x95x120 with Noga PH Holders (PH3101)
VB1002	V Block Magnet Only (60x73x100)
VB1004	V Block Magnet Only (70x95x120)



TEST INDICATOR HOLDERS

NF1021

Unique 5 axis, 3 dimensional Holder Has unique patented 360 degree fine adjustment at the base. Central locking mechanism with NOGA designed spring loaded bearing. On/Off magnetic base 17 Kg/f. Holds test and dial indicator on 8mm, adaptor to 6mm and dove tail.

NF1022



Test Indicator Holder arm for centering of workpieces Has universal fine adjustment. Will hold 6mm, 8mm, 3/8" dovetail

HOLDING SYSTEM

ECONOMICAL HOLDER

Features universal holder with unique 5 positions clamp. Will hold 6mm, 8mm, 3/8" stems. Has dovetail & screw for holding back lug. No fine adjustment Part No. MB1000

Post 12 x 180mm Arm 10 x 165mm

POST HOLDER FAB

PH Holder with unique Fine Adjustment at the base. Universal swivel clamp for all dial and test indicators. Strong arm lock via 3 points clamp.

Part No. PH2040





Post 14 x 203mm Arm 12 x 185mm

POST HOLDER FAT

PH Holder with Fine Adjustment on top with Universal swivel clamp for all dial and test indicators. Strong arm lock via 3 points clamp. Part No. PH6800

> Post 18 x 350mm Arm 16 x 225mm



Similar to NF1021 but with powerful 28 Kg/f permanent magnetic base. Can be mounted on flat as well as on curved surfaces.



Test indicator holder arm with 8mm diameter long stem. Most useful for centering holes on milling machines.



TOP ATTACHMENT FOR ARTICULATED HOLDERS

Fine adjustment, Holds 6mm, 8mm, 3/8", dovetail

Part No. FA1500

TOP ATTACHMENT No fine adjustment Part No. FA1100





HOLDING SYSTEM DIAL

Dial Gauge DG1000

Dial diameter 58mm, stem diameter 8mm Measuring range 0-10mm, graduations 0.01mm

Flat back



HOLDING SYSTEM MAGNETS





Part No	Description		
DG0036	On/Off magnet 800 N M8 thread. 50 x 60 x 55m		
DG0038	On/Off magnet 1000 N M8 thread. 50 x 75 x 55mm		
DG0039	On/Off magnet 1300 N M10 thread. 50 x 120 x 55mm		
NF0037	On/Off magnet 320 N M5 thread. 30 x 40 x 35mm		
DG1003 On/Off magnet 1000 N Multi thread. M6, 8, 10 & 10x1.25			
DG0040	Vacuum Base 350 N M8 thread 92mm diameter		

DIAL GAUGE HOLDERS



Arm only

DG60103	110mm	101mm
MG60103	133mm	113mm
MA60103	326mm	242mm



DOUBLE FINE ADJUSTMENT HOLDER BASE & TOP

New Double Fine Adjustment: Top: universal swivel clamp. Bottom: Unique single direction.

Part	Bottom	Тор	Magnet	Holder
No.	Arm	Arm	Force	Bottom Thread
DG6160	110mm	101mm	800 N	Ext M8
MG6161	133mm	113mm	800 N	Ext M8

ARTICULATED ARM HOLDERS

Due to its stability and ease of use, the NOGA articulated holder has become a popular workshop tool for holding gauges and indicators.

Fine adjustment on top with universal swivel clamp Holds 6mm, 8mm, 3/8", dovetail Central locking mechanism with NOGA designed spring loaded bearing Five axis holder Powerful On / Off magnetic base Instant fixation in any position Fast and easy to set up gauges into the required position Black finished arms

Part	Bottom	Тор	Magnet	Magnet
No.	Arm	Arm	Force	Part No.
NF61003	56mm	51mm	320 N	NF0037
DG61003	110mm	101mm	800 N	DG0036
MG61003	133mm	113mm	800 N	DG0036
MG71003	163.5mm	113mm	800 N	DG0036
MA61003	326mm	242mm	1300 N	DG0039




HOLDER WITH FINE ADJUSTMENT AT BASE

Unique single direction fine adjustment at base. Powerful on/off magnetic base. Unique central locking mechanism with Noga designed spring loaded bearing. Five position. Easy to set up into required position. Black finished Arms.

Part	Bottom	Тор	Magnet	Standard
No.	Arm	Arm	Force	Clamp Dia
DG10503	110mm	101mm	800 N	8mm
MG10503	133mm	113mm	800 N	8mm



DEBURRING TOOLS

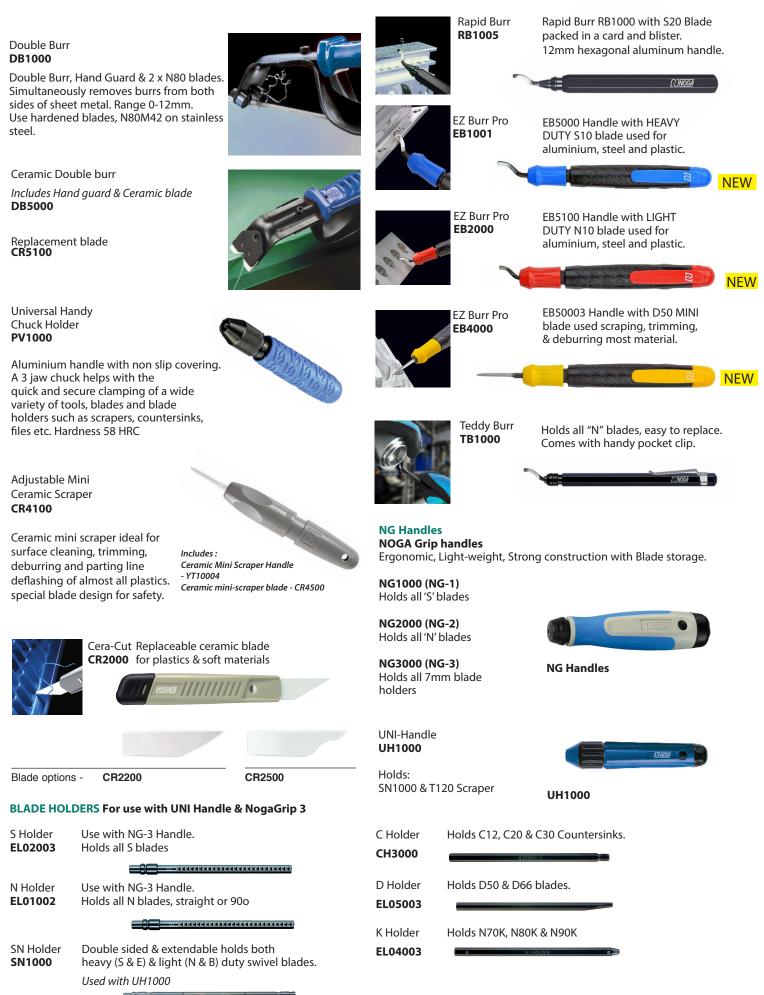



DEBURRING TOOLS



Noga Burr 3NogaGrip HandleNG1003S10, S20, & S35 bladesNoga Burr 5NogaGrip HandleNG1005S10, S20,S35, S101, S202 blades







Tele Burr NG-3 Handle, N Holder NG3002 N1, & N2 blades







Scraper UH1000 Handle, T120 Double sc1000 ended triangular scraper

KVHOGA















Deburr both inside and outside edges of tube. Die cast body with 3 cutters. Reamer for aluminium, brass and copper tubing. Range 4 - 42mm





Adjustable Scraper 12mm Anodized Handle **SC8000** T80 scraper blade

RETAIL DISPLAY PRODUCT BONUS KITS AND RETAIL DISPLAYS



S Promo Set NG8150 NG-1 NogaGrip Handle 10 x S10 blades

NG8250 Cobalt Set Contains: NG-1 Handle 20 x S100 Blades

S Tele Set NG8350 NG-3 NogaGrip Handle 5 x S10 & 5 x S20 blades N Tele Set NG8300 NG-3 NogaGrip Handle 5 x N1 & 5 x N2 blades

N Promo Set NG8000 NG-2 NogaGrip Handle 10 x N1 blades



LB1900 Kit UH1000 Handle & SN1000 Holder with 5 x S10 & 5 x N1 blades



YT2000 New and unique YT Handle Hollow ground HSS D75 triangular adjustable scraper

Double ended triangular adjustable scraper



NG1003

NOGA BURR heavy duty contains the

NG1000 Noga grip handles & 3

EB7000 EZ Burr Pro Set Comes with EB1000, EB2000, EB3000 & EB4000



RB1005 RB1000 Rapid Burr with S10 & S20 Heavy duty blades . Blister Packaging.



NG1503 NG1505 16 x NG1003 or NG1005 in a cardboard counter display



FT3000 Noga Fine Micro Set Fixed S150 blade Fixed 3.2mm Countersink Blade Fixed D50 Scraper Blade



EO1015 EDGE OFF Noga Burr. Disposable tool with S10 Blade, Handy Pocket Clip in Blister Packaging.



Noga RB1500 20 RB1000 Rapid Burrs Aluminium handle with replaceable S10 blade



RG1000 Universal Deburring Set with 4 popular blades. S10 and N2 blades plus D50 scraper and RD10.4 countersink.



EB8000

EZ Burr Pro Counter Display Comes with 36 x EB1001 Used for Aliminium, steel & plastic.

SETS, KITS & MERCHANDISERS



NOGA BOX NX1000

Kit includes: Keyway Burr, Double Burr 2 pcs Edge Off, D-Key, UNI-Handle + SN Holder C Holder + C20, C12 D Holder + D50, D Holder + D66, L Holder + L1, N1, N2, S10, S101, S20, Scraper T120

PLATINUM BOX NG9500

Kit includes :

Double Burr

NogaGrip 1 handle

NogaGrip 3 handle

N Holder, S Holder

Teddy Burr handle C Holder + C20

D Holder + D50

D Holder + D66 K Holder + N80K T Holder + T70 18mm external RotoDrive blade

10.4mm countersink RotoDrive

N1, N2, S10, S20,

S30, & S150 blades

Hex key 1.5mm

NOGA SP3500 Kit Stainless steel deburring kit contains:

UNIKIT STANDARD UK1000

Scraper T120,UNI-Handle

SN Holder, C Holder + C20

N1, N2, S101, S30, S20, S10

Kit includes:

DB1000 equipped with M42 hardened blades

NogaGrip Handle with S blade holder plus S100 cobalt and S20 carbide blades

Adjustable scraper with D55 carbide blade

Bronze UniKit NG9200

Kit includes : NogaGrip 3 handle N Holder S Holder C Holder + C20 D Holder + D50 N1, N2, S10, S20, S30, & S150 blades

COUNTERSINK POWER TOOL SET CS7000

3 sizes Internal countersinks 12mm,20mm and 30mm. - One size External countersink Range ø8-28mm - 2 Pcs. NOGA unique 1/4" adaptors allow you to use all standard power tools.



WK SET

SP7700 Kit includes 7 popular deburring tools: NG3003 NG3710 NG3300 NG3200 NG3700 NG3100 SC8000

DIAMOND NEEDLE FILE SETS

The files are of Swiss made blanks electroplated with ultra high concentration of precisely graded diamond particles.


5 Diamond Needle Files -

All 140mm total length, 70mm coated length, with 3mm shank

Equaling - 5.1 x 1.4mm Triangular - 3.9mm Square - 2.5mm Half Round - 5.4 x 1.9mm Round - 3.0mm

Also comes with NOGA T80 Double ended triangular scraper and D75 mini scraper





Part No YT3000

COUNTERSINKS



Name	Description	Blade holder	Pack
Cat No.		& handles	size
C12 (F12)	12mm 90 degree		1
BC1211	Countersink	all "C" series countersink	
C20 (F20)	20mm 90 degree	blades are used with	1
BC2011	Countersink	the CH3000 holder	
C30 (F30)	30mm 90 degree	and NG3 Handle	1
BC3011	Countersink		
 RD 3.2	Cranked Csk 3.2mm		1
BC3201 #			
RD 6.3	Cranked Csk 6.3mm	all "RD" cranked	1
BC6301 #		countersinks are used	
RD 8.3	Cranked Csk 8.3mm	with either the NG1	1
BC8301 #		handle or	
RD 10.4	Cranked Csk 10.4mm	SN1000 holder with	1
BC1041		UH1000 handle	·
RD 16.5	Cranked Csk 16.5mm		1
BC1651	crunked esk to shim		
RDE 18	Cranked external		1
EX2001	Cianked external		I
	CSK 4 - TOITITT		
SCRAPER BLADES			
			1
D50	3.2x50mm triangular		1
BD5001	scraper.		
D66	3.2x50mm 45 deg.		1
BD6601	Internal scraper		
D75	75mm long. Fits		1
BD7501	Adj scraper handle	D75, D77 & T80 use	
D77	75mm long. Fits	adjustable scraper	1
BD7701	Adj scraper handle	handle	
Т 80	Double medium		1
BT8001	scraper blade.		
T 120	Double ended ground	UH1000 handle	1
BT1201	scraper.	(no holder required)	
N BLADES			
N80	Round blade used		1
BN8001	with double burr	N80 & N80M42	
N80M42	N80 heat treated for	are used with	1
BN8043	stainless steel	DB1000	
N70K	For small keyways.		1
BN7001	1.2 - 8mm		
N80K	Std blade for the	N70K, N80K, N80KM42,	1
BN8101	keyway tool.2.4-11mm	& N90K are used with	
N80KM42	N80K heat treated	KH1000 holder	1
BN8143	for stainless steel.	& UH1000 handle	
N90K	For larger keyways.		1
BN9001	3 - 15mm.		
L & R BLADES			
L1	Used with Leader	LH1000 holder with	1
BL1001	for steel & aluminium	UH1000 handle	
R1	For cross holes 3 - 5.5mm	Used with RC1000	1
BR1001			
R2	For cross holes 5 - 9mm	Used with RC2000	1
BR2001			
R3	For cross holes 10 - 22mm	Used with RC2200	1
BR3001			

SWIVEL BLADES

-



Name	Description	Blade holder	Pack
Cat No.	-	& handles	size
N10	Light duty for steel, aluminium		10
BN1310	and plastic	All "B" series	
N10-Plastic	Specially ground for deburring	& "N" series blades	10
BN1410	plastics	can be used with	
N1 🖛	Light duty for steel, aluminium	the following :	10
BN1010	and plastic	<u> </u>	
N1LH	N1 for left handed user.	SN1000 holder with	10
BN1026		UH1000 handle	
N1 Tin	Tin coated N1 for long life.	Or	10
BN1012		N holder EL01033	
N1 C	Solid carbide N1 for hardened	with NG-3 handle	10
BN1015	steel and special plastics.	or	
N2 (B20)	Light duty for brass & cast iron	TB1000 (no extra	10
BN2010		holder required)	
N2 C	Solid carbide N2 for ceramic	or NG-2 Handle	10
BN2015	and glass	The shank diameter on all	
N3 (B30)	Removes internal and external	"N" or "B" blades	10
BN3010	burrs simultaneously from holes	is 2.6mm	
	drilled into tubing and sheet metal.		
N6 (B60)	For cross holes in difficult		1
BN6001	to reach places		
S10 (E100)	Heavy duty for steel, aluminium		10
BS1010	and plastic		
S10 LH	S10 For left handed users	All "S" or	10
BS1011		"E" series blades	
510 Tin	Tin coated \$10 for long life.	can be used with	10
BS1012	The coaced sho for foling line.	the following :	10
S10 C	Solid carbide tipped S10 for		1
BS1016 #	hardened steel & special plastics	SN1000 holder with	
S100	Combination blade best for	UH1000 handle	10
BS1018	plastics & hard materials.	or	
S101 (E110)	H/D shank with fine cutting edge	S holder EL02003	10
BK1010	for steel, aluminium and plastic.	with NG-3 handle	
S101 LH	S101 for left handed users	or	10
BK1011		NG1 (no extra	
S101 Tin	Tin coated S101 for long life	holder required)	10
BK1012		or	
S150	H/D shank, for holes as small	RB1000 (no extra	10
BK3010	as 1.5mm diameter	holder required)	10
520 (E200)	Heavy duty for brass and		10
BS2010	cast iron		10
520 C	Solid carbide tipped S20 for	The shank diameter on all	1
BS2015 #	hardened materials	"S" or "E" blades is 3.2mm	
5202	H/D shank with fine cutting		10
BK2010	edge for brass & cast iron		10
530 (E300)	H/D removes internal & external		10
BS3010	burrs simultaneously from holes		10
	drilled into tubing & sheet metal		
S35 (E350)	Heavy duty for straight edges		10
BS3510	incury duty for straight edges		10
S60 (E600)	Heavy duty for cross holes		1
BS6001	in difficult to reach places		I
			1
	Patented for internal thread		1
BC1001	cleaning & deburring from 9mm		
	Patented HSS for "O" Ring		1
BO1001	grooves up to 3mm		

Blades marked with # are non stock and may require minimum order quantities as special buy-ins



CHAMFERING TOOLS

SPIDER BURR Self Adjusting Chamfering Tool



Part No	Range
PC2000	75-110mm
PC3000	110-160mm
PC1100	Replacement Blade

Unique mechanism enables quick outer edge burr removal.

Extremely fast chamfering on external tubes Ideal for the outside diameter of plastic pipes.

Easy set up - the diameter of the Spider Burr automatically and quickly adjusts to the required outer circumference of the pipe.

Works on different plastic pipes and tubes such as UPVC, PVC, PP, PE, CPVC, ABS etc.

Working range: 75 - 110 mm (21/2"- 4"), 110 - 160 mm (4" Works best with standard electric/cordless drills - 14V and up.

For best performance run the drill at a low RPM. Use the drill position setting. Same blade is used for both models and is replaceable.



INNER / OUTER REAMER

Fast Chamfering up to 75mm on Plastic

Works on different plastic pipes and tubes such as UPVC, PVC, PP, PE, CPVC, ABS etc. Working range: 25 - 75 mm (3/4"- 21/2").

Works best with standard electric/cordless drills - 14V and up. For best performance run the drill at a low RPM. Use the drill position setting.



Part No	Range	
PC6000	EXT 25-75mm INT 40-75mm	
PC6100	Replacement Blade	

CHIP HOOKS



NogaGrip handle, hand guard.

For removing : chips and cleaning chip trays on machines.

420mm overall length SP2500 595mm overall length SP2550

POWER ARMS NEW


PA1300 (310mm), PA1500 (510mm), PA1800 (810mm)

Noga unveils its state of the art Hybrid articulated arms. They are stronger, bigger, longer and outperform all other three-jointed articulating arms in the industry. simply sophisticated

They can hold heavy components and other production accessories that require extend articulation mounts.

New design combination of mechanical and hydraulic locking system, allowing to hold up to 25Kg.

Central locking system with spring loaded bearings. Black finish.

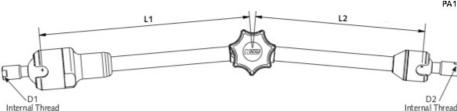

Internal Thread

CODE		INT. THREAD		ARM LENGTH MM		MAX LOAD	
	KG	D1	D2	L1	L2	L1+ L2	KG
PA1300	1.18	M8 x 1.25	M8 x 1.25	180	130	310	25
PA1500	1.33	M8 x 1.25	M8 x 1.25	280	230	510	15
PA1800	1.54	M8 x 1.25	M8 x 1.25	430	380	810	10







COOLING SYSTEM

CUTTING FLUID APPLICATORS

Strong Magnetic base, Separate On/Off air and fluid controls, Stainless steel armoured siphon hose and air hose, Nozzle connected via Loc-Line Flexible Hose, The spray unit comes in three standard lengths: 264, 334, 479 mm (special lengths available upon request).





NOGA Minicool is using the VENTURI principle to spray an air + liquid mixture. The Minicool enables the user to easily control both the air flow rate and liquid rate.

- Strong magnetic base.
- Separate on/off air and fluid control.
- Stainless steel armoured syphone hose and air hose.
- Simple, in expensive, rugged.
- Nozzle connected via Loc-Line® flexible hose.
- Single spray unit.

No. of spray units:	1
Spray unit length:	264mm
Air line length:	1m
Suction line length:	1m



2 x14 Loc-line segments (ON/OFF magnet)

Identical to the MC1700 above, this Noga Minicool system has 2 spray units rather than 1.



Part NoDescriptionsMC140014 Loc-line segments (permanent magnet)MC170014 Loc-line segments (ON/OFF magnet)MC190019 Loc-line segment (permanent magnet)MC290029 Loc-line segments (permanent magnet)

Part No	Descriptions
MC1601	32 kg/f with on/off switch flexible hose w/ a tap has additional outlet.



NOGA COOL ARM FIXED & VARI HP COOL ARMS

The Fixed HP Cool Arm and Vari HP Cool Arm can be fitted with three different sizes of nozzles which will deliver fluids or cooling liquids at high pressure, up to 1000 PSI, allowing a higher level of machining. The arms are easy and fast to set in position.


MC3000

Part No	Descriptions
CA2000	Fixed HP Cool Arm. Single arm with 2 end ball joints so the nozzles can move on wide curve for positioning.
CA3000	Vari HP Cool Arm. Long Articulated Arms provide full axis rotation. Sturdy tight- ening fixtures for total stability.









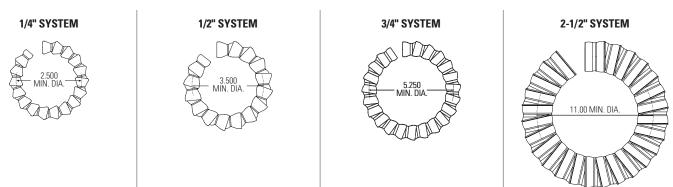

MINIMUM HOSE BENDING DIAMETER

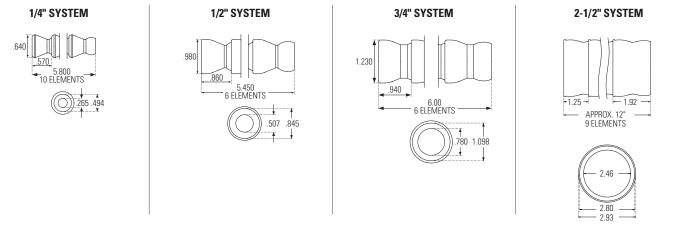

MEASURING LOC-LINE

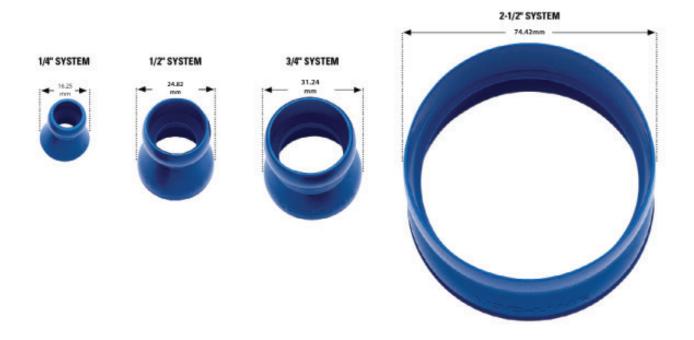

IDENTIFYING LOC-LINE SYSTEMS



LINE PRESSURE AND FLOW RATES

1/4" SYSTEM

*Assumes use of element clamps on all joints

LINE PRESSURE **Standard** 50 PSI w/ clamps up to 110 PSI*

and fully tightened.

FLOW RATE 250 gal/hr Please note that all applications have variables and conditions that will affect the maximum hose pressures. Testing is always recommended whenever possible.

 1/2" SYSTEM

 LINE PRESSURE
 F

 Standard
 30 PSI
 4

 w/ clamps
 up to 75 PSI*
 *

 *Assumes use of element clamps of
 1
 1

FLOW RATE 478 gal/hr

*Assumes use of element clamps on all joints and fully tightened.

MATERIAL SPECIFICATIONS

COMMON COMPATIBILITY WITH LOC-LINE ACETAL PRODUCTS

- ▲ BLUE ▲ ORANGE ▲ BLACK ▲ GREY 🛽 WHITE
- Yes Acetone
- No Acids
- Yes Alcohol, Ethyl
- No Ammonium Hydroxide, Strong
- No Bases, Strong
- Yes Commercial Dish Detergents
- Yes Gasoline
- Yes Greases
- No Hypochlorite Ion Solutions
- Yes Lacquer Solvents
- Yes Oils
- Yes Sodium Hydroxide
- No Sodium Hypochlorite

ACETAL TEMPERATURE DATA

📕 BLUE 📕 ORANGE 📕 BLACK 📕 GREY 🖄 WHITE

Melting point: 329° F Maximum operating temperature: 170° F

TEMPERATURE DATA - HPT NOZZLE

Maximum operating temperature: 115° F

ACETAL ANTI-STATIC ELECTRICAL PROPERTIES

BLACK (2½" System)

Surface Resistivity: 1.000E3 Ohm Volume Resistivity: <6.000E2 Ohm-cm

COMMON COMPATIBILITY WITH LOC-LINE POLYESTER PRODUCTS

YELLOW ACID RESISTANT

- No Acetone
- Yes Acids, (Less than 150° F)
- No Acids, (Greater than 150° F)
- Yes Alcohols
- Yes Aromatic Solvents
- No Chlorinated Hydrocarbon
- No Bases, Strong
- No Ethyl Acetate
- Yes Gasoline
- Yes Greases
- Yes Hydrocarbons
- Yes Oils
- Yes Salt Solutions

TEMPERATURE DATA - POLYESTER

YELLOW ACID RESISTANT

Melting point: 475° F Maximum operating temperature: 170° F



1/4-INCH SYSTEM

KITS

1/4" HOSE KIT

40413 (2) 5¾" Long Segments (1) 1/4" Round Nozzle (1) 1/8" Round Nozzle (1) 1/16" Round Nozzle (1) 1/4" NPT Connector (1) 1/8" NPT Connector

• Assembled Length = 13"

1/4" TAP HOSE NOZZLE KIT

40499

(1) 13" Length with Fitting (2) 5¾" Long Segments (1) 1/8" Round Nozzle (1) 1/4" NPT Male Valve

• Assembled Length = 13"

1/4" FLARED TUBING REPLACEMENT PACK

40452

- (8) 5¾" Long Segments (1) 1" Flare Nozzle (4) 3/8" Flare Nut Adapters (4) 1/8" Round Nozzles (4) 1/4" Round Nozzles

1/2" LATHE ADAPTER KIT

40475

- (4) 1/2" Short Adapters (4) 1/2" x 2" Adapters (2) Flat 5-Hole Nozzles (2) Flat Slot 60 Nozzles
- (2) 1/8" 90° Nozzles
- (2) 1/4" 90° Nozzles
- (2) 1/8" Round Nozzles
- (2) 1/4" Round Nozzles
- (2) Straight Flow Nozzles
- (4) Element Clamps w/ screws

(8) Flomonts



40476

- (2) 1/4" Round Nozzles
- (2) Straight Flow Nozzles (4) Element Clamps w/ screws

15 MM LATHE ADAPTER KIT

(4) 15 mm Short Adapters

- (8) Elements
- (1) 1/4" Assembly Pliers
- 1/4" EXTENDED ELBOW KIT

40472

- (4) Extended Elbows (4) Element Clamps
- w/ screws
- (1) 1/8" NPT Connector (1) 1/4" NPT Connector
- (1) 1/16" Round Nozzle
- (1) 1/8" Round Nozzle
- (1) 1/4" Round Nozzle

1/4" MIXED ELEMENT KIT

- 40473
- (2) Extended Elbows (2) Extended Elements
- (4) Element Clamps w/ screws
- (1) 1/8" NPT Connector
- (1) 1/4" NPT Connector
- (1) 1/16" Round Nozzle (1) 1/8" Round Nozzle
- (1) 1/4" Round Nozzle



1/4" EXTENDED ELBOWS WITH CLAMPS

40474

(4) Extended Elbows (4) Element Clamps w/ screws



1/4" EXTENDED ELEMENT KIT WITH CLAMPS

41475 (4) 1/4" Extended Elements (4) 1/4" Element Clamps w/ screws



1/4" CIRCLE FLOW NOZZLE KIT

41479 📕 Assembled with: (15) 1/4" Side Flow Nozzles (1) 1/4" End Cap



Overall Length = 17.56"

1/4" PROSTREAM® NOZZLE KIT


42400

- (1) 5¾" Long Segments
- (1) ProStream® Nozzle
- 0.160"ø x 1.25"L
- (8) 1/4"Element Clamps
- w/ screws
- (1) 1/4" NPT Connector
- (1) 1/8" NPT Connector



(~/	
(1)	1/4" Assembly Pliers





1/4" EXTENDED ELEMENT

41476 👗 (4) Extended Elements 49445 🔳 🔳 🔳 (20) Extended Elements

1/4" EXTENDED ELBOW

41491 🔳 (4) Extended Elbows 49457 👗 👗 👗 (20) Extended Elbows




HOW TO ORDER BLACK, GRAY OR WHITE LOC-LINE: (Add suffix to part number when ordering, ie: 49421-BLK) **Z-BLK** Part can be ordered in Black, add suffix -BLK **Z**-G Part can be ordered in Gray, add suffix -G □-W Part can be ordered in White, add suffix -W








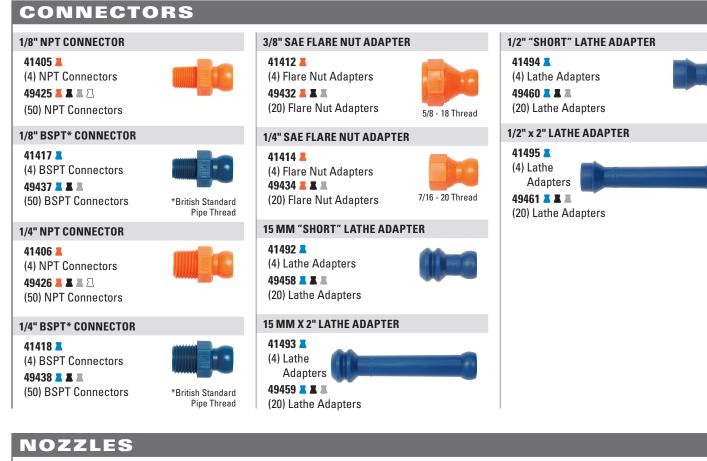

1/4" NOZZLE-RAMA PACK	1/8" ROUND NOZZLE	1/16" 90° NOZZLE	
41490 (20) Includes 1 nozzle from each of these packages: 41402, 41403, 41404, 41407, 41460, 41461, 41462, 41463, 41470, 41471, 41472, 41473,	41403 ▲ (4) Round Nozzles 49423 ▲ ▲ ▲ △ (50) Round Nozzles	41470 ▲ (4) 90° Nozzles 49439 ▲ ▲ (20) 90° Nozzles	
41481, 41482, 41483, 41484, 🛛 🗮 📢 💌	1/4" ROUND NOZZLE	1/8" 90° NOZZLE	
41485, 41486 41488, 41489	41404 로 (4) Round Nozzles 49424 로 로 프 문 (50) Round Nozzles	41471 ▲ (4) 90° Nozzles 49440 ▲ ▲ ▲ (20) 90° Nozzles	
(1) 1/4" 90° Nozzle	1" FLARE NOZZLE	1/4" 90° NOZZLE	
 (1) 1/4" 90° Spray Bar Nozz 1/4" FLAT NOZZLE ASSORTMENT PACK 41487 (1) Flat Slot 40 Nozzle (1) Flat Slot 60 Nozzle 	41407 (2) Flare Nozzles 49427 (20) Flare Nozzles	41472 ▲ (4) 90° Nozzles 49441 ▲ ▲ (20) 90° Nozzles	h
(1) Flat 5 Hole Nozzle (1) Flat 7 Hole Nozzle	1" STRAIGHT FLOW NOZZLE	1/4" 90° SPRAY BAR NOZZLE	
1/16" ROUND NOZZLE	41489 (2) Straight Flow Nozzles	41473 4 (2) 90° Spray Bar Nozzles	11100
41402 ▲ (4) Round Nozzles 49422 ▲ ▲ ▲ △ (50) Round Nozzles	49456 49256 49456 (20) Straight Flow Nozzles	49442 2 (20) 90° Spray Bar Nozzles	


9/32″ 45° NOZZLE	1/4" FLAT SLOT 40 NOZZLE	1/4" SIDE FLOW NOZZLE
41460 ■ (4) 3/32″ 45° Nozzles 49470 ■ ■ (20) 3/32″ 45° Nozzles	41483 I (4) Flat Slot Nozzles 49451 I (20) Flat Slot Nozzles 0.040" Slot height	41478 (4) Side Flow Nozzles 49443 (20) Side Flow Nozzles
/8″ 45° NOZZLE	1/4" FLAT SLOT 60 NOZZLE	1/4" SWIVEL NOZZLE 40
41461 2 (4) 1/8" 45° Nozzles 49471 2 2 2 (20) 1/8" 45° Nozzles	41484 I (4) Flat Slot Nozzles 49452 I I I (20) Flat Slot Nozzles 0.060" Slot height	41481 ▲ (2) Swivel Nozzles 49449 ▲ ▲ (20) Swivel Nozzle
3/16″ 45° NOZZLE	1/4" FLAT 5-HOLE NOZZLE	1/4" SWIVEL NOZZLE 60
41462 (4) 3/16" 45° Nozzles 49472 (20) 3/16" 45° Nozzles	41485 I (4) Flat 5-Hole Nozzles 49453 I (20) Flat 5-Hole Nozzles 0.060" Hole diameter	41482 (2) Swivel Nozzles 49450 (20) Swivel Nozzles 0.060" Hole diameter
/4″ 45° NOZZLE	1/4" FLAT 7-HOLE NOZZLE	2½" SWIVEL NOZZLE 75
41463 (4) 1/4" 45° Nozzles 49473 (20) 1/4" 45° Nozzles	41486 (4) Flat 7-Hole Nozzles 49454 (20) Flat 7-Hole Nozzles 0.040" Hole diameter	41488 (2) Swivel Nozzles 49455 (20) Swivel Nozzles 0.075" Hole diameter
PROSTREAM [®] NO	DZZLES	BALL ADAPTERS
062"Øx.50"L PROSTREAM® NOZZLE	.062"Øx1.25"L PROSTREAM® NOZZLE	10 MMØ X 1/4" LOC-LINE® BALL ADAPTER
	.002 ØX1.25 EFNOSTNEAW WOZZEE	TO WIND A 1/4 LOG-LINE DALLADAFTEN
41420 (2) ProStream Nozzles 49480 (10) ProStream Nozzles	41424 (2) ProStream Nozzles 49484 (10) ProStream Nozzles	 41740 (2) Brass Ball Adapters 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • • (10) ProStream Nozzles 086"Øx.50"L PROSTREAM® NOZZLE	(2) ProStream Nozzles 49484 🛋 🛋	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters
(2) ProStream Nozzles 49480 A (10) ProStream Nozzles	(2) ProStream Nozzles 49484 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 (2) ProStream Nozzles 49485 4	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • • • • • • • • • • • • • • • • •	 (2) ProStream Nozzles 49484	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER
(2) ProStream Nozzles 49480 • • • • • • • • • • • • • • • • • • •	(2) ProStream Nozzles 49484 4 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 4 (2) ProStream Nozzles 49485 4 4 (10) ProStream Nozzles .117"Øx1.25"L PROSTREAM® NOZZLE	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41742 (2) Brass Ball Adapters 49742 (10) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • (10) ProStream Nozzles 086"Øx.50"L PROSTREAM® NOZZLE 41421 • (2) ProStream Nozzles 49481 • • (10) ProStream Nozzles 117"Øx.50"L PROSTREAM® NOZZLE 41422 •	(2) ProStream Nozzles 49484 4 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 4 (2) ProStream Nozzles 49485 4 4 (10) ProStream Nozzles	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41742 (2) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • • (10) ProStream Nozzles 086"Øx.50"L PROSTREAM® NOZZLE 41421 • (2) ProStream Nozzles 49481 • • • (10) ProStream Nozzles 49482 • • • (2) ProStream Nozzles 49482 • • • (10) ProStream Nozzles 49482 • • • (10) ProStream Nozzles	 (2) ProStream Nozzles 49484 4 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 4 (2) ProStream Nozzles 49485 4 4 (10) ProStream Nozzles .117"Øx1.25"L PROSTREAM® NOZZLE 41426 4 (2) ProStream Nozzles 49486 4 4 (2) ProStream Nozzles 	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41742 (2) Brass Ball Adapters 49742 (10) Brass Ball Adapters 12 MMØ X 1/8" NPT BRASS BALL ADAPTER 41988 (2) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • • (10) ProStream Nozzles 086"Øx.50"L PROSTREAM® NOZZLE 41421 • (2) ProStream Nozzles 49481 • • • (10) ProStream Nozzles 117"Øx.50"L PROSTREAM® NOZZLE 41422 • (2) ProStream Nozzles 49482 • • • (10) ProStream Nozzles 49482 • • • (2) ProStream Nozzles 49482 • • • (2) ProStream Nozzles	 (2) ProStream Nozzles 49484 4 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 4 (2) ProStream Nozzles 49485 4 4 (10) ProStream Nozzles .117"Øx1.25"L PROSTREAM® NOZZLE 41426 4 (2) ProStream Nozzles 49486 4 4 (2) ProStream Nozzles 	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41742 (2) Brass Ball Adapters 49742 (10) Brass Ball Adapters 12 MMØ X 1/8" NPT BRASS BALL ADAPTER 41498 (2) Brass Ball Adapters 49493 (10) Brass Ball Adapters
(2) ProStream Nozzles 49480 • • • • (10) ProStream Nozzles 086"Øx.50"L PROSTREAM® NOZZLE 41421 • (2) ProStream Nozzles 49481 • • • (10) ProStream Nozzles 117"Øx.50"L PROSTREAM® NOZZLE 41422 • (2) ProStream Nozzles 49482 • • •	 (2) ProStream Nozzles 49484 4 4 (10) ProStream Nozzles .086"Øx1.25"L PROSTREAM® NOZZLE 41425 4 (2) ProStream Nozzles 49485 4 4 (10) ProStream Nozzles .117"Øx1.25"L PROSTREAM® NOZZLE 41426 4 (2) ProStream Nozzles 49486 4 4 (10) ProStream Nozzles .160"Øx1.25"L PROSTREAM® NOZZLE 	 49740 (10) Brass Ball Adapters 12 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41741 (2) Brass Ball Adapters 49741 (10) Brass Ball Adapters 14 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41743 (2) Brass Ball Adapters 49743 (10) Brass Ball Adapters 15 MMØ X 1/4" LOC-LINE® BALL ADAPTER 41742 (2) Brass Ball Adapters 49742 (10) Brass Ball Adapters 12 MMØ X 1/8" NPT BRASS BALL ADAPTER 41498 (2) Brass Ball Adapters 49493 (10) Brass Ball Adapters 14 MMØ X 1/8" NPT BRASS BALL ADAPTER 41498 (2) Brass Ball Adapters 49493 (10) Brass Ball Adapters 49493 (10) Brass Ball Adapters 49493 (10) Brass Ball Adapters



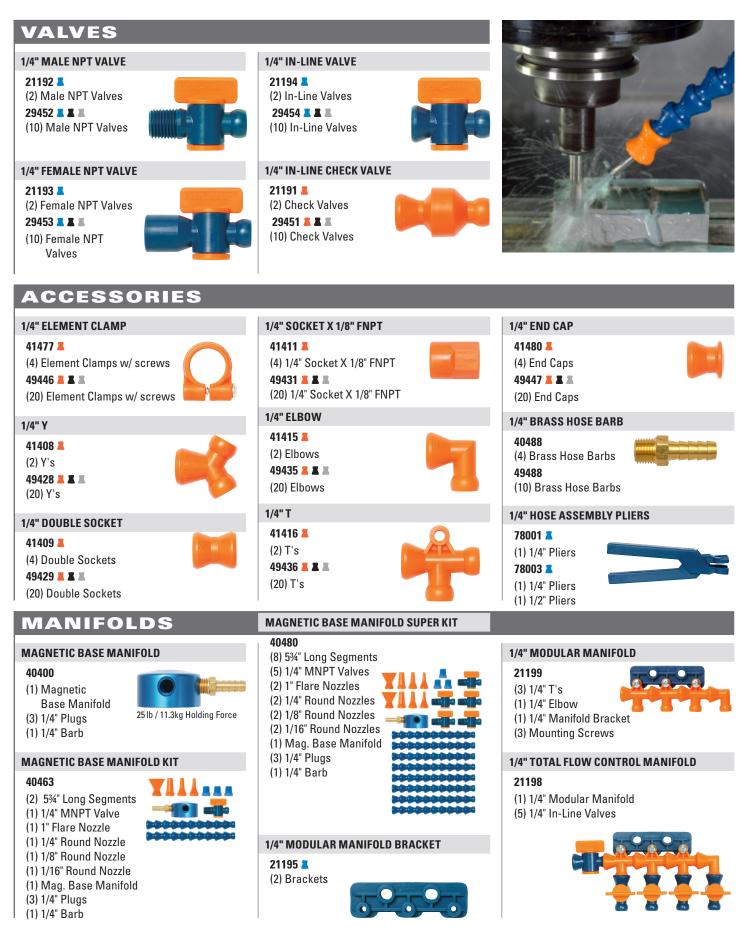

1/2-INCH SYSTEM

KITS

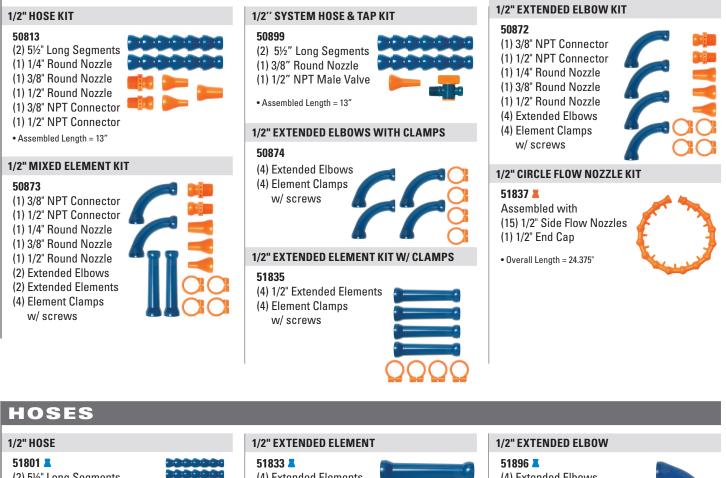

(2) 51/2" Long Segments 59860 🗶 🗶 🗷 (59) Segments, Bulk 25 ft 59859 🔳 🔳 🗷 (1) 5 ft Coil 59861 🔳 📕 🗷



(4) Extended Elements 59883 🔳 🔳 🔳 (20) Extended Elements



(4) Extended Elbows 59899 🗶 🗶 🔳 (20) Extended Elbows




CONNECTORS

3/8" NPT CONNECTOR 51804 (4) NPT Connectors 59864 📕 🗶 🗷 (50) NPT Connectors

(1) 50 ft Coil

• 1 Segment = 6 Elements

HOW TO ORDER BLACK, GRAY OR WHITE LOC-LINE: (Add suffix to part number when ordering, ie: 49421-BLK) **Z-BLK** Part can be ordered in Black, add suffix -BLK -G Part can be ordered in Gray, add suffix -G □-W Part can be ordered in White, add suffix -W



* British Standard Pipe Thread

1/2" NPT CONNECTOR

51805 👗 (4) NPT Connectors 59865 👗 🗶 🗷 (50) NPT Connectors



1/2" BSPT* CONNECTOR

51827 (4) BSPT Connectors 59877 🔳 🖊 📕



(50) BSPT Connectors * British Standard Pipe Thread

3/8" SAE FLARE NUT ADAPTER

51823 (4) Flare Nut Adapters 59873 👗 👗 👗 (20) Flare Nut Adapters





NOZZLES

1/2" NOZZLE-RAMA PAG	Ж
----------------------	---

51849 👗


(16) Includes 1 nozzle from each of these packages: 51802, 51803, 51806, 51807, 51809, 51828, 51829, 51830, 51831, 51840, 51841 51842, 51843, 51845, 51847, 51848

1/2" 90° NOZZLE KIT

51832 📕	
(1) 1/4"90° Nozzle	
(1) 3/8" 90° Nozzle	
(1) 1/2" 90° Nozzle	
(1) 1/2" 90° Spray Bar Noz	zle

1/2" FLAT NOZZLE ASSORTMENT

51844 (1) Flat Slot 80 Nozzle (1) Flat Slot 125 Nozzle



1/4" ROUND NOZZLE FOR 1/2"

51806 4 (4) Round Nozzles 59866 4 2 2 (50) Round Nozzles

3/8" ROUND NOZZLE

51802 ▲ (4) Round Nozzles 59862 ▲ ▲ △ (50) Round Nozzles

1/2" ROUND NOZZLE

51803 (4) Round Nozzles 59863 (50) Round Nozzles

1/4" 90° NOZZLE

51828 (4) 90° Nozzles 59878 (20) 90° Nozzles

3/8" 90° NOZZLE

51829 (4) 90° Nozzles 59879 (20) 90° Nozzles

1/2" 90° NOZZLE

51830 (4) 90° Nozzles 59880 (20) 90° Nozzles

1/2" 90° SPRAY BAR NOZZLE

1¼" FLARE NOZZLE

51807 (2) Flare Nozzles 59867 (20) Flare Nozzles

21/2" FLARE NOZZLE

51809 (2) Flare Nozzles 59871 (20) Flare Nozzles (20) Flare Nozzles



1/2" SIDE FLOW NOZZLE

51836 (4) Side Flow Nozzles 59889 (20) Side Flow Nozzles

21/2" SWIVEL NOZZLE 75 FOR 1/2"

51845 (2) Swivel Nozzles 59895 (20) Swivel Nozzles •.075" Hole diameter



1¹/₄" STRAIGHT FLOW NOZZLE

51847
(2) Straight Flow Nozzles
59897
59897
500 Straight Flow Nozzles



1%" STRAIGHT FLOW NOZZLE

51848 (2) Straight Flow Nozzles
59898 (20) Straight Flow Nozzles



1/2" FLAT SLOT 80 NOZZLE

51840 (4) Flat Slot Nozzles 59890 (20) Flat Slot Nozzles •.080" Slot height



1/2" FLAT SLOT 125 NOZZLE

51841 (4) Flat Slot Nozzles 59891 (20) Flat Slot Nozzles •.125" Slot height



1/2" FLAT 5-HOLE NOZZLE

51842 (4) Flat 5-Hole Nozzles 59892 (20) Flat 5-Hole Nozzles •.125" Hole diameter



1/2" FLAT 7 HOLE NOZZLE

51843 (4) Flat 7-Hole Nozzles 59893 (20) Flat 7-Hole Nozzles • .080" Hole diameter





VALVES

1/2" MALE NPT VALVE

32092 👗 (2) Male NPT Valves 39852 📕 📕 📕 (10) Male NPT Valves

1/2" FEMALE NPT VALVE

32093 🔳 (2) Female NPT Valves 39853 🔳 🔳 🔳 (10) Female NPT Valves



1/2" IN-LINE VALVE 32094 📕

(2) In-Line Valves 39854 🔳 🔳 🔳 (10) In-Line Valves



1/2" IN-LINE CHECK VALVE

32091 👗 (2) Check Valves 39851 🔳 🔳 🔳 (10) Check Valves




ACCESSORIES 1/2" ELEMENT CLAMP 1/2" T 1/2" TO 1/4" REDUCER 51834 📕 51825 👗 51821 (4) Element Clamps (2) T's (2) Reducers w/ screws 59875 👗 👗 👗 59869 👗 👗 👗 59884 📕 🗶 🔳 (20) Reducers (20) T's (20) Element Clamps w/ screws 1/2" FIXED MOUNT 51895 **1/2" MAGNETIC BASE** 1/2" END CAP (2) Fixed Mounts 51846 📕 🗶 👗 51838 📕 59896 👗 👗 👗 (1) Magnetic Base (4) End Caps (20) Fixed Mounts 59885 📕 🗶 🔳 • 60 lb holding force • Mounts with 1/4" bolt, not included (20) End Caps 1/2" Y 1/2" DOUBLE SOCKET **1/2" HOSE ASSEMBLY PLIERS** 51808 📕 51811 📕 78002 (2) Y's (4) Double Sockets (1) 1/2" pliers 59868 🔳 🔳 59872 78003 👗 (20) Y's (20) Double Sockets (1) 1/4" pliers (1) 1/2" pliers 1/2" ELBOW 1/2" TO 1/4" Y REDUCER 51824 📕 51822 (2) Elbows (2) Y Reducers 59874 📕 🗶 🔳 59870 👗 🗶 🔳 (20) Elbows (20) Y Reducers

MANIFOLDS

1/2" MODULAR MANIFOLD

32099 (3) 1/2" T's (1) 1/2" Elbow (1) 1/2" Manifold







1/2" TOTAL FLOW CONTROL MANIFOLD




1/2" MODULAR MANIFOLD BRACKET

32095 👗 (2) Brackets



3/4-INCH SYSTEM



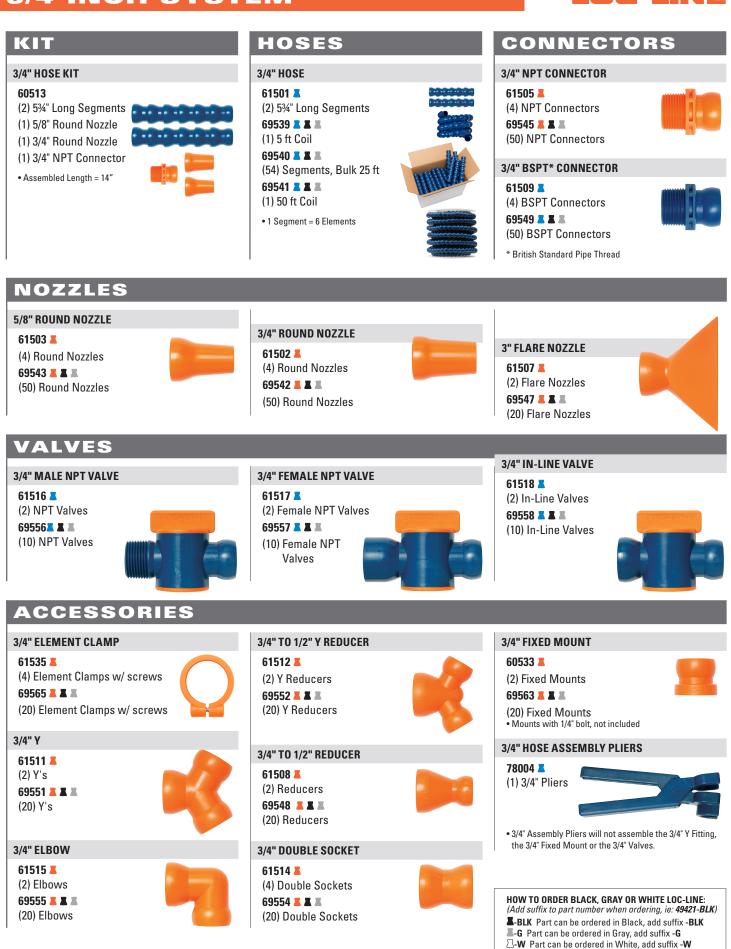

QUICK-SET[™] SHIELDS

KIT

QUICK-SET SHIELD[™] KIT

60525 (1) 6"x8" Shield Kit 60526 (1) 7½"x10" Shield Kit

60527 (1) 8½"x12" Shield Kit

 All Quick-Set Shield Kits include a 14" adjustable 3/4" Loc-Line[®] arm, magnetic base and fitting for fixed mounting.

ACCESSORIES

SHIELD MOUNTING ELBOW

60531 4 (2) Mounting Elbows 69561 4 4 (20) Mounting Elbows • Washer and screw included

REPLACEMENT SHIELD

60528 (1) 6" x 8" Shield 60529 (1) 7½" x 10" Shield 60530 (1) 8½ x 12" Shield



3/4" MAGNETIC BASE

- 60532 **Z Z** (1) Magnetic Base
- 60 lb holding force



3/4" FIXED MOUNT

60533 (2) Fixed Mounts 69563 (20) Fixed Mounts (20) Fixed Mounts



• Mounts with 1/4" bolt, not included.

MIRROR PRODUCTS

KIT ACCESSORIES **INSPECTION MIRROR KIT** 1/2" MIRROR MOUNT **MIRROR LINK** 50501 51503 51502 (1) 2.125" x 3.5" Mirror (2) Mirror Mounts (2) Mirror Links (1) Mirror Mount Nozzle (1) Mirror Link (1) 1/2" x 11" Hose (1) 1/2" Magnetic Base **REPLACEMENT MIRROR** 51501 HOW TO ORDER BLACK, GRAY OR WHITE LOC-LINE: (1) 2.125" x 3.5" Mirror (Add suffix to part number when ordering, ie: 49421-BLK) **E-BLK** Part can be ordered in Black, add suffix **-BLK** B Part can be ordered in Gray, add suffix -G □-W Part can be ordered in White, add suffix -W

2 1/2-INCH SYSTEM

KIT HOSES VACUUM HOSE KIT FOR 2½" SHOP VACUUM 2½" HOSE 80813 81201 (2) 12" Vacuum Hose (1) 12" Segment* (1) Rectangular Nozzle 81202 (1) Tapered Nozzle (2) 12" Segments (1) Shop Vacuum Hose Adapter 89220 👗 with Mounting Tab (20) 12" Segments (1) Shop Vacuum *1 Segment = 9 Elements **Canister Adapter** Hose Bending Radius = 5.75"

www.pretooling.com.au



CONNECTORS

3" THIN WALL PVC DWV SCH. 30 ADAPTER

81206 (1) Sch. 30 PVC Adapter 89226 (10) Sch. 30 PVC Adapters



3" SHEET METAL DUCT ADAPTER

81207
(1) Sheet Metal Duct Adapter
89227
(10) Sheet Metal Duct Adapters



NOZZLES

4¹/₂" ROUND NOZZLE



6" x 3½" RECTANGULAR NOZZLE

81204 (1) Rectangular Nozzle
89224
(10) Rectangular Nozzles



TAPERED OVAL NOZZLE

81205 (1) Oval Nozzle 89225 (10) Oval Nozzles

VALVES

2¹/₂" SLIDE VALVE

81208 (1) Slide Valve 89228 (10) Slide Valves



ACCESSORIES

SHOP VACUUM HOSE ADAPTER WITH MOUNTING TAB

81209 X (1) Shop Vacuum Adapter 89229 X (10) Shop Vacuum Adapters



SHOP VACUUM CANISTER ADAPTER

81210 ▲
(1) Shop Vacuum Canister Adapter
89230 ▲
(10) Shop Vacuum



ANTI-STATIC

21/2" HOSE


81301AS **4** (1) 12" Anti-Static Segment* 81302AS **4**

(2) 12" Anti-Static

Segments 89320AS I (20) 12" Anti-Static Segments *1 Segment = 9 Elements

4½" ROUND NOZZLE

81303AS I (1) Anti-Static Round Nozzle 89323AS I (10) Anti-Static Round Nozzles



81304AS I (1) Anti-Static Rectangular Nozzle

89324AS ▲(10) Anti-Static Rectangular Nozzles



81305AS I (1) Anti-Static Oval Nozzle 89325AS I (10) Anti-Static Oval Nozzles

21/2" SLIDE VALVE

81308AS E (1) Anti-Static Slide Valve 89328AS E (10) Anti-Static Slide Valves

Canister Adapters



3" SHEET METAL DUCT ADAPTER

81307AS **E** (1) Anti-Static Metal Duct Adapter

89327AS **4** (10) Anti-Static Metal Duct Adapters



CT HPT NOZZLES


0.0" NOZZLE LENGTH

High Pressure Turret (HPT) Nozzles expand the working pressure range to a maximum 1,000 PSI, allowing a higher level of machining while providing the same LOC-LINE[®] quality and ease of control you've come to expect. Maximum operating temperature is 115° F/ 46° C.

1/8" NPT/BSPT THREAD CT STYLE NOZZLES

0.5" NOZZLE LENGTH

The **CT** (Compact Turret) style nozzle is designed for tight spaces, from 0 to 1000 PSI.

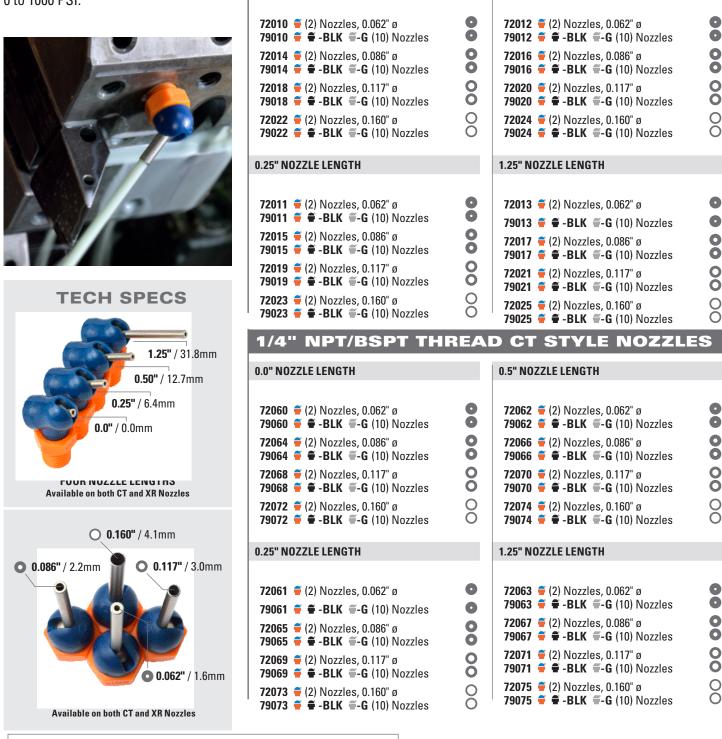

10 PC. PACKAGES ARE AVAILABLE IN BLACK AND GRAY. TO ORDER BLACK OR GRAY LOC-LINE: -BLK Part can be ordered in Black. Add suffix to part number when ordering, ie: 49421-BLK -G Part can be ordered in Gray. Add suffix to part number when ordering, ie: 49421-G





The **XR** (Extended Rotation) style nozzle features a wide nozzle swing and the ability to aim coolant below the horizontal plane, from 0 to 1000 PSI.



1/8" NPT/BSPT THREAD XR STYLE NOZZLES

0.0" NOZZLE LENGTH

79040 불 72044 🏺	(2) Nozzles, 0.062" ø Ŧ -BLK Ŧ-G (10) Nozzles (2) Nozzles, 0.086" ø
79044 🏺	🛢 -BLK 📱-G (10) Nozzles
79048 🏺	(2) Nozzles, 0.117" ø Ŧ -BLK Ŧ-G (10) Nozzles (2) Nozzles, 0.160" ø
	2 - BLK -G (10) Nozzles

0.25" NOZZLE LENGTH

720/11	🗧 (2) Nozzles, 0.062" ø
79041	🏺 📱 -BLK 📱-G (10) Nozzles
72045	두 (2) Nozzles, 0.086" ø
79045	🖡 📱 -BLK 📱-G (10) Nozzles
	🗧 (2) Nozzles, 0.117" ø
79049	🗧 📱 -BLK 📱-G (10) Nozzles
	🗧 (2) Nozzles, 0.160" ø
79053	🗧 甞 -BLK 掌-G (10) Nozzles

0.5" NOZZLE LENGTH

••••••••••••••••••••••••••••••••••••••	72042	00000 00
	1.25" NOZZLE LENGTH	
••••••••••••••••••••••••••••••••••••••	72043	00000 00

1/4" NPT/BSPT THREAD XR STYLE NOZZLES

0

0

0.0" NOZZLE LENGTH 72080 🗧 (2) Nozzles, 0.062" ø 79080 = -BLK -G (10) Nozzles 72084 🗧 (2) Nozzles, 0.086" ø 79084 🟺 🛢 -BLK 📱-G (10) Nozzles 72088 🗧 (2) Nozzles, 0.117" ø 79088 = -BLK -G (10) Nozzles 72092 🗧 (2) Nozzles, 0.160" ø 79092 🗧 🛢 -BLK 📱-G (10) Nozzles

0.25" NOZZLE LENGTH

	(2) Nozzles, 0.062" ø
79081	🖡 📲 -BLK 📱-G (10) Nozzles
	(2) Nozzles, 0.086" ø
79085 🖥	🖡 📲 -BLK 📱-G (10) Nozzles
	(2) Nozzles, 0.117" ø
79089	🖡 📲 -BLK 📱-G (10) Nozzles
	(2) Nozzles, 0.160" ø
79093 🗧	🖡 🖣 -BLK 📱-G (10) Nozzles

0.5" NOZZLE LENGTH

••••••••••••••••••••••••••••••••••••••	72082 € (2) Nozzles, 0.062" Ø 79082 ● -BLK ●-G (10) Nozzles 72086 ● (2) Nozzles, 0.086" Ø 79086 ● -BLK ●-G (10) Nozzles 72090 ● (2) Nozzles, 0.117" Ø 79090 ● -BLK ●-G (10) Nozzles 72094 ● (2) Nozzles, 0.160" Ø 79094 ● -BLK ●-G (10) Nozzles	
	1.25" NOZZLE LENGTH	


	 € (2) Nozzles, 0.062" ø € -BLK = -G (10) Nozzles 	0
	 € (2) Nozzles, 0.086" ø € -BLK = -G (10) Nozzles 	00
72091	 € (2) Nozzles, 0.117" ø € € -G (10) Nozzles 	00
72095	(2) Nozzles, 0.160" ø BLK -G (10) Nozzles	00


NOZZLE ADJUSTMENT LEVER

ADJUSTMENT LEVERS

72000 (2) Adjustment Levers 79000 (10) Adjustment Levers







ACID RESISTANT SYSTEM

1/4" ACID RESISTANT 1/4" ACID RESISTANT HOSE KIT **1" ACID RESISTANT FLARE NOZZLE** 45463 👗 45407 (2) 5¾" Long Segments (2) Flare Nozzles (1) 1/4" Nozzle 46427 👗 (1) 1/8" Nozzle (20) Flare Nozzles (1) 1/16" Nozzle (1) 1/4" NPT Connector (1) 1/8" NPT Connector **1/8" ACID RESISTANT NPT CONNECTOR** 45405 1/4" ACID RESISTANT HOSE (4) NPT Connectors 45401 👗 46425 (2) 5¾" Long Segments (50) NPT Connectors 46420 (55) Segments, Bulk 25-ft 1/4" ACID RESISTANT NPT CONNECTOR 46419 👗 45406 (1) 5 ft Coil (4) NPT Connectors 46421 👗 46426 -(1) 50 ft Coil (50) NPT Connectors 1/4" ACID RESISTANT Y 45408 (2) Y's 1/16" ACID RESISTANT NOZZLE 46428 -45402 👗 (20) Y's (4) Round Nozzles 46422 (50) Round Nozzles **1/4" ACID RESISTANT DOUBLE SOCKET** 45409 **1/8" ACID RESISTANT NOZZLE** (4) Double Sockets 45403 👗 46429 👗 (4) Round Nozzles (20) Double Sockets 46423 (50) Round Nozzles 1/4" ACID RESISTANT NOZZLE 45404 (4) Round Nozzles 46424 (50) Round Nozzles

1/4" SOCKET X 1/8" FNPT ACID RESISTANT 45411



(4) 1/4" Socket X 1/8" FNPT 46431 (20) 1/4" Socket X 1/8" FNPT

1/4" ACID RESISTANT ELBOW

45415 👗 (2) Elbows 46435 👗 (20) Elbows



1/4" ACID RESISTANT T

45416 👗 (2) T's 46436 👗 (20) T's



1/4" ACID RESISTANT SWIVEL NOZZLE 40

45481 👗 (2) Swivel Nozzles 46449 🔼 (20) Swivel Nozzles



1/4" ACID RESISTANT SWIVEL NOZZLE 60

45482 (2) Swivel Nozzles 46450 👗 (20) Swivel Nozzles




• Loc-Line® Acid Resistant Hose is excellent for rinsing cycles in plating operations.

• Acid environments won't corrode the Loc-Line® Acid Resistazzznt Hose because of its polyester composition. CAUTION: Loc-Line® Acid Resistant Hose is not intended for conveying acids or high pressure applications.



94



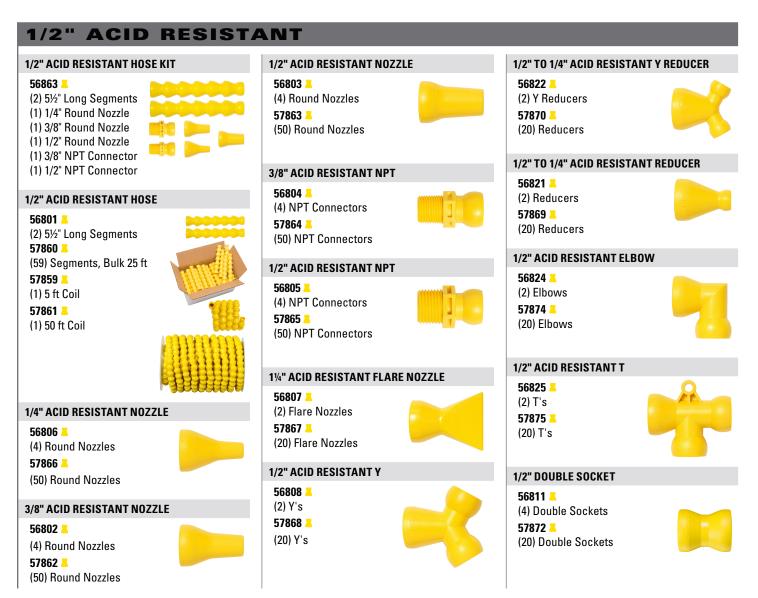

TEFEN[™] COUPLINGS

Tefen[™] products change threaded male components to female threads. Tefen products are made in Israel.


1/8" FEMALE PIPE COUPLING 40656 I (4) Female Pipe Couplings 41756 I (20) Female Pipe Couplings 1/4" FEMALE PIPE COUPLING 40657 I (4) Female Pipe Couplings 41757 I (20) Female Pipe Couplings

3/8" FEMALE PIPE COUPLING	
50660 (4) Female Pipe Couplings 51760 (20) Female Pipe Couplings	TEFEN
1/2" FEMALE PIPE COUPLING	
50661 Z (4) Female Pipe Couplings	N. C

(4) Female Pipe Couplings **51761 –** (20) Female Pipe Couplings

1/4" PIPE PLUG

40654 **×** (4) Pipe Plug 41754 **×** (20) Pipe Plug



(4) Female Pipe Reducers
51759

(20) Female Pipe Reducers



IS OT

SS1.5 1.5mm SS2 2mm SS2.5 2.5mm SS3.5 3.5mm SS3.5 3.5mm SS4.4 4mm SS4.5 4.5mm SS5.5 5.5mm SS5.5 5.5mm SS6 6mm SS6.5 6.5mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS7 7mm SS7 7mm SS7 7mm SS7 7.5mm SS8 8mm SS9 9mm SS10 10mm SS11 11mm SS12 12mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS21 21mm SS2	Part No	Diameter
SS2.5 2.5mm SS3 3mm SS3 3.5mm SS4 4mm SS4.5 4.5mm SS5 5mm SS5.5 5.5mm SS5.5 5.5mm SS5.5 5.5mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS7.5 7.5mm SS7.5 7.5mm SS7.5 7.5mm SS7.5 9.5mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS12 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm	SS1.5	1.5mm
SS3 3mm SS3.5 3.5mm SS4.5 4.5mm SS5.5 5.5mm SS5.5 5.5mm SS6 6mm SS6.5 6.5mm SS6.5 6.5mm SS6 6.5mm SS7 7mm SS7.5 7.5mm SS7 7mm SS7 7mm SS7 7mm SS7 7.5mm SS8 8mm SS9 9mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23	SS2	2mm
SS3.5 3.5mm SS4 4mm SS4.5 4.5mm SS5 5mm SS5 5mm SS5.5 5.5mm SS6.5 6.5mm SS6.5 6.5mm SS6.5 7.5mm SS7 7mm SS7.5 7.5mm SS8 8mm SS9 9mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12.5 12.5mm SS12 12mm SS12 12mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm	SS2.5	2.5mm
SS4 4mm SS4.5 4.5mm SS5.5 5.5mm SS5.5 5.5mm SS6 6mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS7.5 7.5mm SS7 7mm SS7 7mm SS7 7mm SS7 7.5mm SS8 8mm SS9 9mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 <td>SS3</td> <td>3mm</td>	SS3	3mm
SS4.5 4.5mm SS5 5mm SS5 5.5mm SS6 6mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS7.5 7.5mm SS7.5 7.5mm SS7 7mm SS7 7mm SS7 7mm SS7 7.5mm SS8 8mm SS9 9mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25<	SS3.5	3.5mm
SS5 5mm SS5.5 5.5mm SS6.5 6.5mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS7.5 7.5mm SS7 7mm SS7.5 7.5mm SS7 7mm SS7.5 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS12 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm <	SS4	4mm
SS5.5 5.5mm SS6 6mm SS6.5 6.5mm SS7 7mm SS7 7mm SS7.5 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS10 20mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm	SS4.5	4.5mm
SS6 6mm SS6.5 6.5mm SS7 7mm SS7.5 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm	SS5	5mm
SS6.5 6.5mm SS7 7mm SS7 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm	SS5.5	5.5mm
SS7 7mm SS7.5 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm	SS6	6mm
SS7.5 7.5mm SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS12 12mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS6.5	6.5mm
SS8 8mm SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS7	7mm
SS9 9mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12 12mm SS12 12mm SS12 12mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS7.5	7.5mm
SS9.5 9.5mm SS9.5 9.5mm SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS8	8mm
SS10 10mm SS10.5 10.5mm SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS9	9mm
SS10.5 10.5mm SS11 11mm SS12 12mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS9.5	9.5mm
SS11 11mm SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS10	10mm
SS12 12mm SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS10.5	10.5mm
SS12.5 12.5mm SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS11	11mm
SS13 13mm SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS12	12mm
SS14 14mm SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS12.5	12.5mm
SS15 15mm SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS13	13mm
SS16 16mm SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS14	14mm
SS17 17mm SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS15	15mm
SS18 18mm SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS16	16mm
SS19 19mm SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS17	17mm
SS20 20mm SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS18	18mm
SS21 21mm SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS19	19mm
SS22 22mm SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS20	20mm
SS23 23mm SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS21	21mm
SS24 24mm SS25 25mm SS26 26mm SS27 27mm	SS22	22mm
SS25 25mm SS26 26mm SS27 27mm	SS23	23mm
SS26 26mm SS27 27mm	SS24	24mm
SS27 27mm	SS25	25mm
	SS26	26mm
SS28 28mm	SS27	27mm
	SS28	28mm

METRIC

ROUND -

SILVER STEEL

SS29	29mm
SS30	30mm
SS31	31mm
SS32	32mm
SS33	33mm
SS34	34mm
SS35	35mm
SS36	36mm
SS37	37mm
SS38	38mm
SS39	39mm
SS40	40mm
SS45	45mm
SS50	50mm



ALL METRIC & IMPERIAL SILVER STEEL ARE 1 METRE IN LENGTH, ROUND & WATER HARDENING.

Manufactured to BS1407:1970

1" and above, plus or minus 0.0005" below 1" plus or minus 0.0003" Over 25mm, +0.00mm -0.02mm 25mm and below, +0.00mm -0.01mm

Part No	Diameter
SS1/16	1/16″
SS3/32	3/32″
SS1/8	1/8″
SS5/32	5/32″
SS3/16	3/16″
SS7/32	7/32″
SS1/4	1/4″
SS9/32	9/32″
SS5/16	5/16″
SS11/32	11/32″
SS3/8	3/8″

SS13/32	13/32″
SS7/16	7/16″
SS15/32	15/32″
SS1/2	1/2″
SS9/16	9/16″
SS19/32	19/32″
SS5/8	5/8″
SS21/32	21/32″
SS11/16	11/16″

SS3/4	3/4″
SS13/16	13/16″
SS7/8	7/8″
SS15/16	15/16″
SS1INCH	1″
SS1-1/8	1-1/8″
SS1-1/4	1-1/4″
SS1-3/8	1-3/8″
SS1-1/2	1-1/2″
SS1-3/4	1-3/4″
SS2INCH	2″

HSS COMBINATION DRILL & TAP

Drill & Tap in one operation using either a portable power tool or a stationary drilling machine such as a pedestal drill. Back taper beyond tap helps prevent thread damage from over drilling

1/4" hex shank ensures strong connection to the drill chuck

Designed to drill and tap through-holes up to 2X nominal diameter. Drill point must break through the part prior to threading. Applications include Electrical, Construction, Plumbing, Automotive, Cabinet Makers, Heating Ventilation & Air Conditioning installers.



Size	Part No.
M3 x 0.5	CDT3M
M4 x 0.7	CDT4M
M5 x 0.8	CDT5M
M6 x 1.0	CDT6M
M8 x 1.25	CDT8M
M10 x 1.5	CDT10M



HIGH PRECISION TORQUE CONTROL TOOLS



WIHA TORQUEFIX®

WIHA TORQUEVARIO®-S

the ranges from 0.1Nm to 8.0Nm.

The TorqueFix[®] has one, customer provided, torque value preset by Wiha. It's the ideal tool for use in a single application which always requires the same torque to be applied. Use in oily work environments is also not a problem, e.g. for tightening inserts. Wiha TorqueFix[®] is available in the ranges 0.15 Nm up to 7.2Nm

The variable tool for a variety of tasks. Also suitable for oily work places or environments. An included adjustment tool and an integrated window scale allow for the easy adjustment and reading of torque values. All together the user can choose from five models covering 2850 t Wiha TorqueFix®

Series 2850 TorqueFix®

Part number	Nm
26890	0.15
26127	0.5
26047	0.6
26048	0.9
26133	1.1
26051	2.0
26128	2.5
26052	3.0
26129	3.8
26130	5.5
26131	7.2

Series 2852 TorqueVario®-S with window scale

Series 2052 Torque vario		5 with window
Part number		Nm
26888		0.1 - 0.6
26461		0.4 - 1.0
26462		0.8 - 2.0
26463		1.0 - 5.0
26464		2.0 - 8.0

Set contains TorqueVario[®]-S tool with window scale Range 1.0 - 5.0 Nm. Sturdy metal container Torque setter, 1/4" hex Universal bit holder 1/4" hex bits PH 1, PH 2, PZ 1, PZ 2 T10, T15, T20, T25, 2.5mm hex, 3mm hex Part number 26893

WIHA INTERCHANGEABLE BLADE SYSTEM

Series 2859		
Part No	Drive	Nm. max
26199	PH 000	0.4
26196	PH 00	0.4
26197	PH 0	0.9
26058	PH 1	3.8
27079	PH 2	5.9
26198	PZ 0	0.9
26148	PZ 1	3.8
26889	PZ 2	5.5
26200	Hex 1.5	0.9
26060	Hex 2	1.8
26061	Hex 2.5	3.8
26062	Hex 3	8.0
26063	Hex 4	8.0
27526	Universal to hold 1/4" hex	
26864	Torque setter	

Series 2859

Part No	Drive	Nm. max
26158	Torx T5	0.4
26064	Torx T6	0.6
26065	Torx T7	0.9
26066	Torx T8	1.3
26059	Torx T9	2.5
26067	Torx T10	3.8
26068	Torx T15	5.5
26069	Torx T20	8.0
26070	Torx T25	8.0
26073	Torx Plus 15IP	5.5
26229	For 1/4" square nuts	

www.pretooling.com.au



These parts have no connection with the proprietors of the registered trademarks. Phillips[®] & Pozidriv[®] are registered trademarks of the Phillips Screw Company



Xeno Bits for terminal screws Combination profile reduces slipping and ensures greater torque transfer. Specifically designed for use with switch cabinet systems and fuse boxes, terminal blocks and relays.

Drive	Length	Wiha P/N
Phillips® 2	50mm	32492

7011 ZOT Series

7049XH Series

		-
Drive	Length	Wiha P/N
Phillips [®] 2	25mm	05076

7012 Z Series



Drive	Length	Wiha P/N
PoziDriv [®] 0	25mm	05300
PoziDriv [®] 1	25mm	01688
PoziDriv [®] 2	25mm	01689
PoziDriv [®] 3	25mm	01690
PoziDriv [®] 4	32mm	01681

7042 ZOT Series - Features Optimised Torsion Zone



7042 Z Series

DriveLengthWiha P/NPoziDriv® 189mm01809PoziDriv® 289mm01812PoziDriv® 2152mm23228PoziDriv® 389mm04176

Series 7210 Adapter 1/4" square to 1/4" hex Part number 01933



7011 Z Series

14/11 20/14

Drive	Length	Wiha P/N
Phillips [®] 0	25mm	05298
Phillips [®] 1	25mm	01657
Phillips [®] 2	25mm	01658
Phillips [®] 3	25mm	01659
Phillips [®] 4	32mm	01649

7041 ZOT Series

Drive	Length	Wiha P/N
Phillips [®] 1	50mm	33730
Phillips [®] 2	50mm	33704
Phillips [®] 3	50mm	33705

7041 Z Series

Drive	Length	Wiha P/N
Phillips [®] 1	90mm	04126
Phillips [®] 1	152mm	22509
Phillips [®] 2	90mm	04009
Phillips [®] 2	152mm	22510
Phillips [®] 3	89mm	04127



Series 384 Bit Holder Ergonomic handle. 300mm blade length, 418mm overall accepts all 1/4" hex bits Part Number 01476

7113 S Series



Description

Bit holder 2 piece magnetic 59mm overall length Bit Holder 2 piece magnetic 74mm overall length

01895 01894

Wiha P/N

Dimensions of profiles - Torx[®] (mm)

Dimensions of	promes - rorx	()	
ТХ 1	0.84	TX 20	3.84
TX 2	0.94	TX 25	4.40
ТХ 3	1.12	TX 27	4.96
TX 4	1.30	TX 30	5.49
TX 5	1.37	TX 40	6.60
TX 6	1.65	TX 45	7.77
TX 7	1.97	TX 50	8.79
TX 8	2.30	TX 55	11.17
TX 9	2.48	TX 60	13.20
TX 10	2.72	TX 70	15.49
TX 15	3.26		

These parts have no connection with the proprietors of the registered trademarks. Torx[®] is a registered trademark of Camcar Division of Textron.TriWing[®] is a registered trademark of G.K.N. Screws and Fasteners Ltd.



7015 Z Series

Drive Length Wiha P/N Torx[®] TX 3 25mm 26250 Torx[®] TX 4 25mm 25097 Torx[®] TX 5 25mm 01711 Torx[®] TX 6 25mm 01712 Torx[®] TX 7 25mm 01713 Torx[®] TX 8 01714 25mm Torx[®] TX 9 25mm 01715 Torx[®] TX 10 25mm 01716 Torx[®] TX 15 25mm 01717 Torx[®] TX 20 25mm 01718 Torx® TX 25 25mm 01719 Torx[®] TX 27 25mm 01720 Torx[®] TX 30 25mm 01721 Torx[®] TX 40 25mm 01722 Torx[®] TX 45 35mm 01723 Torx[®] TX 50 01724 35mm

Note TX 55 is Series 7025 Z with a 5/16" hex

7045 Z Series & 7045 ZL Series

Drive	Length	Wiha P/N
Torx® TX 5	50mm	32299
Torx [®] TX 6	50mm	32302
Torx® TX 7	50mm	32303
Torx® TX 8	50mm	32304
Torx® TX 9	50mm	32305
Torx [®] TX 10	50mm	32306
Torx [®] TX 10	150mm	33726
Torx [®] TX 15	50mm	32307
Torx® TX 15	90mm	33722
Torx® TX 15	150mm	33728
Torx [®] TX 20	50mm	32308
Torx [®] TX 25	50mm	32309
Torx [®] TX 25	150mm	23249
Torx [®] TX 27	50mm	33920
Torx [®] TX 27	90mm	33922
Torx [®] TX 30	50mm	33923
Torx [®] TX 30	90mm	33925
Torx [®] TX 30	150mm	33927
Torx [®] TX 40	50mm	33928
Torx [®] TX 40	90mm	33930
Torx [®] TX 40	150mm	33932



7015 ZTR Series Drive

Drive	Length	Wiha P/N
Torx [®] security TR 7	25mm	03115
Torx [®] security TR 8	25mm	03117
Torx [®] security TR 9	25mm	01726
Torx [®] security TR 10	25mm	01727
Torx [®] security TR 15	25mm	01728
Torx [®] security TR 20	25mm	01729
Torx [®] security TR 25	25mm	01730
Torx [®] security TR 27	25mm	01731
Torx [®] security TR30	25mm	01732
Torx [®] security TR 40	25mm	01733
	Torx [®] security TR 7 Torx [®] security TR 8 Torx [®] security TR 9 Torx [®] security TR 10 Torx [®] security TR 15 Torx [®] security TR 20 Torx [®] security TR 25 Torx [®] security TR 27 Torx [®] security TR 30	Torx® security TR 725mmTorx® security TR 825mmTorx® security TR 925mmTorx® security TR 1025mmTorx® security TR 1525mmTorx® security TR 2025mmTorx® security TR 2525mmTorx® security TR 2725mmTorx® security TR 3025mm

7045 TR Series

	Drive	Length	Wiha P/N
	Torx [®] security TR 7	50mm	21045
11 A.	Torx [®] security TR 8	50mm	21047
	Torx [®] security TR 9	50mm	20218
	Torx [®] security TR 10	50mm	20219
	Torx [®] security TR 15	50mm	24867
	Torx [®] security TR 20	50mm	20220
	Torx [®] security TR 25	50mm	20221
	Torx [®] security TR 27	50mm	20222
	Torx [®] security TR 30	50mm	20223
	Torx [®] security TR 40	50mm	20224

7046 Z Series

	Drive	Length	Wiha P/N
	Torx-Plus [®] IP 6	50mm	26000
	Torx-Plus [®] IP 7	50mm	26002
T	Torx-Plus [®] IP 8	50zmm	23195
	Torx-Plus [®] IP 9	50mm	23197
	Torx-Plus [®] IP 10	50mm	23199
	Torx-Plus [®] IP 15	50mm	23201
	Torx-Plus [®] IP 20	50mm	23203
	Torx-Plus [®] IP 25	50mm	23205
	Torx-Plus [®] IP 27	50mm	23207
	Torx-Plus [®] IP 30	50mm	23209
	Torx-Plus [®] IP 40	50mm	23211



7010 Z Series

7010 Z Selles		
Drive	Length	Wiha P/N
Slotted 4.5 x 0.6	25mm	01623
Slotted 5.5 x 0.8	25mm	01624
Slotted 6.5 x 1.2	25mm	01626
Slotted 8.0 x 1.6	25mm	01627
Slotted 6.5 x 1.2	50mm	01798

7019 TW ZOT Series - Features optimised Torsion Zone

Drive	Length	Wiha P/N	
Tri-Wing [®] 0	25mm	22603	
Tri-Wing [®] 1	25mm	22604	
Tri-Wing [®] 2	25mm	22605	
Tri-Wing [®] 3	25mm	22606	
Tri-Wing [®] 4	25mm	22607	
Tri-Wing [®] 5	25mm	22608	

7019 TS ZOT Series - Features optimised Torsion Zone



Torq-Set 2	25mm	26249
Torq-Set 3	25mm	26045
Torq-Set 4	25mm	22591
Torq-Set 5	25mm	22592
Torq-Set 6	25mm	22593
Torq-Set 8	25mm	22594
Torq-Set 10	25mm	22595

7018 Z Series

Drive

Drive	Length	Wiha P/N
Square 1 (3/32)	25mm	06634
Square 2 (1/8)	25mm	06635
Square 3 (9/64)	25mm	06636

Square is sometimes referred to as Robinson

7019 SP	Series
---------	--------

Drive	Length	Wiha P/N
Pin Spanner 4	25mm	27064
Pin Spanner 6	25mm	27065
Pin Spanner 8	25mm	27066
Pin Spanner 10	25mm	27067

7013 TR Series

Drive	Length	Wiha P/N
Allen Hex security 2mm	25mm	25560
Allen Hex security 2.5mm	25mm	25561
Allen Hex security 3mm	25mm	25562
Allen Hex security 4mm	25mm	25563
Allen Hex security 5mm	25mm	25564

7017 Z Series



Drive	Length	Wiha P/N
Ballpoint Hex 1.5mm	38mm	01734
Ballpoint Hex 2mm	38mm	01735
Ballpoint Hex 2.5mm	38mm	01736
Ballpoint Hex 3mm	38mm	01737
Ballpoint Hex 4mm	38mm	01738
Ballpoint Hex 5mm	38mm	01739
Ballpoint Hex 6mm	38mm	01740

7013 Z Series



Drive	Length	Wiha P/N
Allen Hex 1.5mm	25mm	04011
Allen Hex 2mm	25mm	01703
Allen Hex 2.5mm	25mm	01704
Allen Hex 3mm	25mm	01705
Allen Hex 4mm	25mm	01706
Allen Hex 5mm	25mm	01707
Allen Hex 6mm	25mm	01708
Allen Hex 8mm	25mm	01709
Allen Hex 10mm	25mm	01710

7043 Z Series

Drive	Length	Wiha P/N
Allen Hex 1.5mm	50mm	05301
Allen Hex 2mm	50mm	05302
Allen Hex 2.5mm	50mm	05303
Allen Hex 3mm	50mm	04194
Allen Hex 4mm	50mm	04195
Allen Hex 5mm	50mm	04196
Allen Hex 6mm	50mm	04197

These parts have no connection with the proprietors of the registered trademarks. Torx® is a registered trademark of Camcar Division of Textron Phillips® and PoziDriv® are registered trademarks of the Phillips Screw Company

wiha





CUTTING FLUIDS

TAP MAGIC® WITH EP-XTRA -

The original formula minus 1.1.1 Trichloroethane. Now an ozone friendly formula that gives you outstanding performance for any cutting operation on any metal. Absolutely without equal on all hard metals and for cuts of exteme pressure or for long duration.

Part No.	Description
10004E	Tap Magic [®] EP-Xtra 4 oz (120ml) spout top plastic bottle (box qty: 24)
10012EL	Tap Magic [®] EP-Xtra 12 oz (354 gram) aerosol can (box qty: 12)
10016E	Tap Magic [®] EP-Xtra 16 oz (472 ml) spout top plastic bottle (box qty: 12)
10050E	Tap Magic® EP-Xtra 5 Litre plastic bottle
10025E	Tap Magic [®] EP-Xtra 25 Litre plastic container

TAP MAGIC® XTRA-THICK - The extreme performance heavyweight cutting fluid for the hardest metals up to 45 RC. Great for lathe, millwork, and deep hole cuts. Very effective on stainless steel. Contains EP-Xtra.

Part No.	Description
70016T	Tap Magic [®] EP-Xtra -Thick 16 oz (472 ml) spout top can plastic bottle (box qty: 12)

TAP MAGIC® ALUMINIUM - the most effective cutting fluid you can use for any metal work on alumunium. Provides excellent performance for all cutting operations.

Part No.	Description
20004A	Tap Magic [®] Aluminium 4 oz (120ml) spout top can (box qty: 24)
20016A	Tap Magic® Aluminium 16 oz (472 ml) spout top can (box qty: 12)
20050A	Tap Magic® Aluminium 5 Litre plastic bottle

TAP MAGIC® MULTI PURPOSE CLEANER / DEGREASER- The second step in any machining process is to remove any oils or debris from the tools or parts. This foaming, water-based cleaner removes fluid, grease, dirt and coolant from your tools, equipment, and parts...

Part No.	Description
90019CTC	Tap Magic [®] Net 19oz Multi Purpose Cleaner / Degreaser aerosol can (box qty: 12)

TAP MAGIC[®] CORROSION INHIBITOR - The final step before putting your tools away or sending parts out to your customers, this inhibitor will protect anything metal around your shop, outside or in! Stops corrosion and displaces moisture in a non-sticky, non-drying formula.

Part No.	Description
90015CTP	Tap Magic [®] Net 15oz Corrosion Inhibitor aerosol can (box qty: 12)

TAP MAGIC[®] H2OX - Tap Magic H2OX[™] is formulated to provide excellent lubricity while eliminating the sticky messy film associated with heavy oil products.

Part No.	Description
80005WS	Tap Magic [®] 5 Litre Fluid Metal Semi-Synethic H2OX plastic bottle
80640WS	Tap Magic [®] 18.9L Fluid Metal Semi-Synethic H2OX plastic container



STAMPS - LETTER & NUMBER

Manufactured in Germany from bright drawn tool steel. Hardness at the engraving : 58 - 60 HRC & the stamping end 38-46 HRC All stamps designed to be used on steel up to 800 N/mm2 Number sets include 0 - 9, letter sets A - Z with & symbol

9 PIECE NUMBER SETS


Part Number	Character Height	Dimensions
SN01	1mm	6 x 6 x 65mm
SN01.5	1.5mm	6 x 6 x 65mm
SN02	2mm	6 x 6 x 65mm
SN02.5	2.5mm	6 x 6 x 65mm
SN03	3mm	6 x 6 x 65mm
SN04	4mm	7 x 7 x 65mm
SN05	5mm	8 x 8 x 65mm
SN06	6mm	9 x 9 x 75mm
SN07	7mm	11 x 11 x 76mm
SN08	8mm	11 x 11 x 76mm
SN10	10mm	12 x 12 x 80mm
SN12	12mm	14 x 14 x 80mm
SN15	15mm	16 x 16 x 85mm
SN20	20mm	24 x 15 x 100mm
SN25	25mm	28 x 15 x 100mm

27 PIECE LETTER SETS

Part Number	Character Height	Dimensions
SL01	1mm	6 x 6 x 65mm
SL01.5	1.5mm	6 x 6 x 65mm
SL02	2mm	6 x 6 x 65mm
SL02.5	2.5mm	6 x 6 x 65mm
SL03	3mm	6 x 6 x 65mm
SL04	4mm	7 x 7 x 65mm
SL05	5mm	8 x 8 x 65mm
SL06	6mm	9 x 9 x 75mm
SL07	7mm	11 x 11 x 76mm
SL08	8mm	11 x 11 x 76mm
SL10	10mm	12 x 12 x 80mm
SL12	12mm	14 x 14 x 80mm
SL15	15mm	16 x 16 x 85mm
SL20	20mm	24 x 15 x 100mm
SL25	25mm	28 x 15 x 100mm

STAMPS - LETTER & NUMBER - REVERSE





Allows a safe distance between the stamping head and your hand Quick-Change device with spring lock. Will hold stamps with a maximum cross section of 20 x 20mm.

Part Number	
HHS	

For use in making moulds, the stamps produce reversed impressions, or in sheet metal raising the character in the opposite side.

9 PIECE NUMBER SETS

Part Number	Character Height	Dimensions
SNR02	2mm	6 x 6 x 65mm
SNR03	3mm	6 x 6 x 65mm
SNR04	4mm	7 x 7 x 65mm
SNR05	5mm	8 x 8 x 65mm
SNR06	6mm	9 x 9 x 75mm
SNR08	8mm	11 x 11 x 76mm
SNR10	10mm	12 x 12 x 80mm
SNR12	12mm	14 x 14 x 80mm

27 PIECE LETTER SETS

Part Number	Character Height	Dimensions
SLR02	2mm	6 x 6 x 65mm
SLR03	3mm	6 x 6 x 65mm
SLR04	4mm	7 x 7 x 65mm
SLR05	5mm	8 x 8 x 65mm
SLR06	6mm	9 x 9 x 75mm
SLR08	8mm	11 x 11 x 76mm
SLR10	10mm	12 x 12 x 80mm
SLR12	12mm	14 x 14 x 80mm

Individual letter and number stamps are available on request. All stamps are UPPER CASE, lower case are available on special buy-in from Germany

STAMPS - LETTER & NUMBER - EXTRA EXTRA

For use on high tensile and hard materials

9 PIECE NUMBER SETS

Part Number	Character Height	Dimensions
SNH02	2mm	7 x 7 x 75mm
SNH03	3mm	8 x 8 x 75mm
SNH04	4mm	9 x 9 x 80mm
SNH05	5mm	10 x 10 x 80mm
SNH06	6mm	12 x 12 x 85mm
SNH08	8mm	14 x 14 x 90mm
SNH10	10mm	16 x 16 x 90mm
SNH12	12mm	18 x 18 x 100mm
SNH15	15mm	18 x 18 x 100mm

STAMPS - LETTER & NUMBER - LOW STRESS

Low stress engraving, silky dulled design, for marking gas pipes, weld seams, high pressure pipes, turbines etc

9 PIECE NUMBER SETS

۱
۱

STAMPS - LETTER & NUMBER - DOT LOW STRESS

For use on low impact, low stress dot style engraving, silky dulled design

9 PIECE NUMBER SETS

Part Number	Character Height	Dimensions
SND02	2mm	7 x 7 x 75mm
SND03	3mm	8 x 8 x 85mm
SND04	4mm	9 x 9 x 78mm
SND05	5mm	10 x 10 x 78mm
SND06	6mm	12 x 12 x 84mm
SND08	8mm	16 x 16 x 90mm
SND10	10mm	16 x 16 x 90mm
SND12	12mm	16 x 16 x 90mm

27 PIECE LETTER SETS

Part Number	Character Height	Dimensions
SLD02	2mm	7 x 7 x 75mm
SLD03	3mm	8 x 8 x 85mm
SLD04	4mm	9 x 9 x 78mm
SLD05	5mm	10 x 10 x 78mm
SLD06	6mm	12 x 12 x 84mm
SLD08	8mm	16 x 16 x 90mm
SLD10	10mm	16 x 16 x 90mm
SLD12	12mm	16 x 16 x 90mm

TYPE IN FONT SETS - EURO TYPE INTERCHANGEABLE 100 PCE

All sets contain Letters A - Z, Numbers 0 - 9, / slash, comma, full stop, hypen, spacers, holder, tweezers. All nickel plated

Part Number	Description
S100S01M	1.0mm - 1.5 x 4.0 x 19.00mm - 19pcs Per Holder
S100S1.5M	1.5mm - 1.5 x 4.0 x 19.00mm - 19pcs Per Holder
S100S02M	2.0mm - 2.0 x 4.0 x 19.00mm - 14pcs Per Holder
S100S02.5M	2.5mm - 2.5 x 6.0 x 19.00mm - 15pcs Per Holder
S100S03M	3.0mm - 3.0 x 6.0 x 19.00mm - 13pcs Per Holder
S100S04M	4.0mm - 4.0 x 8.0 x 19.00mm - 10 Pcs Per Holder
S100S05M	5mm - 5.0 x 8.0 x 19.00mm - 8 Pcs Per Holder

27 PIECE LETTER SETS

Part Number	Character Height	Dimensions
SLH02	2mm	7 x 7 x 75mm
SLH03	3mm	8 x 8 x 75mm
SLH04	4mm	9 x 9 x 80mm
SLH05	5mm	10 x 10 x 80mm
SLH06	6mm	12 x 12 x 85mm
SLH08	8mm	14 x 14 x 90mm
SLH10	10mm	16 x 16 x 90mm
SLH12	12mm	18 x 18 x 100mm
SLH15	15mm	18 x 18 x 100mm





27 PIECE LETTER SETS

Part Number	Character Height	Dimensions	
SLLS03	3mm	6 x 6 x 65mm	
SLLS04	4mm	7 x 7 x 65mm	
SLLS05	5mm	8 x 8 x 65mm	
SLLS06	6mm	9 x 9 x 75mm	
SLLS08	8mm	11 x 11 x 76mm	
SLLS10	10mm	12 x 12 x 80mm	









ADJUSTABLE HAND REAMERS

Each reamer expands to the smallest size of the next larger size.

Reamers are used for light cut, repair work, removing stock or simply for enlarging holes.

Reamers can be hand operated with a wrench. Blades are hardened & ground.

The size can be adjusted by moving the blades in tapered slots by means of loosening one nut and tightening the other.

ADJUSTABLE HAND REAMERS - SETS

Part No.	Description
READSET8A-5A	Set of 4. 8/A to 5/A
READSET4A-M	Set of 16.4A to M



Part No.	Metric Size	Inch Size	No. Blades
READ8A	6.35 - 7.14	1/4 - 9/32	4
READ7A	7.14 - 7.94	9/32 - 5/16	4
READ6A	7.94 - 8.73	5/16 - 11/32	4
READ5A	8.73 - 9.52	11/32 - 3/8	5
READ4A	9.52 - 10.32	3/8 - 13/32	6
READ3A	10.32 - 11.11	13/32 - 7/16	6
READ2A	11.11 - 11.91	7/16 - 15/32	6
READA	11.91 - 13.49	15/32 - 17/32	6
READB	13.49 - 15.08	17/32 - 19/32	6
READC	15.08 - 16.67	19/32 - 21/32	6
READD	16.67 - 18.26	21/32 - 23/32	6
READE	18.26 - 19.84	23/32 - 25/32	6
READF	19.84 - 21.43	25/32 - 27/32	6
READG	21.43 - 23.81	27/32 - 15/16	6
READH	23.81 - 26.99	15/16 - 1-1/16	6
READI	26.99 - 30.16	1-1/16 - 1-3/16	6
READJ	30.16 - 34.13	1-3/16 - 1-11/32	6
READK	34.13 - 38.10	1-11/32 - 1-1/2	6
READL	38.10 - 46.04	1-1/2 - 1-13/16	6
READM	46.04 - 56.36	1-13/16 - 2-7/32	6
READN	56.36 - 69.85	2-7/32 - 2-3/4	6
READO	69.85 - 84.93	2-3/4 - 3-11/32	6





CENTERING SQUARE

For locating turning centres on all square and round material Stainless steel Metric Calibrations

Part No.	RANGE
PCSS	100mm x 70mm
PCSM	150mm x 130mm
PCSL	200mm x 150mm

DEGREE PROTRACTORS

Manufactured from polished stainless steel


Double graduation from 0 - 180° in opposite directions The rectangular head model provides four convenient working edges Used to draw radial lines, setting bevels and transferring angles Knurled nut for firm setting of the blade



Part No.	DESCRIPTION	
PRORD	Round Head. 90mm x 150mm blade	
PROSQ	Rectangular 90mm x 50mm x 150mm blade	

PROTRACTORS ROUND OPEN HEAD STYLE

Locking type protractor with an open head Heavy duty, made from ground stainless steel Easy to read lettering, reads left to right 0 - 180 degree

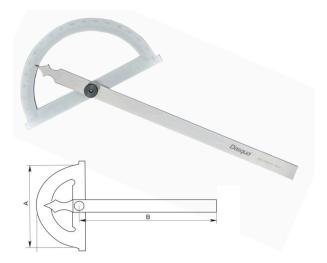

Part No.	Α	В	DESCRIPTION
PRO	120	150	120mm Head x 150mm Rule
PROL	150	200	150mm Head x 200mm Rule
PROXL	200	300	200mm Head x 300mm Rule
PROXXL	300	500	300mm Head x 500mm Rule



TOOLMAKERS PARALLEL CLAMPS

Features hardened & tempered jaws Clamps equipped with spring screw clip Highly useful for holding small work together, when drilling, welding, assembling, etc End jaw is chamfered to clamp under a shoulder or in a recess

Part No.	Capacity x Jaw Size
TPC44 x 63	44mm x 63mm
TPC70 x 102	70mm x 102mm
TPC114 x 152	114mm x 152mm

DEPTH GAUGE WITH PROTRACTORS

Manufactured from polished stainless steel Double graduation from 0 - 180° in opposite directions

The rectangular head model provides four convenient working edges

Narrow 6" and 150mm rule Spring tension nut to secure the rule in the desired

depth & angle

Part No.	DESCRIPTION
PRODGMERD	Round Head. 90mm x 150mm blade
PRODGMESQ	Rectangular 90mm x 50mm x 150mm blade



Made of stainless steel With a magnifier for easy and clear reading Measuring surface hardened, group and lapped ensures smooth movement Satin chrome finish, anti-rust and durable With fine adjustment Provided with 3 adjustments (150mm, 200mm, 300mm)

Part No.	Description
UBP300	Universal Bevel Protractor
UBPE300	Digital Universal Bevel Protractor

ANGULAR DEPTH GAUGE

Angular depth gauge can be used as a protractor for measuring angles 15°, 30° & 45° graduated left & right Pula is graduated matrix and side inches the other

Rule is graduated metric one side, inches the other

Part No.	SIZE
DG150	150mm & 6 inch with 15, 30 & 45 degree
DG200	200mm & 8 inch with 15, 30 & 45 degree
DG300	300mm & 12 inch with 15, 30 & 45 degree

ROUND SHEET METAL & WIRE GAUGE

Popular gauge for measuring steel wire, hot & cold rolled steel sheet Made from polished stainless steel

Clear permanently etched graduations from 0 - 36

	5
Part No.	DESCRIPTION
WGO-36	Wire Gauge 0 - 36



DIAL THICKNESS GAUGE

For quick and easy measurements of small parts and thicknesses. Often used to measure thickness of paper, leather, rubber, fabric, metal plate, glass and plastic plate etc. 0.1mm Graduation

Part No.	RANGE
DTG010	0-10mm
DTG020	0-20mm



CENTRE GAUGES

Very useful gauge used in grinding and setting screw cutting toolsClearly etched scale for finding number of threads per inchthrough graduations in 14th, 20ths, 24ths, & 32nds of an inchAlso features a table of double depth of thread for determiningsize of tap drills. Made of tempered stainless steel

Part No.	Thread profiles
CGM	Metric threads 60° mm scale
CGUN	American threads 60° inch scale
CGW	BSW threads 55° scale



DRILL GAUGES Hole sizes and decimal

equivelents permanently etched

Part No.	Description
DGM	1 - 13mm x 0.1mm increments
DGIMP	1/16 - 1/2 x 1/32 increments
DGL	Letter Drills A - Z
DGN	Number Drills 60 - 80



UNIVERSAL SCREW CUTTING GAUGE

Used for gauging thread profiles 47.5° BA, 14.5° ACME, 60° American & Metric, 55° BSW & BSF Stainless Steel with clearly etched graduation

Part No.	Thread profiles
UNSCG	BA - ACME - Metric - BSW - UNC - UNF



SCREW PITCH GAUGES

Useful gauges to quickly determine the pitch of various threads All leaves are clearly marked with the size

Features a locking device at both ends to securely lock the leaves Made of high quality polished tool steel



Part No.	Description
SPGM	Metric 24 blades 0.25 - 6mm
SPGME	Metric / BSW 52 blades 0.25 - 6mm & 4 - 62
SPGUN	UNC / UNF 60º 31 blades 4 - 42
SPGUNL	UNC / UNF 60º 31 blades 4 - 84
SPGW	BSW 55º 28 blades 4 - 62 G
SPGBSP	BSP 6 blades 8 - 28
SPGMUN	Metric / Unified 52 blades 0.25 - 6mm 4 - 62

RADIUS GAUGES

Handy device for checking radii of tools and dies easier & faster measures both convex & concave radii



Part No.	Description
RG1-7	1 - 7mm 34 leaves
RG7.5-15	7.5 - 15mm 32 leaves
RG15-25	15.5 - 25mm 30 leaves
RG1/32-1/4	1/32 - 1/4 by 1/64 30 leaves
RG17/64-1/2	17/64 - 1/2 by 1/64 32 leaves



TAPER GAUGE

Handy gauge for measuring cylindrical bores, bearing work & gauging slots Made from polished stainless steel Clearly etched graduations for metric on one side and inch the other

Part No.	Description
TGME	1 - 16mm & 1/32 - 5/8 inch

WING COMPASS Square leg, heavy duty, pol[;]

steel, hardened & ground pc.



Part No.	Size
WC150	150mm
WC200	200mm
WC250	250mm
WC300	300mm
WC500	500mm
WC600	600mm
WC800	800mm

Part No.	Size
JC100	100mm
JC150	150mm
JC200	200mm
JC250	250mm
JC300	300mm



JENNY CALIPERS HERMAPHRODITE CALIPER

Used in layout works for locating and testing centres. Adjustable point.


FIRM JOINT DIVIDERS

Firm joint to adjust tension as desired. Legs machined to rigid length and balance

Part No.	Size
FIC150	150mm
FIC200	200mm
FIC250	250mm
FIC300	300mm
FIC450	450mm
FIC600	600mm
FIC900	900mm

FIRM JOINT OUTSIDE CALIPERS

Firm joint to adjust tension as desired. Legs machined to rigid length and balance





FIRM JOINT INSIDE CALIPERS

Firm joint to adjust tension as desired. Legs machined to rigid length and balance



Part No.	Size
FOC150	150mm
FOC200	200mm
FOC250	250mm
FOC300	300mm
FOC450	450mm
FOC600	600mm
FOC900	900mm
FOC1050	1050mm







Inside Calipers



Spring Dividers Solid Nut & Washer

INSIDE CALIPERS

Flat leg, heat treated points, polished steel solid nut & washer, hardened & tempered spring

Part No.	Size
IC075	75mm
IC100	100mm
IC150	150mm
IC200	200mm
IC250	250mm
IC300	300mm
IC450	450mm
IC600	600mm
IC900	900mm

Outside Calipers



Part No.	Size
SD075	75mm
SD100	100mm
SD150	150mm
SD200	200mm
SD250	250mm
SD300	300mm
SD450	450mm
SD600	600mm
SD900	900mm

SPRING DIVIDERS

Flat leg, heat treated points, polished steel solid nut & washer, hardened & tempered spring

OUTSIDE CALIPERS

Flat leg, heat treated points, polished steel solid nut & washer, hardened & tempered spring

Part No.	Size
OC075	75mm
OC100	100mm
OC150	150mm
OC200	200mm
OC250	250mm
OC300	300mm
OC450	450mm
OC600	600mm
OC900	900mm

ENGINEERS PRECISION SQUARES INTERNAL & EXTERNAL SQUARENESS TO DIN 875 OR BS939 GRADE B

Made of the finest quality ground steel Blade is hardened & ground for straightness and parallelism For setting up and checking jobs where extreme accuracy is required

Part No.	Blade x Stock Length
ESQ025	25mm x 38mm
ESQ050	50mm x 50mm
ESQ075	75mm x 63mm
ESQ100	100mm x 75mm
ESQ150	150mm x 100mm
ESQ200	200mm x 127mm
ESQ225	225mm x 150mm
ESQ250	250mm x 150mm
ESQ300	300mm x 200mm
ESQ450	450mm x 254mm
ESQ600	600mm x 330mm
ESQ915	915mm x 445mm











Advanced Design

IP54 Protection agaunst water, dust, oil or any other liquid Hardened, ground and lapped measuring surfaces Zero setting at any position, plus data hold Strictly made in accordance with DIN862 Silky Smooth Movement throughout Millimetres, Decimal, & Fraction

Part No.	Old Part No	Description	Range	Reading
CE150LS54	111-101FR	Digital Caliper IP54 Splashproof Large Screen Triple Read Scale	150mm / 6″	0.01mm / 0.0005″
CE200LS54	111-102FR	Digital Caliper IP54 Splashproof Large Screen Triple Read Scale	200mm / 8″	0.01mm / 0.0005″
CE300LS54	111-103FR	Digital Caliper IP54 Splashproof Large Screen Triple Read Scale	300mm / 12″	0.01mm / 0.0005″

DIGITAL CALIPERS IP67 COOLANT PROOF

Advanced Design

Strictly made in accordance with DIN862 IP67 Protection against water, dust, oil or any other



15MM CHARACTER HEIGHT

Part No.	Description	Range	Reading
CE150CP67	Digital Caliper IP67 Coolant Proof Large Screen	150mm / 6″	0.01mm / 0.0005″
CE200CP67	Digital Caliper IP67 Coolant Proo Large Screen	200mm / 8″	0.01mm / 0.0005″
CE300CP67	Digital Caliper IP67 Coolant Proof Large Screen	300mm / 12″	0.01mm / 0.0005″

LARGE SCREEN DIGITAL CALIPERS

With long jaws Strictly made in accordance with DIN862 With fine adjustment With hold function Hardened stainless steel construction for long life Metric / inch fraction conversion



CE300LJ	Digital Caliper large LCD readout 90mm jaws	300mm / 12″	0.01mm / 0.0005″
CE500	Digital Caliper large LCD readout 100mm jaws	500mm / 20"	0.01mm / 0.0005″
CE600	Digital Caliper large LCD readout 100mm jaws	600mm / 24″	0.01mm / 0.0005″
CE1000	Digital Caliper large LCD readout 200mm jaws	1m / 40 inch	0.01mm / 0.0005″

VERNIER CALIPERS WITH WIRELESS CONNECTIVITY

Advanced Design Wireless capability built in Strictly made in accordance with DIN862 IP54 Protection against water, dust, oil or any other liquid Silky Smooth Movement throughout Hardened, ground and lapped measuring surfaces

Larger sizes available on request

Part No.	Description	Range	Reading
CE150BT54	Digital Caliper Wireless IP54 Triple Read Scale	150mm / 6″	0.01mm / 0.0005″

POLYAMIDE VERNIER CALIPERS

SCALE: 5 Digit display with 7.5mm numeral height for easy readings.

MATERIAL: Made from Non-Metallic high tech material with 50% fibre glass content.

READING: 0.01mm as well as 0.0005 inch

STANDARD: CE Compliant

APPLICATION: For outside, inside and depth measurements

Additional Information:

- Switches off automatically after 5 minutes of non-use.

- Zero setting possible in every position for quick comparison

measurements.

Part No.	Description	Range	Reading
CEP150ME	Digital Caliper Polyamide 150mm CE Compliant	150mm / 6″	0.01mm / 0.0005″
CVP150ME	Vernier Caliper Polyamide 150mm CE Compliant	150mm / 6″	0.1mm / 0.015″

VERNIER CALIPERS



STANDARD AND FINE ADJUSTMENT AVAILABLE FOR MOST SIZES



4 usages for measuring outside diameter, inside diameter, step and depth.

Strictly made in accordance with DIN862.

15.39-

Made with Stainless Steel.

Distinct lines and figures etchesd against satin chrome finish.

With locking screen for stable reading.

Part No.	Description	Range	Reading
CV150ME	Vernier Caliper with locking screw	150mm / 6″	0.02mm / 0.001″
CV150MEFA	Vernier Caliper with fine adjustment	150mm / 6″	0.02mm / 0.001″
CV200MEFA	Vernier Caliper with fine adjustment	200mm / 8″	0.02mm / 0.001″
CV300MEFA	Vernier Caliper with fine adjustment	300mm / 12″	0.02mm / 0.001″
CV600MEFA	Vernier Caliper fine adjustment 90mm jaws	600mm / 24″	0.02mm / 0.001″
CV1MMEFA	Vernier Caliper fine adjustment 125mm jaws	1m / 40″	0.02mm / 0.001″
CV1.5MEFA	Vernier Caliper fine adjustment 125mm jaws	1.5m / 60″	0.02mm / 0.001″
CV2MEFA	Vernier Caliper fine adjustment 200mm jaws	2m / 80″	0.02mm / 0.001″

GEAR TOOTH VERNIER CALIPERS

Verticle scale measures the depth of the teeth from the top of the pitch line

Horizontal scale is used to measure the Chordal Thickness of the gear tooth

The gear does not have to be removed from the machine

Range 1 - 26 Graduations 0.02mm Accuracy ± 0.02mm



DIAL CALIPERS



Part No.	Description	Range	Reading
CDL150	Dial Caliper	150mm	0.02mm
CDL200	Dial Caliper	200mm	0.02mm
CDL300	Dial Caliper	300mm	0.02mm
CDL6	Dial Caliper	6 inch	0.001″

PRECISION MACHINE LEVELS

Used to measure straightness and parallelism of the guideways of various kinds of machine tools and other equipment, and to inspect the horizontal or perpendicular position after the installation of equipment.

PRECISION FRAME LEVELS

Mainly used to inspect guide way straightness of various kinds of machine tools and other equipment, and to inspect the horizontal or perpendicular position after the installation of equipment. The measuring surfaces are "V" shaped so that the levels can be used on cylinders.

GAUGE BLOCK SETS NEW

Part No.	Description
GBM103-0	GRADE 0 - 103 Pce metric set
GBM103-1	GRADE 1 - 103 Pce metric set
GBM112-0	GRADE 0 - 112 Pce metric set
GBM112-1	GRADE 1 - 112 Pce metric set
GBM32-0	GRADE 0 - 32 Pce metric set
GBM32-1	GRADE 1 - 32 Pce metric set
GBM47-0	GRADE 0 - 47 Pce metric set
GBM47-1	GRADE 1 - 47 Pce metric set
GBM87-0	GRADE 0 - 87 Pce metric set
GBM87-1	GRADE 1 - 87 Pce metric set

Part No.	Size	Accuracy
PL100x0.02	100mm	0.02mm
PL150x0.02	150mm	0.02mm
PL200x0.02	200mm	0.02mm
PL200x0.05	200mm	0.05mm
PL250x0.02	250mm	0.02mm
PL300x0.02	300mm	0.02mm

Part No.	Size	Accuracy
PLSQ150x0.05	150mm	0.05mm
PLSQ200x0.02	200mm	0.02mm
PLSQ200x0.05	200mm	0.05mm

- A thread limit plug gauge is a combination of go plug gauge

THREAD PLUG GAUGES

and no-go plug gauge. The scrap side of the thread plug gauge is - The go end of the thread plug gauge must screw into the thread

cut into a part by hand (without using excessive force). If unable to do so, the thread does not meet the requested standards (=scrap). - The scrap side of the thread plug gauge must not be able to be manually turned more than two turns into the cut thread (without using excessive force). If it can be screwed in more, the thread does not meet the requested standards (=scrap).

- The reference temperature for parts and gauges is 20° Celsius. A very wide range is available on request, including Thread Ring Gauges.



NEW

Part No.	Description
TPGM01420	M14 X 2.0
TPGM01602	M16 X 2.0
TPGS03012	7 PCE SET









THREE POINTS INSIDE MICROMETER SET

- Strictly made in accordance with DIN863
- Carbide measuring faces
- Satin chrome-plated scales and operating parts
- Self aligning and self centreing
- Ratchet stop to provide uniform measuring pressure for highest possible reading accuracy
- Non-removable anvils
- Includes extension ring gauge, supplied with extension



Part No.	Range (mm)	Points (mm)	Resolution (mm)	Extension (mm)
MICIN0612	6-12	6-8, 8-10, 10-12	0.001	50
MICIN1220	12-20	12-16, 16-20	0.005	100
MICIN2050	20-50	20-25, 25-30, 30-40, 40-50	0.005	150
MICIN50100	50-100	50-63, 62-75, 75-88, 87-100	0.005	150

INSIDE MICROMETER - CALIPER TYPE

Hardened and Ground Spindle Threads and Measuring Face

Part No.	Range	Reading
MICIN5-30	5 - 30mm	0.01mm
MICIN25-50	25 - 50mm	0.01mm
MICIN50-75	50 - 75mm	0.01mm
MICIN75-100	75 - 100mm	0.01mm

INSIDE MICROMETER - EXTENSION ROD TYPE

Part No.	Range	Reading
MICIN50-250	50 - 250mm	0.01mm
MICIN25-50	25 - 50mm	0.001 inch

NEW

DIAL BORE GAUGES

Part No.	Range	Reading
BG35-160	35-160	0.01

- Large measuring range from 35mm to 160mm

- So cost effective that can reach the range of 2 or 3 dial bore gauges

- Carbide Tipped and ceramic contact points optional for customers' desires

- Strictly made in accordanc with DIN878

NEW PIN GAUGE SETS

- Strictly Made in accordance with DIN2269

 Perfect for measuring hole diameter, distance between holes, hole location, slot standards of setting measuring equipment
 Made of hardened steel, heat treatment, abrasion resistant, hardness 60-63HRC, precision ground for long service life

Part No.	Range	PCE	Standard
PGC0110	0-10MM	91 PCES	DIN2269











NEW



*MICD AVAILABLE UP TO 100MM IMPERIAL SIZES AVAILABLE UPON REQUEST UP TO 4" *MIC LISTED BELOW

OUTSIDE MICROMETERS BOXED SETS

Part No.	Description	
MIC0-75	Micrometer 3 piece set	
0 - 75mm range x 0.01mm		
MIC0-150	Micrometer 6 piece set	
0 - 150mm range x 0.01mm		
MIC0-300	Micrometer 12 piece set	
0 - 300mm r	ange x 0.01mm	
MIC0-6 Micrometer 6 piece set		
0 - 6 inch range x 0.001″		





OUTSIDE MICROMETERS

	Part No.	Range	Reading
	MIC0-25	0 - 25mm	0.01mm
	MIC25-50	25 - 50mm	0.01mm
NEW	MICD025	0 - 25mm	0.01mm
	MIC50-75	50 - 75mm	0.01mm
	MIC75-100	75 - 100mm	0.01mm
	MIC100-125	100 - 125mm	0.01mm
	MIC125-150	125 - 150mm	0.01mm
	MIC150-175	150 - 175mm	0.01mm
	MIC175-200	175 - 200mm	0.01mm
	MIC200-225	200 - 225mm	0.01mm
	MIC225-250	225 - 250mm	0.01mm
	MIC250-275	250 - 275mm	0.01mm
	MIC275-300	275 - 300mm	0.01mm
	MIC300-400	300 - 400mm	0.01mm
	MIC400-500	400 - 500mm	0.01mm
	MIC500-600	500 - 600mm	0.01mm
	MIC600-700	600 - 700mm	0.01mm
	MIC700-800	700 - 800mm	0.01mm
	MIC800-900	800 - 900mm	0.01mm
	MIC900-1000	900 - 1000mm	0.01mm
	MIC0-1	0 - 1″	0.001″
	MIC1-2	1 - 2″	0.001″
	MIC2-3	2 - 3″	0.001″
	MIC3-4	3 - 4″	0.001″
	MIC4-5	4 - 5″	0.001″
	MIC5-6	5 - 6″	0.001″
	MIC6-7	6 - 7″	0.001″
	MIC7-8	7 - 8″	0.001″
	MIC8-9	8 - 9″	0.001″
	MIC9-10	9 - 10″	0.001″
	MIC10-11	10 - 11″	0.001″
	MIC11-12	11 - 12″	0.001″

Large Micrometers contain Interchangeabe Anvils



DISK BRAKE MICROMETER





DEPTH MICROMETERS

Part No.	Range	Reading
MICD1	0 - 1 inch	0.001″
MICD6	0 - 6 inch	0.001″
MICD25	0 - 25mm	0.01mm
MICD100	0 - 100mm	0.01mm

ELECTRONIC DIGITAL OUTSIDE MICROMETERS

Large display Data Hold & ABS. **Carbide Tipped Anvils** Power On / Off.

Metric reading 0.001mm and Inch reading 0.00005"

Ratchet stop handle

Hardened & Ground Measuring Spindle

Part No.	Range
MICE0-25	0 - 25mm & 0 - 1 inch
MICE25-50	25 - 50mm & 1 - 2 inch
MICE50-75	50 - 75mm & 2 - 3 inch
MICE75-100	75 - 100mm & 3 - 4 inch
MICE100-125	100 - 125mm & 4 - 5 inch
MICE125-150	125 - 150mm & 5 - 6 inch
MICE150-175	150 - 175mm & 6 - 7 inch
MICE175-200	175 - 200mm & 7 - 8 inch



IP65 WATER PROOF ELECTRONIC DIGITAL OUTSIDE MICROMETERS

Large display Data Hold & ABS. **Carbide Tipped Anvils** Power On / Off. Metric reading 0.001mm and Inch reading 0.00005" Hardened & Ground Measuring Spindle

Part No.	Range
MICE0025IP65	0 - 25mm & 0 - 1 inch
MICE2550IP65	25 - 50mm & 1 - 2 inch
MICE5075IP65	50 - 75mm & 2 - 3 inch
MICE75100IP65	75 - 100mm & 3 - 4 inch



Ċ

nnnn

ELECTRONIC DIGITAL OUTSIDE MICROMETER WITH WIRELESS CONNECTIVITY

Wireless capability built in Large display Data Hold & ABS. **Carbide Tipped Anvils** Ratchet stop handle

Quick Measuring Function Power On / Off. Metric reading 0.001mm and Inch reading 0.00005" Hardened & Ground Measuring Spindle

Larger sizes can be ordered on request

Part No.	Range
MICE0025BT65	0 - 25mm & 0 - 1 inch

n 0.001r

VERNIER HEIGHT GAUGES

Fine adjustment

Magnifying glass for quick and easy reading

Part No.	Description	Range	Reading
HGV300FAME	Vernier Height Gauge	300mm	0.02mm
HGV500FAME	Vernier Height Gauge	500mm	0.02mm
HGV1000FAME	Vernier Height Gauge	1000mm	0.02mm

DIGITAL HEIGHT GAUGES

Part No.	Description	Range	Reading
HGE300ME	Digital Height Gauge	300mm/12"	0.01mm/0.0005″
HGE500ME	Digital Height Gauge	500mm/20″	0.01mm/0.0005″
HGE1000ME	Digital Height Gauge	1000mm/40"	0.01mm/0.0005″

VERNIER DEPTH GAUGES

Part No.	Description	Range	Reading
DGV250	Vernier Depth Gauge	250mm	0.05mm
DGV300	Vernier Depth Gauge	300mm	0.02mm
DGV500	Vernier Depth Gauge	500mm	0.02mm

DIGITAL DEPTH GAUGES

Part No.	Description	Range	Reading
DGE150	Digital Depth Gauge	150mm	0.01mm / 0.0005″
DGE300	Digital Depth Gauge	300mm	0.01mm / 0.0005″
DGE500	Digital Depth Gauge	500mm	0.01mm / 0.0005″





NEW

HYDRAULIC MAGNETIC BASE

Part No.	Holding Power	Base	Bottom Arm	Top Arm	Dia. Of Clam Hole
MBH7412	80kg	60 x 50 x 55	120mm	116mm	6.0 x 8.0 x dovetail

- Mechanical central locking of all joints

- Special structure ensures high pressure

- Oil hydraulics protected against oil leakage by double seals

- Powerful permanent magnet- Smooth and easy on/off switch

- Joined arms rotate 360 degrees on the dial indicator holder and can be twisted 180 degrees

NEW MINI MAGNETIC HOLDER

Part No.	Holding Power	Base	Dia. Of Clam Hole
MBD0005	20kg	73 x 37 x 12	8.0
MBD0010	20kg	73 x 37 x 26	8.0

- Smaller shape ensures easy and fast fixing to the machine and vices - light metal with laminated permanent magnets

- Low height enables fast, safe and wasy mount on machines and jigs

- Black enamel finish











Long Measuring Range





UNIVERSAL SURFACE MARKING GAUGE

Basic tool for machinists and toolmakers for accurately scribing lines, transferring measurements and probing during inspection work.

Base 82 x 63 x 25mm Spindle diameter 9.5mm

Part No.	Size
USG300	300mm spindle

TELESCOPIC GAUGES

For quick inside measurement & determination of inside diameters Spring loaded plunger that expands in the bore or groove

Part No.	Range
TGSET8-150	8mm through 152mm
TGSET300LR	8mm through 152mm with 300mm Long Reach



DIAL INDICATORS

Part No.	RANGE	Reading	Diameter
DIM10	0 - 10mm	0.01mm	58mm
DIM30	0 - 30mm	0.01mm	58mm
DIM50	0 - 50mm	0.01mm	58mm
DIM80	0 - 80mm	0.01mm	58mm
DIM100	0 - 100mm	0.01mm	58mm
DII1/2	0 - 1/2	0.001″	58mm
DII1	0 - 1″	0.001″	58mm
DII2	0 - 2″	0.001″	58mm

DIAL TEST INDICATORS

Part No.	RANGE	Reading	Diameter
TIM008	0 - 0.8mm	0.01mm	30mm
TII003	0 - 0.03 inch	0.0005″	30mm

DIGITAL INDICATORS

Part No.	RANGE	Reading
DIE13	12.7mm - 1/2″	0.01mm - 0.0005″

DIGITAL INDICATORS WITH WIRELESS CONNECTIVITY Larger sizes can be ordered on request



y	 	 	

Part No.	RANGE	Reading
DIE127BT	12.7mm - 1/2″	0.01mm - 0.0005″

SLIDING T-BEVEL

Stainless Steel blade with aluminium handle

Adjustable gauge for setting & transferring angles. The blade pivots and can be locked at any angle by loosening or tightening the thumbscrew.

Can be used to duplicate an existing angle or set to a desired angle.

Part No.	Size
STB250SS	250mm blade



POT MAGNETS

General purpose magnet - magnetic fasteners, displays, holding maps etc

Supplied with plated keepers

Part No.	Size	Approximate Pull
MPA16X17	16 x 17mm	2.65 Kg
MPB19X22	19 x 22mm	4.00 Kg
MPC25X27	25 x 27mm	5.00 Kg
MPD30X35	30 x 35mm	10.5 Kg

MAGNIFYING GLASS - EYE LOUPE

Lens made of clear ground & polished glass Body made from black polished plastic Hands free magnification

Part No.	Magnification	Focal Length
MG10	10 X	25mm

ADHESIVE BACKED MEASURING TAPES

Use as a customized measure for workbenches, saw tables, machinery, desks countertops, poles, walls, columns etc

Part No.	Description
ABT2M	2 metre reads left to right
ABT5M	5 metre reads left to right
ABT2MRL	2 metre reads right to left
ABT5MRL	5 metre reads right to left

MARKING GAUGE ROUND TYPE

Vernier Scale

Thumb screw for easy adjustment FAME model features Fine Adjustment

Part No.	Range	Reading	Fine Adjustment
MG300	300mm	0.1mm	No
MG500	500mm	0.1mm	Yes
MG300S	Replacement Scriber		-
MG300SCREW	Replacement Screw		-



TRAMMELS

Trammels & Trammel Heads

Used to draw circles and measure sizeable distances with the accuracy of a divider. Also for layout, marking templates.Needle point legs and one trammel can hold a pencil.

Part No.	Description	
TRHEADS	Trammel Head Set 2 PCE	
TR500	Trammel Set with Fine Adj up to 500mm	





Betting	Can be cut to desired length
easure	Part No.
	ABT2M
	ABT5M
	ABT2MRL
ad re	ABT5MRL

FEELER STRIP

METRIC 12.7 x 300mm Long

IMPERIAL 1/2 x 12 Inch Long

Part No.	Thickness	Part No.	Thickness
FSM0.03	0.03mm	FSM1.70	1.70mm
FSM0.04	0.04mm	FSM1.80	1.80mm
FSM0.05	0.05 mm	FSM1.90	1.90mm
FSM0.06	0.06 mm	FSM2.00	2.00mm
FSM0.07	0.07 mm	FSI0.001	0.001 inch
FSM0.08	0.08 mm	FSI0.0015	0.0015 inch
FSM0.09	0.09 mm	FSI0.002	0.002 inch
FSM0.10	0.10mm	FSI0.0025	0.0025 inch
FSM0.11	0.11mm	FSI0.003	0.003 inch
FSM0.12	0.12mm	FSI0.004	0.004 inch
FSM0.13	0.13mm	FSI0.005	0.005 inch
FSM0.14	0.14mm	FSI0.006	0.006 inch
FSM0.15	0.15mm	FSI0.007	0.007 inch
FSM0.16	0.16mm	FSI0.008	0.008 inch
FSM0.17	0.17mm	FSI0.009	0.009 inch
FSM0.18	0.18mm	FSI0.010	0.010 inch
FSM0.19	0.19mm	FSI0.011	0.011 inch
FSM0.20	0.20mm	FSI0.012	0.012 inch
FSM0.25	0.25mm	FSI0.013	0.013 inch
FSM0.30	0.30mm	FSI0.014	0.014 inch
FSM0.35	0.35mm	FSI0.015	0.015 inch
FSM0.40	0.40mm	FSI0.016	0.016 inch
FSM0.45	0.45mm	FSI0.017	0.017 inch
FSM0.50	0.50mm	FSI0.018	0.018 inch
FSM0.55	0.55mm	FSI0.019	0.019 inch
FSM0.60	0.60mm	FSI0.020	0.020 inch
FSM0.65	0.65mm	FSI0.021	0.021 inch
FSM0.70	0.70mm	FSI0.022	0.022 inch
FSM0.75	0.75mm	FSI0.023	0.023 inch
FSM0.80	0.80mm	FSI0.024	0.024 inch
FSM0.85	0.85mm	FSI0.025	0.025 inch
FSM0.90	0.90mm	FSI0.026	0.026 inch
FSM0.95	0.95mm	FSI0.027	0.027 inch
FSM1.00	1.00mm	FSI0.028	0.028 inch
FSM1.10	1.10mm	FSI0.029	0.029 inch
FSM1.20	1.20mm	FSI0.030	0.030 inch
FSM1.30	1.30mm	FSI0.032	0.032 inch
FSM1.40	1.40mm	FSI0.035	0.035 inch
FSM1.50	1.50mm	FSI0.040	0.040 inch
FSM1.60	1.60mm		





SETS

FSSETMM300MM
20 piece 0.05 - 1mm
300mm length
FSSETMM150MM
20 piece 0.05 - 1mm in 0.05
increments
150mm length
FSSETMM100MM
10 piece 0.05 - 80mm
100mm length
100mm length



ENGINEERS SCRIBERS

Part No.	Description
SC190	L Shaped. Double Ended. Knurled Body. 190mm length
SC225	L Shaped. Double Ended. Knurled Body. 225mm length
SCTCT	Fixed Carbide Tip. Chrome Plated Handle. Pocket Clip. 150mm length
SCTCWRT	Replaceable Carbide Tip. Magnetic End. Knurled Body. Pocket Clip. 150mm Ingth
SCTCWRTTIP	- Replacement Carbide Tip for SCTCWRT
SCMACH	Single Replaceable Point. Knurled Body. 125mm length
SCCH	Regular Point & Chisel Point Knurled Body. 165mm length



www.pretooling.com.au



PARTING TOOL HOLDERS HSS - STRAIGHT

- Heat treated hardened body
- Machined to precise tolerances
- Support the blade over a wide area, reducing blade breakage
- Supplied with one wrench

Part No.	Blade Size	Shank Size
LPTH5/16	5/16″	8 x 14 x 90mm
LPTH1/2	1/2″	8 x 19 x 114mm
LPTH5/8	5/8″	9.5 X 22 X 127mm
LPTH3/4	3/4″	13 x 28 x 152mm
LPTH7/8	7/8″	16 x 35 x 178mm
LPTH1	1 inch	19 x 41 x 203mm



Blades sold separately

PARTING TOOL HOLDERS CLAMP TYPE

- Tool blocks with rigid construction for 100% clamping power
- Hardened and tempered body

Can be used on front or rear tool posts

Part No.	Shank Size	Body Size	Blade Size
COTB1/2	1/2″	55 x 30.5 x 28mm	3/4″
COTB5/8	5/8″	90 x 38 x 32mm	1 inch
COTB3/4	3/4″	90 x 38 x 36mm	1 inch

Blades sold separately

LATHE PARTING TOOL BLADES

Part No.	Material	Blade Size
LPT5/16	HSS M-2	5/16 x 1/16 x 3-1/2
LPT1/2	HSS M-2	1/2 x 3/32 x 4
LPT5/8	HSS M-2	5/8 x 3/32 x 5
LPT3/4	HSS M-2	3/4 x 1/8 x 6
LPT7/8	HSS M-2	7/8 x 1/8 x 6
LPT1	HSS M-2	1 x 3/16 x 6



- Available in HSS M-2 & 5% Cobalt
- Fit most common tool holders
- Hardened & Ground
- Trapezoidal section to fit standard tool holders

FLY CUTTER HOLDERS

- Counterbalanced to get smoother finishes
- Machines up to 150mm wide surface with standard tool bit

• Round shank 1/2" & 3/4"

Part No.	Bit Size	Head Diameter	Shank	
FC3/16	3/16″	19mm - 3/4″	1/2″	
FC1/4	1/4″	28mm - 1-1/8″	1/2″	
FC5/16	5/16″	38mm - 1-1/2″	1/2″	
FCSET1/2	1/2" shank set of 3 includes above 3 sizes			
FC1.5-3/4	5/16″	38mm - 1-1/2″	3/4″	
FC2.5-3/4	5/16″	64mm - 2-1/2″	3/4″	
FCSET3/4	3/4" shank set o	of 3 includes (38mm, 50.8	8mm, 63.5mm)	



Bits sold separately



TURNING TOOL HOLDERS



Accurately machined from special steel

- Available in straight, left & right hand shanks
- Supplied with Wrench / Key

Holder size dimensions are : Length x Height x Width

Part No.	Bit Size	Holder Size	Shank
LTH1/8	1/8	115 x 12.7 x 8mm	Straight
LTH3/16	3/16	115 x 19 x 8mm	Straight
LTH1/4	1/4	125 x 22.5 x 10mm	Straight
LTH5/16	5/16	152 x 28 x 13mm	Straight
LTH3/8	3/8	178 x 35 x 16	Straight
LTH1/2	1/2	228 x 44 x 22mm	Straight
LTH5/8	5/8	280 x 50 x 25mm	Straight
LTH3/4	3/4	330 x 57 x 32mm	Straight
LTH3/16R	3/16	115 x 19 x 8mm	Right Hand
LTH1/4R	1/4	125 x 22.5 x 10mm	Right Hand
LTH5/16R	5/16	152 x 28 x 13mm	Right Hand
LTH3/8R	3/8	178 x 35 x 16	Right Hand
LTH1/2R	1/2	228 x 44 x 22mm	Right Hand
LTH5/8R	5/8	280 x 50 x 25mm	Right Hand
LTH3/4R	3/4	330 x 57 x 32mm	Right Hand
LTH3/16L	3/16	115 x 19 x 8mm	Left Hand
LTH1/4L	1/4	125 x 22.5 x 10mm	Left Hand
LTH5/16L	5/16	152 x 28 x 13mm	Left Hand
LTH3/8L	3/8	178 x 35 x 16	Left Hand
LTH1/2L	1/2	228 x 44 x 22mm	Left Hand
LTH5/8L	5/8	280 x 50 x 25mm	Left Hand
LTH3/4L	3/4	330 x 57 x 32mm	Left Hand

DOUBLE ENDED BORING BARS WITH HOLDERS

Part No.	Bar Size	Holder Size	Square Bit
LBB1/8HSS	3/8 x 4-1/2	1/2 x 2-1/4	1/8″
LBB3/16HSS	7/16 x 5-1/4	5/8 x 2-1/2	3/16″
LBB1/4HSS	9/16 x 6-3/4	5/8 x 3	1/4″
LBB5/16HSS	3/4 x 9-1/4	7/8 x 3-3/4	5/16″
LBB3/8HSS	7/8 x 11-1/2	1-1/4 x 4-1/2	3/8″
LBB1/2HSS	1-3/16 x 13-3/4	1-5/8 x 5	1/2″



Double ended boring bars & holder comes complete with screws & hex keys

Boring Bars have one end 45° and the other 90°

Made from tool steel with black finish

SLOTTED ANGLE PLATES

Made of high quality seasoned castings

Accurately machined 90 degrees square



Part No.	Length	First	Second	Style
AP075	75mm	63mm	50mm	Slotted & Webbed
AP112	115mm	90mm	75mm	Slotted & Webbed
AP150	150mm	125mm	115mm	Slotted & Open
AP200	200mm	150mm	125mm	Slotted & Webbed
AP250	250mm	200mm	150mm	Slotted & Webbed
AP300	300mm	225mm	200mm	Slotted & Open
AP300W	300mm	225mm	200mm	Slotted & Webbed

Webbed





NEW

COMBINATION SQUARE CAST IRON

Sturdy high quality cast iron Combination Square

-Metric & Imperial measurements

-Spirit Level on square & protractor -Engraved graduations on both the rule & protractor

-Rule has a Satin Chrome Finish -Supplied in a Sturdy Storage Case

Part No.	Description		
COMBSETCI	Combination Set Cast Iron 300mm / 12 inch Rule		
COMBSQ	Combination Square for Cast Iron Set		
COMBSACE	Combination Set Centre Finder Piece Only		
COMBSAPRO	Combination Set Cast Iron Protractor Head Only		
COMBR300ME	Ruler to Suit Combination Set. 300mm / 12inch		
COMBSETDIG	NEW Combination Set Cast Iron 300mm / 12 inch Rule		

VEE BLOCKS VEE BLOCK AND CLAMP SET

All sides are ground square and parallel to each other. V's are central, parallel and square and are matched in pairs. Made of heat treated and hardened tool steel. Precision made for machinist's and tool-makers use

Part No.	Length x Width x Height	Clamping Capacity
VB25	40 x 32 x 32mm	25mm
VB38	50 x 38 x 38mm	38mm
VB38HD	70 x 45 x 40mm	38mm
VB70	100 x 75 x 75mm	70mm

These V-Blocks can be used on top, bottom and either side. Clamps are secured in grooves machined in top & bottom surfaces.

Part No.	Length x Width x Height	Clamping Capacity
VB38TOP	70 x 63 x 45mm	38mm
VB55TOP	125 x 88 x 70mm	55mm





CAST IRON V BLOCKS in Pairs without Clamps

Made of high quality seasoned castings. Blocks are accurately ground square & parallel. Supplied in matched & numbered pairs. Parallelism tolerance of Vee Axis to base per 6 inch length within 30 microns. Squareness tolerance of Vee Axis to end faces within 25 microns.

Part No.	Length	Height	Thickness	Width of Vee
VBCI100	100mm	65mm	41mm	50mm
VBCI125	125mm	80mm	50mm	50mm
VBCI160	150mm	90mm	63mm	82mm
VBCI200	205mm	140mm	100mm	100mm
VBCI250	255mm	168mm	125mm	125mm
VBCI300	305mm	205mm	180mm	165mm



www.pretooling.com.au

LATHE LIVE CENTRES DUAL BEARING - for applications up to 2000rpm



Hardened and ground High Carbon Steel - point hardened to 52-58 HRC Two anti-friction bearings - Single row deep groove ball bearing and taper roller bearing to absorb combined radial and thrust loads.

Run out within 0.005mm (0.0002") and speed capacity up to 2000rpm.

Part No.	Morse Taper	Length	Feature
LLC1MTHD	1MTHD	120mm	Dual Bearings
LLC2MTHD	2MTHD	148mm	Dual Bearings
LLC3MTHD	3MTHD	185mm	Dual Bearings
LLC4MTHD	4MTHD	220mm	Dual Bearings
LLC5MTHD	5MTHD	260mm	Dual Bearings
LLC6MTHD	6MTHD	355mm	Dual Bearings



Precision Triple bearing design

Manufactured of hardened and ground alloy steel

Part No	Morse Taper	Point Dia.	Length
LLC2MTHDPREC	2MT	15mm	140mm
LLC3MTHDPREC	3MT	15mm	155mm
LLC4MTHDPREC	4MT	20mm	180mm

LATHE LIVE CENTRE SETS - with 7 interchangeable tips

- Hardened and ground High Carbon Steel
- Complete with seven interchangeable tips + drift
- Incorporates three anti-friction bearings
- Run out within 0.005mm (0.0002")

LLCSET2MT	2MTHD	3 bearings
LLCSET3MT	3MTHD	3 bearings





PIPE LIVE CENTRES

- Designed to hold pipe and hollow work
- Preloaded bearings to achieve good thrust and radial load capacities
- Head made from heat treated hardened high carbon alloy steel
- Head hardened to 55-60 HRC

Part No.	Morse	Head	Total	Angle of
	Taper	Diameter	Length	Bevel
LLCP2MT063	2MT	63mm	136mm	70 deg.
LLCP3MT078	3MT	78mm	172mm	70 deg.
LLCP4MT128	4MT	128mm	193mm	75 deg.
LLCP5MT147	5MT	147mm	243mm	75 deg.



LATHE DEAD CENTRES

- Design features to ISO298 / DIN806 standards
- 60° point solid lathe centre
- Precision ground and hardened
- Carbide tipped centres offer more wear resistance in both turning and grinding applications thus giving longer tool life and reducing costs

Part No.	Morse Taper	Length	Body Diameter			
LDC0MT	OMT	70mm	9.2mm			
LDC1MT	1MT	80mm	12.2mm			
LDC2MT	2MT	100mm	18.0mm			
LDC3MT	3MT	125mm	24.1mm			
LDC4MT	4MT	160mm	31.6mm			
LDC5MT	5MT	200mm	44.7mm			
LDC6MT	6MT	270mm	63.8mm			
Lathe	DEAD CENTRES	- CARBIDE TIPPI	Ð			
LDC1MTTCT	1MT	80mm	12.2mm			
LDC2MTTCT	2MT	100mm	18.0mm			
LDC3MTTCT	3MT	125mm	24.1mm			
LDC4MTTCT	4MT	160mm	31.6mm			
LDC5MTTCT	5MT	200mm	44.7mm			
LDC6MTTCT	6MT	270mm	63.8mm			





LATHE HALF CENTRES - CARBIDE TIPPED

- Solid, fully hardened construction
- 60° point hardened to 60-63 HRC
- Carbide tipped centres offer more wear resistance in both turning and grinding applications thus giving longer tool life and reducing costs

Part No.	Morse Taper	Length	Feature
LDC2MTH	2MT	104mm	carbide tipped
LDC3MTH	3MT	133mm	carbide tipped



EDGE & CENTRE FINDERS

Hardened and centreless ground to precision tolerance Locate working edges like shoulders, centering points and scribed lines easily & accurately

Part No.	Description	Shank	Tip
EFI	Edge Finder	1/2 inch	0.2000″
EFM	Edge Finder	12mm	5mm
ECFI	Edge & Centre Finder	1/2 inch	0.2000″



WIGGLER & CENTRE FINDER SET

For accurately locating working points on drill presses, lathes, milling & other machines Set consists of Snap In Holder, Needle point, ball contact & disc contact attachments and offset indicator holder

CFSET 5 Piece Set



UNIGRIP DRILL PRESS VICE

•Made of high tensile iron casting •Used for precision jobs •Slots for easy clamping to the tables •Heavy duty construction

Part No.	Jaw Width	Depth of Jaw	Weight
VDPU4	100mm	24mm	4.2 Kg
VDPU5	125mm	30mm	5.8 Kg



*Vice colours may vary

NEW

WELDERS CORNER ANGLE VICE

- Heavy duty vise to clamp at right angle.
- Floating head design
- Copper Plated Screw to withstand weld splatter

Part No.	Jaw Size	Jaw Opening	Jaw Height
MGWC0080	100x35mm	75mm	35mm



NEW & IMPROVED

NEEDLE FILE SETS

NF12 - 12 PCE Needle File Set in plastic box
DFN00012 - 12 PCE Diamond Needle File Set in plastic wallet

The MAXIGEAR Standard Needle File set as well as the Diamond Needle File Set are suitable for working on a range of materials by tool and die makers, instrument makers, jewellers and hobbyist.

Standard Needle File Set NF12:

- Effective filing
- Set contains various shapes
- Set comes in a sturdy plastic contain and a hang-sell box for easy storage

Diamond Needle File Set DNF00012:

- Diamond particles securely bonded onto steel body
- Effective filing
- Comfortable plastic handle
- Each set contains a variety of shapes





TOOL STEEL

Part No.	Size	Material	Shape
T\$1/8x2.5	1/8 x 2-1/2	M-2 HSS	Square
TS1/8x3	1/8 x 3	M-2 HSS	Square
TS3/16x2.5	3/16 x 2.5	M-2 HSS	Square
TS3/16x3	3/16 x 3	M-2 HSS	Square
TS3/16x8	3/16 x 8	M-2 HSS	Square
TS1/4x2.5	1/4 x 2-1/2	M-2 HSS	-
			Square
TS1/4x3	1/4 x 3	M-2 HSS	Square
TS1/4x8	1/4 x 8	M-2 HSS	Square
TS5/16x2.5	5/16 x 2-1/2	M-2 HSS	Square
TS5/16x3	5/16 x 3	M-2 HSS	Square
TS5/16x4	5/16 x 4	M-2 HSS	Square
TS5/16x8	5/16 x 8	M-2 HSS	Square
TS3/8x2.5	3/8 x 2-1/2	M-2 HSS	Square
TS3/8x3	3/8 x 3	M-2 HSS	Square
TS3/8x4	3/8 x 4	M-2 HSS	Square
TS3/8x8	3/8 x 8	M-2 HSS	Square
TS1/2x3	1/2 x 3	M-2 HSS	Square
TS1/2x4	1/2 x 4	M-2 HSS	Square
TS1/2x5	1/2 x 5	M-2 HSS	Square
TS1/2x8	1/2 x 8	M-2 HSS	Square
TS5/8x5	5/8 x 5	M-2 HSS	Square
TS3/4x5	3/4 x 5	M-2 HSS	Square
TS1x7	1 x 7	M-2 HSS	Square
TS6x100	6mm x 100	M-2 HSS	Square
TS8x100	8mm x 100	M-2 HSS	Square
TS9x100	9mm x 100	M-2 HSS	Square
TS10x100	10mm x 100	M-2 HSS	Square
TS10x200	10mm x 200	M-2 HSS	Square
TSR1/8x2-3/4	1/8 x 2-3/4	M-2 HSS	Round
TSR3/16x3-1/2	3/16 x 3-1/2	M-2 HSS	Round
TSR1/4x3	1/4 x 3	M-2 HSS	Round
TSR5/16x4-1/2	5/16 x 4-1/2	M-2 HSS	Round
TSR3/8x5	3/8 x 5	M-2 HSS	Round
TSR1/2x4	1/2 x 4	M-2 HSS	Round
TSR5/8x6	5/8 x 6	M-2 HSS	Round
TSR3/4x6	3/4 x 6	M-2 HSS	Round






M-2 High Speed Steel

- This general purpose tool gives exceptional results on mild steel, alloys and tool steel
- Ideal for finishing applications





Machined & Ground in shiny black finish , Knurls are hob cut from HSS and heat treated

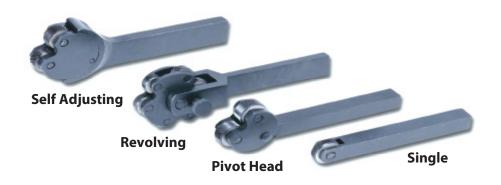

Part No.	Description	Knurl type	Knurls	Knurl Size	Bore	Shank
KTS1/2	Single Straight	Medium	1	3/4 x 1/4	1/4	12mm
KTS3/4	Single Straight	Medium	1	3/4 x 3/8	1/4	19mm
KTP	Pivot Head	Medium Diagonal	2	3/4 x 3/8	1/4	12mm
KTAS	Self Adjusting	Medium Diagonal	2	5/8 x 5/16	7/32	19 x 8mm
KTAL	Self Adjusting	Medium Diagonal	2	3/4 x 3/8	1/4	35 x 16mm
KT6S	Revolving	Fine Medium Coarse	6	5/8 x 5/16	7/32	19 x 8mm
KT6L	Revolving	Fine Medium Coarse	6	3/4 x 3/8	1/4	19 x 13mm



REPLACEMENT KNURLING WHEELS





Diagonal



Diamond Cross

Suit Tool KTAS & KT6S
CTAS & KT6S
(TAS & KT6S
CTAS & KT6S
CTAS & KT6S
CTAS & KT6S
(TAS & KT6S
CTAS & KT6S
CTAS & KT6S
KTP KTAL KT6L
KTS1/2
KTS1/2
KTS1/2

Pitch of Knurls Coarse = 2mm or 14 TPI Medium 1.05mm or 21 TPI Fine = 0.75mm or 33 TPI

WHEEL DRESSERS

Sturdy Cast Iron Construction

Part No.	Description	
WD0	Wheel dresser #0 for small wheels	
WD1	Wheel dresser #1 for wheels to 200mm	
WD2	Wheel dresser #2 for wheels > 200mm	
WDSP0	Spare Cutter Wheels for #0	
WDSP1	Spare Cutter Wheels for #1	
WDSP2	Spare Cutter Wheels for #2	

- #0 4 wheels x 30mm O/D x 12mm wide x 8mm bore
- #1 4 wheels x 40mm O/D x 12mm wide x 13mm bore
- #2 6 wheels x 60mm O/D x 16mm wide x 15.25mm bore



DIAMOND WHEEL DRESSERS

Part No.	Diamond	Shank Size
WDD0.25x6	0.25 Carat	12.7 x 150
WDD0.5	0.5 Carat	12.7 x 150
WDD0.5-3	0.5 Carat	10 x 75
WDD0.5x3	0.5 Carat	12.7 x 150
WDD0.75x6	0.75 Carat	12.7 x 150
WDD1	1 Carat	12.7 x 150
WDD1.5x6	1.5 Carat	12.7 x 150
WDD2.0x6	2 Carat	12.7 x 150
WDDT	0.5 Carat	40 x 120





Ideal tool for dressing wheels for surface grinders, universal grinders etc.

Quality industrial diamonds.

TAP WRENCHES - BAR TYPE

The best tool for hand tapping. Hardened and tempered jaws.

Part No.	Tap Capacity	Length	Square Range	Equivalent
TWB0	1.6 - 6.35mm	180mm	2 - 6mm	No. 00
TWB1	1.6 - 9.5mm	235mm	2.5 - 8mm	
TWB1-1/2	1 - 12mm	175mm	2 - 7 mm	No. 0
TWB2	4 - 12.7mm	280mm	4 - 9mm	No. 5
TWB3	6.35 - 19mm	375mm	4.9 - 12mm	No. 6
TWB4	6.35 - 28.75mm	500mm	5.5 - 16mm	No. 7
TWB5	19 - 38.1mm	1000mm	9 - 25mm	
TWB6	12.7 - 63.5mm	1370mm	16 - 32mm	



TAP WRENCHES T TYPE SOLID JAW

Designed to hold taps in confined areas where it is not possible to use bar type wrenches. Heavy knurled cap for a better grip. Ground finish.

Part No.	Suit Taps		
TWT1	2 - 5mm		
TWT2	3 - 6mm		
TWT3	6 - 12mm		
TWTSET	TWT1, TWT2, TWT3		

TAP WRENCHES T TYPE EXTRA LONG

Hardened & tempered replaceable jaws

Part No.	Tap Capacity	Length
TWT2L	4 - 8mm	330mm
TWT3L	6 - 12mm	330mm

TAP WRENCHES T TYPE RATCHETING

Part No.	Tap Capacity	
TWTR2	3 - 6mm	
TWTR3	6 - 12mm	
TWTR3-12	3 - 12mm	

TAP WRENCHES T TYPE RATCHETING EXTRA LONG

Part No.	Tap Capacity	Length
TWTR2L	3 - 6mm	330mm
TWTR3L	6 - 12mm	330mm

ROUND DIE STOCK HANDLES

For holding adjustable round split dies Three set screw pattern. Single piece construction

Part No.	Die OD	Length
DH5/8	5/8	140mm
DH13/16	13/16	170mm
DH1	1 inch	220mm
DH1-5/16	1-5/16	250mm
DH1-1/2	1-1/2	300mm
DH1-3/4	1-3/4	370mm
DH2	2 inch	380mm
DH2-1/4	2-1/4	420mm
DH2-1/2	2-1/2	480mm
DH3	3 inch	560mm







ŀ	1-1
•	3 • 3
•	5 C 3
•	
<u>(*</u>	
•	
5.	~

PIN SPANNERS

Part No.	Description	Colour
PSRED	Pins 5mm on 35mm centres	Red
PSBE	Pins 4mm on 20mm centres	Blue
PSBK	Pins 5mm on 23mm centres	Black
PSG	PSG Pins 4mm on 28mm centres	
PSADJ	PSADJ Adjustable light duty pin spanner	
PSZINC	Flat style 5mm on 35mm centres	Zinc

FLANGES FOR ANGLE GRINDERS

Part No.	Description
FSC14X2	Flange Set for cut-off wheels 14 x 2 x 90mm
F14X2	Flange 45mm diameter M14 x 2.0 thread
FSCW	Hard washer 90mm diameter M14x2.0 thread
FSCBF	Bottom Flange 90mm diameter M14 x 2.0 thread
F10X1.5	Flange 32mm diameter 100mm Grinder M10 x 1.5



PLANER BLADES

Part No.	Description
HSSPB1900B	80mm HSS suits Makita 1900B card of 2
HSSPB1600B	80mm HSS suits Makita 1600B card of 2
HSSPB1323A	82mm HSS suits Ryobi 1323A card of 2
HSSPB-22L	78mm HSS suits Ryobi L22L card of 2
HSSPBL120	90mm HSS suits Ryobi L120 card of 2
HSSPBF-20A	82mm HSS suits Hitachi F20A card of 2
HSSPBF-30A	90mm HSS suits Hitachi F30A card of 2



PLANER BLADES TUNGSTEN CARBIDE

Part No.	Description
CPBD	82mm card of 2 blades
CPB10SET	82mm sleeve of 10 pairs



BACKING PADS - BLACK

Part No

BP100X10X125B

BP100X10X15B

BP115X14X2B

BP125X14X2B

BP178X14X2B







Part No	Size	Thread			Grits	Flexipads
BP100x10x15BISO	100	M10 x 1.5			80 + FINER	11502
BP115X14X2BISO	115	M14 x 2			80 + FINER	11513
BP125X14X2BISO	125	M14 x 2			80 + FINER	11523
BP178X14X2BISO	178	M14 x 2			80 + FINER	11532
BACKING PADS - WHI	TE		SWI	SS MANU	FACTURED	
Part No	Size	Thread		Density	Grits	Flexipads
BP100X10X15W	100	M10 x 1.5		MEDIUM		
BP115X14X2W	115	M14 x 2		MEDIUM		
BP125X14X2W	125	M14 x 2		MEDIUM		
BP178X14X2W	178	M14 x 2		MEDIUM		
BACKING PADS - FLEX	KIBLE NYL	ON WHITE				
Part No	Size	Thread	Foam layer	Density	Grits	Flexipads
BP100X10X15WISO	100	M10 x 1.5			60 + FINER	11102
BP115X14X2WISO	115	M14 x 2			60 + FINER	11113
BP125X14X2WISO	125	M14 x 2			60 + FINER	11123
BP178X14X2WISO	178	M14 x 2			60 + FINER	11132
BP178X5/8WISO	178	5/8 UNC			60 + FINER	11131
BACKING PADS - TURBO HARD FLEXIBILITY						
Part No	Size	Thread		Density	Grits	Flexipads
BP100X10X15T	100	M10 x 1.5		HARD	36 + finer	11703

Thread

M10 x1.25

M10 x 1.5

M14 x 2

M14 x 2

M14 x 2

Size

100

100

115

125

178

115

125

178

M14 x 2

M14 x 2

M14 x 2

BACKING PADS - EXTRA LONG HEAVY DUTY 'GRIPPER SYSTEM' - SWISS

BACKING PADS - FLEXIBLE NYLON BLACK

SWISS MANUFACTURED

Density

HARD

HARD

HARD

HARD

HARD

HARD

HARD

HARD

36 + finer

36 + finer

36 + finer

11713

11723

11732

NEW

BP115X14X2T

BP125X14X2T

BP178X14X2T

SWISS MADE

MANUFACTURED						
	Part No	Size	Thread		Density	
	BP100VLHCK	100	M14 x 2		HARD	
	BP100VLHPL	100	M14 x 2		HARD	
	BP115VLHCK	115	M14 x 2		HARD	
	BP125VLHCK	125	M14 x 2		HARD	
	BP125VLHPL	125	M14 x 2		HARD	
	BP175VLHCK	175	M14 x 2		HARD	

SANDER POLISHER PADS - SOFT DENSITY VELCRO						
Part No	Size	Thread	Foam layer	Density	Max RPM	Flexipads
BP100x14x2VEF12S	115	M14 x 2	12mm	Soft	15,300	10346
BP125x14x2VEF12S	125	M14 x 2	12mm	Soft	12,250	36305
BP150x14x2VEF12S	150	M14 x 2	12mm	Soft	10,200	36315
SANDER POLISHER PADS - MEDIUM DENSITY VELCRO						
Part No	Size	Thread	Foam layer	Density	Max RPM	Flexipads
BP100X14X2VEF12M	100	M14 x 2	12mm	Medium	15,300	36115
BP115X14X2VEF12M	115	M14 x 2	12mm	Medium	13,300	36125
BP125X14X2VEF12M	125	M14 x 2	12mm	Medium	12,250	36140
BP150X14X2VEF12M	150	M14 x 2	12mm	Medium	10,200	36155
BP178X14X2VEF12M	178	M14 x 2	12mm	Medium	8,500	36170
BP178X5/8VEF12M	178	5/8 UNC	12mm	Medium	8,500	36175
SANDER POLISHER PA	ADS - MED	DIUM DEN	SITY PSA		l	
Part No	Size	Thread	Foam layer	Density	Max RPM	Flexipads
BP178X14X2PSA	178	M14 x 2	12mm	Medium	8,500	36070
BACKING PADS - MED	DIUM FLEX		ELCRO NO FO	AM LAYEF	2	
Part No	Size	Thread	Foam layer	Density	Max RPM	Flexipads
BP100X14X2VEGP	100	M14 x 2	NONE	FIRM	15,300	11340
BP115X14X2VEGP	115	M14 x 2	NONE	FIRM	13,300	11341
BP125X14X2VEGP	125	M14 x 2	NONE	FIRM	12,250	11342
BP150X14X2VEGP	150	M14 x 2	NONE	FIRM	10,200	11343
BP178X14X2VEGP	178	M14 x 2	NONE	FIRM	8,500	11344
SANDER POLISHER PA	ADS - EXT	RA GRIP V	ELCRO FOR S	URFACE C	ONDITION	ING DISCS
Part No	Size	Thread	Foam layer	Density	Max RPM	Flexipads
BP100X14X2VEX	100	M14 x 2	3mm + HOLE	Hard	15,300	10370
BP115X14X2VEX	115	M14 x 2	3mm	Hard	13,300	10371
BP125X14X2VEX	125	M14 x 2	3mm	Hard	12,250	10372
BP178X14X2VEX	178	M14 x 2	3mm	Hard	8,500	10374
BUFFING & POL						
Part No.	Dim	nension	Max	KPM		











5/8

2,500

2,500

Coarse

150 x 50

Soft polishing foam that works very well on dark colours

Coarse, open-celled foam designed for heavy cutting of oxidised paints.

150 x 50 M14 x 2

44310 Yellow

44205 Black

POLISHING COMPOUNDS

Part No.	Description					
PCBRL	Tripoli					
	PCBRL Polishing compound brown Tripoli Non ferrous & plastics - soft metals ie Aluminium, brass, copper, diecast - combined combined					
cutting & finisł	ning. General purpose - use with stitched rag o buff	r loose leaf calico				
PCGY	Polishing compound grey	Ferropol				
Fast cuttin	g for polishing steel & stainless - use with stitc Used to cut back light scratches	hed sisal buff				
PCWH	Hyfin					
Fast cutter	Fast cutter for all metals - use with sisal buff for cutting then calico for finishing					
PCGN Polishing compound green rouge		Orion BB				
For mirror finish on all metals when using calico mops						
PCBLS	Polishing compound	Multishine				
Fine finish for non ferrous metals - for high gloss polish use loose leaf calico buff						
PCUN Polishing compound liquid		Unipol				
Liquid polish for metals, plastic and stone						
PCBB	Polishing compound tripoli fine	Tripoli BB				
Fine finish for non ferrous metals						





ALUMINIUM LUBRICANTS

Used for lubricating circular saws, band saws etc when cutting aluminium & non ferrous metals & reduce clogging of sanding discs & belts

** Weights are approximate and can vary**

	Part No.	Description		
	AL700	Tallow base lubricant 500 gram tube		
WAX600 Whit		White Stearene Wax in a tray 600 gram		

ABRASIVE RESTORERS

Cleaning stick for Abrasive Belts and discs

Part No.	Description		
ARL032	Natural Rubber Large 32 x 32 x 200mm		
ARM050 Natural Rubber Magnum 50 x 50 x 20			
WDA150	Abrasive Wheel Dresser 150 x 25 x 25		

VELCRO CONVERTER DISCS & ABRASIVE DISCS


Part No.	Description		
CD125B	Converter Disc 125mm		
CD150B	Converter Disc 150mm		
CD180B	Converter Disc 180mm		
CD230B	Converter Disc 230mm		
CD125D	Converter Disc & Abrasive Disc 125mm		
CD150D	Converter Disc & Abrasive Disc 150mm		
CD180D	Converter Disc & Abrasive Disc 180mm		
CD230D	Converter Disc & Abrasive Disc 230mm		

Converter Discs accept Hook & Loop type abrasive discs on one side and the other side is adhesive stick on.







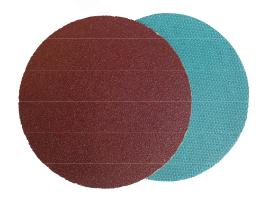




TAPERED SPINDLES TAPERED SPINDLES FOR BENCH GRINDERS • MANUFACTURED IN AUSTRALIA

Note - All lengths are approximate and subject to change as per Manufacturer's Specifications.



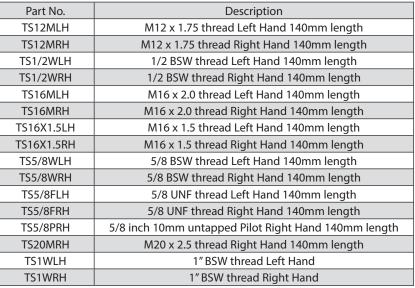

Spindles described as "Pilot" have 10mm untapped hole that can be drilled and tapped.

TAPERED SPINDLES FOR STRAIGHT GRINDERS • MANUFACTURED IN AUSTRALIA

TSS12M	M12 x 1.75 thread Right Hand 90mm length
TSS14M	M14 x 2 thread Right Hand 90mm length
TSS1/2W	1/2 BSW thread Right Hand 90mm length
TSS10PLH	10mm Untapped Pilot Left Hand 90mm length
TSS10PRH	10mm Untapped Pilot Right Hand 90mm length

Spindles described as "Pilot" have 10mm untapped hole that can be drilled and tapped.

TAPERED SPINDLES WITH ROUND SHANK • MANUFACTURED IN AUSTRALIA

TS06MRDSH	6mm Round Shank Right Hand 85mm length				
TS12MRDSH	12mm Round Shank Right Hand 95mm length				
Constructed in statistic dame (a plick and a sin daill should with \$12 and a second it					

Can be used in straight grinders / polishers or in drill chucks with 6-12mm capacity.

EXTENSION SPINDLES FOR BENCH GRINDERS • MANUFACTURED IN AUSTRALIA

ES1/2WLH	1/2 BSW thread Left Hand 135mm overall length
ES1/2WRH	1/2 BSW thread Right Hand 135mm overall length
ES16MLH	M16 thread Left Hand 135mm overall length
ES16MRH	M16 thread Right Hand 135mm overall length
ES5/8WLH	5/8 BSW Left Hand 135mm overall length
ES5/8WRH	5/8 BSW Right Hand 135mm overall length
ES5/8FLH	5/8 UNF Left Hand 135mm overall length
ES5/8FRH	5/8 UNF Right Hand 135mm overall length



ESS14-5/8	M14 Female thread 5/8-11 Male thread 55mm length
ESS5/8-14	5/8-11 Female thread M14 Male thread 55mm length
ESS14MM	M14 Female thread M14 Male thread 55mm length

ESS14-5/8 is for using wire brushes etc with 5/8" female threads on angle grinders with 14mm spindles ESS5/8-14 is for using wire brushes etc with 14mm female threads on anle grinders with 5/8" spindles





POLISHING MOPS - LOOSE LEAF CALICO (UNSTITCHED)

Part No.	Size	Folds	Width
PMC038050	38 mm	50	13 mm
PMC038100	38 mm	100	36 mm
PMC050050	50 mm	50	13 mm
PMC050100	50 mm	100	36 mm
PMC050125	50 mm	125	
PMC075050	75 mm	50	13 mm
PMC075100	75 mm	100	36 mm
PMC100050	100 mm	50	13 mm
PMC100100	100 mm	100	36 mm
PMC100150	100 mm	150	
PMC125100	125 mm	100	36 mm
PMC150050	150 mm	50	13 mm
PMC150100	150 mm	100	36 mm
PMC150150	150 mm	150	
PMC150200	150 mm	200	
PMC200025	200 mm	25	
PMC200050	200 mm	50	13 mm
PMC200100	200 mm	100	36 mm
PMC200150	200 mm	150	
PMC200200	200 mm	200	
PMC250050	250 mm	50	13 mm
PMC250100	250 mm	100	36 mm
PMC250200	250 mm	200	
PMC300050	300 mm	50	13 mm
PMC300100	300 mm	100	36 mm

POLISHING RAG MOPS - STITCHED RAG

	r		
Part No.	Size	Sections	Width
PMST0381	38 mm	1 section	13mm
PMST0382	38 mm	2 sections	25mm
PMST0501	50 mm	1 section	13mm
PMST0502	50 mm	2 sections	25mm
PMST0503	50 mm	3 sections	38mm
PMST0751	75 mm	1 section	13mm
PMST0752	75 mm	2 sections	25mm
PMST1001	100 mm	1 section	13mm
PMST1002	100 mm	2 sections	25mm
PMST1003	100 mm	3 sections	38mm
PMST1501	150 mm	1 section	13mm
PMST1502	150 mm	2 sections	25mm
PMST1503	150 mm	3 sections	38mm
PMST2001	200 mm	1 section	13mm
PMST2002	200 mm	2 sections	25mm
PMST2003	200 mm	3 sections	38mm
PMST2004	200 mm	4 sections	50mm
PMST2501	250 mm	1 section	13mm
PMST2502	250 mm	2 sections	25mm
PMST2503	250 mm	3 sections	38mm
PMST2504	250 mm	4 sections	50mm
PMST3001	300 mm	1 section	13mm
PMST3002	300 mm	2 sections	25mm
PMST3003	300 mm	3 sections	38mm
PMST3004	300 mm	4 sections	50mm
PMST3502	350 mm	2 sections	25mm
PMST3504	350 mm	4 sections	50mm



Loose Leaf Calico Mop

Sisal Stitched Mop





Stitched Rag Mop



POLISHING MOPS - SISAL STITCHED

Part No.	Size	Sections	Width	Colour	
PMS0381	38 mm	1 section	13mm	Untreated	
PMS0382	38 mm	2 section	25mm	Untreated	
PMS0501	50 mm	1 section	13mm	Untreated	
PMS0502	50 mm	2 section	25mm	Untreated	
PMS0503	50 mm	3 section	38mm	Untreated	
PMS0751	75 mm	1 section	13mm	Untreated	
PMS0752	75 mm	2 section	25mm	Untreated	
PMS1001	100 mm	1 section	13mm	Untreated	
PMS1002	100 mm	2 section	25mm	Untreated	
PMS1501	150 mm	1 section	13mm	Untreated	
PMS1502	150 mm	2 section	25mm	Untreated	
PMS2001	200 mm	1 section	13mm	Untreated	
PMS2002	200 mm	2 section	25mm	Untreated	
PMS2003	200 mm	3 section	38mm	Untreated	
PMS2004	200 mm	4 section	50mm	Untreated	
PMS2501	250 mm	1 section	13mm	Untreated	
PMS2502	250 mm	2 section	25mm	Untreated	
PMS3001	300 mm	1 section	25mm	Untreated	
PMS3002	300 mm	2 section	25mm	Untreated	
PMS3004	300 mm	4 section	50mm	Untreated	
PMS3504	350 mm	4 section	50mm	Untreated	
POLISHING MOPS - LAMBSWOOL BONNETS					

POLISHING MOPS - LAMBSWOOL BONNETS

Part No.	Size
PB180	180 mm
PB200	200 mm



POLISHING MOPS - NON WOVEN MOPS



Generally used as a cut and polish wheel where a clean satin finish is required. Non woven wheels are sensitive to heat and must not run too fast or with too much pressure.

Part No.	Size	Sections	Thickness	Colour
PMGNW0506	50mm	6	42mm	Green
PMGNW1003	100mm	3	21mm	Green
PMGNW1503	150mm	3	21mm	Green
PMGNW1506	150mm	6	42mm	Green
PMMNW0506	50mm	6	42mm	Maroon
PMMNW1003	100mm	3	21mm	Maroon
PMMNW1503	150mm	3	21mm	Maroon
PMMNW1506	150mm	6	42mm	Maroon















SAFETY LOCK CABLE & AIR SCRIBERS - MADE IN THE USA



Safety Lock Cables

Durable heavy duty steel cables help prevent injury from accidental separation of clamp and coupling devices TX-SLC1 1/8" cable x 20" TX-SLC2 1/4" cable x 38"



TXAS1 Air Scribe

Adjustable throttle for a variety of jobs Carbide tipped stylus for longer life Equipped with a flexible hose & filter with a 3/8" NPT fitting



IN-LINE LUBRICATORS - MADE IN THE USA

Designed for use with tools being used too far away from compressor to be lubricated by a permanently mounted unit. Suitable for use on a wide range of tools, including air scribes, chipping hammers, needle scalers and piston scalers.

Part		Max working	Oil WT.	Air Flow
No.		pressure	Rec	70 PSI
TX-0L	1.4 fl.oz (42 ml) in-line lubricator 1/2" BSPF	500	10 WT.	30 CFM
TX-1L	3.7 fl.oz (111 ml) in-line lubricator 3/4" BSPF	260	10 WT.	70 CFM
TX-2L	11 fl.oz (330ml) in-line lubricator 3/4″ BSPF	300	10 WT.	70 CFM
TX-3L	16 fl.oz (480 ml) in-line lubricator 1" BSPF	250	10 WT.	150 CFM



IN-LINE FILTER LUBRICATORS - MADE IN THE USA

One of the most common repairs an air tool undergoes is disassembly to clean foreign material out of the valve assembly. In-line Filter Lubricators help prevent this from happening. The 40 micron filter can be easily cleaned or replaced.



Part		Max working	Oil WT.	Air Flow
No.		pressure	Rec	70 PSI
TX-0L-F	1.4 fl.oz (42 ml) in-line filter lubricator 1/2" BSPF	500	10 WT.	30 CFM
02008	40 Micron bronze filter to suit TX-0L-F			
TX-1L-F	3.7 fl.oz (111 ml) in-line filter lubricator 3/4" BSPF	260	10 WT.	70 CFM
02013	40 Micron bronze filter to suit TX-1L-F			

VENTURI AIR MOVERS - MADE IN THE USA

Air movers or air horns are used wherever there is a need to disperse fumes, move air into confined spaces, or cool machinery or products with a blast of directed air.

Part No	Desctiption
TX3AMS	6" Horn x 16.75" length air mover
ТХЗАМ	7" Horn x 30.5" length air mover
TX6AM	12.5" Horn x 44.25" length air mover
TX8AM	15.5" Horn x 46.06" length air mover
TX10AM	15.75" Horn x 48" length air mover



PIN CHUCK KIT

Designed for holding small drills. 3 interchangeable collets 0 - 0.8mm, 0.8 - 1.60mm, & 1.60 - 2.40mm

PCHUCK

Pin Chuck Kit with 3 collets

MICRO CHUCK

For use in drill press or hand held tools. Suitable for drills 0.3 - 1.00mm Can be held in any 1/8 or 3/16 collet or 3 jaw drill chuck

PMICRO

Micro chuck for 0.3 - 1.00mm drills

DOUBLE ENDED PIN VICE

Has two 4 jaw double ended collets

Popular tool for jewellers, watch makers, model makers

PVDE

4 Jaw Pin Vice 0 - 3.2mm

PIN VICE SET

PV4001S 4 Jaw Pin vices 0.8 through 4.85mm

TWEEZER SET

6 Piece Set contains 2 straight, 1 knurled straight, 2 bent point & 1 self locking Lengths vary from 125 - 175mm

TWSET

Stainless Steel Hobbyist Set













SUPERFLEX CURVE

Product innovation, designed and manufactured by Grinding Techniques in accordance with European Safety Standards ensures exceptional safety for hand held radiii and contour cutting. Used for hand-held grinders, suitable for Stainless and Carbon steel, High alloy steel and Mild steel. (Available in Shape 28).





MGCCD125

Super Flex Curve Disc 125 x 2.1 x 23mm

Marking Tools

NEW

CHALK-RITE II™ EXTRA BOLD

CHALK-RITE II™ ULTRA THIN

Tajim

Since 1909



Code	Item	Details	Inner	Outer
CR201R-PR	Chalk-Rite II™ Extra Bold Line & Dye	1.0mm x 30m Line, 5 Gear Fast Wind	4	24
CR202B	Chalk-Rite II™ Ultra Thin Line & Chalk	0.5mm x 30m Line + Chalk, 5 Gear Fast Wind	4	24

CHALK-RITE II™ JAM FREE

CHALK-RITE II™ AUTO WIND



Code	Item	Details	Inner	Outer
CR301JF	Chalk-Rite II™ Jam Free	1.0mm x 30m Line, 5 Gear Fast Wind	8	32
CR101S	Chalk-Rite II™ Auto wind	1.0mm x 7m Line, Auto Wind	6	36





SNAP LINE DYE

MICRO CHALK

CHALK-RITE II[™] LINE





Code	Item	Details	Inner	Outer
PLCDR300	Snap Line Dye Dark Red	300g Semi Permanent Dye Powder	6	60
PLCBK300	Snap Line Dye Black	300g Semi Permanent Dye Powder	6	60
PLCB300	Micro Chalk Blue	300g Chalk Powder	6	60
PLCR300	Micro Chalk Red	300g Chalk Powder	6	60
PLCY300	Micro Chalk Yellow	300g Chalk Powder	6	60
PLCW300	Micro Chalk White	300g Chalk Powder	6	60
PLITOL	Chalk-Rite II™ Extra Bold Line	1.0mm x 30m Replacement Snap Line	10	100
PLITOS	Chalk-Rite II™ Ultra Thin Line	0.5mm x 30m Replacement Snap line	10	100

INK-RITE II[™] SNAP LINE AUTO WIND

INK-RITE II™ SNAP LINE INK





Code	ltem	Details	Inner	Outer
IR101S	Ink-Rite II™ Snap Line Auto Wind	0.6mm x 7.5m Line, 5 Gear Fast wind	6	36
PSB2180	Ink-Rite II™Snap Line Ink Black	180ml Quick Dry Ink	12	60
PSR2180	Ink-Rite II™Snap Line Ink Red	180ml Quick Dry Ink	12	60
PSW3180	Ink-Rite II™Snap Line Ink White	180ml Wet Weather Ink	12	60

NEW Knives & Blades

SNAP BLADE KNIVES







Code	ltem	Details	Inner	Outer
LC360	GRI® 9mm Knife	Precision Craft, Auto-Lock Blade Lock	10	120
LC560	GRI® 18mm Knife	Heavy Duty, Auto-Lock Blade Lock	10	120
LC660	GRI® 25mm Knife	Rock Hard, Auto-Lock Blade Lock	10	120

SNAP BLADE KNIVES



Code	Item	Details	Inner	Outer
LC500	Endura™ 18mm Knife	Display box, Cellophane pack	40	120
LC500B	Endura™ 18mm Knife	Blister pack	10	120
LC650	Rock Hard® 25mm Knife	Bonus 3 blades & Storage case	18	72



REPLACEMENT BLADES



9mm



Code	Item	Details	Inner	Outer
LCB30C	Endura Blade™ 9mm 10Pk	Snap Segment Blades	10	120
LCB30-50	Endura Blade™ 9mm 50Pk	Snap Segment Blades	10	100







18mm

Code	Item	Details	Inner	Outer
LCB50	Endura Blade™ 18mm 10pk	Snap Segment Blades	10	120
LCB50-50	Endura Blade™ 18mm 50pk	Snap Segment Blades	10	50
LCB50S	Endura Blade™ Solid 18mm 10pk	Solid Blades	10	120



25mm

Code	Item	Details	Inner	Outer
LCB65	Rock Hard Blade™ 25mm 10pk	Snap Segment Blades	10	120
LCB65-20	Rock Hard Blade™ 25mm 20pk	Snap Segment Blades	10	50
LCB65S	Rock Hard Blade™ 25mm 10pk	Solid Blades	10	120

UTILITY KNIVES







Code	Item	Details	Inner	Outer
VR101	V-Rex™ Fixed Blade Knife	Bonus 3 Blades	12	72
VR102	V-Rex™ Retractable Blade Knife	Bonus 3 Blades	12	72
VR103	V-Rex™ Safety Knife	Bonus 3 Blades	12	72

UTILITY BLADES



Code	Item	Details	Inner	Outer
VRB5B	V-Rex™ Blade 5pk		10	120
VRB10B	V-Rex [™] Blade 10pk	Dispenser Pack	10	120
VRB50B	V-Rex™ Blade 50pk	Dispenser Pack	10	120
VRB100B	V-Rex [™] Blade 100pk	Dispenser Pack	10	120





PULL SAWS AND BLADES





Code	Item	Details	Inner	Outer
JPR265	Japan Pull™ Saw & 265mm blade	Ergonomic Non-slip Curved Handle	6	24
GNB230	Japan Pull™ Saw Blade 230mm	21 TPI, Replacement Blade	24	120
GNB250	Japan Pull™ Saw Blade 250mm	19 TPI, Replacement Blade	24	120
GNB265	Japan Pull™ Saw Blade 265mm	16 TPI, Replacement Blade	24	120
GNB300	Japan Pull™ Saw Blade 300mm	13 TPI, Replacement Blade	24	120

FOLDING PRUNING SAWS AND BLADES



Code	Item	Details	Inner	Outer
GK-G210	G-Saw™ Rapid-Pull 210mm	Folding Handle, Lock Blade	6	60
GK-G240	G-Saw™ Rapid-Pull 240mm	Folding Handle, Lock Blade	6	60
GKB-G210	G-Saw™ Spare Blade 210mm	Replacement Blade	12	120
GKB-G240	G-Saw™ Spare Blade 240mm	Replacement Blade	12	120

Scrapers / Layout / Plaster Tools

NEW TAJIMA Since 1909

SCRAPERS & BLADES



Code	Item	Details	Inner	Outer
SCR300	Scrape-Rite™ 300mm Handle	Includes 3 x 18mm blades	4	24
SCR600	Scrape-Rite™ 600mm Handle	Includes 3 x 18mm blades	4	24
LCB50S	Endura Blade™ Solid 18mm 10pk	Solid Replacement Blades	10	120
LCB65S	Rock Hard Blade™ 25mm 10pk	Solid Replacement Blades	10	120

LAYOUT TOOLS

PLASTER TOOLS



Code	Item	Details	Inner	Outer
PZB-400GP	Plumb-Rite™ Bob 400g	Self-Retracting Line, Quick Stabilizing Bob	6	24
SLT-100	Slant 100 Rotary Angle Metre	One Hand Operation Angle Measure	6	36
TBYD180	Combination Plaster Rasp 180mm	3 Grinding Sections, Dual Action, Clog Free	6	36
TBK180H45	Plaster Bevelling Tool 45°	Includes 1 Blade & Resizing Tool	6	36



NEW

Caulking Guns & Measuring Tape

CAULKING GUNS



Code	Item	Details	Inner	Outer
CNV-JUST	Convoy Just™ Yellow Caulking Gun	Auto Flow Stop, for 300 to 400ml cartridges	6	24
CNV-100LT	Convoy Lite™ Caulking Gun	Ultra Light Weight	6	24
CNV100SP12	Convoy Super™ 12 Caulking Gun	For Thick Viscous Materials	6	24
CNV100SP26	Convoy Super™ 26 Caulking Gun	For Extra Thick Viscous Materials	6	24

MEASURING TAPES





Code	Item	Details	Inner	Outer
G5P80MYL	G-Lock™ 8m Tape	Metric	4	40
G5PAOMYL	G-Lock™ 10m Tape	Metric	4	40
PIT 20	Pit Measure Adhesive Tape 2m		10	80
PIT 50	Pit Measure Adhesive Tape 5m		10	80

©SmartStraps

STANDARD TIE DOWNS



Code	Item	Lashing Capacity	Box Qty
153	Ratchet Tie Down 3m 4pk Green	200kg	4
139	Ratchet Tie Down 4m 1pk Green	340kg	6
138	Ratchet Tie Down 2m 2pk Green	340kg	6
145	Ratchet Tie Down 4m 4pk Green	340kg	4





Code	Item	Lashing Capacity	Box Qty
141	Ratchet Tie Down 4m 1pk Orange	680kg	4
140	Ratchet Tie Down 3m 2pk Orange	680kg	3



RATCHET X TIE DOWNS



Code	Item	Lashing Capacity	Box Qty
339	Ratchet X Tie Down 4.5m 1pk Green	340kg	4
938	Ratchet X Tie Down 4m 2pk Green	340kg	4
345	Ratchet X Tie Down 3.5m 4pk Green	340kg	4





Code	Item	Lashing Capacity	Box Qty
341	Ratchet X Tie Down 4.5m 1pk Orange	680kg	4
940	Ratchet X Tie Down 4m 2pk Orange	680kg	4



Code	Item	Lashing Capacity	Box Qty
151	Ratchet X Tie down 5.5m 1pk Yellow	1130kg	4
159	Ratchet X Tie down 4.5m 2pk Yellow	1130kg	3
143	Ratchet X Tie down 7.6m 1pk Yellow	2265kg	3
967	Ratchet X Tie down 10m 1pk Yellow	2265kg	3

Tie Downs

NEW

RATCHET X TIE DOWNS - CAMO





©SmartStraps

Code	Item	Lashing Capacity	Box Qty
364	Ratchet X Camo 3m 2pk Camo	340kg	4
365	Ratchet X Camo 4.2m 4pk Camo	340kg	4

RETRACTABLE TIE DOWNS



Code	Item	Lashing Capacity	Box Qty
170	Retract Tie Down 1.8m 2pk Green	340kg	3
468	Retract Tie Down 1.8m 4pk Green	340kg	3
173	Retract Tie Down 3m 2pk Orange	680kg	3

CAMBUCKLE TIE DOWNS



Code	Item	Lashing Capacity	Box Qty
105	Cambuckle Lash Straps 3.6m 2pk Green	100kg	6
136	Cambuckle Tie Down 2m 2pk Green	270kg	6
137	Cambuckle Tie down 2.4m 2pk Orange	500kg	4
146	Cambuckle Tie down 3m 4pk Green	200kg	4





STANDARD BUNGEE

SUPER STRONG BUNGEE





Code	Item	Details	Box Qty
190	Bungee Cord	61cm 2pk Green	14
191	Bungee Cord	91cm 2pk Orange	12
192	Bungee Cord	122cm 2pk Yellow	10
118	Bungee Cord	Assorted 20pcs	4
183	Super Stong Bungee Cord	60cm 1pk Green	9
184	Super Stong Bungee Cord	90cm 1pk Orange	9
185	Super Stong Bungee Cord	120cm 1pk Yellow	9

FLAT STRAP BUNGEE

BUNGEE X ADJUSTABLE





Code	Item	Details	Box Qty
230	Bungee Flat Strap	61cm 2pk Green	12
231	Bungee Flat Strap	91cm 2pk Orange	12
232	Bungee Flat Strap	122cm 2pk Yellow	8
215	Bungee Flat Strap	Assorted 10pk	4
407	Bungee X Adjustable	40-60cm 1pk Green	7
408	Bungee X Adjustable	55-80cm 1pk Orange	7
409	Bungee X Adjustable	75-120cm 1pk Yellow	7

Tarp Straps



TARP STRAPS









Code	Item	Details	Box Qty
270	Tarp Strap	38cm 35pk	35
271	Tarp Strap	53cm 20pk	20
272	Tarp Strap	79cm 15pk	15
273	Tarp Strap	104cm 15pk	15

ADJUSTABLE TARP STRAPS



Code	Item	Details	Box Qty
374	Adjustable Tarp Strap	86cm 15pk	15
116	Tarp Strap Assortment	10pk	4





ACCESSORIES



Code	Item	Details	Box Qty
114	Mini Bungee Cords	20pk	9
111	Soft Ties	45cm 2pk Green	16
110	Toggle Balls Adjustable	5-30cm 8pk	9

ACCESSORIES





Code	Item	Details	Box Qty
221	Anchor Points Universal	2pk	5
104	Carabiner Hooks	2pk Assorted colours	22

Marking Tools

NEW

C.H. HANSON

PENCILS



Code	Item	Details	Inner	Outer
CPSINGLE	Carpenters Pencil Single		72	
PENHOLD	Pencil Holder		12	
CP10	Carpenters Pencil 10pk	Includes bonus Sharpener	9	72
SHARP	Verasharp Sharpener - Box 25	Use for Pencils and Crayons	25	100

CRAYONS





Code	Item	Details	Inner	Outer
YCRAY	Crayon Yellow	No Melt Lumber Crayon	12	144
RCRAY	Crayon Red	No Melt Lumber Crayon	12	144
BCRAY	Crayon Blue	No Melt Lumber Crayon	12	144
BLCRAY	Crayon Black	No Melt Lumber Crayon	12	144
CRAYHOLD	Crayon Holder	Extends Crayon Life	12	

NEW





Code	ltem	Details	Inner	Outer
SEM002	Standard Earmuffs	Rating 28db, Class 5	6	24
SSLEM002	Standard Earmuffs Slimline	Rating 26db, Class 5	6	24



Safety Products



Code	Item	Details	Inner	Outer
EM001	Electronic Earmuffs	Noise cancelling, Rating 29db, Class 5	12	
SLEM001	Electronic Earmuffs Slim Line	Noise cancelling, Rating 22db, Class 4	6	24

Safety Products



TTL KNEE PADS



Code	ltem	Details	Inner	Outer
KP001	Knee Pads Gel	Gel Cushioned Comfort	1pr	10
KPS002	Knee Pads Standard	Pro Swivel-Flex Knee Pads	1pr	10

TTL SAFETY TAPES



Code	Item	Details	Box Qty
DANSAFE	Safety Tape	100m Danger	16
RWSAFE	Safety Tape	100m Red & White	16
CAUSAFE	Safety Tape	100m Caution	16
BYSAFE	Safety Tape	100m Black & Yellow	16



NEW Tool Belts

TTL TOOL BELTS







Code	Item	Details	Box Qty
NB001	Nail Bag 12 pocket	Oil-Tanned Split Leather, Adjustable Belt	15
CA12SL2	Construction Apron 12 Pocket	Split Suede Leather Adjustable Belt (Out of stock)	25
CA18PL	Construction Apron 18 Pocket	Lightweight & Durable Polyester, Adjust Belt	20

TTL TOOL POCKETS




Code	ltem	Details	Box Qty
NB10OSL	Nail Bag 10 Pocket Leather	Oil-Tanned Split Leather	25
NB10SL	Nail Bag 10 Pocket Suede	Split Leather	25
HH001	Hammer Holder Leather	Oil-Tanned Split Leather	100

NEW



TTL COMBINATION SQUARES

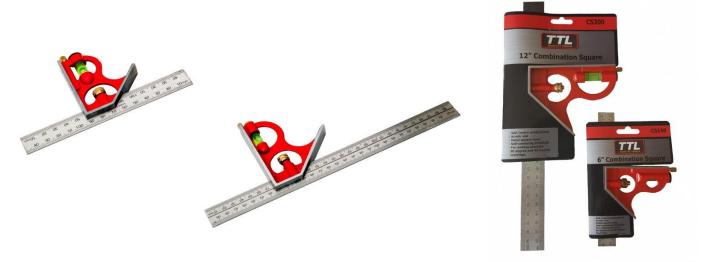

Code	Item	Details	Inner	Outer
CS150	Combination Square	150mm	10	
CS300	Combination Square	300mm	10	60

CH HANSON ASQUARE



Code	Item	Details	Box Qty
ASQUARE345	5 345 A Square	3' x 4' x 5' Folding Layout Triangle	3



NEW Measuring Tools



Code	Item	Details	Inner	Outer
JM316A	Measuring Counter Wheel	Carry Bag Included	1	4
MW318	Measuring Wheel Trigger Brake	Carry Bag Included, Extra Long Handle	1	5



Code	Item	Details	Inner	Outer
TTL001RMET	Standard Tape Measure	8m Metric Only, Red	12	48
TTL001YMET	Standard Tape Measure	8m Metric only, Yellow	12	48
TTL002MET/IN	1 Standard tape Measure	8m Metric/Imperial, Yellow	12	48
RL001MET	Extendable Ruler	1m Metric	12	120
RL002MET/IM	Extendable Ruler	1m Metric/Imperial	12	120

Riveters

NEW



TTL RIVETERS





Code	ltem	Details	Box Qty
BT106	Hand Riveter	Standard	6



Code	ltem	Details	Box Qty
BT201	Hand Riveter	Long Arm (Out of stock)	10
BT301	Hand Riveter	Scissor	10





TTL GENERAL ITEMS



Code	Item	Details	Box Qty
MB001	Mitre box	Locks for 10 Pre-set Cuts	4
BUC001	Tradie bucket 12L	Minimum Order Qty 6	20
DT001	Duct Tape 30m - silver	PVC Sealing and Joining	60
DTB001	Duct Tape 30m - black	PVC Sealing and Joining	60

TTL GENERAL ITEMS



Code	Item	Details	Box Qty
WS986	Drywall/Plaster Jab Saw	With Storage Pouch	10
GK001	Gun Kit 27 Pieces	Gun Cleaning Kit	20