


Taps DIN

High Performance Tap Range

- M, MF, MJ
- UNC, UNF, UN
- G (BSPF)
- NPT

TAPS DIN

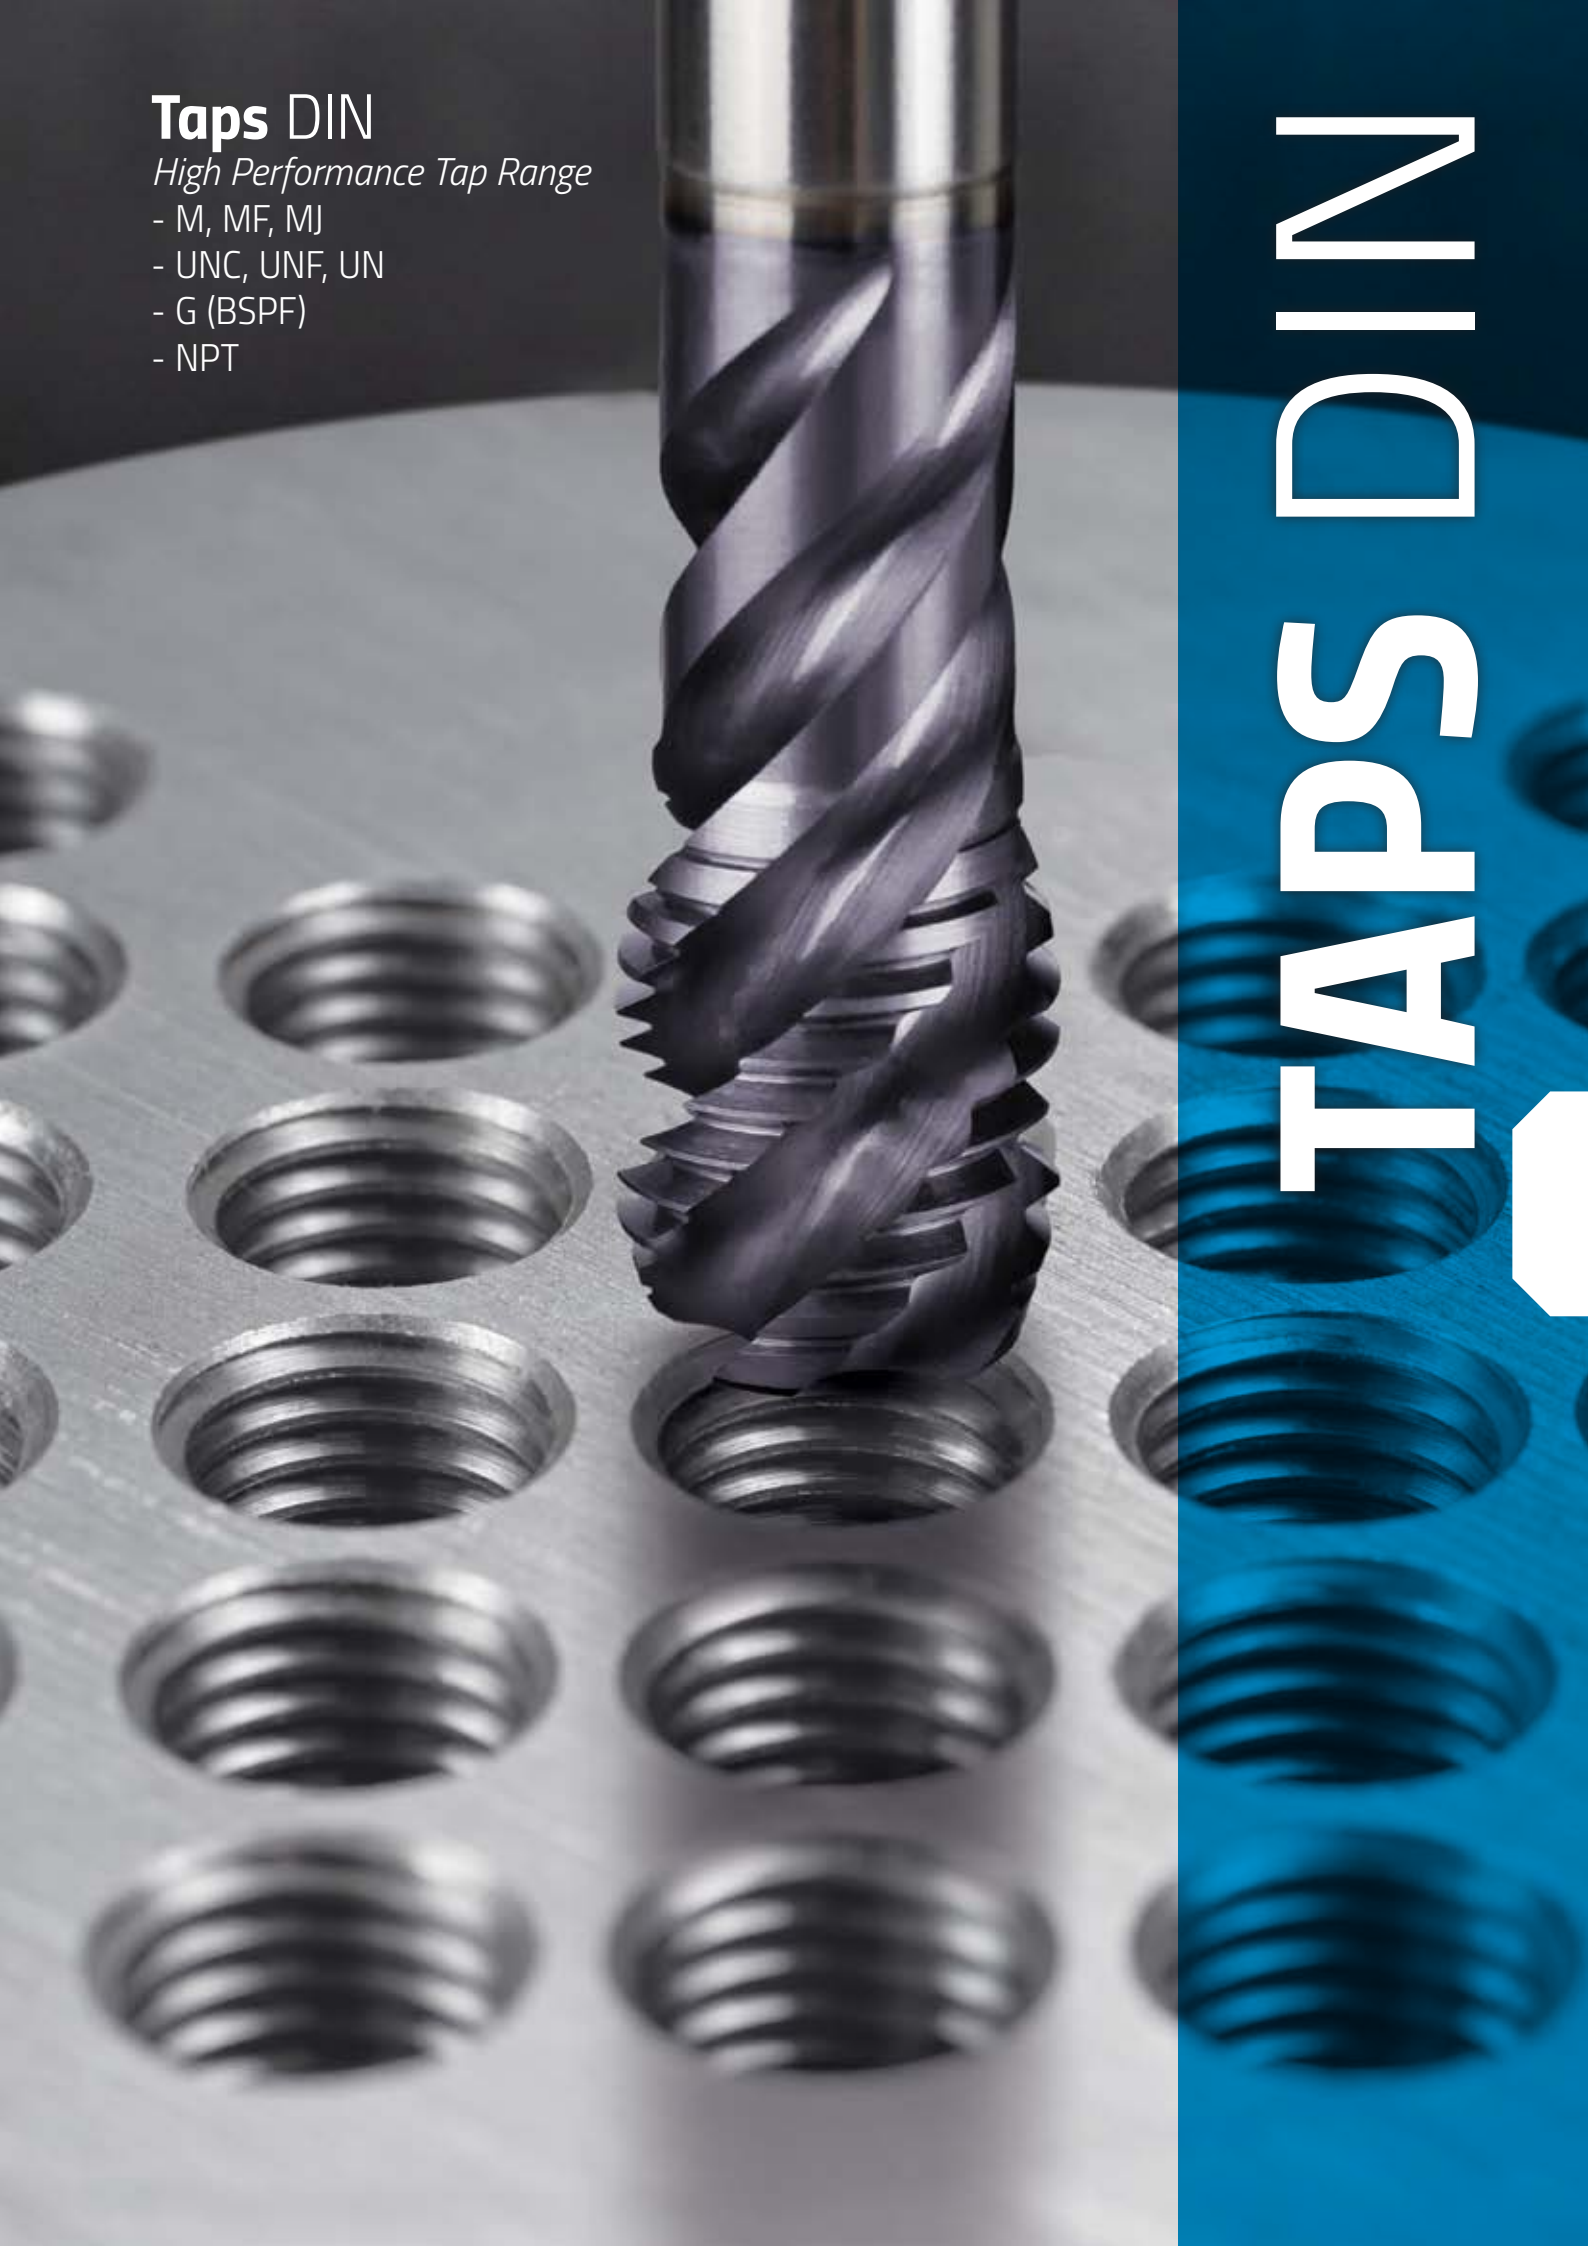

ISO VDI Material Group

Sutton

P	A	Steel	N	UNI
M	R	Stainless Steel	VA	
K	F	Cast Iron	GG	
N	N	Non-Ferrous Metals, Aluminiums & Coppers	Al W	
S	S	Titaniums & Super Alloys	Ti	
H	H	Hard Materials (≥ 45 HRC)	H	

^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

For Synchro Tapping



Catalogue Code M
MF
Material
Surface Finish
Sutton Designation
Tapping Depth
Limit & Nut Tolerance

Page

183	183	184	184	185	185	186	186	187	187
T377	T379	T373	T375	T365	T367	T369	T371	T381	T383
T766	T768	T762	T764	T754	T756	T758	T760	T770	T772
PM-HSSE V3		PM-HSSE V3		PM-HSSE V3		PM-HSSE V3		PM-HSSE V3	
TiCN		TiCN		TiCN		CrN		TiN	
UNI		UNI		UNI		AI		UNI	
2xØ		2xØ		2xØ		2xØ		2xØ	
6HX		6HX		6HX		6HX		6HX	

ISO	VDI 3323	Material	Condition	HB	N/mm²													
P	1	Steel - Non-alloy, cast & free cutting	~ 0.15 %C	A	125	440	●	●	●	●	●	●	●	●	●	●	●	●
	2			A	190	640	●	●	●	●	●	●	●	●	●	●	●	●
	3		~ 0.45 %C	QT	250	840	●	●	●	●	●	●	●	●	●	●	●	●
	4			A	270	910	●	●	●	●	●	●	●	●	●	●	●	●
	5			QT	300	1010	○	○	○	○	○	○	○	○	○	○	○	○
	6	Steel - Low alloy & cast < 5% of alloying elements	~ 0.75 %C	A	180	610	●	●	●	●	●	●	●	●	●	●	●	●
	7			QT	275	930	●	●	●	●	●	●	●	●	●	●	●	●
	8			QT	300	1010	○	○	○	○	○	○	○	○	○	○	○	○
	9			QT	350	1180	○	○	○	○	○	○	○	○	○	○	○	○
	10	Steel - High alloy, cast & tool		A	200	680	●	●	●	●	●	●	●	●	●	●	●	●
	11			HT	325	1100	○	○	○	○	○	○	○	○	○	○	○	○
	12	Steel - Corrosion resistant & cast	Ferritic / Martensitic	A	200	680	●	●	●	●	●	●	●	●	●	●	●	●
	13		Martensitic	QT	240	810	○	○	○	○	○	○	○	○	○	○	○	○
M	14.1	Stainless Steel	Austenitic	AH	180	610	●	●	●	●	●	●	●	●	●	●	●	●
	14.2		Duplex		250	840	●	●	●	●	●	●	●	●	●	●	●	●
	14.3		Precipitation Hardening		250	840	○	○	○	○	○	○	○	○	○	○	○	○
K	15	Cast Iron - Grey (GG)	Ferritic / Pearlitic		180	610	●	●	●	●	●	●	●	●	●	●	●	●
	16		Pearlitic		260	880	○	○	○	○	○	○	○	○	○	○	○	○
	17	Cast Iron - Nodular (GGG)	Ferritic		160	570	●	●	●	●	●	●	●	●	●	●	●	●
	18		Pearlitic		250	840	○	○	○	○	○	○	○	○	○	○	○	○
	19	Cast Iron - Malleable	Ferritic		130	460	●	●	●	●	●	●	●	●	●	●	●	●
N	20		Pearlitic		230	780	○	○	○	○	○	○	○	○	○	○	○	○
	21	Aluminum & Magnesium - wrought alloy	Non Heat Treatable		60	210	●	●	●	●	●	●	●	●	●	●	●	●
	22		Heat Treatable	AH	100	360	●	●	●	●	●	●	●	●	●	●	●	●
	23	Aluminum & Magnesium - cast alloy ≤ 12% Si	Non Heat Treatable		75	270	●	●	○	○	●	●	●	●	●	●	●	●
	24		Heat Treatable	AH	90	320	●	●	○	○	●	●	●	●	●	○	○	○
	25	Al & Mg - cast alloy > 12% Si	Non Heat Treatable		130	460	○	○	●	●	○	○	○	○	○	○	○	○
	26	Copper & Cu alloys (Brass/Bronze)	Free cutting, Pb > 1%		110	390	○	○	○	○	●	●	●	●	●	●	●	●
	27		Brass (CuZn, CuSnZn)		90	320	○	○	○	○	○	○	○	○	○	○	○	○
	28		Bronze (CuSn)		100	360	●	●	○	○	●	●	●	●	●	●	●	●
	29	Non-metallic - Thermosetting & fiber-reinforced plastics																
	30	Non-metallic - Hard rubber, wood etc.																
S	31	High temp. alloys	Fe based	A	200	680	●	●	●	●								
	32			AH	280	950												
	33		Ni / Co based	A	250	840	●	●	●	●								
	34			AH	350	1180												
	35			C	320	1080												
	36	Titanium & Ti alloys	CP Titanium		400 MPa													
	37.1		Alpha alloys		860 MPa				●	●								
	37.2		Alpha / Beta alloys	A	960 MPa				●	●								
	37.3			AH	1170 MPa													
	37.4		Beta alloys	A	830 MPa				●	●								
H	38.1	Hardened steel		HT	45 HRC													
	38.2			HT	55 HRC													
	39.1			HT	58 HRC													
	39.2			HT	62 HRC													
	40	Cast Iron	Chilled	C	400	1350												
	41			HT	55 HRC													

Condition: A (Annealed), AH (Age Hardened), C (Cast), HT (Hardened & Tempered), QT (Quenched & Tempered)

● Optimal ○ Effective

ISO	VDI 3323	Material Group	Sutton
P	A	Steel	N
M	R	Stainless Steel	VA
K	F	Cast Iron	GG
N	N	Non-Ferrous Metals, Aluminiums & Coppers	Al W
S	S	Titaniums & Super Alloys	Ti Ni
H	H	Hard Materials (≥ 45 HRC)	H


^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

For Tapping Through Holes



Page M
MF
UNC
UNF
G (BSPF)

194	194	194	196	196	197	198	199	199	199
233	233	233	233			235			
251	251	251	251			252			
268	268	268	268			269			
279	279	279				280			

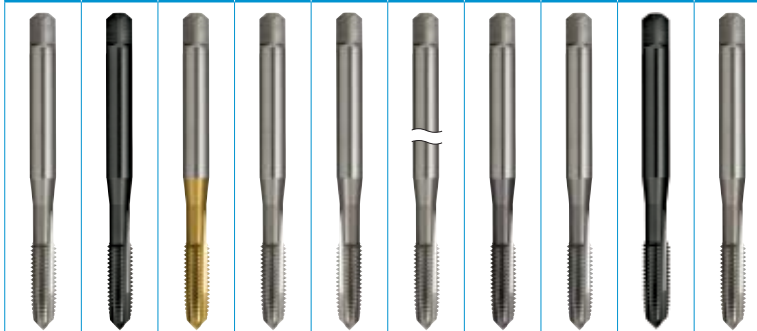

Catalogue Code M

MF

UNC

UNF

G (BSPF)

Material

Surface Finish

Sutton Designation

Tapping Depth

Limit & Nut Tolerance

T100 / T101	T102 / T103	T104 / T105	T106 / T107	T648 / T649	T337 / T338	T687 / T688	T122 / T123	T124 / T125	T126 / T127
T154	T156	T157	T155			T689			
T164	T166	T167	T165			T693			
T173	T702	T175	T174			T694			
T178	T179	T180				T700			
HSSE			HSSE	HSSE	HSSE	PM-HSSE V3	HSSE		HSSE
Brt	Blu	TiN	Brt	Brt	Brt	Hardlube	Ni	Blu	CrN
N			N	N - LH	N - Long	UNI	W		Cu
$\leq 3x\phi$			$\leq 3x\phi$	$\leq 3x\phi$	$\leq 3x\phi$	$\leq 3x\phi$	$\leq 3x\phi$		$\leq 3x\phi$
ISO 2 / 6H			ISO 3 / 6G	ISO 2 / 6H	ISO 2 / 6H	6HX	ISO 2 / 6H		ISO 2 / 6H

ISO	VDI 3323	Material	Condition	HB	N/mm ²									
P	1	Steel - Non-alloy, cast & free cutting	~ 0.15 %C	A	125	440	●	●	●	●	●	●	●	●
	2			A	190	640	●	●	●	●	●	●	●	●
	3		~ 0.45 %C	QT	250	840	○	●	●	○	○	○	○	○
	4			A	270	910	○	●	●	○	○	○	○	○
	5			QT	300	1010			○					
	6	Steel - Low alloy & cast < 5% of alloying elements	~ 0.75 %C	A	180	610	●	●	●	●	●	●	●	●
	7			QT	275	930	○	●	●	○	○	○	○	○
	8			QT	300	1010			○					
	9			QT	350	1180								
	10	Steel - High alloy, cast & tool		A	200	680	○	●	●	○	○	○	○	○
	11			HT	325	1100								
	12	Steel - Corrosion resistant & cast	Ferritic / Martensitic	A	200	680		○	○		●			
	13		Martensitic	QT	240	810					○			
M	14.1	Stainless Steel	Austenitic	AH	180	610		○	○		●			
	14.2		Duplex		250	840		○	○		●			
	14.3		Precipitation Hardening		250	840		○	○					
K	15	Cast Iron - Grey (GG)	Ferritic / Pearlitic		180	610	○	○	○	○	○	○	○	○
	16		Pearlitic		260	880			○		○			
	17	Cast Iron - Nodular (GGG)	Ferritic		160	570	○	○	○	○	○	○	○	○
	18		Pearlitic		250	840			○		○			
	19	Cast Iron - Malleable	Ferritic		130	460	○	○	○	○	○	○	○	○
N	20		Pearlitic		230	780	○	○	○	○	○	○	○	○
	21	Aluminum & Magnesium - wrought alloy	Non Heat Treatable		60	210	●		●	●	●	●	●	●
	22		Heat Treatable	AH	100	360	●		●	●	●	●	●	●
	23	Aluminum & Magnesium - cast alloy $\leq 12\%$ Si	Non Heat Treatable		75	270	○		○	○	○	○	○	○
	24		Heat Treatable	AH	90	320	○		○	○	○	○	○	○
	25	Al & Mg - cast alloy $> 12\%$ Si	Non Heat Treatable		130	460					○		○	○
	26	Copper & Cu alloys (Brass/Bronze)	Free cutting, Pb $> 1\%$		110	390	○		○	○	○	○	○	○
	27		Brass (CuZn, CuSnZn)		90	320	○		○	○	○	○	○	○
	28		Bronze (CuSn)		100	360					○	○		○
	29	Non-metallic - Thermosetting & fiber-reinforced plastics												
S	30	Non-metallic - Hard rubber, wood etc.												
	31	High temp. alloys	Fe based	A	200	680								
	32			AH	280	950								
	33		Ni / Co based	A	250	840								
	34			AH	350	1180								
	35			C	320	1080								
	36	Titanium & Ti alloys	CP Titanium		400 MPa									
	37.1		Alpha alloys		860 MPa									
	37.2		Alpha / Beta alloys	A	960 MPa									
	37.3			AH	1170 MPa									
	37.4		Beta alloys	A	830 MPa									
	37.5			AH	1400 MPa									
H	38.1	Hardened steel		HT	45 HRC									
	38.2			HT	55 HRC									
	39.1			HT	58 HRC									
	39.2			HT	62 HRC									
	40	Cast Iron	Chilled	C	400	1350								
	41			HT	55 HRC									

Condition: A (Annealed), AH (Age Hardened), C (Cast), HT (Hardened & Tempered), QT (Quenched & Tempered)

● Optimal ○ Effective

200	200	201	201	201	202	202	202	202	203	203	204	204	204	205	205	205	220	221	
		236	236		237	237					238	238			239		220	221	
		253	253			254					255	255		256	256		266	267	
		270	270			271											266	267	
		281	281		282	282													
																			
T128 / T129	T130 / T131	T110 / T111	T112 / T113	T359 / T360	T114 / T115	T116 / T117	T118 / T119	T680 / T681	T650 / T651	T120 / T121	T134 / T135	T140 / T141	T142 / T143	T144 / T145	T146 / T147	T148 / T149	T152 / T153	T217 / T218	
		T158	T161		T159	T160					T654	T163			T710		T784 / T785	T792 / T793	
		T170	T171			T697					T168	T169		T172	T666		T786	T794	
		T176	T177			T698											T787	T795	
		T181	T182		T349	T350													
HSSE		HSSE			PM-HSSE V3				PM-HSSE V3		PM-HSSE V3			PM-HSS Co			PM-HSS Co		
Brt	TiN	Blu	TiCN	Blu	Blu	TiCN			Blu	TiCN	Blu	TiAlN	Blu	TiCN		TiCN			
Sticky Material		VA				VA PM				VA DH		NH			H			Ti	Ni
≤ 3xØ		≤ 3xØ			≤ 3xØ				≤ 3.5xØ		≤ 3xØ			≤ 3xØ			≤ 1.5xØ		
ISO 2 / 6H		ISO 2 / 6H		ISO 3 / 6G		6HX		6GX	6HX	ISO 2 / 6H			6HX			6HX / 3BX			
○	●	●	●	●	●	●	●	●	●	●									
○	○	●	●	●	●	●	●	●	●	●									
○	○	○	○	○	○	○	○	○	○	○	●	●	●						
○	○	○	○	○	○	○	○	○	○	○	●	●	●		●	●	●		
											○	●	●		●	●	●		
											○	○	○	●	●	●			
	○		○		○	○	○	○	○	○	○	●	●		●	●	●		
○	○	○	●	○	○	●	●	●	○	●	○	○	○	○	○	○	○		
			○			○	○	○		○	○	○	○	●	●	●	○		
○	○	●	●	●	●	●	●	●	●	●	○	○	○						
○	○	●	●	●	●	●	●	●	●	●	○	○	○						
		○	●	○	○	●	●	●	○	●	○	●	●	○	○	○	○		
											○	○	○	○	●	●			
											○	○	○	○	○	○			
											○	○	○	○	○	○			
											○	○	○	○	○	○			
											○	○	○	○	○	○			
●	○		○			○	○	○	○	○									
○	○		○			○	○	○	○	○									
			○			○	○	○	○	○		○	○						
			○			○	○	○	○	○		○	○						
			○			○	○	○	○	○		○	○		○	○			
●	●		○			○	○	○	○	○		●	●						
●	●											○	○	○	●	●			
●	●		○			○	○	○	○	○		○	○						
			●			●	●	●										●	
			○			●	●	●										●	
			○			●	●	●										●	
																		○	
														○	○	○			
														○	●	●	●		
														○	●	●	○		
														○	●	●	●		
														○	●	●	○		
												○	○	○	●	●			

ISO VDI Material Group

Sutton

P	A	Steel	N	
M	R	Stainless Steel	VA	UNI
K	F	Cast Iron	GG	
N	N	Non-Ferrous Metals, Aluminiums & Coppers	Al W	
S	S	Titaniums & Super Alloys	Ti	Ni
H	H	Hard Materials (≥ 45 HRC)	H	

^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

For Tapping Blind Holes



Catalogue Code M

MF

UNC

UNF

G (BSPF)

Material

Surface Finish

Sutton Designation

Tapping Depth


Limit & Nut Tolerance

ISO	VDI ³³²³	Material	Condition	HB	N/mm ²														
P	1	Steel - Non-alloy, cast & free cutting	~ 0.15 %C	A	125	440	●	●	●	●	●	●	●	●	●	●	●	●	●
	2			A	190	640	●	●	●	●	●	●	●	●	●	●	●	●	●
	3		~ 0.45 %C	QT	250	840	○	●	○	○	●	●	○	○	○	○	○	○	○
	4			A	270	910	○	●	○	○	●	●	○	○	○	○	○	○	○
	5			QT	300	1010		○			○								
	6	Steel - Low alloy & cast < 5% of alloying elements		A	180	610	●	●	●	●	●	●	●	●	●	●	●	●	●
	7			QT	275	930	○	●	○	○	●	●	○	○	○	○	○	○	○
	8			QT	300	1010		○			○								
	9			QT	350	1180					○								
	10	Steel - High alloy, cast & tool		A	200	680	○	●	○	○	●	●	○	○	○	○	○	○	○
	11			HT	325	1100													
	12	Steel - Corrosion resistant & cast	Ferritic / Martensitic	A	200	680		○		○	○						●		
	13		Martensitic	QT	240	810											○		
M	14.1	Stainless Steel	Austenitic	AH	180	610		○			○	○					●		
	14.2		Duplex		250	840		○			○	○					●		
	14.3		Precipitation Hardening		250	840		○			○	○							
K	15	Cast Iron - Grey (GG)	Ferritic / Pearlitic		180	610	○	○	○	○	○	○	○	○	○	○	○	○	○
	16		Pearlitic		260	880		○			○	○					○		
	17	Cast Iron - Nodular (GGG)	Ferritic		160	570	○	○	○	○	○	○	○	○	○	○	○	○	○
	18		Pearlitic		250	840		○			○	○					○		
	19	Cast Iron - Malleable	Ferritic		130	460	○	○	○	○	○	○	○	○	○	○	○	○	○
N	20		Pearlitic		230	780	○	○	○	○	○	○	○	○	○	○	○	○	○
	21	Aluminum & Magnesium - wrought alloy	Non Heat Treatable		60	210	●	●	●	●	●	●	●	●	●	●	●	●	●
	22		Heat Treatable	AH	100	360	●	●	●	●	●	●	●	●	●	●	●	●	●
	23	Aluminum & Magnesium - cast alloy ≤ 12% Si	Non Heat Treatable		75	270	○	○	○	○	○	○	○	○	○	○	○	○	○
	24		Heat Treatable	AH	90	320	○	○	○	○	○	○	○	○	○	○	○	○	○
	25	Al & Mg - cast alloy > 12% Si	Non Heat Treatable		130	460											○		
	26	Copper & Cu alloys (Brass/Bronze)	Free cutting, Pb > 1%		110	390	○	○	○	○	○	○	○	○	○	○	○	○	○
	27		Brass (CuZn, CuSnZn)		90	320	○	○	○	○	○	○	○	○	○	○	○	○	○
	28		Bronze (CuSn)		100	360												○	○
	29	Non-metallic - Thermosetting & fiber-reinforced plastics																	
	30	Non-metallic - Hard rubber, wood etc.																	
S	31	High temp. alloys	Fe based	A	200	680													
	32			AH	280	950													
	33		Ni / Co based	A	250	840													
	34			AH	350	1180													
	35			C	320	1080													
	36	Titanium & Ti alloys	CP Titanium		400 MPa														
	37.1		Alpha alloys		860 MPa														
	37.2		Alpha / Beta alloys	A	960 MPa														
	37.3			AH	1170 MPa														
	37.4		Beta alloys	A	830 MPa														
	37.5			AH	1400 MPa														
	38.1	Hardened steel		HT	45 HRC														
	38.2			HT	55 HRC														
	39.1			HT	58 HRC														
	39.2			HT	62 HRC														
H	40	Cast Iron	Chilled	C	400	1350													
	41			HT	55 HRC														

Condition: A (Annealed), AH (Age Hardened), C (Cast), HT (Hardened & Tempered), QT (Quenched & Tempered)

● Optimal ○ Effective

Page M
MF
UNC
UNF
G (BSPF)

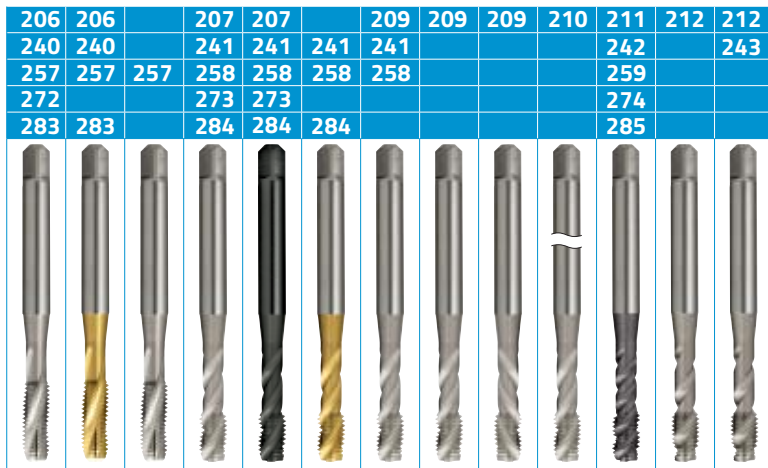

T183 / T184	T185 / T186		T187 / T188	T189 / T190		T191 / T192	T193 / T194	T195 / T196	T339 / T340	T684 / T685	T231 / T232	T233 / T234
T243	T244		T245	T247	T248	T246				T686		T703
T255	T256	T257	T258	T260	T273	T259				T691		
T274			T275	T701						T692		
T278	T279		T281	T282	T283					T699		
HSSE			HSSE			HSSE			PM-HSSE V3		HSSE	
Br	TiN	Br	Br	Blu	TiN	Br			Hardlube		Br	CrN
N			N			N			N - LH	N - Long	UNI	AI
≤ 1.5xØ			≤ 3xØ			≤ 3xØ			≤ 3xØ		≤ 3xØ	
ISO 2 / 6H			3B			ISO 2 / 6H			ISO3/6G ISO1/4H		ISO 2 / 6H	

213	213	213	213	214	214	214	215	215	215	215	216			217	217	217	218	218	218	219	221																						
				244	244		245	245						246	246			247		219	221																						
				260	260			261				262	262	263	263		264	264		265	267																						
				275	275			276												265	267																						
				286	286		287	287																																			
T235 / T236	T237 / T238	T241 / T242	T239 / T240	T197 / T199	T201 / T202	T198 / T200	T203 / T204	T205 / T206	T678 / T679	T676 / T677	T207 / T208			T221 / T222	T227 / T228	T229 / T230	T209 / T210	T211 / T212	T213 / T214	T215 / T216	T217 / T218																						
				T249	T251		T250	T252						T655	T254			T707		T788 / T789	T792 / T793																						
				T261	T262			T695				T263	T264	T266	T267		T265	T667		T790	T794																						
				T276	T277			T696												T791	T795																						
				T284	T285		T351	T352																																			
HSSE				HSSE			HSSE				PM-HSSE V3				HSSE		PM-HSSE V3		PM-HSS Co																								
Ni	Blu	TiN	CrN	Blu	TiCN	Blu	Blu	TiCN				BrT	TiCN	Blu	TiAlN		Blu	TiCN	TiCN																								
W				Cu			VA DH				VA PM				VA		NH		H				Ti				Ni																
≤ 3xØ				≤ 3xØ			≤ 3xØ				≤ 3xØ				≤ 2.5xØ		≤ 2.5xØ		≤ 1.5xØ				≤ 1.5xØ																				
ISO 2 / 6H				ISO 2 / 6H			ISO 3 / 6G				6HX				2B		ISO 2 / 6H		ISO 2 / 6HX				6HX / 3BX																				
																						VDI 3323		ISO																			
●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1	P																				
●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	2																					
○	○	○		○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	3																					
○	○	●						○	○	○	○	○	○	○	○	○	○	○	○	○	○	4																					
●	●	●		○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	5																					
○	○	○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6																					
				○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	7																					
				○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	8																					
																						9																					
				○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	10																					
				○	●	○	○	●	●	●	●	●	●	●	○	○	○	○	○	○	○	11																					
				○	●	○	○	●	●	●	●	●	●	●	○	○	○	○	○	○	○	12																					
																						13																					
				●	●	●	●	●	●	●	●	●	●	●	○	○	○					14.1	M																				
				●	●	●	●	●	●	●	●	●	●	●	○	○	○					14.2																					
				○	●	○	○	●	●	●	●	●	●	○	○	○	○	○	○	○	○	14.3																					
															○	○	○	○	○	○	○	15	K																				
															○	○	○	○	○	○	○	16																					
															○	○	○	○	○	○	○	17																					
															○	○	○	○	○	○	○	18																					
															○	○	○	○	○	○	○	19																					
															○	○	○	○	○	○	○	20																					
●	○	○	○	○		○			○	○	○	○	○	○	○	○		○	○			21																					

^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

Code M

UNC

UNF

G (BSPF)

Material Surface Finish

Surface Finish

Cutter Designation

Tapping Depth

Limit & Nut Tolerance


[illegible]

Condition: A (Annealed), AH (Age Hardened), C (Cast), HT (Hardened & Tempered), QT (Quenched & Tempered)

● Optimal ○ Effective

suttontools

- For high speed and precision tapping
- For rigid tapping in CNC machines with synchronised feed
- Suitable for materials up to 850N/mm²
- Through holes up to 2 x d₁
- h6 endmill shank

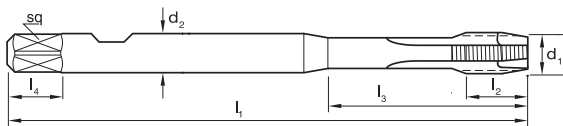

Catalogue Code	T377	T379
Discount Group	D0412	D0412
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	TICN	TICN
Geometry		IK
Chamfer	Form B / 4.5 x P	Form B / 4.5 x P
Shank Form (~DIN 1835)	B	B
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	70	4	13	6.0	4.9	8.0	3	1.6	T377 0200	
0250	M 2.5	x 0.45	70	4.5	14	6.0	4.9	8.0	3	2.1	T377 0250	
0300	M 3	x 0.5	70	5	18	6.0	4.9	8.0	3	2.5	T377 0300	
0400	M 4	x 0.7	70	7	21	6.0	4.9	8.0	3	3.3	T377 0400	
0500	M 5	x 0.8	70	8	25	6.0	4.9	8.0	3	4.2	T377 0500	T379 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8.0	3	5.0	T377 0600	T379 0600
0800	M 8	x 1.25	90	13	35	8.0	6.2	9.0	3	6.8	T377 0800	T379 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11.0	3	8.5	T377 1000	T379 1000
1200	M 12	x 1.75	110	18	42	12.0	9.0	12.0	3	10.3	T377 1200	T379 1200
1400	M 14	x 2	110	20	49	14.0	11.0	14.0	3	12.0	T377 1400	T379 1400
1600	M 16	x 2	110	20	55	16.0	12.0	15.0	4	14.0	T377 1600	T379 1600
1800	M 18	x 2.5	125	25	-	16.0	12.0	15.0	4	15.5	T377 1800	T379 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15.0	4	17.5	T377 2000	T379 2000

											T766	T768
0805	MF 8	x 1	90	13	30	8.0	6.2	9.0	3	7.0	•	•
1005	MF 10	x 1	100	15	39	10.0	8.0	11.0	3	9.0	•	•
1006	MF 10	x 1.25	100	15	39	10.0	8.0	11.0	3	8.8	•	•
1205	MF 12	x 1	110	18	42	12.0	9.0	12.0	3	11.0	•	•
1206	MF 12	x 1.25	110	18	42	12.0	9.0	12.0	3	10.8	•	•
1207	MF 12	x 1.5	110	18	42	12.0	9.0	12.0	3	10.5	•	•

ISO	P												M	K								N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	37.2	37.3	37.4	37.5	38	38.2	39	39.2	40	41	
T377	●	●	●	●	○	●	●	○		●		●	○	●	●	●	○	●	○	○	○	○	●	●	●	●	○	●	○	●			●		●															
T379	●	●	●	●	○	●	●	○		●		●	○	●	○	○	○	○	○	○	○	○	●	●	●	●	○	○	○	○			●		●															

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

M

suttontools

- For high speed and precision tapping
- For rigid tapping in CNC machines with synchronised feed
- Suitable for materials up to 850N/mm²
- Blind holes up to 2 x d₁
- h6 endmill shank

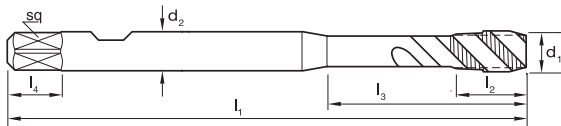

watch the video



Catalogue Code	T373	T375
Discount Group	D0412	D0412
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	TICN	TICN
Geometry	R50	R50 IK
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Shank Form (~DIN 1835)	B	B
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	70	4	13	6.0	4.9	8.0	3	1.6	T373 0200	
0250	M 2.5	x 0.45	70	4.5	14	6.0	4.9	8.0	3	2.1	T373 0250	
0300	M 3	x 0.5	70	5	18	6.0	4.9	8.0	3	2.5	T373 0300	
0400	M 4	x 0.7	70	7	21	6.0	4.9	8.0	3	3.3	T373 0400	
0500	M 5	x 0.8	70	8	25	6.0	4.9	8.0	3	4.2	T373 0500	T375 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8.0	3	5.0	T373 0600	T375 0600
0800	M 8	x 1.25	90	13	35	8.0	6.2	9.0	3	6.8	T373 0800	T375 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11.0	3	8.5	T373 1000	T375 1000
1200	M 12	x 1.75	110	18	42	12.0	9.0	12.0	4	10.3	T373 1200	T375 1200
1400	M 14	x 2	110	20	49	14.0	11.0	14.0	4	12.0	T373 1400	T375 1400
1600	M 16	x 2	110	20	55	16.0	12.0	15.0	4	14.0	T373 1600	T375 1600
1800	M 18	x 2.5	125	25	-	16.0	12.0	15.0	4	15.5	T373 1800	T375 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15.0	4	17.5	T373 2000	T375 2000

											T762	T764
0805	MF 8	x 1	90	13	30	8.0	6.2	9.0	3	7.0	•	•
1005	MF 10	x 1	100	15	39	10.0	8.0	11.0	3	9.0	•	•
1006	MF 10	x 1.25	100	15	39	10.0	8.0	11.0	3	8.8	•	•
1205	MF 12	x 1	110	18	42	12.0	9.0	12.0	3	11.0	•	•
1206	MF 12	x 1.25	110	18	42	12.0	9.0	12.0	3	10.8	•	•
1207	MF 12	x 1.5	110	18	42	12.0	9.0	12.0	3	10.5	•	•

ISO	P												M		K						N								S								H												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T373	●	●	●	●	○	●	●	○		●		●	○	●	○	○	●	○	○	○	○	○	●	○	○	○	○	○	○	○			●		●														
T375	●	●	●	●	○	●	●	○		●		●	○	●	○	○	●	○	○	○	○	○	●	○	○	○	○	○	○	○			●		●														


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools

- For high speed and precision tapping
- For rigid tapping in CNC machines with synchronised feed
- For aluminium & aluminium alloys
- Blind holes up to $2 \times d_1$
- h6 endmill shank

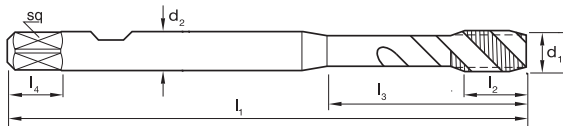

Catalogue Code	T369	T371
Discount Group	D0412	D0412
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	CrN	CrN
Geometry	R45	R45 IK
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Shank Form (~DIN 1835)	B	B
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	L ₁	L ₂	L ₃	d ₂	sq	L ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	70	4	13	6.0	4.9	8.0	2	1.6	T369 0200	
0250	M 2.5	x 0.45	70	4.5	14	6.0	4.9	8.0	2	2.1	T369 0250	
0300	M 3	x 0.5	70	5	18	6.0	4.9	8.0	2	2.5	T369 0300	
0400	M 4	x 0.7	70	7	21	6.0	4.9	8.0	2	3.3	T369 0400	
0500	M 5	x 0.8	70	8	25	6.0	4.9	8.0	2	4.2	T369 0500	T371 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8.0	2	5.0	T369 0600	T371 0600
0800	M 8	x 1.25	90	13	35	8.0	6.2	9.0	2	6.8	T369 0800	T371 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11.0	2	8.5	T369 1000	T371 1000
1200	M 12	x 1.75	110	18	42	12.0	9.0	12.0	2	10.3	T369 1200	T371 1200
1400	M 14	x 2	110	20	49	14.0	11.0	14.0	2	12.0	T369 1400	T371 1400
1600	M 16	x 2	110	20	55	16.0	12.0	15.0	2	14.0	T369 1600	T371 1600
1800	M 18	x 2.5	125	25	-	16.0	12.0	15.0	2	15.5	T369 1800	T371 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15.0	2	17.5	T369 2000	T371 2000

											T758	T760
0805	MF 8	x 1	90	13	30	8.0	6.2	9.0	2	7.0	•	•
1005	MF 10	x 1	100	15	39	10.0	8.0	11.0	2	9.0	•	•
1006	MF 10	x 1.25	100	15	39	10.0	8.0	11.0	2	8.8	•	•
1205	MF 12	x 1	110	18	42	12.0	9.0	12.0	2	11.0	•	•
1206	MF 12	x 1.25	110	18	42	12.0	9.0	12.0	2	10.8	•	•
1207	MF 12	x 1.5	110	18	42	12.0	9.0	12.0	2	10.5	•	•

ISO	P													M	K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T369																							•	•	•	•	•	•	•	•	•																		
T371																							•	•	•	•	•	•	•	•	•																		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps Metric, Straight Flute, N


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Depths up to 1.5 x d₁



Catalogue Code	T286	T288
Discount Group	D0402	D0406
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	N	N
Geometry	Form C / 2.5 x P	Form C / 2.5 x P
Chamfer	ISO 2 / 6H	ISO 2 / 6H
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	T286 0200	T288 0200
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	T286 0220	T288 0220
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	T286 0230	T288 0230
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	T286 0250	T288 0250
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	T286 0260	T288 0260
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T286 0300	T288 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	T286 0350	T288 0350
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T286 0400	T288 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T286 0500	T288 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T286 0600	T288 0600
0700	M 7	x 1	80	19	30	7.0	5.5	8	3	6.0	•	•
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T286 0800	T288 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T286 1000	T288 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0600	M 6	x 1	80	19	-	4.5	3.4	6	3	5.0	T287 0600	T289 0600
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	3	6.8	T287 0800	T289 0800
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	3	8.5	T287 1000	T289 1000
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T287 1200	T289 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T287 1400	T289 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T287 1600	T289 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T287 1800	T289 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T287 2000	T289 2000
2200	M 22	x 2.5	140	34	-	18.0	14.5	17	4	19.5	T287 2200	T289 2200
2400	M 24	x 3	160	38	-	18.0	14.5	17	4	21.0	T287 2400	T289 2400
2700	M 27	x 3	160	38	-	20.0	16.0	19	4	24.0	T287 2700	T289 2700
3000	M 30	x 3.5	180	45	-	22.0	18.0	21	4	26.5	T287 3000	T289 3000

ISO	P													M			K					N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T286	●	●	●	●	○	●	○			○													○	○	○	○		○	○	○																			
T288	●	●	●	●	○	●	○			○													○	○	○	○		○	○	○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps Metric, Straight Flute, GG

suttontools

- For use in grey cast iron (GG)
- Through & blind holes
- Depths up to 3 x d₁

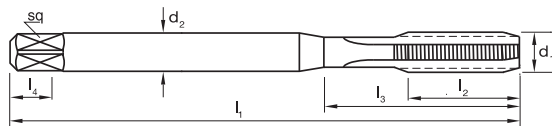

Catalogue Code	T290	T292
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Ni + Blu	TiCN
Sutton Designation	GG	GG
Geometry	Low Relief	Low Relief
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.40	45	8	-	2.8	2.1	5	4	1.6	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	4	1.75	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	4	1.9	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	4	2.05	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	4	2.15	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	4	2.5	T290 0300	T292 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	4	2.9	•	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	4	3.3	T290 0400	T292 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	4	4.2	T290 0500	T292 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	4	5.0	T290 0600	T292 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	4	6.8	T290 0800	T292 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	4	8.5	T290 1000	T292 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
											T291	T293
0600	M 6	x 1	80	19	-	4.5	3.4	6	4	5.0	T291 0600	T293 0600
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	4	6.8	T291 0800	T293 0800
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	4	8.5	T291 1000	T293 1000
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	4	10.2	T291 1200	T293 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	4	12.0	T291 1400	T293 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T291 1600	T293 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	•	•
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T291 2000	T293 2000

ISO	P													M	K						N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T290																	●	●	●	●	○	○																												
T292																	●	●	●	●	○	○						○																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

M


suttontools

- VHM, for use in Al >10% Si & cast iron (GGG)
- Through & blind holes
- Depths up to 3 x d₁

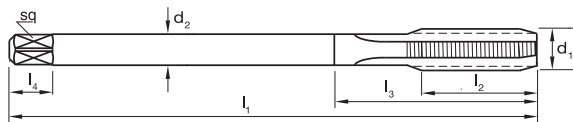

Catalogue Code	T670	T741
Discount Group	D0414	D0414
Material	VHM	VHM
Surface Finish	TICN	TICN
Sutton Designation	GGG	GGG
Geometry	Low Relief	IK
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	6H	6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.40	45	8	-	2.8	2.1	5	4	1.6	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	4	1.75	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	4	1.9	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	4	2.05	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	4	2.15	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	4	2.5	•	•
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	4	2.9	•	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	4	3.3	•	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	4	4.2	•	•
0600	M 6	x 1	80	19	30	6.0	4.9	8	4	5.1	T670 0600	•
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	4	6.9	T670 0800	•
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	4	8.6	T670 1000	•



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0600	M 6	x 1	80	19	-	4.5	3.4	6	4	5.1	•	•
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	4	6.9	•	•
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	4	8.6	•	•
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	4	10.3	T671 1200	•
1400	M 14	x 2	110	30	-	11.0	9.0	12	4	12.1	•	•
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.1	T671 1600	•
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.7	•	•
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.7	•	•

ISO	P													M			K						N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T670																	●	●	●	●	○	○					●		●																		●		
T741																	●	●	●	●	○	○					●		●																		●		


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.


suttontools

- For production tapping in die cast materials
- PM-HSS Co for superior tool life
- Form E for maximum thread depth in blind holes
- Depths up to $1.5 \times d_1$

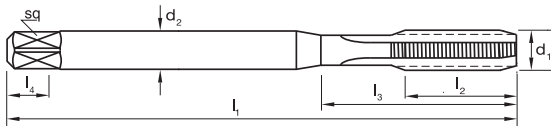

Catalogue Code	T335	T357
Discount Group	D0408	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	TICN	TICN
Sutton Designation	Die Cast	Die Cast
Geometry	Form E / 1.5 x P	IK
Chamfer	6HX	6HX
Limit & Nut Tolerance		

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0600	M 6	x 1	80	19	30	6.0	4.9	8	4	5.0	T335 0600	T357 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	4	6.8	T335 0800	T357 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	4	8.5	T335 1000	T357 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
											T336	T358
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	4	10.2	T336 1200	T358 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	4	12.0	T336 1400	T358 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T336 1600	T358 1600
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T336 2000	T358 2000



ISO	P												M	K								N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T335																																																	
T357																																																	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

M

DIN Taps Metric, Straight Flute, XH

suttontools

- Use in hardened steels 42-52 HRC
- Through & blind holes
- Depths up to 1.5 x d₁



Catalogue Code	T294	T295
Discount Group	D0408	D0408
Material	SPM	SPM
Surface Finish	TICN	TICN
Sutton Designation	XH	XH
Geometry	Special Relief	Special Relief
Chamfer	Form C / 3 x P	Form D / 5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0300	M 3	x 0.5	46	11	18	3.5	2.7	6	4	2.55	T294 0300	T295 0300
0400	M 4	x 0.7	52	13	21	4.5	3.4	6	4	3.4	T294 0400	T295 0400
0500	M 5	x 0.8	60	16	25	6.0	4.9	8	4	4.3	T294 0500	T295 0500
0600	M 6	x 1	62	19	30	6.0	4.9	8	4	5.1	T294 0600	T295 0600
0800	M 8	x 1.25	70	22	-	6.0	4.9	9	5	6.9	T294 0800	T295 0800
1000	M 10	x 1.5	75	24	-	7.0	5.5	11	5	8.6	T294 1000	T295 1000
1200	M 12	x 1.75	82	29	-	9.0	7.0	10	5	10.3	T294 1200	T295 1200
1600	M 16	x 2	95	32	-	12.0	9.0	12	5	14.1	T294 1600	T295 1600
2000	M 20	x 2.5	105	37	-	16.0	12.0	15	5	17.7	T294 2000	T295 2000

M

ISO	P													M		K					N										S												H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T294					○			○	●		●		●					●	●	●	●	●							○															●				●			
T295					○			○	●		●		●					●	●	●	●	●								○																●				●	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

-



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
DIN 371												
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	4	2.55	T296 0300	T297 0300
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	4	3.4	T296 0400	T297 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	4	4.3	T296 0500	T297 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	5	5.1	T296 0600	T297 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	5	6.9	T296 0800	T297 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	5	8.6	T296 1000	T297 1000
DIN 376												
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	5	10.3	T296 1200	T297 1200
1600	M 16	x 2	110	32	-	12.0	9.0	12	6	14.1	T296 1600	T297 1600
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	6	17.7	T296 2000	T297 2000

ISO	P												M			K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T296									○		○		○																	○														●	●	●	○	○	●	
T297									○		○		○																	○															●	●	●	○	○	●

P Steel

M Stainless Steel

K Cast Iron

N Non-Ferrous Metals

S Titanium & Super Alloys


H Hard Materials

● Optimal

○ Effective

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to 3 x d₁



Catalogue Code	T100	T102	T104
Discount Group	D0402	D0402	D0406
Material	HSSE	HSSE	HSSE
Surface Finish	<i>Brt</i>	<i>Blu</i>	<i>TIN</i>
Sutton Designation	N	N	N
Geometry			
Chamfer	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	Limit & Nat. Tolerance											ISO 27-01			ISO 27-01			ISO 27-01		
	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø		Item #	Item #	Item #	Item #	Item #	Item #			
0100	M 1	x 0.25	40	6	-	2.5	2.1	5	2	0.75		T100 0100	•	•	•	•	•			
0110	M 1.1	x 0.25	40	6	-	2.5	2.1	5	2	0.85		•	•	•	•	•	•			
0120	M 1.2	x 0.25	40	6	-	2.5	2.1	5	2	0.95		T100 0120	•	•	•	•	•			
0140	M 1.4	x 0.3	40	7	-	2.5	2.1	5	2	1.1		T100 0140	•	•	•	•	•			
0160	M 1.6	x 0.35	40	8	-	2.5	2.1	5	2	1.25		T100 0160	•	•	•	•	•			
0170	M 1.7	x 0.35	40	8	-	2.5	2.1	5	2	1.35		•	•	•	•	•	•			
0180	M 1.8	x 0.35	40	8	-	2.5	2.1	5	2	1.45		T100 0180	•	•	•	•	•			
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	2	1.6		T100 0200	T102 0200	•	•	•	•			
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	2	1.75		T100 0220	T102 0220	•	•	•	•			
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	2	1.9		T100 0230	T102 0230	•	•	•	•			
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2	2.05		T100 0250	T102 0250	•	•	•	•			
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	2	2.15		T100 0260	T102 0260	•	•	•	•			
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5		T100 0300	T102 0300	T104 0300	•	•	•			
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9		T100 0350	T102 0350	T104 0350	•	•	•			
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3		T100 0400	T102 0400	T104 0400	•	•	•			
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2		T100 0500	T102 0500	T104 0500	•	•	•			
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0		T100 0600	T102 0600	T104 0600	•	•	•			
0700	M 7	x 1	80	19	30	7.0	5.5	8	3	6.0		T100 0700	T102 0700	•	•	•	•			
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8		T100 0800	T102 0800	T104 0800	•	•	•			
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5		T100 1000	T102 1000	T104 1000	•	•	•			

[illegible]


P Steel **M** Stainless Steel **K** Cast Iron **N** Non-Ferrous Metals **S** Titanium & Super Alloys **H** Hard Materials

- Available on request as special manufacture. Subject to lead time.

● Optimal ○ Effective

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T106	T108*	T648
D0402	D0402	D0402
HSSE	HSSE	HSSE
Br _t	Br _t	Br _t
N	N	N
6G	4H	Left Hand
Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
ISO 3 / 6G	ISO 1 / 4H	ISO 2 / 6H LH

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	2	1.6	•	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	2	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	2	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2	2.05	•	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	2	2.15	•	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T106 0300	T108 0300	T648 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	T106 0350	T108 0350	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T106 0400	•	T648 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T106 0500	T108 0500	T648 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T106 0600	T108 0600	T648 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T106 0800	T108 0800	T648 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T106 1000	T108 1000	T648 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0600	M 6	x 1	80	19	-	4.5	3.4	6	3	5.0	•	•	•
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	3	6.8	•	•	•
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	3	8.5	•	•	•
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T107 1200	T109 1200	T649 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T107 1400	T109 1400	T649 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	3	14.0	T107 1600	T109 1600	T649 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T107 1800	T109 1800	T649 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T107 2000	•	T649 2000

ISO	P													M			K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T106	●	●	○	○		●	○				○						○	○	○		○	○	●	●	○	○		○	○																					
T108	●	●	○	○		●	○										○	○	○		○	○	●	●	○	○		○	○																					
T648	●	●	○	○		●	○				○						○	○	○		○	○	●	●	○	○		○	○																					


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time. *Not available once current stock is depleted


suttontools

- For long reach applications
- Suitable for materials up to 1000N/mm²
- Depths up to 3 x d₁
- d₂ and sq in accordance to DIN371



Catalogue Code	T337
Discount Group	D0402
Material	HSSE
Surface Finish	Brt
Sutton Designation	N
Geometry	Extra Length
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0300	M 3	x 0.5	112	11		3.5	2.7	6	3	2.5	T337 0300
0400	M 4	x 0.7	126	13		4.5	3.4	6	3	3.3	T337 0400
0500	M 5	x 0.8	140	15		6.0	4.9	8	3	4.2	T337 0500
0600	M 6	x 1	160	17		6.0	4.9	8	3	5.0	T337 0600
0800	M 8	x 1.25	180	20		8.0	6.2	10	3	6.8	T337 0800



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
											T338
1000	M 10	x 1.5	200	24	100	7.0	5.5	8	3	8.5	T338 1000
1200	M 12	x 1.75	220	28	110	9.0	7.0	10	3	10.2	T338 1200
1400	M 14	x 2	220	30	110	11.0	9.0	12	3	12.0	T338 1400
1600	M 16	x 2	220	32	110	12.0	9.0	12	3	14.0	T338 1600
2000	M 20	x 2.5	280	34	110	16.0	12.0	15	4	17.5	T338 2000
2400	M 24	x 3	320	38	120	18.0	14.5	17	4	21.0	T338 2400

ISO	P													M			K				N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T337	●	●	○	○		●	○			○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
T338	●	●	○	○		●	○			○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective




watch the video



- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

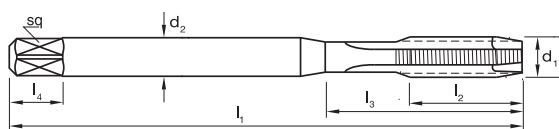

Limit & Nut Tolerance											Unit
Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T687 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T687 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T687 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T687 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T687 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T687 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₆	z	drill Ø	Item #
											T688
1200	M 12 x 1.75	110	17.5	-	9.0	7.0	10	3	10.2		T688 1200
1400	M 14 x 2	110	20	-	11.0	9.0	12	3	12.0		T688 1400
1600	M 16 x 2	110	20	-	12.0	9.0	12	4	14.0		T688 1600
1800	M 18 x 2.5	125	25	-	14.0	11.0	14	4	15.5		T688 1800
2000	M 20 x 2.5	140	25	-	16.0	12.0	15	4	17.5		T688 2000
2200	M 22 x 2.5	140	25	-	18.0	14.5	17	4	19.5		•
2400	M 24 x 3	160	30	-	18.0	14.5	17	4	21.0		•
2700	M 27 x 3	160	30	-	20.0	16.0	19	4	24.0		•
3000	M 30 x 3.5	180	35	-	22.0	18.0	21	4	26.5		•

ISO	P													M			K					N								S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T687	●	●	●	○		●	○			●		●	●	●	●		○	○	○	○	○	○	●	●	●	○	○	○	○																				

P

Steel

M

Stainless Steel

K

Cast Iron

N

Non-Ferrous Metals

S


Titanium & Super Alloys

H

Hard Materials

● Optimal ○ Effective

- Use in soft elastic materials
- Through holes
- Depths up to $3 \times d_1$

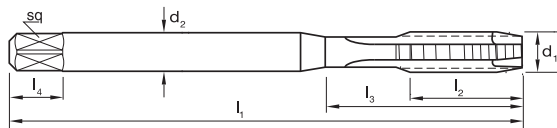

Catalogue Code	T128	T130
Discount Group	D0402	D0406
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	Sticky Material	Sticky Material
Geometry	Interrupted Threads	Interrupted Threads
Chamfer	Form B / 4.5 x P	Form B / 4.5 x P
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T128 0300	T130 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	•	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T128 0400	T130 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T128 0500	T130 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T128 0600	T130 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T128 0800	T130 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T128 1000	T130 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0600	M 6	x 1	80	19	-	4.5	3.4	6	3	5.0	•	•
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	3	6.8	•	•
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	3	8.5	•	•
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T129 1200	T131 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T129 1400	T131 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	3	14.0	T129 1600	T131 1600


ISO	P													M			K						N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T128	○	○	○	○		○	○					○		○	○								●	○					●	●	●																		
T130	●	○	○	○		○	○				○	○		○	○									○	○					●	●	●																	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

- Use in stainless steels and high strength steels
- Suitable for materials up to 850N/mm²
- Through holes
- Depths up to 3 x d₁



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T110 0300	•	T112 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	T110 0350	•	T112 0350
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T110 0400	•	T112 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T110 0500	•	T112 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T110 0600	•	T112 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T110 0800	•	T112 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T110 1000	•	T112 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0600	M 6	x 1	80	19	-	4.5	3.4	6	3	5.0	T111 0600	•	T113 0600
0800	M 8	x 1.25	90	22	-	6.0	4.9	8	3	6.8	T111 0800	•	T113 0800
1000	M 10	x 1.5	100	24	-	7.0	5.5	8	3	8.5	T111 1000	•	T113 1000
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T111 1200	•	T113 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T111 1400	•	T113 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T111 1600	•	T113 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T111 1800	•	T113 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T111 2000	•	T113 2000
2200	M 22	x 2.5	140	34	-	18.0	14.5	17	4	19.5	T111 2200	•	T113 2200
2400	M 24	x 3	160	38	-	18.0	14.5	17	4	21.0	T111 2400	•	T113 2400
2700	M 27	x 3	160	38	-	20.0	16.0	19	4	24.0	T111 2700	•	T113 2700
3000	M 30	x 3.5	180	45	-	22.0	18.0	21	4	26.5	T111 3000	•	T113 3000

ISO	P												M		K					N										S										H				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
T110	●	●	○	○		●	○					○		●	●	○																												
T359	●	●	○	○		●	○					○		●	●	○																												
T112	●	●	○	○		●	○		○			○	○	●	●	○						○	○	○	○	○	○	○			●	○	○											


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools


- PM-HSSE V3 offers superior performance
- Use in stainless steels and high strength steels
- Suitable for materials up to 850N/mm²
- Through holes
- Depths up to 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T114	T116	T680	T118
D0402	D0408	D0408	D0408
PM-HSSE V3	PM-HSSE V3	PM-HSSE V3	PM-HSSE V3
Blu	TICN	TICN	TICN
VA PM	VA PM	VA PM	VA PM
Special Relief	Special Relief	Special Relief	Internal Coolant
Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
6HX	6HX	6GX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0160	M 1.6	x 0.35	40	8	-	2.5	2.1	5	3	1.25	•	T116 0160	•	•
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	T114 0200	T116 0200	T680 0200	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	T114 0250	T116 0250	T680 0250	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T114 0300	T116 0300	T680 0300	•
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	•	T116 0350	T680 0350	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T114 0400	T116 0400	T680 0400	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T114 0500	T116 0500	T680 0500	T118 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T114 0600	T116 0600	T680 0600	T118 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T114 0800	T116 0800	T680 0800	T118 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T114 1000	T116 1000	T680 1000	T118 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
											T115	T117	T681	T119
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T115 1200	T117 1200	T681 1200	T119 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T115 1400	T117 1400	T681 1400	T119 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T115 1600	T117 1600	T681 1600	T119 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T115 1800	T117 1800	T681 1800	T119 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T115 2000	T117 2000	T681 2000	T119 2000
2200	M 22*	x 2.5	140	34	-	18.0	14.5	17	4	19.5	•	•	T681 2200	•
2400	M 24*	x 3	160	38	-	18.0	14.5	17	4	21.0	•	•	T681 2400	•
2700	M 27*	x 3	160	38	-	20.0	16.0	19	4	24.0	•	•	•	•
3000	M 30*	x 3.5	180	45	-	22.0	18.0	21	4	26.5	•	•	•	•

ISO	P													M			K						N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T114	●	●	●	○	○		●	○		○		○	○	●	●	○								○	○	○	○	○	○		○			●	●	●													
T116	●	●	●	○	○		●	○		○		○	○	●	●	○								○	○	○	○	○	○		○			●	●	●													
T680	●	●	○	○		●	○		○		○	○	○	●	●	○								○	○	○	○	○	○		○			●	●	●													
T118	●	●	○	○		●	○		○		○	○	○	●	●	○								○	○	○	○	○	○		○			●	●	●													


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


* HSSE >20mm • Available on request as special manufacture. Subject to lead time.

suttontools

- Suitable for synchronous tapping in deep holes
- PM-HSSE V3 offers superior performance
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes
- Depths up to 3,5 x d₁



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	2	1.6	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	2	1.75	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	2	1.9	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2	2.05	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	2	2.15	•	•
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	3	2.5	T650 0300	T120 0300
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	3	2.9	•	•
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	3	3.3	T650 0400	T120 0400
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	3	4.2	T650 0500	T120 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8	3	5.0	T650 0600	T120 0600
0800	M 8	x 1.25	90	12.5	35	8.0	6.2	9	3	6.8	T650 0800	T120 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	3	8.5	T650 1000	T120 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0600	M 6	x 1	80	10	-	4.5	3.4	6	3	5.0	•	•
0800	M 8	x 1.25	90	12.5	-	6.0	4.9	8	3	6.8	•	•
1000	M 10	x 1.5	100	15	-	7.0	5.5	8	3	8.5	•	•
1200	M 12	x 1.75	110	17.5	-	9.0	7.0	10	3	10.2	T651 1200	T121 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	3	12.0	T651 1400	T121 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	4	14.0	T651 1600	T121 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	•	T121 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T651 2000	T121 2000


ISO	P													M			K						N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T650	●	●	○	○		●	○			○		○		●	●	●							○	○	○	○	○	○		○																			
T120	●	●	○	○		●	○			○		●	○	●	●	●							○	○	○	○	○	○		○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

- Suitable for harder materials up to 42 HRC
- Through holes
- Depths up to 3 x d₁

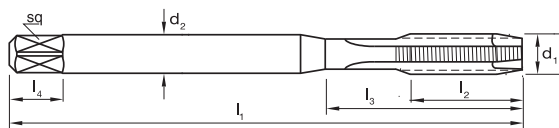


Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance



T134	T140	T142
D0402	D0410	D0410
PM-HSSE V3	PM-HSSE V3	PM-HSSE V3
Blu	TIAIN	TIAIN
NH	NH	NH
IK		
Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
ISO 2 / 6H	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T134 0300	T140 0300	•
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	•	•	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T134 0400	T140 0400	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T134 0500	T140 0500	•
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T134 0600	T140 0600	T142 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T134 0800	T140 0800	T142 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T134 1000	T140 1000	T142 1000

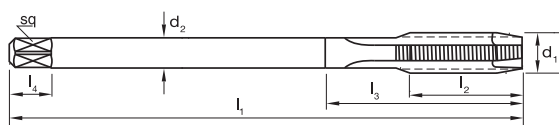

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
											T135	T141	T143
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T135 1200	T141 1200	T143 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T135 1400	T141 1400	T143 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T135 1600	T141 1600	T143 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T135 1800	T141 1800	T143 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T135 2000	T141 2000	T143 2000
2200	M 22	x 2.5	140	34	-	18.0	14.5	17	4	19.5	•	•	•
2400	M 24	x 3	160	38	-	18.0	14.5	17	4	21.0	•	•	•
2700	M 27	x 3	160	38	-	20.0	16.0	19	4	24.0	•	•	•
3000	M 30	x 3.5	180	45	-	22.0	18.0	21	4	26.5	•	•	•


ISO	P													M			K						N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T134			●	●	○		●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																									○			
T140			●	●	●		●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	○	○		●	○	○																	○		
T142			●	●	●		●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	○	○		●	○	○																	○		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

- Suitable for harder materials up to 45 HRC
- Through holes
- Depths up to 3 x d₁



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T144 0300	T146 0300	•
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	•	•	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T144 0400	T146 0400	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T144 0500	T146 0500	•
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T144 0600	T146 0600	T148 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T144 0800	T146 0800	T148 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T144 1000	T146 1000	T148 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T145 1200	T147 1200	T149 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T145 1400	T147 1400	T149 1400
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T145 1600	T147 1600	T149 1600
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T145 1800	T147 1800	T149 1800
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T145 2000	T147 2000	T149 2000
2200	M 22	x 2.5	140	34	-	18.0	14.5	17	4	19.5	•	•	•
2400	M 24	x 3	160	38	-	18.0	14.5	17	4	21.0	•	•	•
2700	M 27	x 3	160	38	-	20.0	16.0	19	4	24.0	•	•	•
3000	M 30	x 3.5	180	45	-	22.0	18.0	21	4	26.5	•	•	•

ISO	P												M		K						N										S										H					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
T144					●			●	●		●	●	●		○	○	○	○	○	○							○									○	○	○	○	○	○		○			
T146					●			●	●		●	●	●		○	○	○	○	○	○						○	●									○	○	○	○	○	○		○			
T148					●			●	●		●	●	●		○	○	○	○	○	○						○	○	●								○	○	○	○	○	○		○			


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time.

suttontools

- 

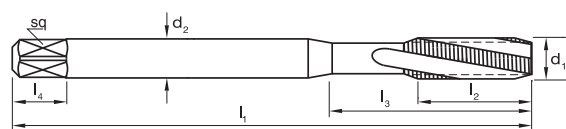

Limit & Nut tolerance											ISO 27 01	
Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	T183 0200	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	T183 0250	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3	2.5	T183 0300	•
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3	2.9	T183 0350	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3	3.3	T183 0400	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3	4.2	T183 0500	•
0600	M 6	x 1	80	19	30	6.0	4.9	8	3	5.0	T183 0600	•
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3	6.8	T183 0800	•
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3	8.5	T183 1000	•

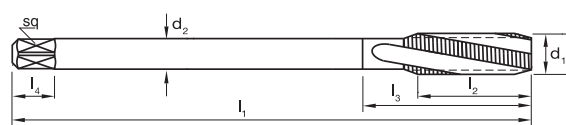

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
											T184	T186
1200	M 12	x 1.75	110	28	-	9.0	7.0	10	3	10.2	T184 1200	•
1400	M 14	x 2	110	30	-	11.0	9.0	12	3	12.0	T184 1400	•
1600	M 16	x 2	110	32	-	12.0	9.0	12	4	14.0	T184 1600	•
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	4	15.5	T184 1800	•
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4	17.5	T184 2000	•
2200	M 22	x 2.5	140	34	-	18.0	14.5	17	4	19.5	•	•
2400	M 24	x 3	160	38	-	18.0	14.5	17	4	21.0	•	•
2700	M 27	x 3	160	38	-	20.0	16.0	19	4	24.0	•	•
3000	M 30	x 3.5	180	45	-	22.0	18.0	21	4	26.5	•	•

[illegible]

● Optimal ○ Effective

- Available on request as special manufacture. Subject to lead time.




	T183	T185
Catalogue Code	D0402	D0406
Discount Group	D0402	D0406
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	N	N
Geometry	R15	R15
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H



DIN Taps Metric, Spiral Flute, R40 N - 6G, 4H, LH

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to 2.5 x d₁

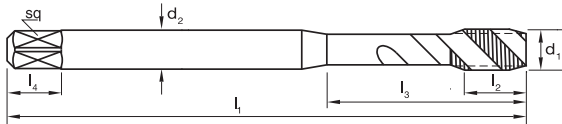

Catalogue Code

Discount Group

Material

Surface Finish

Sutton Designation


Geometry

Chamfer

Limit & Nut Tolerance

T191	T193	T195
D0402	D0402	D0402
HSSE	HSSE	HSSE
BrT	BrT	BrT
N	N	N
R40 - 6G	R40 - 4H	L40
Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P
ISO 3 / 6G	ISO 1 / 4H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	2	1.6	T191 0200	T193 0200	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	2	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	2	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2	2.05	T191 0250	T193 0250	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	2	2.15	•	•	•
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	3	2.5	T191 0300	T193 0300	T195 0300
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	3	2.9	•	•	•
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	3	3.3	T191 0400	T193 0400	T195 0400
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	3	4.2	T191 0500	T193 0500	T195 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8	3	5.0	T191 0600	T193 0600	T195 0600
0800	M 8	x 1.25	90	13	35	8.0	6.2	9	3	6.8	T191 0800	T193 0800	T195 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	3	8.5	T191 1000	T193 1000	T195 1000

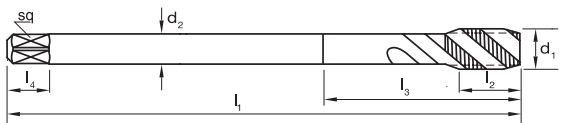

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0600	M 6	x 1	80	10	-	4.5	3.4	6	3	5.0	•	•	•
0800	M 8	x 1.25	90	13	-	6.0	4.9	8	3	6.8	•	•	•
1000	M 10	x 1.5	100	15	-	7.0	5.5	8	3	8.5	•	•	•
1200	M 12	x 1.75	110	18	-	9.0	7.0	10	3	10.2	T192 1200	•	T196 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	3	12.0	T192 1400	•	T196 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	3	14.0	T192 1600	•	T196 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	T192 1800	•	T196 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T192 2000	•	T196 2000

ISO	P													M		K				N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T191	●	●	○	○		●	○			○							○		○			○	○	●	●	○	○		○	○																			
T193	●	●	○	○		●	○			○							○		○			○	○	●	●	○	○		○	○																			
T195	●	●	○	○		●	○			○							○		○			○	○	●	●	○	○		○	○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

M


suttontools

- For long reach applications
- Suitable for materials up to 1000N/mm²
- Depths up to 2.5 x d₁
- d₂ and sq in accordance to DIN376



Catalogue Code	T339
Discount Group	D0402
Material	HSSE
Surface Finish	Brt
Sutton Designation	N
Geometry	R40 - Extra Length
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0300	M 3	x 0.5	112	5		3.5	2.7	6	3	2.5	T339 0300
0400	M 4	x 0.7	126	7		4.5	3.4	6	3	3.3	T339 0400
0500	M 5	x 0.8	140	8		6.0	4.9	8	3	4.2	T339 0500
0600	M 6	x 1	160	10		6.0	4.9	8	3	5.0	T339 0600
0800	M 8	x 1.25	180	13		8.0	6.2	10	3	6.8	T339 0800



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
1000	M 10	x 1.5	200	15	100	7.0	5.5	8	3	8.5	T340 1000
1200	M 12	x 1.75	220	18	110	9.0	7.0	10	3	10.2	T340 1200
1400	M 14	x 2	220	20	110	11.0	9.0	12	3	12.0	T340 1400
1600	M 16	x 2	220	20	110	12.0	9.0	12	3	14.0	T340 1600
2000	M 20	x 2.5	280	34	110	16.0	12.0	15	4	17.5	T340 2000
2400	M 24	x 3	320	38	120	18.0	14.5	17	4	21.0	•



ISO	P													M	K					N										S										H																																											
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41																																		
T339	●	●	○	○		●	○			○							○		○		○	○	●	●	○	○		○	○																																																						
P	Steel			M			Stainless Steel			K			Cast Iron			N			Non-Ferrous Metals			S			Titanium & Super Alloys			H			Hard Materials																																																				
																																										●	Optimal		○	Effective																																					

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools


BLACKMAGIC

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

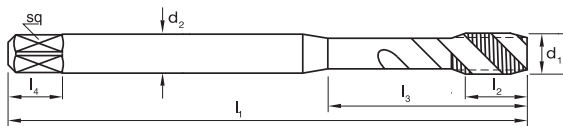

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0200	M 2 x 0.4		45	8	-	2.8	2.1	5	3	1.6	•
0220	M 2.2 x 0.45		45	9	-	2.8	2.1	5	3	1.75	•
0230	M 2.3 x 0.4		45	9	-	2.8	2.1	5	3	1.9	•
0250	M 2.5 x 0.45		50	9	-	2.8	2.1	5	3	2.05	•
0260	M 2.6 x 0.45		50	9	-	2.8	2.1	5	3	2.15	•
0300	M 3 x 0.5		56	5	18	3.5	2.7	6	3	2.5	T684 0300
0350	M 3.5 x 0.6		56	6	20	4.0	3.0	6	3	2.9	•
0400	M 4 x 0.7		63	7	21	4.5	3.4	6	3	3.3	T684 0400
0500	M 5 x 0.8		70	8	25	6.0	4.9	8	3	4.2	T684 0500
0600	M 6 x 1		80	10	30	6.0	4.9	8	3	5.0	T684 0600
0800	M 8 x 1.25		90	12.5	35	8.0	6.2	9	3	6.8	T684 0800
1000	M 10 x 1.5		100	15	39	10.0	8.0	11	3	8.5	T684 1000

Catalogue Code	T684
Discount Group	D0410
Material	PM-HSSE V3
Surface Finish	HARDLUBE
Sutton Designation	UNI
Geometry	R50
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	6HX

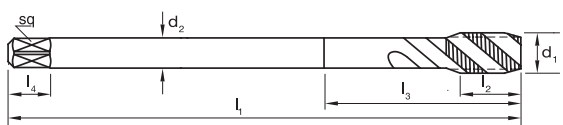

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
1200	M 12 x 1.75		110	17.5	-	9.0	7.0	10	3	10.2	T685 1200
1400	M 14 x 2		110	20	-	11.0	9.0	12	3	12.0	T685 1400
1600	M 16 x 2		110	20	-	12.0	9.0	12	4	14.0	T685 1600
1800	M 18 x 2.5		125	25	-	14.0	11.0	14	4	15.5	T685 1800
2000	M 20 x 2.5		140	25	-	16.0	12.0	15	4	17.5	T685 2000
2200	M 22 x 2.5		140	25	-	18.0	14.5	17	4	19.5	•
2400	M 24 x 3		160	30	-	18.0	14.5	17	4	21.0	•
2700	M 27 x 3		160	30	-	20.0	16.0	19	4	24.0	•
3000	M 30 x 3.5		180	35	-	22.0	18.0	21	4	26.5	•


ISO	P													M	K								N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T684	●	●	●	○		●	○			●		●	○	●	●	○		○	○	○	○	○	○	●	●	●	○	○	○																				
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																		●	Optimal		○	Effective						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

suttontools

- 



Size Ref.	Limit & Tolerance										ISO 27-01		ISO 27-01		ISO 27-01		ISO 27-01	
	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #				
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	2	1.6	T235 0200	•	•	•				
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	2	1.75	•	•	•	•				
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	2	1.9	•	•	•	•				
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2	2.05	T235 0250	•	•	•				
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	2	2.15	•	•	•	•				
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	3	2.5	T235 0300	T237 0300	T241 0300	T239 0300				
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	3	2.9	T235 0350	•	T241 0350	•				
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	3	3.3	T235 0400	T237 0400	T241 0400	T239 0400				
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	3	4.2	T235 0500	T237 0500	T241 0500	T239 0500				
0600	M 6	x 1	80	10	30	6.0	4.9	8	3	5.0	T235 0600	T237 0600	T241 0600	T239 0600				
0800	M 8	x 1.25	90	12.5	35	8.0	6.2	9	3	6.8	T235 0800	T237 0800	T241 0800	T239 0800				
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	3	8.5	T235 1000	T237 1000	T241 1000	T239 1000				



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
											T236	T238	T242	T240
0600	M 6	x 1	80	10	-	4.5	3.4	6	3	5.0	T236 0600	•	T242 0600	T240 0600
0800	M 8	x 1.25	90	12.5	-	6.0	4.9	8	3	6.8	T236 0800	•	T242 0800	•
1000	M 10	x 1.5	100	15	-	7.0	5.5	8	3	8.5	T236 1000	•	T242 1000	•
1200	M 12	x 1.75	110	17.5	-	9.0	7.0	10	3	10.2	T236 1200	T238 1200	T242 1200	T240 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	3	12.0	T236 1400	T238 1400	T242 1400	T240 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	4	14.0	T236 1600	T238 1600	T242 1600	T240 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	T236 1800	T238 1800	T242 1800	T240 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T236 2000	T238 2000	T242 2000	T240 2000



[illegible]

● Optimal ○ Effective

DIN Taps Metric, Spiral Flute, R45 VA DH

suttontools

- Suitable for controlled tapping in deep holes
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes
- Depths up to 3 x d₁

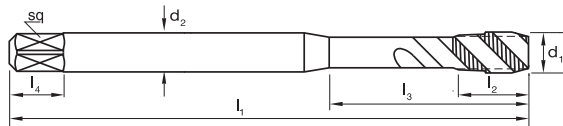

Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T197

D0402

HSSE

Blu

VA DH

R45 Back Chamf.

Form C / 2.5 x P

ISO 2 / 6H

T198

D0402

HSSE

Blu

VA DH

R45 Back Chamf.

Form C / 2.5 x P

ISO 3 / 6G

T201

D0408

HSSE

TICN



VA DH

R45 Back Chamf.

Form C / 2.5 x P

ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	•	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	•	•
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5	3	2.15	•	•	•
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	3	2.5	T197 0300	•	T201 0300
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	3	2.9	•	•	•
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	3	3.3	T197 0400	•	T201 0400
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	3	4.2	T197 0500	•	T201 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8	3	5.0	T197 0600	•	T201 0600
0800	M 8	x 1.25	90	12.5	35	8.0	6.2	9	3	6.8	T197 0800	•	T201 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	3	8.5	T197 1000	•	T201 1000

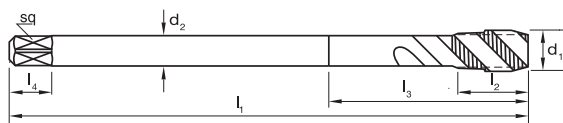

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0600	M 6	x 1	80	10	-	4.5	3.4	6	3	5.0	T199 0600	•	T202 0600
0800	M 8	x 1.25	90	12.5	-	6.0	4.9	8	3	6.8	T199 0800	•	T202 0800
1000	M 10	x 1.5	100	15	-	7.0	5.5	8	3	8.5	T199 1000	•	T202 1000
1200	M 12	x 1.75	110	17.5	-	9.0	7.0	10	3	10.2	T199 1200	•	T202 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	3	12.0	T199 1400	•	T202 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	4	14.0	T199 1600	•	T202 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	T199 1800	•	T202 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T199 2000	•	T202 2000
2200	M 22	x 2.5	140	25	-	18.0	14.5	17	4	19.5	T199 2200	•	T202 2200
2400	M 24	x 3	160	30	-	18.0	14.5	17	4	21.0	T199 2400	•	T202 2400
2700	M 27	x 3	160	30	-	20.0	16.0	19	4	24.0	T199 2700	•	T202 2700
3000	M 30	x 3.5	180	35	-	22.0	18.0	21	4	26.5	T199 3000	•	T202 3000
3600	M 36	x 4	200	40	-	28.0	22.0	25	4	32.0	T199 3600	•	T202 3600
4200	M 42	x 4.5	200	45	-	32.0	24.0	27	4	37.5	T199 4200	•	•

ISO	P												M			K					N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T197	●	●	○			○	○					○		●	●	○																																			
T198	●	●	○			○	○							●	●	○																																			
T201	●	●	○	○		○	○	○		○		●		●	●	●								○	○	○	○		○		○		○		○																

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials



• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps Metric, Spiral Flute, R50 VA PM

suttontools


- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Deep blind holes
- Depths up to 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T203	T205	T678	T676
D0402	D0408	D0408	D0408
PM-HSSE V3	PM-HSSE V3	PM-HSSE V3	PM-HSSE V3
Blu	TICN	TICN	TICN
VA PM	VA PM	VA PM	VA PM
R50	R50	R50	R50
Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P	Form E / 1.5 x P
6HX	6HX	6GX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0160	M 1.6	x 0.35	40	8	-	2.5	2.1	5	3	1.25	•	T205 0160	•	•
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	3	1.6	•	T205 0200	T678 0200	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	3	1.75	•	•	•	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	3	1.9	•	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	3	2.05	•	T205 0250	T678 0250	•
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	3	2.5	T203 0300	T205 0300	T678 0300	T676 0300
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	3	2.9	•	T205 0350	T678 0350	T676 0350
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	3	3.3	T203 0400	T205 0400	T678 0400	T676 0400
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	3	4.2	T203 0500	T205 0500	T678 0500	T676 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8	3	5.0	T203 0600	T205 0600	T678 0600	T676 0600
0800	M 8	x 1.25	90	12.5	35	8.0	6.2	9	3	6.8	T203 0800	T205 0800	T678 0800	T676 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	3	8.5	T203 1000	T205 1000	T678 1000	T676 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
											T204	T206	T679	T677
1200	M 12	x 1.75	110	17.5	-	9.0	7.0	10	3	10.2	T204 1200	T206 1200	T679 1200	T677 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	3	12.0	T204 1400	T206 1400	T679 1400	T677 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	4	14.0	T204 1600	T206 1600	T679 1600	T677 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	T204 1800	T206 1800	T679 1800	T677 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T204 2000	T206 2000	T679 2000	T677 2000
2200	M 22*	x 2.5	140	25	-	18.0	14.5	17	4	19.5	T204 2200	T206 2200	T679 2200	T677 2200
2400	M 24*	x 3	160	30	-	18.0	14.5	17	4	21.0	T204 2400	T206 2400	T679 2400	T677 2400
2700	M 27*	x 3	160	30	-	20.0	16.0	19	4	24.0	T204 2700	T206 2700	•	•
3000	M 30*	x 3.5	180	35	-	22.0	18.0	21	4	26.5	T204 3000	T206 3000	•	•

ISO	P													M			K						N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T203	●	●	●	●		●	○	○				○		●	●	○								○	○	○	○		○				●			○																
T205	●	●	●	○		○	○				○		○	●	●	○								○	○	○	○		○		○		●			○																
T678	●	●	○	○		○	○							○	○	○							○	○	○	○		○					●																			
T676	●	●	○	○		○	○	○			○	●		●	●	●							○	○	○	○		○		○			●			○																

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

* HSSE >20mm • Available on request as special manufacture. Subject to lead time.

M


suttontools

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Deep blind holes
- Depths up to 3 x d₁

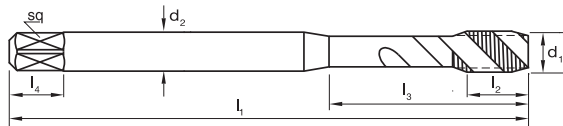

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0160	M 1.6	x 0.35	40	8	-	2.5	2.1	5	4	1.25	•
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	4	1.6	•
0220	M 2.2	x 0.45	45	9	-	2.8	2.1	5	4	1.75	•
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5	4	1.9	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	4	2.05	•
0300	M 3	x 0.5	56	5	18	3.5	2.7	6	4	2.5	•
0350	M 3.5	x 0.6	56	6	20	4.0	3.0	6	4	2.9	•
0400	M 4	x 0.7	63	7	21	4.5	3.4	6	4	3.3	•
0500	M 5	x 0.8	70	8	25	6.0	4.9	8	4	4.2	T207 0500
0600	M 6	x 1	80	10	30	6.0	4.9	8	4	5.0	T207 0600
0800	M 8	x 1.25	90	12.5	35	8.0	6.2	9	4	6.8	T207 0800
1000	M 10	x 1.5	100	15	39	10.0	8.0	11	4	8.5	T207 1000

Catalogue Code	T207
Discount Group	D0408
Material	PM-HSSE V3
Surface Finish	TICN
Sutton Designation	VA PM
Geometry	R50 IK
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	6HX

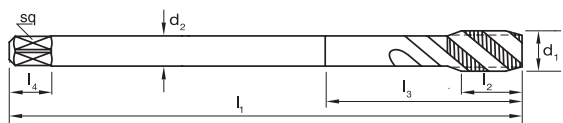

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
T208											
1200	M 12	x 1.75	110	17.5	-	9.0	7.0	10	4	10.2	T208 1200
1400	M 14	x 2	110	20	-	11.0	9.0	12	4	12.0	T208 1400
1600	M 16	x 2	110	20	-	12.0	9.0	12	4	14.0	T208 1600
1800	M 18	x 2.5	125	25	-	14.0	11.0	14	4	15.5	T208 1800
2000	M 20	x 2.5	140	25	-	16.0	12.0	15	4	17.5	T208 2000
2200	M 22*	x 2.5	140	25	-	18.0	14.5	17	4	19.5	•
2400	M 24*	x 3	160	30	-	18.0	14.5	17	4	21.0	•
2700	M 27*	x 3	160	30	-	20.0	16.0	19	4	24.0	•
3000	M 30*	x 3.5	180	35	-	22.0	18.0	21	4	26.5	•

ISO	P													M	K										N										S										H													
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41									
T207	●	●	●	○		●	○			○		●		●	●	●								○	○	○	○		○				●		○																							
P	Steel		M Stainless Steel											K Cast Iron										N Non-Ferrous Metals										S Titanium & Super Alloys										H Hard Materials					● Optimal ○ Effective									


• Optimal ○ Effective



DIN Taps Metric, Spiral Flute, R40 NH


suttontools

- Suitable for harder short chipping materials up to 42 HRC
- Blind holes
- Depths up to 2.5 x d₁



Catalogue Code	T221	T227	T229
Discount Group	D0402	D0410	D0410
Material	PM-HSSE V3	PM-HSSE V3	PM-HSSE V3
Surface Finish	Blu	TiAIN	TiAIN
Sutton Designation	NH	NH	NH
Geometry	R40	R40	R40 IK
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0200	M 2 x 0.4	45	8	-	2.8	2.1	5	3	1.6		•	•	•
0220	M 2.2 x 0.45	45	9	-	2.8	2.1	5	3	1.75		•	•	•
0230	M 2.3 x 0.4	45	9	-	2.8	2.1	5	3	1.9		•	•	•
0250	M 2.5 x 0.45	50	9	-	2.8	2.1	5	3	2.05		•	•	•
0260	M 2.6 x 0.45	50	9	-	2.8	2.1	5	3	2.15		•	•	•
0300	M 3 x 0.5	56	5	18	3.5	2.7	6	3	2.5		T221 0300	T227 0300	•
0350	M 3.5 x 0.6	56	6	20	4.0	3.0	6	3	2.9		•	•	•
0400	M 4 x 0.7	63	7	21	4.5	3.4	6	3	3.3		T221 0400	T227 0400	•
0500	M 5 x 0.8	70	8	25	6.0	4.9	8	3	4.2		T221 0500	T227 0500	T229 0500
0600	M 6 x 1	80	10	30	6.0	4.9	8	3	5.0		T221 0600	T227 0600	T229 0600
0800	M 8 x 1.25	90	12.5	35	8.0	6.2	9	3	6.8		T221 0800	T227 0800	T229 0800
1000	M 10 x 1.5	100	15	39	10.0	8.0	11	3	8.5		T221 1000	T227 1000	T229 1000



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
											T222	T228	T230
1200	M 12 x 1.75	110	17.5	-	9.0	7.0	10	3	10.2		T222 1200	T228 1200	T230 1200
1400	M 14 x 2	110	20	-	11.0	9.0	12	3	12.0		T222 1400	T228 1400	T230 1400
1600	M 16 x 2	110	20	-	12.0	9.0	12	3	14.0		T222 1600	T228 1600	T230 1600
1800	M 18 x 2.5	125	25	-	14.0	11.0	14	4	15.5		T222 1800	T228 1800	T230 1800
2000	M 20 x 2.5	140	25	-	16.0	12.0	15	4	17.5		T222 2000	T228 2000	T230 2000
2200	M 22 x 2.5	140	25	-	18.0	14.5	17	4	19.5		•	•	•
2400	M 24 x 3	160	30	-	18.0	14.5	17	4	21.0		•	•	•
2700	M 27 x 3	160	30	-	20.0	16.0	19	4	24.0		•	•	•
3000	M 30 x 3.5	180	35	-	22.0	18.0	21	4	26.5		•	•	•

ISO	P													M			K						N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T221			●	●	○		●	○		○		○		○		○	○	○	○	○	○	○																									○		
T227			●	●	●		●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○															○		
T229			●	●	●		●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○															○		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time.

M

DIN Taps Metric, Spiral Flute, R15 Ti

suttontools

- For Titanium based alloys
- Unique cutting geometry for highly efficient swarf ejection
- Optimised microfinish for optimal process reliability and excellent thread quality
- Blind holes up to approx. 1.5 x d₁



Catalogue Code	T215	T788
Discount Group	D0408	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	TICN	TICN
Sutton Designation	Ti	Ti
Geometry	R15	R15
Chamfer	Form C / 3 x P	Form C / 3 x P
Limit & Nut Tolerance	6HX	MJ-4HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
DIN 371												
0300	M 3 x 0.5		56	6	18	3.5	2.7	6	3	2.5	T215 0300	•
0400	M 4 x 0.7		63	7	21	4.5	3.4	6	3	3.3	T215 0400	•
0500	M 5 x 0.8		70	8	25	6.0	4.9	8	3	4.2	T215 0500	•
0600	M 6 x 1		80	10	30	6.0	4.9	8	3	5.0	T215 0600	•
0800	M 8 x 1.25		90	12.5	35	8.0	6.2	9	3	6.8	T215 0800	•
1000	M 10 x 1.5		100	15	39	10.0	8.0	11	3	8.5	T215 1000	•
DIN 376												
											T216	T789
1200	M 12 x 1.75		110	17.5	-	9.0	7.0	10	3	10.2	T216 1200	•
1400	M 14 x 2		110	20	-	11.0	9.0	12	3	12.0	T216 1400	•
1600	M 16 x 2		110	20	-	12.0	9.0	12	3	14.0	T216 1600	•
1800	M 18 x 2.5		125	25	-	14.0	11.0	14	4	15.5	T216 1800	•
2000	M 20 x 2.5		140	25	-	16.0	12.0	15	4	17.5	T216 2000	•

*Other sizes available to order on request

Special Taps Service

Sutton Tools understands the difficulty of manufacturing super alloys.

Our Special Tool Service enables us to meet your requirements and deliver superior performance in Titanium & high temperature alloys.

With our state of the art CNC grinding equipment almost any profile can be achieved. Feel free to discuss these with our Tech team.

All Thread Forms

M, MJ, UNJC, UNJF, Screw Thread Insert (STI)

Sizes

M2-M30, #2-1"

ISO	P												M	K					N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T215													○			○																																	

P

Steel

M

Stainless Steel

K

Cast Iron

N

Non-Ferrous Metals

S

Titanium & Super Alloys

H

Hard Materials

●

Optimal

○

Effective

P Steel **M** Stainless Steel **K** Cast Iron **N** Non-Ferrous Metals **S** Titanium & Super Alloys **H** Hard Materials

● Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time & MOQ.

M/MJ

DIN Taps Metric, Spiral Flute, R10 Ni

suttontools

- For Nickel alloys / age-hardened super alloys >1150M/mm²
- Reinforced cutting geometry
- Blind or through holes
- Depths up to approx. 1.5 x d₁

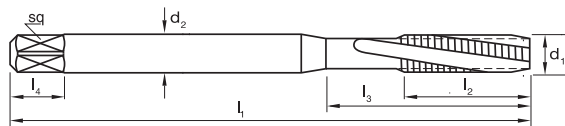

Catalogue Code	T217	T792
Discount Group	D0408	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	TICN	TICN
Sutton Designation	Ni	Ni
Geometry	R10	R10
Chamfer	Form C / 3 x P	Form C / 3 x P
Limit & Nut Tolerance	6HX	MJ-4HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø [†]	Item #	Item #
DIN 371												
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	3		T217 0300	•
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3		T217 0400	•
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	3		T217 0500	•
0600	M 6	x 1	80	19	30	6.0	4.9	8	3		T217 0600	•
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	3		T217 0800	•
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	3		T217 1000	•
DIN 376												
1200	M 12	x 1.75	110	29	-	9.0	7.0	10	3		T218 T218 1200	T793 •
1400	M 14	x 2	110	30	-	11.0	9.0	12	3		T218 1400	•
1600	M 16	x 2	110	32	-	12.0	9.0	12	3		T218 1600	•
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	4		T218 2000	•

*Other sizes available to order on request

Special Taps Service

Sutton Tools understands the difficulty of manufacturing super alloys.

Our Special Tool Service enables us to meet your requirements and deliver superior performance in Titanium & high temperature alloys.

With our state of the art CNC grinding equipment almost any profile can be achieved. Feel free to discuss these with our Tech team.

All Thread Forms

M, MJ, UNJC, UNJF, Screw Thread Insert (STI)

Sizes

M2-M30, #2-1"

[†] Sutton Tools recommends that in difficult to machine materials the tapping drill holes should be drilled as large as practical whilst maintaining sufficient strength in the produced thread. This will need to be determined for each individual application. By decreasing the % thread engagement the tapping torque required is reduced and the tool life can be increased.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T217																																																	
P	Steel	M	Stainless Steel	K	Cast Iron	N	Non-Ferrous Metals	S	Titanium & Super Alloys	H	Hard Materials																																						
																																										● Optimal	○ Effective						

● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time & MOQ.

M/MJ

Technical Information Fluteless Taps

Fluteless taps do not cut threads in the same manner as conventional taps – but actually **FORM** and **FLOW** the threads with an absence of chips. Used under suitable conditions, these taps produce threads with a high degree of finish not possible with ordinary taps. Ductile materials are most appropriate for forming of threads and must have a minimum 10% elongation.

Suitable for wide range materials

- Low carbon steels
- Lead steels
- Austenitic stainless steels
- Alloy steels; typically up to 1200 N/mm², (36 Rc) with a minimum 10% elongation
- Aluminium die castings alloys (low silicon, 10% max;)
- Wrought aluminium alloys (Ductile)
- Zinc die casting alloys
- Copper and copper alloys

Benefits of thread forming

Figure 1. No chips produced

Figure 2. Higher tensile strength threads produced due to grain structure following the thread form

Figure 3. For use in through and blind holes applications
Higher speeds and tool life
Reduced possibility of breakage due to no cutting edges and robust tool construction

Figure 1.

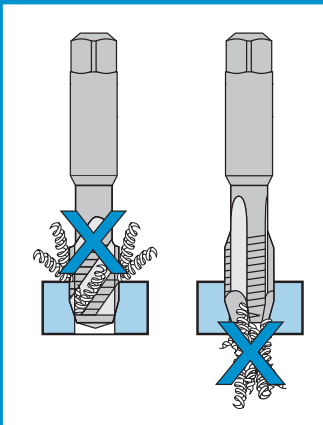


Figure 2.


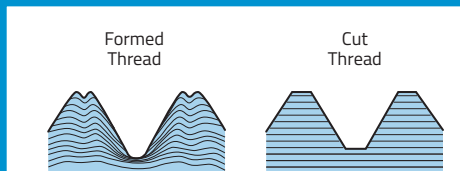


Figure 3.



Whats New?

Figure 4. New polygon profile

Figure 5. New radiused blend on polygon profile

Figure 6. Thread profile with radius crest

Figure 7. Polished tool surface finish

Figure 4.




Figure 5.




Figure 6.





Figure 7.



Percentage of thread required

Because the thread produced by a fluteless tap is substantially stronger than a conventional thread, greater tool life and efficiency may be obtained when forming up to 65% thread.

Threads may be formed up to 80% of depth, but tool life will be reduced and work clamping pressure necessarily increased. Greater tapping speeds allow the metal to flow far more readily, so 60 feet per minute minimum may be used as a guide, but this could increase with the type of material being tapped. A depth of 65% is recommended for the ductile materials mentioned, but this percentage will be reduced for less ductile materials to maintain all-round efficiency.

Tapping drill formula for fluteless taps

Refer Tapping Drill Size Chart for recommended sizes (Suitable for Unified, Whitworth and Metric sizes only). The formula to calculate the theoretical hole size for a required percentage of thread is:

Formula	Example
Drill size = nominal thread dia. (in mm) – (0,007 x % of thread x pitch)	Drill size for 65% of thread in a M6 x 1,0 threaded hole would be: Drill size = 6 – (0,007 x 65 x 1,0 (pitch)) = 5.54mm (Use 5,50mm drill (Stockable drill) = 71%)

It is to be noted that the drill size for fluteless tapping is always larger than the P.D. of the thread. A drill size equal to the P.D. of the thread would produce 100% of thread, but this is NOT recommended.

As the additional driving torque is only up to 50% increase, any conventional driving equipment using the square as a drive is suitable for fluteless tapping.

Lubrication


In general it is best to use a good cutting oil or lubricant rather than a coolant for fluteless tapping. Sulphur base and mineral oils, along with most friction reducing lubricants recommended for use in cold extrusion or metal drawing, have proven best for this work. Make sure lubricant is clean, free from chips swarf and filings in suspension, which produce a poor finish and jamming, sometimes breakage – extra filtration may be required.

Countersinking

Because the fluteless tap displaces metal, some metal will be displaced above the mouth of the hole during tapping, countersink or chamfer the hole prior to tapping will reduce the extrusion within the countersink and not interfere with the mating part.

suttontools

-
- Technical specifications for the screw: DIN 2174, two views of the screw head, and a 60° thread angle.




Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0100	M 1	x 0.25	40	6	-	2.5	2.1	3		0.9	T309 0100	T313 0100	T311 0100	T315 0100
0120	M 1.2	x 0.25	40	6	-	2.5	2.1	3		1.1	T309 0120	T313 0120	T311 0120	T315 0120
0140	M 1.4	x 0.3	40	6	-	2.5	2.1	3		1.28	T309 0140	T313 0140	T311 0140	T315 0140
0160	M 1.6	x 0.35	40	7	-	2.5	2.1	3		1.45	T309 0160	T313 0160	T311 0160	T315 0160
0170	M 1.7	x 0.35	40	8	-	2.5	2.1	3		1.55	T309 0170	T313 0170	T311 0170	T315 0170
0180	M 1.8	x 0.35	40	8	-	2.5	2.1	3		1.65	T309 0180	T313 0180	T311 0180	T315 0180
0200	M 2	x 0.4	45	8	-	2.8	2.1	5		1.8	T309 0200	T313 0200	T311 0200	T315 0200
0220	M 2.2	x 0.45	45	8	-	2.8	2.1	5		2.0	T309 0220	T313 0220	T311 0220	T315 0220
0230	M 2.3	x 0.4	45	9	-	2.8	2.1	5		2.1	T309 0230	T313 0230	T311 0230	T315 0230
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5		2.3	T309 0250	T313 0250	T311 0250	T315 0250
0260	M 2.6	x 0.45	50	9	-	2.8	2.1	5		2.4	T309 0260	T313 0260	T311 0260	T315 0260
0300	M 3	x 0.5	56	11	18	3.5	2.7	6		2.8	T309 0300	T313 0300	T311 0300	T315 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6		3.2	T309 0350	T313 0350	T311 0350	T315 0350
0400	M 4	x 0.7	63	13	21	4.5	3.4	6		3.7	T309 0400	T313 0400	T311 0400	T315 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8		4.6	T309 0500	T313 0500	T311 0500	T315 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8		5.5	T309 0600	T313 0600	T311 0600	T315 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9		7.4	T309 0800	T313 0800	T311 0800	T315 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11		9.3	T309 1000	T313 1000	T311 1000	T315 1000

[illegible]

suttontools


- Suitable for materials with >10% elongation
- Through or blind holes
- Depths up to $3 \times d_1$



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T319	T321	T323	T329
D0408	D0408	D0408	D0404
HSSE	HSSE	HSSE	HSSE
TICN	TICN	TICN	CrN
N	N	N	Cu
Multi Coolant Groove	Multi Coolant Groove	Multi Coolant Groove	Single-Coolant Groove
Form C / 2.5 x P	Form D / 4 x P	Form C / 2.5 x P	Form C / 2.5 x P
6HX	6HX	6GX	6HX

Size Ref.	d ₁	Pitch	L ₁	L ₂	L ₃	d ₂	sq	L ₄	z	drill Ø	Item #	Item #	Item #	Item #
0100*	M 1	x 0.25	40	6	-	2.5	2.1	3	0.9	0.9	T319 0100	•	•	•
0140	M 1.4	x 0.3	40	6	-	2.5	2.1	3	1.28	1.28	T319 0140	•	•	•
0160*	M 1.6	x 0.35	40	7	-	2.5	2.1	3	1.45	1.45	T319 0160	•	•	•
0200	M 2	x 0.4	45	8	-	2.8	2.1	5	1.8	1.8	T319 0200	•	•	•
0250	M 2.5	x 0.45	50	9	-	2.8	2.1	5	2.3	2.3	T319 0250	•	•	•
0300	M 3	x 0.5	56	11	18	3.5	2.7	6	2.8	2.8	T319 0300	T321 0300	T323 0300	T329 0300
0350	M 3.5	x 0.6	56	13	20	4.0	3.0	6	3.2	3.2	T319 0350	T321 0350	T323 0350	T329 0350
0400	M 4	x 0.7	63	13	21	4.5	3.4	6	3.7	3.7	T319 0400	T321 0400	T323 0400	T329 0400
0500	M 5	x 0.8	70	16	25	6.0	4.9	8	4.6	4.6	T319 0500	T321 0500	T323 0500	T329 0500
0600	M 6	x 1	80	19	30	6.0	4.9	8	5.5	5.5	T319 0600	T321 0600	T323 0600	T329 0600
0800	M 8	x 1.25	90	22	35	8.0	6.2	9	7.4	7.4	T319 0800	T321 0800	T323 0800	T329 0800
1000	M 10	x 1.5	100	24	39	10.0	8.0	11	9.3	9.3	T319 1000	T321 1000	T323 1000	T329 1000



Size Ref.	d ₁	Pitch	L ₁	L ₂	L ₃	d ₂	sq	L ₄	z	drill Ø	Item #	Item #	Item #	Item #
											T320	T322	T324	T330
0600	M 6 [†]	x 1	80	19	-	4.5	3.4	6	5.5	5.5	T320 0600	•	•	•
0800	M 8 [†]	x 1.25	90	22	-	6.0	4.9	8	7.4	7.4	T320 0800	•	•	•
1000	M 10 [†]	x 1.5	100	24	-	7.0	5.5	8	9.3	9.3	T320 1000	•	•	•
1200	M 12	x 1.75	110	29	-	9.0	7.0	10	11.2	11.2	T320 1200	T322 1200	T324 1200	T330 1200
1400	M 14	x 2	110	30	-	11.0	9.0	12	13.1	13.1	T320 1400	T322 1400	T324 1400	•
1600	M 16	x 2	110	32	-	12.0	9.0	12	15.1	15.1	T320 1600	T322 1600	T324 1600	•
1800	M 18	x 2.5	125	34	-	14.0	11.0	14	16.9	16.9	•	•	T324 1800	•
2000	M 20	x 2.5	140	34	-	16.0	12.0	15	18.9	18.9	T320 2000	•	T324 2000	•

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41												
T319																																																					
T321																																																					
T323																																																					
T329																																																					


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time. † Made to -DIN 376 standard.

suttontools

- SPM for superior performance
- Suitable for materials with restricted ductility
- Application specific geometry for harder materials (GGV)
- Through or Blind holes
- Depths up to 2 x d1



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₆	z	drill Ø	Limit & Nut Tolerance		Item #	Item #
											Ø	Ø		
0220	M 2.2	x 0.45	45	7	-	2.8	2.1	5		2.0			•	
0230	M 2.3	x 0.4	45	7	-	2.8	2.1	5		2.1			•	
0250	M 2.5	x 0.45	50	8	-	2.8	2.1	5		2.3			T331 0250	
0260	M 2.6	x 0.45	50	8	-	2.8	2.1	5		2.4			•	
0300	M 3	x 0.5	56	9	18	3.5	2.7	6		2.8			T331 0300	
0350	M 3.5	x 0.6	56	11	20	4.0	3.0	6		3.2			T331 0350	
0400	M 4	x 0.7	63	12	21	4.5	3.4	6		3.7			T331 0400	
0500	M 5	x 0.8	70	13	25	6.0	4.9	8		4.6			T331 0500	
0600	M 6	x 1	80	15	30	6.0	4.9	8		5.5			T331 0600	•
0800	M 8	x 1.25	90	18	35	8.0	6.2	9		7.4			T331 0800	•
1000	M 10	x 1.5	100	20	39	10.0	8.0	11		9.3			T331 1000	•

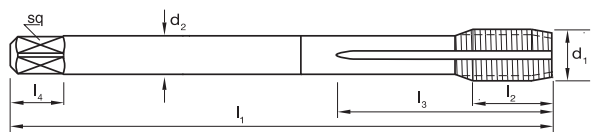


Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	
											T332	T746
1200	M 12	x 1.75	110	23	-	9.0	7.0	10		11.2	T332 1200	•
1400	M 14	x 2	110	25	-	11.0	9.0	12		13.1	T332 1400	•
1600	M 16	x 2	110	25	-	12.0	9.0	12		15.1	T332 1600	•
1800	M 18	x 2.5	125	30	-	14.0	11.0	14		16.9	•	
2000	M 20	x 2.5	140	30	-	16.0	12.0	15		18.9	•	


ISO	P													M			K					N										S										H														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41							
T331	○	○	○	●	○	○	○	○	○	●				○	○								○	○	○	○		○	○	○																										
T745	○	○	○	○	○	○	○	○	○	○				○	○								○	○	○	○		○	○	○																										
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																														●	Optimal		○	Effective	

suttontools

- VHM for high volume production
- Suitable for materials with restricted ductility & high Silicon cast Aluminium
- Through or Blind holes
- Depths up to $2 \times d_1$



Size Ref.	d_1	Pitch	l_1	l_2	l_3	d_2	sq	l_4	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	45	6	-	2.8	2.1	5	1.8			
0220	M 2.2	x 0.45	45	7	-	2.8	2.1	5	2.0			
0230	M 2.3	x 0.4	45	7	-	2.8	2.1	5	2.1			
0250	M 2.5	x 0.45	50	8	-	2.8	2.1	5	2.3			
0260	M 2.6	x 0.45	50	8	-	2.8	2.1	5	2.4			
0300	M 3	x 0.5	56	9	18	3.5	2.7	6	2.8		•	
0350	M 3.5	x 0.6	56	11	20	4.0	3.0	6	3.2		•	
0400	M 4	x 0.7	63	12	21	4.5	3.4	6	3.7		•	
0500	M 5	x 0.8	70	13	25	6.0	4.9	8	4.6		•	
0600	M 6	x 1	80	15	30	6.0	4.9	8	5.5		•	•
0800	M 8	x 1.25	90	18	35	8.0	6.2	9	7.4		•	•
1000	M 10	x 1.5	100	20	39	10.0	8.0	11	9.3		•	•

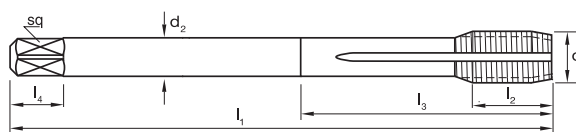

Size Ref.	d_1	Pitch	l_1	l_2	l_3	d_2	sq	l_4	z	drill Ø	Item #	Item #
											T683	T748
1200	M 12	x 1.75	110	23	-	9.0	7.0	10	11.2		•	•
1400	M 14	x 2	110	25	-	11.0	9.0	12	13.1		•	•
1600	M 16	x 2	110	25	-	12.0	9.0	12	15.1		•	•

ISO	P													M			K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T682	●	●	●	●	○	●	●	○		●				●	●								●	●	●		○	○	●																						
T747	●	●	●	●	○	●	●	○		●				●	●								●	●	●		○	○	●																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.




Catalogue Code	T682	T747
Discount Group	D0414	D0414
Material	VHM	VHM
Surface Finish	TICN	TICN
Sutton Designation	N	N
Geometry	Multi-Coolant Groove	Multi-Coolant Groove IK
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	6HX	6HX



M

suttontools

- HSSE, for use in grey cast iron (GG)
- VHM, for use in Al >10% Si & cast iron (GGG)
- Through & blind holes
- Depths up to 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T300	T301	T743	T744
D0402	D0408	D0414	D0414
HSSE	HSSE	VHM	VHM
Ni + Blu	TICN	TICN	TICN
GG	GG	GG	GG
Low Relief	Low Relief	Low Relief	IK
Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P
6HX	6HX	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
DIN 374														
0302	MF 3	x 0.35	56	8	-	2.2	-	-	4	2.65	•	•		
0403	MF 4	x 0.5	63	10	-	2.8	2.1	5	4	3.5	T300 0403	T301 0403		
0503	MF 5	x 0.5	70	12	-	3.5	2.7	6	4	4.5	T300 0503	T301 0503		
0604	MF 6	x 0.75	80	14	-	4.5	3.4	6	4	5.3	T300 0604	T301 0604		
0803	MF 8	x 0.5	80	18	-	6.0	4.9	8	4	7.5	•	•		
0804	MF 8	x 0.75	80	18	-	6.0	4.9	8	4	7.3	•	•		
0805	MF 8	x 1	90	22	-	6.0	4.9	8	4	7.0	T300 0805	T301 0805		
1004	MF 10	x 0.75	90	20	-	7.0	5.5	8	4	9.3	•	•		
1005	MF 10	x 1	90	20	-	7.0	5.5	8	4	9.0	T300 1005	T301 1005		
1006	MF 10	x 1.25	100	24	-	7.0	5.5	8	4	8.8	T300 1006	T301 1006		
1205	MF 12	x 1	100	22	-	9.0	7.0	10	4	11.0	•	•		
1206	MF 12	x 1.25	100	22	-	9.0	7.0	10	4	10.8	T300 1206	T301 1206		
1207	MF 12	x 1.5	100	22	-	9.0	7.0	10	4	10.5	T300 1207	T301 1207		
1405	MF 14	x 1	100	22	-	11.0	9.0	12	4	13.0	•	•		
1406	MF 14	x 1.25	100	22	-	11.0	9.0	12	4	12.8	T300 1406	T301 1406		
1407	MF 14	x 1.5	100	22	-	11.0	9.0	12	4	12.5	T300 1407	T301 1407		
1605	MF 16	x 1	100	22	-	12.0	9.0	12	4	15.0	•	•		
1607	MF 16	x 1.5	100	22	-	12.0	9.0	12	4	14.5	T300 1607	T301 1607		
1805	MF 18	x 1	110	25	-	14.0	11.0	14	4	17.0	•	•		
1807	MF 18	x 1.5	110	25	-	14.0	11.0	14	4	16.5	T300 1807	T301 1807		
1808	MF 18	x 2	125	34	-	14.0	11.0	14	4	16.0	•	•		
2005	MF 20	x 1	125	25	-	16.0	12.0	15	4	19.0	•	•		
2007	MF 20	x 1.5	125	25	-	16.0	12.0	15	4	18.5	T300 2007	T301 2007		
2008	MF 20	x 2	140	34	-	16.0	12.0	15	4	18.0	•	•		
DIN 371														
0805	MF 8	x 1	90	22	35	8.0	6.2	9	4	7.0			•	•
1005	MF 10	x 1	100	24	39	10.0	8.0	11	4	9.0			•	•
DIN 376														
1207	MF 12	x 1.5	110	28	-	9.0	7.0	10	4	10.5			•	•
1407	MF 14	x 1.5	110	30	-	11.0	9.0	12	4	12.5			•	•

ISO	P													M			K						N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T300																	●	●	●	●	○	○						○																								
T301																	●	●	●	●	○	○						○																								
T743																	●	●	●	●	○	○						●																						●		
T744																	●	●	●	●	○	○						●		●																			●			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

MF

suttontools

- Premium design for cast aluminium and cast iron (Short Chipping)
- Through & blind holes
- Depths up to approx. 1.5 x d₁
- Axial coolant duct available

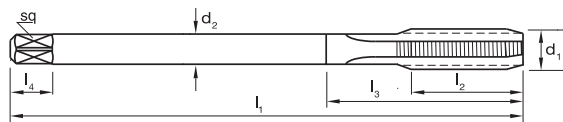

Catalogue Code	T668	T669
Discount Group	D0408	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	TICN	TICN
Sutton Designation	Die Cast	Die Cast
Geometry	IK	IK
Chamfer	Form E / 1.5 x P	Form E / 1.5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1006	MF 10 x 1.25	100	24	-	7.0	5.5	8	4	8.8		T668 1006	T669 1006
1207	MF 12 x 1.5	100	22	-	9.0	7.0	10	4	10.5		T668 1207	T669 1207
1407	MF 14 x 1.5	100	22	-	11.0	9.0	12	4	12.5		T668 1407	T669 1407
1607	MF 16 x 1.5	100	22	-	12.0	9.0	12	4	14.5		T668 1607	T669 1607

MF

ISO	P													M	K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T668																	○	○	○	○	○				●	●	●		○																	○			
T669																	○	○	○	○	○					●	●	●		○																	○		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps Metric Fine, Straight Flute, XH

suttontools

- Use in hardened steels 42-52 HRC
- Through & blind holes
- Suitable for machine operations
- Depths up to approx. 1.5 x d₁



Catalogue Code	T343	T344
Discount Group	D0408	D0408
Material	SPM	SPM
Surface Finish	TICN	TICN
Sutton Designation	XH	XH
Geometry	Special Relief	Special Relief
Chamfer	Form C / 3 x P	Form D / 5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0805	MF 8 x 1		70	22	-	6.0	4.9	8	5	7.1	•	•
1005	MF 10 x 1		75	24	-	7.0	5.5	8	5	9.1	•	•
1006	MF 10 x 1.25		75	24	-	7.0	5.5	8	5	8.9	•	•
1205	MF 12 x 1		82	29	-	9.0	7.0	10	5	11.1	•	•
1206	MF 12 x 1.25		82	29	-	9.0	7.0	10	5	10.9	•	•
1207	MF 12 x 1.5		82	29	-	9.0	7.0	10	5	10.6	•	•

MF

ISO	P												M	K						N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T343					○			○	●		●		●					●		●										○														●				●	
P	Steel	M Stainless Steel												K Cast Iron	N Non-Ferrous Metals						S Titanium & Super Alloys										H Hard Materials				●	○													


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools

- Use in hardened steels 50-60 HRC
- Through & blind holes
- Suitable for machine operations
- Depths up to approx. $1.5 \times d_1$

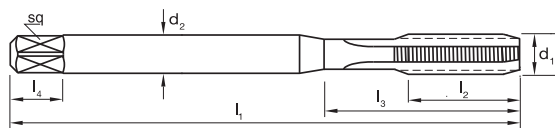


Catalogue Code	T345	T346
Discount Group	D0414	D0414
Material	VHM	VHM
Surface Finish	<i>TICN</i>	<i>TICN</i>
Sutton Designation	VH	VH
Geometry	Special Relief	Special Relief
Chamfer	Form C / 3 x P	Form D / 5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Limit & Nat. Tolerance		Unit	
											Item #	Item #		
DIN 371														
0805	MF 8	x 1	90	22	35	8.0	6.2	9	5	7.0		T345 0805	T346 0805	
1005	MF 10	x 1	100	24	39	10.0	8.0	11	5	9.0		T345 1005	T346 1005	
1006	MF 10	x 1.25	100	24	39	10.0	8.0	11	5	9.0		T345 1006	T346 1006	
DIN 376														
1206	MF 12	x 1.25	110	28	-	9.0	7.0	10	5	10.5		T345 1206	T346 1206	
1207	MF 12	x 1.5	110	28	-	9.0	7.0	10	5	10.5		T345 1207	T346 1207	
1407	MF 14	x 1.5	110	30	-	11.0	9.0	12	5	12.5		•	•	
1607	MF 16	x 1.5	110	32	-	12.0	9.0	12	6	14.1		•	•	
2007	MF 20	x 1.5	140	34	-	16.0	12.0	15	6	17.7		•	•	

ISO	P													M			K							N										S								H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T345									○		○		○																	○																			
P Steel	M Stainless Steel	K Cast Iron	N Non-Ferrous Metals	S Titanium & Super Alloys	H Hard Materials																																					● Optimal	○ Effective						

- General purpose use, materials up to approx. 1000 N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

	T154	T155	T156	T157
Catalogue Code	D0402	D0402	D0402	D0406
Discount Group	HSSE	HSSE	HSSE	HSSE
Material	Brt	Brt	Blu	TiN
Surface Finish	N	N	N	N
Sutton Designation	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
Geometry	ISO 2 / 6H	ISO 3 / 6G	ISO 2 / 6H	ISO 2 / 6H
Chamfer				
Limit & Nut Tolerance				

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0302	MF 3 x 0.35	56	8	-	2.2	-	-	3	2.65	T154 0302	•	•	•	•
0403	MF 4 x 0.5	63	10	-	2.8	2.1	5	3	3.5	T154 0403	•	T156 0403	•	•
0503	MF 5 x 0.5	70	12	-	3.5	2.7	6	3	4.5	T154 0503	•	T156 0503	•	•
0604	MF 6 x 0.75	80	14	-	4.5	3.4	6	3	5.3	T154 0604	T155 0604	T156 0604	T157 0604	•
0803	MF 8 x 0.5	80	18	-	6.0	4.9	8	3	7.5	T154 0803	T155 0803	•	T157 0803	•
0804	MF 8 x 0.75	80	18	-	6.0	4.9	8	3	7.3	T154 0804	T155 0804	T156 0804	T157 0804	•
0805	MF 8 x 1	90	22	-	6.0	4.9	8	3	7.0	T154 0805	T155 0805	T156 0805	T157 0805	•
1004	MF 10 x 0.75	90	20	-	7.0	5.5	8	3	9.3	T154 1004	•	T156 1004	•	•
1005	MF 10 x 1	90	20	-	7.0	5.5	8	3	9.0	T154 1005	T155 1005	T156 1005	T157 1005	•
1006	MF 10 x 1.25	100	24	-	7.0	5.5	8	3	8.8	T154 1006	T155 1006	T156 1006	T157 1006	•
1205	MF 12 x 1	100	22	-	9.0	7.0	10	3	11.0	T154 1205	T155 1205	T156 1205	T157 1205	•
1206	MF 12 x 1.25	100	22	-	9.0	7.0	10	3	10.8	T154 1206	T155 1206	T156 1206	T157 1206	•
1207	MF 12 x 1.5	100	22	-	9.0	7.0	10	3	10.5	T154 1207	T155 1207	T156 1207	T157 1207	•
1405	MF 14 x 1	100	22	-	11.0	9.0	12	3	13.0	T154 1405	•	•	•	•
1406	MF 14 x 1.25	100	22	-	11.0	9.0	12	3	12.8	T154 1406	T155 1406	T156 1406	T157 1406	•
1407	MF 14 x 1.5	100	22	-	11.0	9.0	12	3	12.5	T154 1407	T155 1407	T156 1407	T157 1407	•
1605	MF 16 x 1	100	22	-	12.0	9.0	12	3	14.5	T154 1605	•	•	•	•
1607	MF 16 x 1.5	100	22	-	12.0	9.0	12	3	14.5	T154 1607	•	T156 1607	T157 1607	•
1805	MF 18 x 1	110	25	-	14.0	11.0	14	4	17.0	T154 1805	•	•	•	•
1807	MF 18 x 1.5	110	25	-	14.0	11.0	14	4	16.5	T154 1807	•	T156 1807	T157 1807	•
1808	MF 18 x 2	125	34	-	14.0	11.0	14	4	16.0	T154 1808	•	•	•	•
2005	MF 20 x 1	125	25	-	16.0	12.0	15	4	19.0	T154 2005	•	•	•	•
2007	MF 20 x 1.5	125	25	-	16.0	12.0	15	4	18.5	T154 2007	•	T156 2007	T157 2007	•
2008	MF 20 x 2	140	34	-	16.0	12.0	15	4	18.0	T154 2008	•	•	•	•
2205	MF 22 x 1	125	25	-	18.0	14.5	17	4	18.5	T154 2205	•	•	•	•
2207	MF 22 x 1.5	125	25	-	18.0	14.5	17	4	20.5	T154 2207	•	•	•	•
2208	MF 22 x 2	140	28	-	18.0	14.5	17	4	20.0	T154 2208	•	•	•	•
2405	MF 24 x 1	140	28	-	18.0	14.5	17	4	23.0	T154 2405	•	•	•	•
2407	MF 24 x 1.5	140	28	-	18.0	14.5	17	4	22.5	T154 2407	•	•	•	•
2408	MF 24 x 2	140	28	-	18.0	14.5	17	4	22.0	T154 2408	•	•	•	•
2505	MF 25 x 1	140	28	-	18.0	14.5	17	4	24.0	•	•	•	•	•
2507	MF 25 x 1.5	140	28	-	18.0	14.5	17	4	23.5	T154 2507	•	•	•	•
2508	MF 25 x 2	140	28	-	18.0	14.5	17	4	23.0	•	•	•	•	•
2605	MF 26 x 1	140	28	-	18.0	14.5	17	4	25.0	•	•	•	•	•
2607	MF 26 x 1.5	140	28	-	18.0	14.5	17	4	24.5	T154 2607	•	•	•	•
2608	MF 26 x 2	140	28	-	18.0	14.5	17	4	24.0	•	•	•	•	•
2707	MF 27 x 1.5	140	28	-	20.0	16.0	19	4	25.5	T154 2707	•	•	•	•
2708	MF 27 x 2	140	28	-	20.0	16.0	19	4	25.0	T154 2708	•	•	•	•
2807	MF 28 x 1.5	140	28	-	20.0	16.0	19	4	26.5	T154 2807	•	•	•	•
2808	MF 28 x 2	140	28	-	20.0	16.0	19	4	26.0	•	•	•	•	•

ISO	P													M			K				N										S										H			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
T154	●	●	○	○		●	○			○					○		○		○	○	●	●	○	○		○	○																	
T155	●	●	○	○		●	○			○					○		○		○	○	●	●	○	○		○	○																	
T156	●	●	○	○		●	○			○		○		○	○	○	○	○	○	○	●	●	○	○		○	○																	
T157	●	●	●	○		●	●	○		●				○	○	○	○	○	○	○	●	●	○	○		●	○																	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

- General purpose use, materials up to approx. 1000 N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁

DIN
37460°
MF

Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance



T154	T155	T156	T157
D0402	D0402	D0402	D0406
HSSE	HSSE	HSSE	HSSE
BrT	BrT	Blu	TiN
N	N	N	N
6G	6G	6G	6G
Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
ISO 2 / 6H	ISO 3 / 6G	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
3005	MF 30 x 1		150	28	-	22.0	18.0	21	4	29.0	T154 3005	•	•	•
3007	MF 30 x 1.5		150	28	-	22.0	18.0	21	4	28.5	T154 3007	•	•	•
3008	MF 30 x 2		150	28	-	22.0	18.0	21	4	28.0	T154 3008	•	•	•
3207	MF 32 x 1.5		150	28	-	22	18	21	4	30.5	T154 3207	•	•	•
3307	MF 33 x 1.5		160	30	-	25	20	23	4	31.5	T154 3307	•	•	•
3308	MF 33 x 2		160	30	-	25	20	23	4	31	T154 3308	•	•	•
3407	MF 34 x 1.5		170	30	-	28	22	25	4	32.5	T154 3407	•	•	•
3507	MF 35 x 1.5		170	30	-	28	22	25	4	33.5	T154 3507	•	•	•
3607	MF 36 x 1.5		170	30	-	28	22	25	4	34.5	T154 3607	•	•	•
3608	MF 36 x 2		170	30	-	28	22	25	4	34	T154 3608	•	•	•
3609	MF 36 x 3		200	56	-	28	22	25	4	33	T154 3609	•	•	•
3807	MF 38 x 1.5		170	30	-	28	22	25	4	36.5	T154 3807	•	•	•
4007	MF 40 x 1.5		170	30	-	32	24	27	4	38.5	T154 4007	•	•	•
4207	MF 42 x 1.5		170	30	-	32	24	27	4	40.5	T154 4207	•	•	•
4208	MF 42 x 2		170	30	-	32	24	27	4	40	T154 4208	•	•	•
4209	MF 42 x 3		200	30	-	32	24	27	4	39	T154 4209	•	•	•
4507	MF 45 x 1.5		180	32	-	36	29	32	4	43.5	T154 4507	•	•	•
4508	MF 45 x 2		180	32	-	36	29	32	4	43	T154 4508	•	•	•
4807	MF 48 x 1.5		190	32	-	36	29	32	4	46.5	T154 4807	•	•	•
5007	MF 50 x 1.5		190	32	-	36	29	32	4	48.5	T154 5007	•	•	•
5207	MF 52 x 1.5		190	32	-	40	32	35	4	50.5	T154 5207	•	•	•

ISO	P													M			K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T154	●	●	○	○			●	○		○							○		○		○	○	●	●	○	○		○	○																					
T155	●	●	○	○			●	○		○							○		○		○	○	●	●	○	○		○	○																					
T156	●	●	○	○			●	○		●		○		○	○	○	○		○		○	○	○	●	●	○	○																							
T157	●	●	●	●	○		●	○		●				○	○	○	○		○		○	○	○	●	●	○	○		●	○																				

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time.



watch the video



- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to $3 \times d_1$
- Suitable for synchronous tapping in machine operations



Product Name	T689
Discount Group	DO410
Material	PM-HSSE V3
Surface Finish	HARDLUBE
Sutton Designation	UNI
Geometry	Special Relief
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	6HX

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0302	MF 3	x 0.35	56	8	-	2.2	-	-	3	2.65	•
0403	MF 4	x 0.5	63	10	-	2.8	2.1	5	3	3.5	•
0503	MF 5	x 0.5	70	12	-	3.5	2.7	6	3	4.5	•
0604	MF 6	x 0.75	80	14	-	4.5	3.4	6	3	5.3	T689 0604
0803	MF 8	x 0.5	80	18	-	6.0	4.9	8	3	7.5	T689 0803
0804	MF 8	x 0.75	80	18	-	6.0	4.9	8	3	7.3	•
0805	MF 8	x 1	90	22	-	6.0	4.9	8	3	7.0	T689 0805
1004	MF 10	x 0.75	90	20	-	7.0	5.5	8	3	9.3	•
1005	MF 10	x 1	90	20	-	7.0	5.5	8	3	9.0	T689 1005
1006	MF 10	x 1.25	100	24	-	7.0	5.5	8	3	8.8	T689 1006
1205	MF 12	x 1	100	22	-	9.0	7.0	10	3	11.0	T689 1205
1206	MF 12	x 1.25	100	22	-	9.0	7.0	10	3	10.8	T689 1206
1207	MF 12	x 1.5	100	22	-	9.0	7.0	10	3	10.5	T689 1207
1405	MF 14	x 1	100	22	-	11.0	9.0	12	3	13.0	T689 1405
1406	MF 14	x 1.25	100	22	-	11.0	9.0	12	3	12.8	T689 1406
1407	MF 14	x 1.5	100	22	-	11.0	9.0	12	3	12.5	T689 1407
1605	MF 16	x 1	100	22	-	12.0	9.0	12	3	15.0	T689 1605
1607	MF 16	x 1.5	100	22	-	12.0	9.0	12	3	14.5	T689 1607
1805	MF 18	x 1	110	25	-	14.0	11.0	14	4	17.0	T689 1805
1807	MF 18	x 1.5	110	25	-	14.0	11.0	14	4	16.5	T689 1807
1808	MF 18	x 2	125	34	-	14.0	11.0	14	4	16.0	•
2005	MF 20	x 1	125	25	-	16.0	12.0	15	4	19.0	T689 2005
2007	MF 20	x 1.5	125	25	-	16.0	12.0	15	4	18.5	T689 2007
2008	MF 20	x 2	140	34	-	16.0	12.0	15	4	18.0	•

ISO	P													M		K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T689	●	●	●	○		●	○			●		●		●	●		○	○	○	○	○	○	●	●	○	○	○	○	○	○	○																		

P

 Steel

M

 Stainless Steel

K

 Cast Iron

N

 Non-Ferrous Metals

S

 Titanium & Super Alloys

H

 Hard Materials

●

 Optimal


○

 Effective

DIN Taps Metric Fine, Spiral Flute, R40 N

suttontools

- General purpose use, materials up to approx. 1000 N/mm²
- Blind holes
- Suitable for machine operations
- Depths up to approx. 2.5 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

	T245	T246	T247	T248
Catalogue Code	D0402	D0402	D0402	D0406
Discount Group	HSSE	HSSE	HSSE	HSSE
Material	Brt	Brt	Blu	TiN
Surface Finish	N	N	N	N
Sutton Designation	R40	R40	R40	R40
Geometry	Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P
Chamfer	ISO 2 / 6H	ISO 3 / 6G	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0302	MF 3	x 0.35	56	4	-	2.2	-	-	3	2.65	•	•	•	•
0403	MF 4	x 0.5	63	6	-	2.8	2.1	5	3	3.5	•	•	•	•
0503	MF 5	x 0.5	70	7	-	3.5	2.7	6	3	4.5	•	•	•	•
0604	MF 6	x 0.75	80	8	-	4.5	3.4	6	3	5.3	T245 0604	T246 0604	T247 0604	T248 0604
0803	MF 8	x 0.5	80	10	-	6.0	4.9	8	3	7.5	•	•	•	•
0804	MF 8	x 0.75	80	10	-	6.0	4.9	8	3	7.3	•	•	•	•
0805	MF 8	x 1	90	8	-	6.0	4.9	8	3	7.0	T245 0805	T246 0805	T247 0805	T248 0805
1004	MF 10	x 0.75	90	10	-	7.0	5.5	8	3	9.3	•	•	•	•
1005	MF 10	x 1	90	10	-	7.0	5.5	8	3	9.0	T245 1005	T246 1005	T247 1005	T248 1005
1006	MF 10	x 1.25	100	13	-	7.0	5.5	8	3	8.8	T245 1006	T246 1006	T247 1006	T248 1006
1205	MF 12	x 1	100	14	-	9.0	7.0	10	3	11.0	•	T246 1205	•	•
1206	MF 12	x 1.25	100	14	-	9.0	7.0	10	3	10.8	T245 1206	T246 1206	T247 1206	T248 1206
1207	MF 12	x 1.5	100	14	-	9.0	7.0	10	3	10.5	T245 1207	•	T247 1207	T248 1207
1405	MF 14	x 1	100	16	-	11.0	9.0	12	3	13.0	•	•	•	•
1406	MF 14	x 1.25	100	16	-	11.0	9.0	12	3	12.8	•	•	•	•
1407	MF 14	x 1.5	100	16	-	11.0	9.0	12	3	12.5	T245 1407	T246 1407	T247 1407	T248 1407
1605	MF 16	x 1	100	16	-	12.0	9.0	12	3	14.5	•	•	•	•
1607	MF 16	x 1.5	100	16	-	12.0	9.0	12	3	14.5	T245 1607	•	T247 1607	T248 1607
1805	MF 18	x 1	110	20	-	14.0	11.0	14	4	17.0	•	•	•	•
1807	MF 18	x 1.5	110	20	-	14.0	11.0	14	4	16.5	T245 1807	•	T247 1807	T248 1807
1808	MF 18	x 2	125	20	-	14.0	11.0	14	4	16.0	•	•	•	•
2005	MF 20	x 1	125	20	-	16.0	12.0	15	4	19.0	•	•	•	•
2007	MF 20	x 1.5	125	20	-	16.0	12.0	15	4	18.5	T245 2007	•	T247 2007	T248 2007
2008	MF 20	x 2	140	20	-	16.0	12.0	15	4	18.0	•	•	•	•
2205	MF 22	x 1	125	15	-	18.0	14.5	17	4	18.5	T245 2205	•	•	•
2207	MF 22	x 1.5	125	15	-	18.0	14.5	17	4	20.5	T245 2207	•	•	•
2208	MF 22	x 2	140	20	-	18.0	14.5	17	4	20.0	T245 2208	•	•	•
2405	MF 24	x 1	140	20	-	18.0	14.5	17	4	23.0	T245 2405	•	•	•
2407	MF 24	x 1.5	140	20	-	18.0	14.5	17	4	22.5	T245 2407	•	•	•
2408	MF 24	x 2	140	20	-	18.0	14.5	17	4	22.0	T245 2408	•	•	•
2505	MF 25	x 1	140	15	-	18.0	14.5	17	4	24.0	•	•	•	•
2507	MF 25	x 1.5	140	15	-	18.0	14.5	17	4	23.5	T245 2507	•	•	•
2508	MF 25	x 2	140	15	-	18.0	14.5	17	4	23.0	•	•	•	•
2605	MF 26	x 1	140	15	-	18.0	14.5	17	4	25.0	•	•	•	•
2607	MF 26	x 1.5	140	15	-	18.0	14.5	17	4	24.5	T245 2607	•	•	•
2608	MF 26	x 2	140	15	-	18.0	14.5	17	4	24.0	•	•	•	•
2707	MF 27	x 1.5	140	20	-	20.0	16.0	19	4	25.5	T245 2707	•	•	•
2708	MF 27	x 2	140	20	-	20.0	16.0	19	4	25.0	T245 2708	•	•	•
2807	MF 28	x 1.5	140	15	-	20.0	16.0	19	4	26.5	T245 2807	•	•	•
2808	MF 28	x 2	140	15	-	20.0	16.0	19	4	26.0	•	•	•	•
3005	MF 30	x 1	150	20	-	22.0	18.0	21	4	29.0	T245 3005	•	•	•
3007	MF 30	x 1.5	150	20	-	22.0	18.0	21	4	28.5	T245 3007	•	•	•
3008	MF 30	x 2	150	20	-	22.0	18.0	21	4	28.0	T245 3008	•	•	•

ISO	P													M		K				N								S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	37.2	37.3	37.4	37.5	38	38.2	39	39.2	40	41
T245	●	●	○	○		●	○			○					○		○		○	○	●	●	○	○		○	○																				
T246	●	●	○	○		●	○			○					○		○		○	○	●	●	○	○		○	○																				
T247	●	●	○	○		●	○			●		○		○	○		○		○	○	●	●	○	○																							
T248	●	●	○	○		●	○	○		●				○	○		○		○	○	●	●	○	○			●	○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

MF

BLACKMAGIC

-



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0302	MF 3	x 0.35	56	4	-	2.2	-	-	3	2.65	•
0403	MF 4	x 0.5	63	6	-	2.8	2.1	5	3	3.5	•
0503	MF 5	x 0.5	70	7	-	3.5	2.7	6	3	4.5	•
0604	MF 6	x 0.75	80	8	-	4.5	3.4	6	3	5.3	T686 0604
0803	MF 8	x 0.5	80	10	-	6.0	4.9	8	3	7.5	T686 0803
0804	MF 8	x 0.75	80	10	-	7.0	4.9	8	3	7.3	•
0805	MF 8	x 1	90	8	-	6.0	4.9	8	3	7.0	T686 0805
1004	MF 10	x 0.75	90	10	-	7.0	5.5	8	3	9.3	T686 1004
1005	MF 10	x 1	90	10	-	7.0	5.5	8	3	9.0	T686 1005
1006	MF 10	x 1.25	100	13	-	7.0	5.5	8	3	8.8	T686 1006
1205	MF 12	x 1	100	14	-	9.0	7.0	10	3	11.0	T686 1205
1206	MF 12	x 1.25	100	14	-	9.0	7.0	10	3	10.8	T686 1206
1207	MF 12	x 1.5	100	14	-	9.0	7.0	10	3	10.5	T686 1207
1405	MF 14	x 1	100	16	-	11.0	9.0	12	3	13.0	T686 1405
1406	MF 14	x 1.25	100	16	-	11.0	9.0	12	3	12.8	T686 1406
1407	MF 14	x 1.5	100	16	-	11.0	9.0	12	3	12.5	T686 1407
1605	MF 16	x 1	100	16	-	12.0	9.0	12	3	15.0	T686 1605
1607	MF 16	x 1.5	100	16	-	12.0	9.0	12	3	14.5	T686 1607
1805	MF 18	x 1	110	20	-	14.0	11.0	14	4	17.0	T686 1805
1807	MF 18	x 1.5	110	20	-	14.0	11.0	14	4	16.5	•
1808	MF 18	x 2	125	20	-	14.0	11.0	14	4	16.0	•
2005	MF 20	x 1	125	20	-	16.0	12.0	15	4	19.0	T686 2005
2007	MF 20	x 1.5	125	20	-	16.0	12.0	15	4	18.5	T686 2007
2008	MF 20	x 2	140	20	-	16.0	12.0	15	4	18.0	•

MIF

ISO	P													M			K					N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	4.0	4.1
T686	●	●	●	○			●	○			●		●	○	●			○	○	○	○	○	●	●	●	○	○	○	○																				

P

Steel

M

Stainless Steel

K

Cast Iron

N

Non-Ferrous Metals

S

Titanium & Super Alloys

H


Hard Materials

● Optimal ○ Effective

● Optimal ○ Effective

suttontools

- Suitable for use in wrought aluminium and low silicon aluminium
- Blind holes
- Depths up to approx. $3 \times d_1$
- CrN for longer tool life

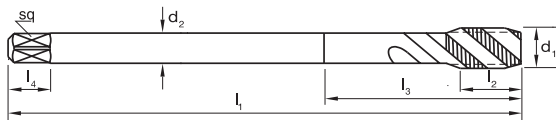

Catalogue Code	T703
Discount Group	D0404
Material	HSSE
Surface Finish	CrN
Sutton Designation	Al
Geometry	R45 2 Flute
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0805	MF 8 x 1	90	8	-	6.0	4.9	8	2	7.0		•
1005	MF 10 x 1	90	10	-	7.0	5.5	8	2	9.0		•
1006	MF 10 x 1.25	100	13	-	7.0	5.5	8	2	8.8		•
1205	MF 12 x 1	100	14	-	9.0	7.0	10	2	11.0		•
1206	MF 12 x 1.25	100	14	-	9.0	7.0	10	2	10.8		•
1207	MF 12 x 1.5	100	14	-	9.0	7.0	10	2	10.5		•

MF

ISO	P													M	K								N								S								H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T703																							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
P	Steel	M Stainless Steel													K Cast Iron	N Non-Ferrous Metals								S Titanium & Super Alloys								H Hard Materials	● Optimal	○ Effective															

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

- Use in stainless steels and high strength steels up to 1000N/mm²
- PM-HSSE V3 offers higher edge hardness than standard VA series
- Blind holes
- Suitable for synchronous tapping in machine operations
- Depths up to approx. 3 x d₁



Catalogue Code	T250	T252
Discount Group	D0402	D0408
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	Blu	TiCN
Sutton Designation	VA PM	VA PM
Geometry	R50	R50
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	6HX	6HX

Size Ref.	d ₁	Pitch	L ₁	L ₂	L ₃	d ₂	sq	L ₄	z	drill Ø	Item #	Item #
0302	MF 3	x 0.35	56	4	-	2.2	-	-	3	2.65	T250 0302	•
0403	MF 4	x 0.5	63	6	-	2.8	2.1	5	3	3.5	T250 0403	•
0503	MF 5	x 0.5	70	7	-	3.5	2.7	6	3	4.5	T250 0503	•
0604	MF 6	x 0.75	80	8	-	4.5	3.4	6	3	5.3	T250 0604	T252 0604
0803	MF 8	x 0.5	80	10	-	6.0	4.9	8	3	7.5	T250 0803	T252 0803
0804	MF 8	x 0.75	80	10	-	7.0	4.9	8	3	7.3	•	•
0805	MF 8	x 1	90	8	-	6.0	4.9	8	3	7.0	T250 0805	T252 0805
1004	MF 10	x 0.75	90	10	-	7.0	5.5	8	3	9.3	T250 1004	T252 1004
1005	MF 10	x 1	90	10	-	7.0	5.5	8	3	9.0	T250 1005	T252 1005
1006	MF 10	x 1.25	100	13	-	7.0	5.5	8	3	8.8	T250 1006	T252 1006
1205	MF 12	x 1	100	14	-	9.0	7.0	10	3	11.0	T250 1205	T252 1205
1206	MF 12	x 1.25	100	14	-	9.0	7.0	10	3	10.8	T250 1206	T252 1206
1207	MF 12	x 1.5	100	14	-	9.0	7.0	10	3	10.5	T250 1207	T252 1207
1405	MF 14	x 1	100	16	-	11.0	9.0	12	3	13.0	T250 1405	T252 1405
1406	MF 14	x 1.25	100	16	-	11.0	9.0	12	3	12.8	T250 1406	T252 1406
1407	MF 14	x 1.5	100	16	-	11.0	9.0	12	3	12.5	T250 1407	T252 1407
1605	MF 16	x 1	100	16	-	12.0	9.0	12	3	15.0	T250 1605	T252 1605
1607	MF 16	x 1.5	100	16	-	12.0	9.0	12	3	14.5	T250 1607	T252 1607
1805	MF 18	x 1	110	20	-	14.0	11.0	14	4	17.0	•	T252 1805
1807	MF 18	x 1.5	110	20	-	14.0	11.0	14	4	16.5	T250 1807	T252 1807
1808	MF 18	x 2	125	20	-	14.0	11.0	14	4	16.0	•	T252 1808
2005	MF 20	x 1	125	20	-	16.0	12.0	15	4	19.0	•	T252 2005
2007	MF 20	x 1.5	125	20	-	16.0	12.0	15	4	18.5	T250 2007	T252 2007
2008	MF 20	x 2	140	20	-	16.0	12.0	15	4	18.0	•	•

ISO	P												M			K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T250	●	●	●			●	○					○		●	●	○																																	
T252	●	●	●	○			○			○				●	●	○								○	○	○	○	○			○				●		●												
P	Steel	M Stainless Steel												K Cast Iron			N Non-Ferrous Metals										S Titanium & Super Alloys					H Hard Materials				●	○	Effective											


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools

- Suitable for harder materials up to 45 HRC
- Blind holes
- Depths up to $1.5 \times d_1$



Catalogue Code	T707
Discount Group	D0408
Material	PM-HSS Co
Surface Finish	TICN
Sutton Designation	H
Geometry	R15
Chamfer	Form C / 3 x P
Limit & Nut Tolerance	ISO 2 / 6HX

Size Ref.	d_1	Pitch	l_1	l_2	l_3	d_2	sq	l_4	z	drill $\emptyset$	Item #
0604	MF 6 x 0.75	80	8	-	4.5	3.4	6	3	5.3		•
0805	MF 8 x 1	90	8	-	6.0	4.9	8	3	7.0		•
1005	MF 10 x 1	90	10	-	7.0	5.5	8	3	9.0		•
1006	MF 10 x 1.25	100	13	-	7.0	5.5	8	3	8.8		•
1205	MF 12 x 1	100	14	-	9.0	7.0	10	3	11.0		•
1206	MF 12 x 1.25	100	14	-	9.0	7.0	10	3	10.8		•
1207	MF 12 x 1.5	100	14	-	9.0	7.0	10	3	10.5		•
1407	MF 14 x 1.5	100	16	-	11.0	9.0	12	3	12.5		•
1607	MF 16 x 1.5	100	16	-	12.0	9.0	12	3	14.5		•
1807	MF 18 x 1.5	110	20	-	14.0	11.0	14	4	16.5		•
2007	MF 20 x 1.5	125	20	-	16.0	12.0	15	4	18.5		•

MJ

ISO	P													M	K										N										S										H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41											
T707					●			●	●		●	○	●				○	●	●	●	●	●	●					○		●									○	●	●	●	●	●							●									
P	Steel			M			Stainless Steel			K			Cast Iron			N			Non-Ferrous Metals			S			Titanium & Super Alloys			H			Hard Materials																													
																																														● Optimal					○ Effective									

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

suttontools

world class cutting tools



Expert Tool Selector

Sutton Tools Expert Tool Selector enables easy tool selection for your machining task. The Expert Tool Selector will recommend the right tool for your application, with advice on suitable cutting parameters. Simply select your work piece material, and enter your machining operation and setup to get the best advice in 5 easy steps:




suttontools.com/expert-tool-selector

DIN Taps UNC, Straight Flute, GG


suttontools

- Use in grey cast iron (GG), brittle plastics, hard bronzes to a hardness of 850 N/mm²
- Through & blind holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁

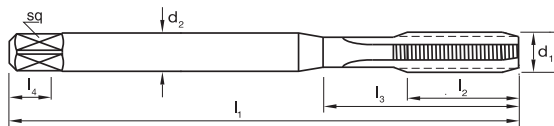

Catalogue Code	T302	T303
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Ni + Blu	TiCN
Sutton Designation	GG	GG
Geometry	Low Relief	Low Relief
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2BX	2BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	#2	56	45	9	10	2.8	2.1	5	4	1.85	•	•
0251	#3	48	50	9	10	2.8	2.1	5	4	2.1	•	•
0284	#4	40	56	11	18	3.5	2.7	6	4	2.3	•	•
0318	#5	40	56	11	18	3.5	2.7	6	4	2.6	•	•
0351	#6	32	56	13	19	4.0	3.0	6	4	2.8	•	•
0417	#8	32	63	13	19	4.5	3.4	6	4	3.4	•	•
0483	#10	24	70	16	20	6.0	4.9	8	4	3.8	•	•
0549	#12	24	80	19	29	6.0	4.9	8	4	4.5	•	•
0635	1/4	20	80	19	30	7.0	5.5	8	4	5.1	T302 0635	•
0794	5/16	18	90	22	34	8.0	6.2	9	4	6.6	T302 0794	•
0953	3/8	16	100	22	35	10.0	7.0	10	4	8.0	T302 0953	•



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	24	-	8.0	6.2	8	4	9.4	•	•
1270	1/2	13	110	28	-	9.0	7.0	10	4	10.8	T302 1270	•
1429	9/16	12	110	30	-	11.0	9.0	12	4	12.2	•	•
1588	5/8	11	110	32	-	12.0	9.0	12	4	13.5	T302 1588	•
1905	3/4	10	125	34	-	14.0	11.0	14	4	16.5	T302 1905	•
2223	7/8	9	140	34	-	18.0	14.5	17	4	19.5	•	•
2540	1	8	160	38	-	18.0	14.5	17	4	22.2	T302 2540	•


ISO	P													M	K						N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T302																	●	●	●	●	○	○																												
T303																	●	●	●	●	○	○						○																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.


- General purpose use, materials up to approx. 1000 N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

	T164	T165	T166	T167
Catalogue Code	D0402	D0402	D0402	D0406
Discount Group	HSSE	HSSE	HSSE	HSSE
Material	Brt	Brt	Blu	TIN
Surface Finish	N	N	N	N
Sutton Designation	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
Geometry	2B	3B	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	T164 0218	•	T166 0218	T167 0218
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	T164 0251	•	T166 0251	T167 0251
0284	# 4	40	56	11	18	3.5	2.7	6	2	2.3	T164 0284	•	T166 0284	T167 0284
0318	# 5	40	56	11	18	3.5	2.7	6	3	2.6	T164 0318	•	T166 0318	T167 0318
0351	# 6	32	56	13	19	4.0	3.0	6	3	2.8	T164 0351	•	T166 0351	T167 0351
0417	# 8	32	63	13	19	4.5	3.4	6	3	3.4	T164 0417	•	T166 0417	T167 0417
0483	# 10	24	70	16	20	6.0	4.9	8	3	3.8	T164 0483	•	T166 0483	T167 0483
0549	# 12	24	80	19	29	6.0	4.9	8	3	4.5	T164 0549	•	T166 0549	T167 0549
0635	1/4	20	80	19	30	7.0	5.5	8	3	5.1	T164 0635	•	T166 0635	T167 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3	6.6	T164 0794	•	T166 0794	T167 0794
0953	3/8	16	100	22	35	10.0	7.0	10	3	8.0	T164 0953	•	T166 0953	T167 0953



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
1111	7/16	14	100	24	-	8.0	6.2	8	3	9.4	T164 1111	•	T166 1111	T167 1111
1270	1/2	13	110	28	-	9.0	7.0	10	3	10.8	T164 1270	•	T166 1270	T167 1270
1429	9/16	12	110	30	-	11.0	9.0	12	3	12.2	T164 1429	•	T166 1429	T167 1429
1588	5/8	11	110	32	-	12.0	9.0	12	3	13.5	T164 1588	•	T166 1588	T167 1588
1905	3/4	10	125	34	-	14.0	11.0	14	4	16.5	T164 1905	•	T166 1905	T167 1905
2223	7/8	9	140	34	-	18.0	14.5	17	4	19.5	T164 2223	•	T166 2223	T167 2223
2540	1	8	160	38	-	18.0	14.5	17	4	22.2	T164 2540	•	T166 2540	T167 2540

ISO	P													M		K						N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T164	●	●	●	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T165	●	●	●	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T166	●	●	●	●	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T167	●	●	●	●	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations




watch the video



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0218	# 2	56	45	9	12	2.8	2.1	5	3	1.85	T693 0218
0284	# 4	40	56	11	18	3.5	2.1	5	3	2.35	T693 0284
0351	# 6	32	56	12	20	4	2.7	6	3	2.85	T693 0351
0417	# 8	32	63	13	21	4.5	2.7	6	3	3.50	T693 0417
0483	# 10	24	70	16	25	6	3.0	6	3	3.90	T693 0483
0635	1/4	20	80	19	30	7	5.5	8	3	5.10	T693 0635

Catalogue Code	T693
Discount Group	D0410
Material	PM-HSSE V3
Surface Finish	HARDLUBE
Sutton Designation	UNI
Geometry	Special Relief
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	2BX



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	18	90	22	35	6	4.9	8	3	6.60	T693 0794
0953	3/8	16	100	24	39	7	5.5	8	3	8.00	T693 0953
1270	1/2	13	110	28	-	9	7	10	4	10.80	T693 1270
1588	5/8	11	110	32	-	12	9	12	4	13.50	T693 1588




ISO	P													M	K								N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T693	●	●	●	○		●	○			●		●	○	●	●	○	○	○	○	○	○	○	●	●	●	○	○	○	○	○																			
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials													●	Optimal		○	Effective											


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

- Use in stainless steels and high strength steels up to 1000N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	•
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	# 4	40	56	11	18	3.5	2.7	6	2	2.3	•	•
0318	# 5	40	56	11	18	3.5	2.7	6	3	2.6	•	•
0351	# 6	32	56	13	19	4.0	3.0	6	3	2.8	T170 0351	T171 0351
0417	# 8	32	63	13	19	4.5	3.4	6	3	3.4	T170 0417	T171 0417
0483	# 10	24	70	16	20	6.0	4.9	8	3	3.8	T170 0483	T171 0483
0549	# 12	24	80	19	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	19	30	7.0	5.5	8	3	5.1	T170 0635	T171 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3	6.6	T170 0794	T171 0794
0953	3/8	16	100	22	35	10.0	7.0	10	3	8.0	T170 0953	T171 0953



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	24	-	8.0	6.2	8	3	9.4	T170 1111	T171 1111
1270	1/2	13	110	28	-	9.0	7.0	10	3	10.8	T170 1270	T171 1270
1429	9/16	12	110	30	-	11.0	9.0	12	3	12.2	T170 1429	T171 1429
1588	5/8	11	110	32	-	12.0	9.0	12	3	13.5	T170 1588	T171 1588
1905	3/4	10	125	34	-	14.0	11.0	14	4	16.5	T170 1905	T171 1905
2223	7/8	9	140	34	-	18.0	14.5	17	4	19.5	T170 2223	T171 2223
2540	1	8	160	38	-	18.0	14.5	17	4	22.2	T170 2540	T171 2540

ISO	P										M					K					N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	37.2	37.3	37.4	37.5	38	38.2	39	39.2	40	4				
T170	●	●	●	○		●	○					●	○	●	○																																				
T171	●	●	○	○		●	○			○		●	○	○	○							○	○	○	○	○	○		○			●	○	○																	
P	Steel					M	Stainless Steel					K	Cast Iron					N	Non-Ferrous Metals										S	Titanium & Super Alloys										H	Hard Materials					●	Optimal		○	Effective	


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective



• Available on request as special manufacture. Subject to lead time.

suttontools


- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁

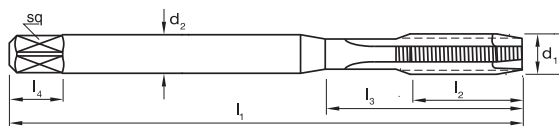

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0218	# 2	56	45	9	12	2.8	2.1	5	3	1.85	T697 0218
0284	# 4	40	56	11	18	3.5	2.7	6	3	2.35	T697 0284
0351	# 6	32	56	12	20	4	3.0	6	3	2.85	T697 0351
0417	# 8	32	63	13	21	4.5	3.4	6	3	3.50	T697 0417
0483	# 10	24	70	16	25	6	4.9	8	3	3.90	T697 0483
0635	1/4	20	80	19	30	7	5.5	8	3	5.10	T697 0635



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	18	90	22	-	6	4.9	8	3	6.60	T697 0794
0953	3/8	16	100	24	-	7	5.5	8	3	8.00	T697 0953
1270	1/2	13	110	28	-	9	7	10	4	10.80	T697 1270
1588	5/8	11	110	32	-	12	9	12	4	13.50	T697 1588



ISO	P													M	K								N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T697	●	●	○	○		●	○			○		●	○	●	●	●							○	○	○		○	○	○		○			●	●	●													
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																							●	Optimal		○	Effective	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective



Catalogue Code **T697**

Discount Group **D0408**

Material **PM-HSSE V3**

Surface Finish **TICN**

Sutton Designation **VA PM**


Geometry Special Relief

Chamfer Form B / 4.5 x P


Limit & Nut Tolerance 2BX



- Use in harder short chipping materials up to 42 HRC
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	•
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	# 4	40	56	11	18	3.5	2.7	6	2	2.3	•	•
0318	# 5	40	56	11	18	3.5	2.7	6	3	2.6	•	•
0351	# 6	32	56	13	19	4.0	3.0	6	3	2.8	•	•
0417	# 8	32	63	13	19	4.5	3.4	6	3	3.4	•	•
0483	# 10	24	70	16	20	6.0	4.9	8	3	3.8	•	•
0549	# 12	24	80	19	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	19	30	7.0	5.5	8	3	5.1	T168 0635	T169 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3	6.6	T168 0794	T169 0794
0953	3/8	16	100	22	35	10.0	7.0	10	3	8.0	T168 0953	T169 0953



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	24	-	8.0	6.2	8	3	9.4	•	•
1270	1/2	13	110	28	-	9.0	7.0	10	3	10.8	T168 1270	T169 1270
1429	9/16	12	110	30	-	11.0	9.0	12	3	12.2	•	•
1588	5/8	11	110	32	-	12.0	9.0	12	3	13.5	T168 1588	T169 1588
1905	3/4	10	125	34	-	14.0	11.0	14	4	16.5	T168 1905	T169 1905
2223	7/8*	9	140	34	-	18.0	14.5	17	4	19.5	•	•
2540	1*	8	160	38	-	18.0	14.5	17	4	22.2	T168 2540	T169 2540

ISO	P													M		K							N										S										H				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
T168			●	●	○		●	○	○	○	○	○	○	○	○	○	○	○	○	○																						○					
T169			●	●	●		●	●	○	●	○	○	○	○	○	●	○	○	○	○	○			○	○	○	●	○	○											○			○				

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time. * HSSE > 3/4



Catalogue Code	T168	T169
Discount Group	D0402	D0410
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	Blu	TiAIN
Sutton Designation	NH	NH
Geometry	Form B / 4,5 x P	Form B / 4,5 x P
Chamfer	2B	2B
Limit & Nut Tolerance		




- Use in harder materials up to 45 HRC
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁

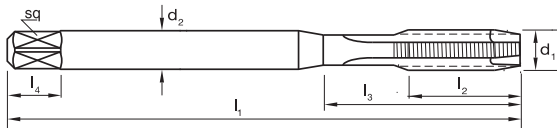

Catalogue Code	T172	T666
Discount Group	D0402	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	Blu	TiCN
Sutton Designation	H	H
Geometry	Low Relief	Low Relief
Chamfer	Form C / 3 x P	Form C / 3 x P
Limit & Nut Tolerance	2BX	2BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	•
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	# 4	40	56	11	18	3.5	2.7	6	2	2.3	•	•
0318	# 5	40	56	11	18	3.5	2.7	6	3	2.6	•	•
0351	# 6	32	56	13	19	4.0	3.0	6	3	2.8	•	•
0417	# 8	32	63	13	19	4.5	3.4	6	3	3.4	•	•
0483	# 10	24	70	16	20	6.0	4.9	8	3	3.8	•	•
0549	# 12	24	80	19	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	19	30	7.0	5.5	8	3	5.1	T172 0635	T666 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3	6.6	T172 0794	T666 0794
0953	3/8	16	100	22	35	10.0	7.0	10	3	8.0	T172 0953	T666 0953

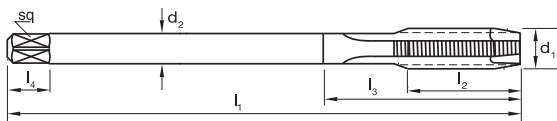

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	24	-	8.0	6.2	8	3	9.4	T172 1111	T666 1111
1270	1/2	13	110	28	-	9.0	7.0	10	3	10.8	T172 1270	T666 1270
1429	9/16	12	110	30	-	11.0	9.0	12	3	12.2	T172 1429	T666 1429
1588	5/8	11	110	32	-	12.0	9.0	12	3	13.5	T172 1588	T666 1588
1905	3/4	10	125	34	-	14.0	11.0	14	4	16.5	T172 1905	T666 1905
2223	7/8*	9	140	34	-	18.0	14.5	17	4	19.5	T172 2223	T666 2223
2540	1*	8	160	38	-	18.0	14.5	17	4	22.2	T172 2540	T666 2540
2858	1.1/8*	7	180	45	-	22.0	18.0	21	4	25.0	T172 2858	T666 2858


ISO	P													M	K										N										S										H					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T172					●			●	●		●	○	●				○	○	○	○	○	○							○									○	○	○	○	○	○					○		
T666					●			●	●		●	○	●				○	○	●	●	●	●	●					○	●									○	●	●	●	●	●	●					●	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective


* Available on request as special manufacture. Subject to lead time. * HSSE > 3/4

- General purpose use, materials up to approx. 1000 N/mm²
- Blind holes
- Suitable for machine operations
- Depths up to approx. 1.5 x d₁

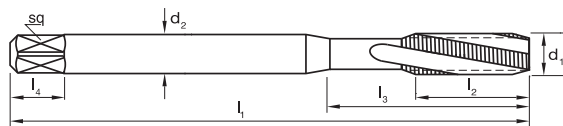

Catalogue Code	T255	T256	T257
Discount Group	D0402	D0406	D0402
Material	HSSE	HSSE	HSSE
Surface Finish	Brt	TiN	Brt
Sutton Designation	N	N	N
Geometry	R15	R15	R15
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2B	2B	3B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	•	•
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•	•
0284	# 4	40	56	5	18	3.5	2.7	6	2	2.3	•	•	•
0318	# 5	40	56	6	18	3.5	2.7	6	3	2.6	•	•	•
0351	# 6	32	56	6	19	4.0	3.0	6	3	2.8	•	•	•
0417	# 8	32	63	7	19	4.5	3.4	6	3	3.4	•	•	•
0483	# 10	24	70	8	20	6.0	4.9	8	3	3.8	•	•	•
0549	# 12	24	80	10	29	6.0	4.9	8	3	4.5	•	•	•
0635	1/4	20	80	10	30	7.0	5.5	8	3	5.1	•	•	•
0794	5/16	18	90	13	34	8.0	6.2	9	3	6.6	•	•	•
0953	3/8	16	100	15	35	10.0	7.0	10	3	8.0	•	•	•

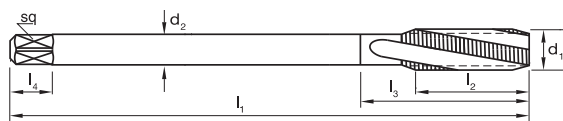

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
1111	7/16	14	100	15	-	8.0	6.2	8	3	9.4	•	•	•
1270	1/2	13	110	18	-	9.0	7.0	10	3	10.8	•	•	•
1429	9/16	12	110	20	-	11.0	9.0	12	3	12.2	•	•	•
1588	5/8	11	110	20	-	12.0	9.0	12	3	13.5	•	•	•
1905	3/4	10	125	25	-	14.0	11.0	14	4	16.5	•	•	•
2223	7/8	9	140	28	-	18.0	14.5	17	4	19.5	•	•	•
2540	1	8	160	32	-	18.0	14.5	17	4	22.2	•	•	•

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
T255	●	●	○	○		●	○			○				○	○	○	○	○	○	○	○	●	●	○	○		○	○																		
T256	●	●	●	●	○	●	○	○		●		○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																	
T257	●	●	○	○	○	●	○			○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools

BLACKMAGIC

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

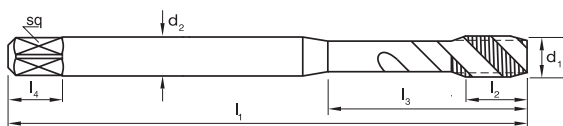


Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0218	# 2	56	45	9	12	2.8	2.1	5	3	1.85	T691 0218
0284	# 4	40	56	5	18	3.5	2.7	6	3	2.35	T691 0284
0351	# 6	32	56	6	20	4	3	6	3	2.85	T691 0351
0417	# 8	32	63	7	21	4.5	3.4	6	3	3.50	T691 0417
0483	# 10	24	70	9	25	6	4.9	8	3	3.90	T691 0483
0635	1/4	20	80	10	30	7	5.5	8	3	5.10	T691 0635

Catalogue Code	T691
Discount Group	D0410
Material	PM-HSSE V3
Surface Finish	HARDLUBE
Sutton Designation	UNI
Geometry	R50
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	2BX



UNC

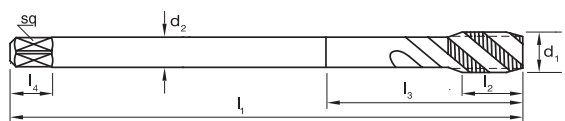

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	18	90	13	35	6	4.9	8	3	6.60	T691 0794
0953	3/8	16	100	15	39	7	5.5	8	3	8.00	T691 0953
1270	1/2	13	110	18	-	9	7	10	4	10.80	T691 1270
1588	5/8	11	110	20	-	12	9	12	4	13.50	T691 1588




ISO	P													M	K								N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T691	●	●	●	○		●	○			●		●	○	●	○	○	○	○	○	○	○	○	○	●	●	●	○	○	○	○																			
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																							●	Optimal		○	Effective	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective



suttontools

- Use in stainless steels and high strength steels up to 1000N/mm²
- Blind holes
- Suitable for synchronous tapping in machine operations
- Depths up to approx. 3 x d₁

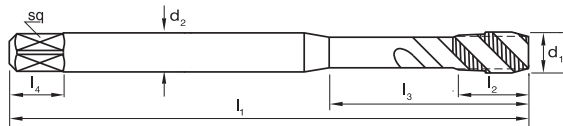

Catalogue Code	T261	T262
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Blu	TICN
Sutton Designation	VA DH	VA DH
Geometry	R45	R45
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	T262 0218
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	# 4	40	56	5	18	3.5	2.7	6	2	2.3	T261 0284	T262 0284
0318	# 5	40	56	6	18	3.5	2.7	6	3	2.6	•	•
0351	# 6	32	56	6	19	4.0	3.0	6	3	2.8	T261 0351	T262 0351
0417	# 8	32	63	7	19	4.5	3.4	6	3	3.4	T261 0417	T262 0417
0483	# 10	24	70	8	20	6.0	4.9	8	3	3.8	T261 0483	T262 0483
0549	# 12	24	80	10	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	10	30	7.0	5.5	8	3	5.1	T261 0635	T262 0635
0794	5/16	18	90	13	34	8.0	6.2	9	3	6.6	T261 0794	T262 0794
0953	3/8	16	100	15	35	10.0	7.0	10	3	8.0	T261 0953	T262 0953

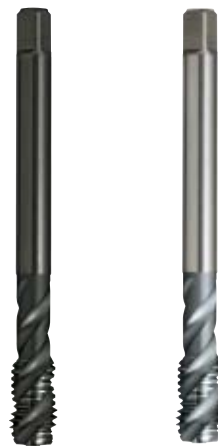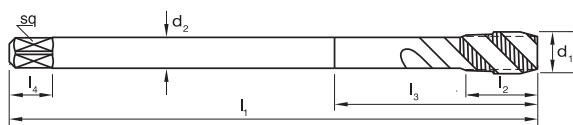

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	15	-	8.0	6.2	8	3	9.4	T261 1111	T262 1111
1270	1/2	13	110	18	-	9.0	7.0	10	3	10.8	T261 1270	T262 1270
1429	9/16	12	110	20	-	11.0	9.0	12	3	12.2	•	•
1588	5/8	11	110	20	-	12.0	9.0	12	3	13.5	T261 1588	T262 1588
1905	3/4	10	125	25	-	14.0	11.0	14	4	16.5	T261 1905	T262 1905
2223	7/8	9	140	28	-	18.0	14.5	17	4	19.5	T261 2223	T262 2223
2540	1	8	160	32	-	18.0	14.5	17	4	22.2	T261 2540	T262 2540

ISO	P													M			K							N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41				
T261	●	●	○			○	○					○		●	●	○								○	○	○	○		○		○																						
T262	●	●	○	○		○	○	○			○	●		●	●	●								○	○	○	○		○				●		○																		


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

suttontools

- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

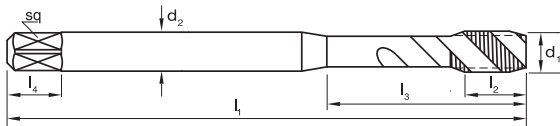

Catalogue Code **T695**

Discount Group **D0408**

Material **PM-HSSE V3**

Surface Finish **TICN**


Sutton Designation **VA PM**

Geometry **R50**

Chamfer **Form C / 2.5 x P**

Limit & Nut Tolerance **2BX**

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0218	# 2	56	45	9	12	2.8	2.1	5	3	1.85	T695 0218
0284	# 4	40	56	5	18	3.5	2.7	6	3	2.35	T695 0284
0351	# 6	32	56	6	20	4	3.0	6	3	2.85	T695 0351
0417	# 8	32	63	7	21	4.5	4.3	6	3	3.50	T695 0417
0483	# 10	24	70	9	25	6	4.9	8	3	3.90	T695 0483
0635	1/4	20	80	10	30	7	5.5	8	3	5.10	T695 0635



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	18	90	13	-	6	4.9	8	3	6.60	T695 0794
0953	3/8	16	100	15	-	7	5.5	8	3	8.00	T695 0953
1270	1/2	13	110	18	-	9	7	10	4	10.80	T695 1270
1588	5/8	11	110	20	-	12	9	12	4	13.50	T695 1588

ISO	P												M	K								N												S								H																									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41																		
T695	●	●	●	○		●	○	○		○		●		●	●									○	○	○	○	○		○			●		●																																
P	Steel												M	Stainless Steel								K	Cast Iron								N	Non-Ferrous Metals												S	Titanium & Super Alloys								H	Hard Materials				●	Optimal				○	Effective			


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

UNC

suttontools

- Use in stainless steels and high strength steels up to 1000N/mm²
- Blind holes
- Suitable for synchronous tapping in machine operations
- Depths up to approx. 2.5 x d₁



Catalogue Code	T263	T264
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Brf	TICN
Sutton Designation	VA	VA
Geometry	R40	R40
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
2858	1-1/8	8	180	30	-	22.0	18.0	21	4	25.5	T263 2858	T264 2858
3175	1-1/4	8	180	30	-	22.0	18.0	21	4	28.5	T263 3175	T264 3175
3493	1-3/8	8	200	30	-	28.0	22.0	25	4	31.75	T263 3493	T264 3493
3810	1-1/2	8	200	30	-	28.0	22.0	25	6	35.0	T263 3810	T264 3810
4128	1-5/8	8	200	30	-	32.0	24.0	27	6	38.0	T263 4128	T264 4128
4445	1-3/4	8	220	30	-	36.0	29.0	3	6	41.5	T263 4445	T264 4445
4763	1-7/8	8	250	30	-	40.0	32.0	35	6	44.5	T263 4763	T264 4763
5080	2	8	250	33	-	40.0	32.0	35	6	47.5	T263 5080	T264 5080


ISO	P													M	K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T263	●	●	●	○		●	○	○		○		●		●	●	●								○	○	○	○		○		○																		
T264	●	●	●	○		●	○	○		○		●		●	●	●								○	○	○	○		○		○																		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective


suttontools

- Use in harder materials up to 42 HRC
- Blind holes
- Suitable for machine operations
- Depths up to approx. 2.5 x d₁

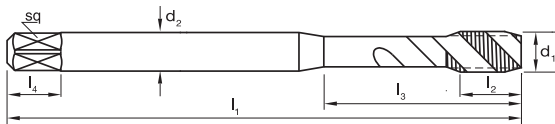

Catalogue Code	T266	T267
Discount Group	D0402	D0410
Material	PM-HSSE V3	PM-HSSE V3
Surface Finish	Blu	TiAlN
Sutton Designation	NH	NH
Geometry	R40	R40
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	56	45	9	10	2.8	2.1	5	2	1.85	•	•
0251	# 3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	# 4	40	56	5	18	3.5	2.7	6	2	2.3	•	•
0318	# 5	40	56	6	18	3.5	2.7	6	3	2.6	•	•
0351	# 6	32	56	6	19	4.0	3.0	6	3	2.8	•	•
0417	# 8	32	63	7	19	4.5	3.4	6	3	3.4	•	•
0483	# 10	24	70	8	20	6.0	4.9	8	3	3.8	•	•
0549	# 12	24	80	10	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	10	30	7.0	5.5	8	3	5.1	T266 0635	T267 0635
0794	5/16	18	90	13	34	8.0	6.2	9	3	6.6	T266 0794	T267 0794
0953	3/8	16	100	15	35	10.0	7.0	10	3	8.0	T266 0953	T267 0953



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	15	-	8.0	6.2	8	3	9.4	•	•
1270	1/2	13	110	18	-	9.0	7.0	10	3	10.8	T266 1270	T267 1270
1429	9/16	12	110	20	-	11.0	9.0	12	3	12.2	•	T267 1429
1588	5/8	11	110	20	-	12.0	9.0	12	3	13.5	T266 1588	T267 1588
1905	3/4	10	125	25	-	14.0	11.0	14	4	16.5	T266 1905	T267 1905
2223	7/8*	9	140	28	-	18.0	14.5	17	4	19.5	•	•
2540	1*	8	160	32	-	18.0	14.5	17	4	22.2	T266 2540	T267 2540

ISO	P													M			K						N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41				
T266			●	●			●				○			○	○	○	○	○	○	○	○	○																										○					
T267				●	●			●			○			○		●												●	○	○	○																	○					
P	Steel	M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys						H	Hard Materials										●	Optimal										○	Effective									

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials



• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time. * HSSE > 3/4

DIN Taps UNC, Spiral Flute, R15 H

suttontools


- Use in harder materials up to 45 HRC
- Blind holes
- Suitable for machine operations
- Depths up to approx. 1.5 x d₁

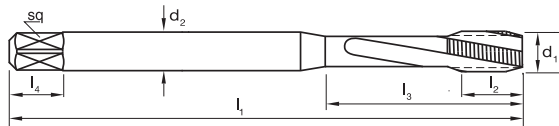

Catalogue Code	T265	T667
Discount Group	D0402	D0408
Material	PM-HSS Co	PM-HSS Co
Surface Finish	Blu	TICN
Sutton Designation	H	H
Geometry	R15	R15
Chamfer	Form C / 3 x P	Form C / 3 x P
Limit & Nut Tolerance	2BX	2BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	#2	56	45	9	10	2.8	2.1	5	2	1.85	•	•
0251	#3	48	50	9	10	2.8	2.1	5	2	2.1	•	•
0284	#4	40	56	5	18	3.5	2.7	6	2	2.3	•	•
0318	#5	40	56	6	18	3.5	2.7	6	3	2.6	•	•
0351	#6	32	56	6	19	4.0	3.0	6	3	2.8	•	•
0417	#8	32	63	7	19	4.5	3.4	6	3	3.4	•	•
0483	#10	24	70	8	20	6.0	4.9	8	3	3.8	•	•
0549	#12	24	80	10	29	6.0	4.9	8	3	4.5	•	•
0635	1/4	20	80	10	30	7.0	5.5	8	3	5.1	T265 0635	T667 0635
0794	5/16	18	90	13	34	8.0	6.2	9	3	6.6	T265 0794	T667 0794
0953	3/8	16	100	15	35	10.0	7.0	10	3	8.0	T265 0953	T667 0953

UNC

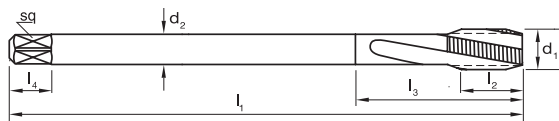

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	14	100	15	-	8.0	6.2	8	3	9.4	T265 1111	T667 1111
1270	1/2	13	110	18	-	9.0	7.0	10	4	10.8	T265 1270	T667 1270
1429	9/16	12	110	20	-	11.0	9.0	12	4	12.2	T265 1429	T667 1429
1588	5/8	11	110	20	-	12.0	9.0	12	4	13.5	T265 1588	T667 1588
1905	3/4	10	125	25	-	14.0	11.0	14	4	16.5	T265 1905	T667 1905
2223	7/8*	9	140	28	-	18.0	14.5	17	4	19.5	T265 2223	T667 2223
2540	1*	8	160	32	-	18.0	14.5	17	4	22.2	T265 2540	T667 2540
2858	1.1/8*	7	180	45	-	22.0	18.0	21	4	25.0	T265 2858	T667 2858

ISO	P													M		K						N						S						H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T265					●			●	●		●	○	●				○	○	○	○	○	○								○							○	○	○	○	○	○					○		
T667					●			●	●		●	○	●				○	○	○	○	○	○						○	●									○	○	○	○	○					●		


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time. * HSSE > 3/4

suttontools

- For Titanium based alloys
- Unique cutting geometry for highly efficient swarf ejection
- Optimised microfinish for optimal process reliability and excellent thread quality
- Blind holes up to approx. $1.5 \times d_1$



Catalogue Code	T790
Discount Group	D0408
Material	PM-HSS Co
Surface Finish	TICN
Sutton Designation	Ti
Geometry	R15
Chamfer	Form C / 3 x P
Limit & Nut Tolerance	3BX

Size Ref.	d ₁	TPI	I ₁	I ₂	I ₃	d ₂	sq	I ₄	z	Item #
UNJC										
0635	1/4	20	80	10	30	7.0	5.5	8	3	T790 0635
0794	5/16	18	90	13	34	8.0	6.2	9	3	T790 0794
0953	3/8	16	100	15	35	10.0	7.0	10	3	T790 0953
UNJF										T791
0635	1/4	28	80	10	30	7.0	5.5	8	3	T791 0635
0794	5/16	24	90	13	34	8.0	6.2	9	3	T791 0794
0953	3/8	24	100	15	35	10.0	7.0	10	3	T791 0953

***Other sizes available to order on request**

Special Taps Service

Sutton Tools understands the difficulty of manufacturing super alloys.

Our Special Tool Service enables us to meet your requirements and deliver superior performance in Titanium & high temperature alloys.

With our state of the art CNC grinding equipment almost any profile can be achieved. Feel free to discuss these with our Tech team.

All Thread Forms

M, MJ, UNJC, UNJF, Screw Thread Insert (STI)

Sizes

M2-M30, #2-1"

[†] Sutton Tools recommends that in difficult to machine materials the tapping drill holes should be drilled as large as practical whilst maintaining sufficient strength in the produced thread. This will need to be determined for each individual application. By decreasing the % thread engagement the tapping torque required is reduced and the tool life can be increased.

ISO	P													M	K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T790													○			○																							●	●	○	●	○						

P

Steel

M

Stainless Steel

K

Cast Iron

N

Non-Ferrous Metals

S

Titanium & Super Alloys

H

Hard Materials

●

Optimal



○

Effective

*Available on request as special manufacture. Subject to lead time & MOQ.

suttontools

- For Titanium based alloys
- Unique cutting geometry for highly efficient swarf ejection
- Optimised microfinish for optimal process reliability and excellent thread quality
- Blind holes up to approx. $1.5 \times d_1$

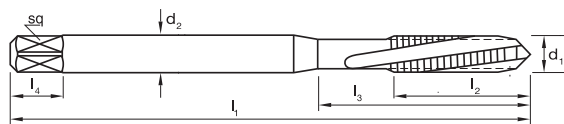

Catalogue Code	T786
Discount Group	D0408
Material	PM-HSS Co
Surface Finish	TICN
Sutton Designation	Ti
Geometry	L12
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	3BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
UNJC											
0635	1/4	20	80	19	30	7.0	5.5	8	3		T786 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3		T786 0794
0953	3/8	16	100	24	35	10.0	7.0	10	3		T786 0953

UNJF											T787
0635	1/4	28	80	19	30	7.0	5.5	8	3		T787 0635
0794	5/16	24	90	22	34	8.0	6.2	9	3		T787 0794
0953	3/8	24	100	24	35	10.0	7.0	10	3		T787 0953



ISO	P													M	K							N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T786													○			○																							●	●	○	●	○							
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																		●	Optimal		○	Effective							

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

- For Nickel alloys / age-hardened super alloys >1150M/mm²
- Reinforced cutting geometry
- Blind or through holes
- Depths up to approx. 1.5 x d₁

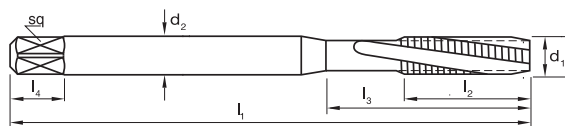

Catalogue Code	T794
Discount Group	D0408
Material	PM-HSS Co
Surface Finish	TICN
Sutton Designation	Ni
Geometry	R10
Chamfer	Form C / 3 x P
Limit & Nut Tolerance	3BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø [†]	Item #
UNJC											
0635	1/4	20	80	19	30	7.0	5.5	8	3		T794 0635
0794	5/16	18	90	22	34	8.0	6.2	9	3		T794 0794
0953	3/8	16	100	22	35	10.0	7.0	10	3		T794 0953
1270	1/2	13	110	28	-	9.0	7.0	10	3		T794 1270
UNJF											
											T795
0635	1/4	28	80	19	30	7.0	5.5	8	3		T795 0635
0794	5/16	24	90	22	34	8.0	6.2	9	3		T795 0794
0953	3/8	24	100	22	35	10.0	7.0	10	3		T795 0953

*Other sizes available to order on request

Special Taps Service

Sutton Tools understands the difficulty of manufacturing super alloys.

Our Special Tool Service enables us to meet your requirements and deliver superior performance in Titanium & high temperature alloys.

With our state of the art CNC grinding equipment almost any profile can be achieved. Feel free to discuss these with our Tech team.

All Thread Forms

M, MJ, UNJC, UNJF, Screw Thread Insert (STI)

Sizes

M2-M30, #2-1"



[†] Sutton Tools recommends that in difficult to machine materials the tapping drill holes should be drilled as large as practical whilst maintaining sufficient strength in the produced thread. This will need to be determined for each individual application. By decreasing the % thread engagement the tapping torque required is reduced and the tool life can be increased.

ISO	P													M	K						N										S										H																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
T794																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals						S	Titanium & Super Alloys						H	Hard Materials																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										

P Steel **M** Stainless Steel **K** Cast Iron **N** Non-Ferrous Metals **S** Titanium & Super Alloys **H** Hard Materials

● Optimal ○ Effective


- General purpose use, materials up to approx. 1000 N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Application
Geometry
Chamfer
Limit & Nut Tolerance

T173	T174	T702	T175
D0402	D0402	D0402	D0406
HSSE	HSSE	HSSE	HSSE
Brt	Brt	Blue	TIN
N	N	N	N
Form B / 4.5 x P 2B	Form C / 2.5 x P 3B	Form B / 4.5 x P 2B	Form B / 4.5 x P 2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
0218	#2	64	45	9	-	2.8	2.1	5	2	1.9	T173 0218	•	T702 0218	T175 0218
0251	#3	56	50	9	-	2.8	2.1	5	2	2.1	•	•	•	•
0284	#4	48	56	11	18	3.5	2.7	6	2	2.35	T173 0284	•	T702 0284	T175 0284
0318	#5	44	56	11	18	3.5	2.7	6	3	2.65	•	•	•	T175 0318
0351	#6	40	56	13	20	4.0	3.0	6	3	2.9	T173 0351	•	T702 0351	T175 0351
0417	#8	36	63	13	21	4.5	3.4	6	3	3.5	T173 0417	•	T702 0417	T175 0417
0483	#10	32	70	16	25	6.0	4.9	8	3	4.1	T173 0483	•	T702 0483	T175 0483
0549	#12	28	80	19	30	6.0	4.9	8	3	4.6	•	•	•	•
0635	1/4	28	80	19	30	7.0	5.5	8	3	5.5	T173 0635	T174 0635	T702 0635	T175 0635
0794	5/16	24	90	22	35	8.0	6.2	9	3	6.9	T173 0794	•	T702 0794	T175 0794
0953	3/8	24	100	20	35	10.0	8.0	11	3	8.5	T173 0953	•	T702 0953	T175 0953

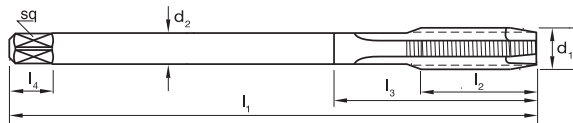


Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #	Item #
1111	7/16	20	100	24	-	8.0	6.2	8	3	9.8	T173 1111	•	•	T175 1111
1270	1/2	20	110	28	-	9.0	7.0	10	3	11.5	T173 1270	•	•	T175 1270
1429	9/16	18	110	32	-	11.0	9.0	12	3	12.8	T173 1429	•	•	T175 1429
1588	5/8	18	110	32	-	12.0	9.0	12	3	14.5	T173 1588	•	•	T175 1588
1905	3/4	16	125	34	-	14.0	11.0	14	4	17.5	T173 1905	•	•	T175 1905
2223	7/8	14	140	34	-	18.0	14.5	17	4	20.5	T173 2223	•	•	T175 2223
2540	1	12	160	38	-	18.0	14.5	17	4	23.5	T173 2540	•	•	T175 2540

ISO	P													M			K					N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T173	●	●	●	○		●	○			○							○	○	○	○	○	○	●	●	○	○	○	○	○																				
T174	●	●	●	○		●	○			○							○	○	○	○	○	○	●	●	○	○	○	○	○																				
T702	●	●	●	●		●	●			●		○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																			
T175	●	●	●	○		○	○			●		○		○	○	○	○	○	○	○	○	○	○	●	○	○	○	○	○	○																			
P	Steel	Stainless Steel													Cast Iron			Non-Ferrous Metals										Titanium & Super Alloys										Hard Materials					●	○					

• Available on request as special manufacture. Subject to lead time.

• Optimal ○ Effective

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

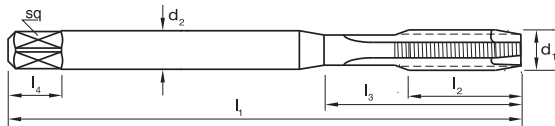

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0284	# 4	48	56	11	18	3.5	2.7	6	2	2.35	T694 0284
0318	# 5	44	56	11	18	3.5	2.7	6	3	2.65	•
0351	# 6	40	56	13	20	4.0	3.0	6	3	2.9	T694 0351
0417	# 8	36	63	13	21	4.5	3.4	6	3	3.5	T694 0417
0483	# 10	32	70	16	25	6.0	4.9	8	3	4.1	T694 0483
0635	1/4	28	80	19	30	7.0	5.5	8	3	5.5	T694 0635

Catalogue Code T694

Discount Group D0410

Material PM-HSSE V3



Surface Finish HARDLUBE

Sutton Designation UNI


Geometry Special Relief

Chamfer Form B / 4.5 x P

Limit & Nut Tolerance 2BX



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	24	90	22	35	6	4.9	8	3	6.90	T694 0794
0953	3/8	24	90	20	39	7	5.5	8	3	8.50	T694 0953
1270	1/2	20	100	22	-	9	7	10	4	11.50	T694 1270
1588	5/8	18	100	22	-	12	9	12	4	14.50	T694 1588



ISO	P													M	K						N										S										H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41															
T694	●	●	●	○			●	○			●	●	○	●	○		○	○	○	○	○	●	●	●	○	○	○	○	○																											
P	Steel			M	Stainless Steel										K	Cast Iron						N	Non-Ferrous Metals										S	Titanium & Super Alloys										H	Hard Materials						●	Optimal		○	Effective	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective




watch the video



suttontools


- Use in stainless steels and high strength steels up to 1000N/mm²
- Through holes
- Suitable for machine operations
- Depths up to approx. $3 \times d_1$



	T176	T177
Catalogue Code	D0402	D0408
Discount Group	HSSE	HSSE
Material	<i>Blu</i>	<i>TiCN</i>
Surface Finish	VA	VA
Sutton Designation	Special Relief	Special Relief
Geometry	Form B / 4.5 x P	Form B / 4.5 x P
Chamfer	2B	2B
Limit & Nut Tolerance		

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₆	z	drill Ø	Limit & Mat. Tolerance	ED	ED
0218	# 2	64	45	9	-	2.8	2.1	5	2	1.9		•	•
0251	# 3	56	50	9	-	2.8	2.1	5	2	2.1		•	•
0284	# 4	48	56	11	18	3.5	2.7	6	2	2.35		T176 0284	•
0318	# 5	44	56	11	18	3.5	2.7	6	3	2.65		•	•
0351	# 6	40	56	13	20	4.0	3.0	6	3	2.9		T176 0351	•
0417	# 8	36	63	13	21	4.5	3.4	6	3	3.5		T176 0417	•
0483	# 10	32	70	16	25	6.0	4.9	8	3	4.1		T176 0483	T177 0483
0549	# 12	28	80	19	30	6.0	4.9	8	3	4.6		•	•
0635	1/4	28	80	19	30	7.0	5.5	8	3	5.5		T176 0635	T177 0635
0794	5/16	24	90	22	35	8.0	6.2	9	3	6.9		T176 0794	T177 0794
0953	3/8	24	100	20	35	10.0	8.0	11	3	8.5		T176 0953	T177 0953

UNF




Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	20	100	24	-	8.0	6.2	8	3	9.8	T176 1111	T177 1111
1270	1/2	20	110	28	-	9.0	7.0	10	3	11.5	T176 1270	T177 1270
1429	9/16	18	110	32	-	11.0	9.0	12	3	12.8	T176 1429	T177 1429
1588	5/8	18	110	32	-	12.0	9.0	12	3	14.5	T176 1588	T177 1588
1905	3/4	16	125	34	-	14.0	11.0	14	4	17.5	T176 1905	T177 1905
2223	7/8	14	140	34	-	18.0	14.5	17	4	20.5	T176 2223	T177 2223
2540	1	12	160	38	-	18.0	14.5	17	4	23.5	T176 2540	T177 2540

ISO	P										M			K						N							S								H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T176	●	●		○		●	○						○		●	●	○							○	○	○	○	○	○		○																			
T177	●	●	○			○	○			○			●	○	○									○	○	○	○	○	○		○			●	○	○														
P	Steel	M	Stainless Steel		K	Cast Iron		N	Non-Ferrous Metals		S	Titanium & Super Alloys		H	Hard Materials																										●	Optimal		○	Effective					


- Available on request as special manufacture. Subject to lead time.

- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁

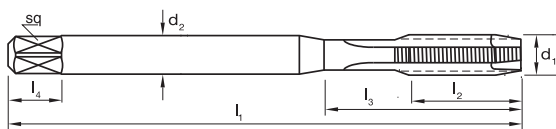

Catalogue Code	T698
Discount Group	D0408
Material	PM-HSSE V3
Surface Finish	TICN
Sutton Designation	VA PM
Geometry	Special Relief
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	2BX

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0284	# 4	48	56	11	18	3.5	2.7	6	2	2.35	T698 0284
0351	# 6	40	56	12	20	4.0	3.0	6	3	2.9	T698 0351
0417	# 8	36	63	13	21	4.5	3.4	6	3	3.5	T698 0417
0483	# 10	32	70	16	25	6.0	4.9	8	3	4.1	T698 0483
0635	1/4	28	80	19	30	7.0	5.5	8	3	5.5	T698 0635



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	24	90	22	-	6	4.9	8	3	6.90	T698 0794
0953	3/8	24	90	20	-	7	5.5	8	3	8.50	T698 0953
1270	1/2	20	100	22	-	9	7	10	4	11.50	T698 1270
1588	5/8	18	100	22	-	12	9	12	4	14.50	T698 1588


ISO	P													M	K							N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T698	●	●	○	○		●	○			○		●	○	●	●	●								○	○	○	○	○	○		○			●	●	●													
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																							●	Optimal		○	Effective	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

- General purpose use, materials up to approx. 1000 N/mm²
- Blind holes
- Suitable for machine operations
- Depths up to approx. 1.5 x d₁

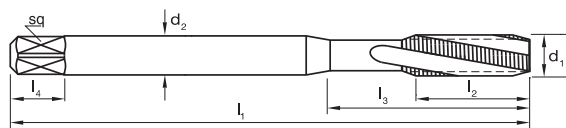


Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₆	z	drill Ø	Item #
0218	# 2	64	45	9	-	2.8	2.1	5	2	1.9	•
0251	# 3	56	50	9	-	2.8	2.1	5	2	2.1	•
0284	# 4	48	56	5	18	3.5	2.7	6	2	2.35	•
0318	# 5	44	56	6	18	3.5	2.7	6	3	2.65	•
0351	# 6	40	56	6	20	4.0	3.0	6	3	2.9	•
0417	# 8	36	63	7	21	4.5	3.4	6	3	3.5	•
0483	# 10	32	70	8	25	6.0	4.9	8	3	4.1	•
0549	# 12	28	80	10	30	6.0	4.9	8	3	4.6	•
0635	1/4	28	80	10	30	7.0	5.5	8	3	5.5	•
0794	5/16	24	90	13	35	8.0	6.2	9	3	6.9	•
0953	3/8	24	100	15	35	10.0	8.0	11	3	8.5	•



Catalogue Code	T274
Discount Group	D0402
Material	HSSE
Surface Finish	<i>Brt</i>
Sutton Designation	N
Geometry	R15
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	2B

UNF

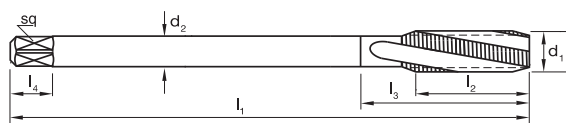


Size Ref.	d ₁	TPI	I ₁	I ₂	I ₃	d ₂	sq	I ₄	z	drill Ø	Item #
1111	7/16	20	100	15	-	8.0	6.2	8	3	9.8	•
1270	1/2	20	110	18	-	9.0	7.0	10	3	11.5	•
1429	9/16	18	110	20	-	11.0	9.0	12	3	12.8	•
1588	5/8	18	110	20	-	12.0	9.0	12	3	14.5	•
1905	3/4	16	125	25	-	14.0	11.0	14	4	17.5	•
2223	7/8	14	140	28	-	18.0	14.5	17	4	20.5	•
2540	1	12	160	32	-	18.0	14.5	17	4	23.5	•



ISO	P													M			K					N										S										H																																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	4.0	4.1																													
T274	●	●	●	●		●	●			●							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																													
P	Steel													M			Stainless Steel					K					Cast Iron					N										Non-Ferrous Metals										S										Titanium & Super Alloys					H					Hard Materials					● Optimal	● Effective

suttontools


- General purpose use, materials up to approx. 1000 N/mm²
- Blind holes
- Suitable for machine operations
- Depths up to approx. 2.5 x d₁



Catalogue Code	T275	T701
Discount Group	D0402	D0402
Material	HSSE	HSSE
Surface Finish	Br	Blu
Sutton Designation	N	N
Geometry	R40	R40
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	64	45	9	-	2.8	2.1	5	2	1.9	•	•
0251	# 3	56	50	9	-	2.8	2.1	5	2	2.1	•	•
0284	# 4	48	56	5	18	3.5	2.7	6	2	2.35	T275 0284	•
0318	# 5	44	56	6	18	3.5	2.7	6	3	2.65	T275 0318	•
0351	# 6	40	56	6	20	4.0	3.0	6	3	2.9	T275 0351	T701 0351
0417	# 8	36	63	7	21	4.5	3.4	6	3	3.5	T275 0417	T701 0417
0483	# 10	32	70	8	25	6.0	4.9	8	3	4.1	T275 0483	T701 0483
0549	# 12	28	80	10	30	6.0	4.9	8	3	4.6	T275 0549	•
0635	1/4	28	80	10	30	7.0	5.5	8	3	5.5	T275 0635	T701 0635
0794	5/16	24	90	13	35	8.0	6.2	9	3	6.9	T275 0794	T701 0794
0953	3/8	24	100	15	35	10.0	8.0	11	3	8.5	T275 0953	T701 0953

UNF

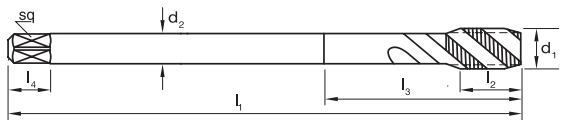

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1111	7/16	20	100	15	-	8.0	6.2	8	3	9.8	T275 1111	T701 1111
1270	1/2	20	110	18	-	9.0	7.0	10	3	11.5	T275 1270	•
1429	9/16	18	110	20	-	11.0	9.0	12	3	12.8	T275 1429	•
1588	5/8	18	110	20	-	12.0	9.0	12	3	14.5	T275 1588	•
1905	3/4	16	125	25	-	14.0	11.0	14	4	17.5	T275 1905	•
2223	7/8	14	140	28	-	18.0	14.5	17	4	20.5	T275 2223	•
2540	1	12	160	32	-	18.0	14.5	17	4	23.5	T275 2540	•

ISO	P													M			K						N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T275	●	●	●	●		●	○			○							○		○		○	○	○	●	○	○		○	○																					
T701	●	●	●	●		●	○			●		○		○			○		○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
P	Steel			M			Stainless Steel			K			Cast Iron			N			Non-Ferrous Metals			S						Titanium & Super Alloys						H					Hard Materials					● Optimal ○ Effective						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.


suttontools

BLACKMAGIC

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations




watch the video

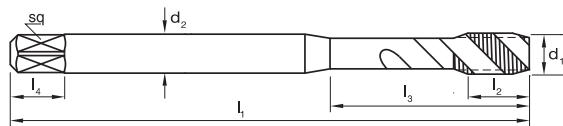

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0284	# 4	48	56	5	18	3.5	2.7	6	3	2.40	T692 0284
0351	# 6	40	56	6	20	4	3	6	3	2.95	T692 0351
0417	# 8	36	63	7	21	4.5	3.4	6	3	3.50	T692 0417
0483	# 10	32	70	8	25	6	4.9	8	3	4.10	T692 0483
0635	1/4	28	80	10	30	7	5.5	8	3	5.50	T692 0635

Catalogue Code	T692
Discount Group	D0410
Material	PM-HSSE V3
Surface Finish	HARDLUBE
Sutton Designation	UNI
Geometry	R50
Chamfer	Form B / 4.5 x P
Limit & Nut Tolerance	2BX

UNF



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	24	90	13	35	6	4.9	8	3	6.90	T692 0794
0953	3/8	24	90	15	39	7	5.5	8	3	8.50	T692 0953
1270	1/2	20	100	18	-	9	7	10	4	11.50	T692 1270
1588	5/8	18	100	20	-	12	9	12	4	14.50	T692 1588




ISO	P													M	K								N										S										H						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T692	●	●	●	○		●	○			●		●	○	●	●	○	○	○	○	○	○	○	●	●	●	○	○	○	○																				
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials													●	Optimal		○	Effective											

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

suttontools

- Use in stainless steels and high strength steels up to 1000N/mm²
- Blind holes
- Suitable for synchronous tapping in machine operations
- Depths up to approx. 3 x d₁

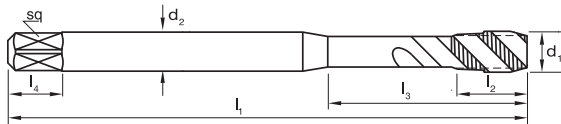

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0218	# 2	64	45	9	-	2.8	2.1	5	2	1.9	•	•
0251	# 3	56	50	9	-	2.8	2.1	5	2	2.1	•	•
0284	# 4	48	56	5	18	3.5	2.7	6	2	2.35	•	•
0318	# 5	44	56	6	18	3.5	2.7	6	3	2.65	•	•
0351	# 6	40	56	6	20	4.0	3.0	6	3	2.9	T276 0351	•
0417	# 8	36	63	7	21	4.5	3.4	6	3	3.5	T276 0417	•
0483	# 10	32	70	8	25	6.0	4.9	8	3	4.1	T276 0483	•
0549	# 12	28	80	10	30	6.0	4.9	8	3	4.6	•	•
0635	1/4	28	80	10	30	7.0	5.5	8	3	5.5	T276 0635	T277 0635
0794	5/16	24	90	13	35	8.0	6.2	9	3	6.9	T276 0794	T277 0794
0953	3/8	24	100	15	35	10.0	8.0	11	3	8.5	T276 0953	T277 0953



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
1429	7/16	20	100	15	-	8.0	6.2	8	3	9.8	T276 1111	T277 1111
1270	1/2	20	110	18	-	9.0	7.0	10	3	11.5	T276 1270	T277 1270
1429	9/16	18	110	20	-	11.0	9.0	12	3	12.8	•	•
1588	5/8	18	110	20	-	12.0	9.0	12	3	14.5	T276 1588	T277 1588
1905	3/4	16	125	25	-	14.0	11.0	14	4	17.5	T276 1905	T277 1905
2223	7/8	14	140	28	-	18.0	14.5	17	4	20.5	T276 2223	T277 2223
2540	1	12	160	32	-	18.0	14.5	17	4	23.5	T276 2540	T277 2540

ISO	P													M			K							N										S										H					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T276	●	●	○			○	○					○		●	●	○																																	
T277	●	●	○	○		○	○	○		○		●		●	●	●								○	○	○	○		○		○			●		○													

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials



• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.


UNF

suttontools

- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

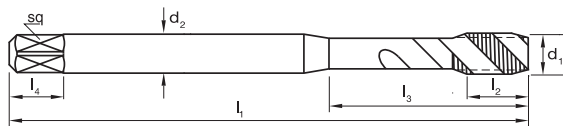

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0284	# 4	48	56	5	18	3.5	2.7	6	2	2.35	T696 0284
0351	# 6	40	56	6	20	4.0	3.0	6	3	2.9	T696 0351
0417	# 8	36	63	7	21	4.5	3.4	6	3	3.5	T696 0417
0483	# 10	32	70	8	25	6.0	4.9	8	3	4.1	T696 0483
0635	1/4	28	80	10	30	7.0	5.5	8	3	5.5	T696 0635

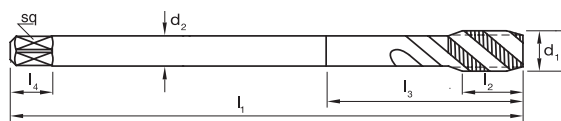

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0794	5/16	24	90	13	-	6	4.9	8	3	6.90	T696 0794
0953	3/8	24	90	15	-	7	5.5	8	3	8.50	T696 0953
1270	1/2	20	100	18	-	9	7	10	4	11.50	T696 1270
1588	5/8	18	100	20	-	12	9	12	4	14.50	T696 1588

ISO	P													M			K								N										S										H																																														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41																																										
T696	●	●	●	○		●	○			○		●		●	●									○	○	○	○	○		○				●		●																																																							
P	Steel			M			Stainless Steel			K			Cast Iron			N			Non-Ferrous Metals			S			Titanium & Super Alloys			H			Hard Materials																																																												
																																														●	Optimal		○	Effective																																									

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective




Catalogue Code	T696
Discount Group	D0408
Material	PM-HSSE V3
Surface Finish	TTCN
Sutton Designation	VA PM
Geometry	R50
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	2BX



DIN Taps G (BSPF), Straight Flute, N

suttontools

- General Purpose use in materials up to approx. 1000 N/mm²
- Through & blind holes
- Suitable machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T304	T305
Discount Group	D0402	D0406
Material	HSSE	HSSE
Surface Finish	BrT	TiN
Sutton Designation	N	N
Geometry	Form C / 2.5 x P	Form C / 2.5 x P
Chamfer	ISO 228	ISO 228
Limit & Nut Tolerance	Item #	Item #

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	4	8.8	T304 0973	T305 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	4	11.8	T304 1316	T305 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	4	15.3	T304 1666	T305 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	4	19.0	T304 2096	T305 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	4	21.0	T304 2291	T305 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	4	24.5	T304 2644	T305 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	4	28.5	T304 3020	T305 3020
3325	G 1	11	160	30	-	25.0	20.0	23	4	31.0	T304 3325	T305 3325
3790	G 1-1/8	11	170	30	-	28.0	22.0	25	4	35.5	T304 3790	•
4191	G 1-1/4	11	170	30	-	32.0	24.0	27	6	39.5	T304 4191	•
4432	G 1-3/8	11	180	32	-	36.0	29.0	32	6	42.0	•	•
4780	G 1-1/2	11	190	32	-	36.0	29.0	32	6	45.5	T304 4780	•
5375	G 1-3/4	11	190	32	-	40.0	32.0	35	6	51.0	•	•
5961	G 2	11	220	40	-	45.0	35.0	38	6	57.0	•	•

G

ISO	P													M			K							N										S										H					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T304	●	●	●	●	○	●	○			○														○	○	○	○		○	○	○																		
T305	●	●	●	●	○	●	○			○														○	○	○	○		○	○	○																		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps G (BSPF), Straight Flute, GG

suttontools

- Use in grey cast iron (GG), brittle plastics, hard bronzes to a hardness of 850 N/mm²
- Through & blind holes
- Suitable machine operations
- Depths up to approx. 3 x d₁



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø
0973	G 1/8	28	90	20	-	7.0	5.5	8	4	8.8
1316	G 1/4	19	100	22	-	11.0	9.0	12	4	11.8
1666	G 3/8	19	100	22	-	12.0	9.0	12	5	15.3
2096	G 1/2	14	125	25	-	16.0	12.0	15	5	19.0
2291	G 5/8	14	125	25	-	18.0	14.5	17	5	21.0
2644	G 3/4	14	140	28	-	20.0	16.0	19	6	24.5
3020	G 7/8	14	150	28	-	22.0	18.0	21	6	28.5
3325	G 1	11	160	30	-	25.0	20.0	23	6	31.0



Catalogue Code	T306	T307
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Ni + Blu	TICN
Sutton Designation	GG	GG
Geometry	Low Relief	Low Relief
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 228	ISO 228


Item #	Item #
T306 0973	T307 0973
T306 1316	T307 1316
T306 1666	T307 1666
T306 2096	T307 2096
T306 2291	T307 2291
T306 2644	T307 2644
T306 3020	T307 3020
T306 3325	T307 3325

ISO	P													M	K						N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T306																	●	●	●	●	○	○																											
T307																	●	●	●	●	○	○					○																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

- General Purpose use in materials up to approx. 1000 N/mm²
- Through holes
- Suitable machine operations
- Depths up to approx. 3 x d₁



Catalogue Code	T178	T179	T180
Discount Group	D0402	D0402	D0406
Material	HSSE	HSSE	HSSE
Surface Finish	Brt	Blu	TIN
Sutton Designation	N	N	N
Geometry	Form B / 4.5 x P	Form B / 4.5 x P	Form B / 4.5 x P
Chamfer	ISO 228	ISO 228	ISO 228
Limit & Nut Tolerance	Item #	Item #	Item #

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	3	8.8	T178 0973	T179 0973	T180 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	3	11.8	T178 1316	T179 1316	T180 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	3	15.3	T178 1666	T179 1666	T180 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	3	19.0	T178 2096	T179 2096	T180 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	4	21.0	T178 2291	T179 2291	T180 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	4	24.5	T178 2644	T179 2644	T180 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	4	28.5	T178 3020	T179 3020	T180 3020
3325	G 1	11	160	30	-	25.0	20.0	23	4	31.0	T178 3325	T179 3325	T180 3325

ISO	P												M		K				N										S										H											
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T178	●	●	○	○		●	○				○						○		○		○	○	●	●	○	○		○	○																					
T179	●	●	●	●		●	○			●		○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T180	●	●	●	●	●	●	●	○		●	○			○	○	○	○	○	○	○	○	○	○	●	●	○	○		●	○																				



suttontools

BLACKMAGIC

- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Through holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations



watch the video



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	3	8.8	T700 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	3	11.8	T700 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	3	15.3	T700 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	3	19.0	T700 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	4	21.0	T700 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	5	24.5	T700 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	5	28.5	T700 3020
3325	G 1	11	160	30	-	25.0	20.0	23	5	31.0	T700 3325

Catalogue Code

T700

Discount Group

D0410

Material

PM-HSSE V3

Surface Finish

HARDLUBE

Sutton Designation

UNI

Geometry

Special Relief

Chamfer

Form B / 4.5 x P

Limit & Nut Tolerance

ISO 228


ISO	P													M		K						N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T700	●	●	●	○		●	○			●		●		●	●		○	○	○	○	○	○	●	●	○	○	○	○	○	○	○	○																	
P	Steel			M	Stainless Steel			K	Cast Iron			N	Non-Ferrous Metals			S	Titanium & Super Alloys			H	Hard Materials																							●	Optimal		○	Effective	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

- Use in stainless steels and high strength steels up to 1000N/mm²
- Through holes
- Suitable machine operations
- Depths up to approx. 3 x d₁



Catalogue Code	T181	T182
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	Blu	TiCN
Sutton Designation	VA	VA
Geometry	Special Relief	Special Relief
Chamfer	Form B / 4,5 x P	Form B / 4,5 x P
Limit & Nut Tolerance	ISO 228	ISO 228

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	3	8.8	T181 0973	T182 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	3	11.8	T181 1316	T182 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	3	15.3	T181 1666	T182 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	3	19.0	T181 2096	T182 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	4	21.0	T181 2291	T182 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	4	24.5	T181 2644	T182 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	4	28.5	T181 3020	T182 3020
3325	G 1	11	160	30	-	25.0	20.0	23	4	31.0	T181 3325	T182 3325


ISO	P												M			K				N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T181	●	●	●	○		●	○					○		●	●	○																																	
T182	●	●	●	○		●	○					○		●	●	○								○	○	○	○	○	○		○			●	○	○													
P	Steel	M	Stainless Steel	K	Cast Iron	N	Non-Ferrous Metals										S	Titanium & Super Alloys										H	Hard Materials				●	Optimal		○	Effective												

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

- General purpose use, materials up to approx. 1000 N/mm²
- Blind holes
- Suitable for machine operations
- Depths up to approx. 1.5 x d₁



Catalogue Code	T278	T279
Discount Group	D0402	D0406
Material	HSSE	HSSE
Surface Finish	BrT	TiN
Sutton Designation	N	N
Geometry	R15	R15
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 228	ISO 228

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	3	8.8	T278 0973	T279 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	3	11.8	T278 1316	T279 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	3	15.3	T278 1666	T279 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	4	19.0	T278 2096	T279 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	4	21.0	T278 2291	T279 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	5	24.5	T278 2644	T279 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	5	28.5	T278 3020	T279 3020
3325	G 1	11	160	30	-	25.0	20.0	23	5	31.0	T278 3325	T279 3325

ISO	P													M		K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T278	●	●	○	○		●	○			○							○		○			○	○	●	●	○	○		○	○																			
T279	●	●	●	●	○	○	●	○		●		○		○			○	○	○	○	○	○	○	●	●	○	○		○	○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

BLACKMAGIC


- Universal high performance tapping
- PM-HSSE V3 offers superior tool life
- Use in stainless steels and high strength steels up to 850N/mm²
- Blind holes up to 3 x d₁
- Suitable for synchronous tapping in machine operations

DIN
5156

55°
G


Z

HSC



watch the video



Catalogue Code

T699

Discount Group

D0410

Material

PM-HSSE V3

Surface Finish

HARDLUBE

Sutton Designation

UNI

Geometry

R50

Chamfer

Form C / 2.5 x P

Limit & Nut Tolerance

ISO 228

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	4	8.8	T699 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	4	11.8	T699 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	5	15.3	T699 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	5	19.0	T699 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	5	21.0	T699 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	5	24.5	T699 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	5	28.5	T699 3020
3325	G 1	11	160	30	-	25.0	20.0	23	5	31.0	T699 3325

G


ISO	P												M	K						N										S										H														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41					
T699	●	●	●	○		●	○			●		●	○	●	○			○	○	○	○	○	●	●	●	○	○	○	○																									
P	Steel	M	Stainless Steel		K	Cast Iron		N	Non-Ferrous Metals		S	Titanium & Super Alloys										H	Hard Materials										●	Optimal										○	Effective									

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

suttontools

- Use in stainless steels and high strength steels up to 1000N/mm²
- Blind holes
- Suitable for synchronous tapping in machine operations
- Depths up to approx. 3 x d_t




Catalogue Code	T284	T285
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	<i>Blu</i>	<i>TiCN</i>
Sutton Designation	VA	VA
Geometry	R45	R45
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 228	ISO 228

Limit & Nut Tolerance											150 220	150 220
Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	4	8.8	T284 0973	T285 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	4	11.8	T284 1316	T285 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	5	15.3	T284 1666	T285 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	5	19.0	T284 2096	T285 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	5	21.0	T284 2291	T285 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	5	24.5	T284 2644	T285 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	5	28.5	T284 3020	T285 3020
3325	G 1	11	160	30	-	25.0	20.0	23	5	31.0	T284 3325	T285 3325

ISO	P													M			K					N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T284	●	●	●	○			○	○					○	●	●	●								○	○	○	○	○		○				●		○													
T285	●	●	●	○			○	○					●	●	●	●								○	○	○	○	○		○																			
P	Steel			M			Stainless Steel			K			Cast Iron			N			Non-Ferrous Metals			S			Titanium & Super Alloys			H			Hard Materials													●	Optimal		○	Effective	

suttontools

- For cold forming of threads in materials with good flow characteristics
- BrT - For non-ferrous materials
- TiCN - Suitable for abrasive and difficult materials
- Through or blind holes
- Suitable for machine operations
- Depths up to approx. $3 \times d_1$



Catalogue Code	T361	T363
Discount Group	D0402	D0408
Material	HSSE	HSSE
Surface Finish	BrT	TiCN
Sutton Designation	N	N
Geometry	Multi Groove	Multi Groove
Chamfer	Form C / 2.5 x P	Form C / 2.5 x P
Limit & Nut Tolerance	ISO 228 X	ISO 228 X

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	G 1/8	28	90	20	-	7.0	5.5	8	9.25		T361 0973	T363 0973
1316	G 1/4	19	100	22	-	11.0	9.0	12	12.5		T361 1316	T363 1316
1666	G 3/8	19	100	22	-	12.0	9.0	12	16.0		T361 1666	T363 1666
2096	G 1/2	14	125	25	-	16.0	12.0	15	20.0		T361 2096	T363 2096
2291	G 5/8	14	125	25	-	18.0	14.5	17	22.0		T361 2291	T363 2291
2644	G 3/4	14	140	28	-	20.0	16.0	19	25.5		T361 2644	T363 2644
3020	G 7/8	14	150	28	-	22.0	18.0	21	29.25		•	•
3325	G 1	11	160	30	-	25.0	20.0	23	32.0		•	•

ISO	P													M	K					N										S										H									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T361	●	●	○	●		○								●									●	●	○	○		○		○																			
T363	●	●	●	●		●								●									●	●	○	○		●		○																			

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials



• Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

DIN Taps NPT, Straight Flute, UNI

suttontools

- Universal use.
- Suitable for materials up to 1000N/mm²
- Through & blind holes



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
1029	1/8	27	90	20	-	7.0	5.5	8	4	8.2	T308 1029
1372	1/4	18	100	22	-	11.0	9.0	12	4	10.8	T308 1372
1716	3/8	18	100	22	-	12.0	9.0	12	4	14.0	T308 1716
2134	1/2	14	125	25	-	16.0	12.0	15	4	17.5	T308 2134
2667	3/4	14	140	28	-	20.0	16.0	19	4	23.0	T308 2667
3340	1	11.5	160	30	-	25.0	20.0	23	5	28.5	T308 3340
4216	1-1/4	11.5	170	30	-	32.0	24.0	27	5	37.0	•




Catalogue Code	T308
Discount Group	D0402
Material	HSSE
Surface Finish	Br
Sutton Designation	UNI
Geometry	1:16 Taper
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	ANSI B1.20.1

DIN Taps RC (BSPT), Straight Flute, UNI

suttontools

- Universal use.
- Suitable for materials up to 1000N/mm²
- Through & blind holes



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0973	1/8	28	90	15	-	7.0	5.5	8	4	8.4	T808 0973
1316	1/4	19	100	22	-	11.0	9.0	12	4	10.8	T808 1316
1666	3/8	19	100	22	-	12.0	9.0	12	4	14.5	T808 1666
2096	1/2	14	125	28	-	16.0	12.0	15	4	18.0	T808 2096
2644	3/4	14	140	28	-	20.0	16.0	19	4	23.0	T808 2644
3325	1	11	160	32	-	25.0	20.0	23	5	29.0	T808 3325



Catalogue Code	T808
Discount Group	D0402
Material	HSSE
Surface Finish	Br
Sutton Designation	UNI
Geometry	1:16 Taper
Chamfer	Form C / 2.5 x P
Limit & Nut Tolerance	ANSI B1.20.1

NPT

ISO	P											M			K			N											S											H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
T308	●	●	●	●	●	●	●	○		○		○	○	○	○	○	○	○	○	○	○	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
T808	●	●	●	●	●	●	●	○		○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
P Steel	M Stainless Steel	K Cast Iron	N Non-Ferrous Metals	S Titanium & Super Alloys											H Hard Materials																						● Optimal	○ Effective									

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

