

WHEN YOU HAVE SERIOUS WORK
TO DO, BRING IN A SPECIALIST

SUPERIOR PERFORMING PRODUCTS FOR YOUR SPECIALTY NEEDS



SPECIALIST™


ANTI FRICTION DRY PTFE LUBRICANT

WD-40 Specialist Anti-Friction Dry PTFE Lubricant contains PTFE (polytetrafluoroethylene) which delivers enhanced lubrication and protection values while reducing friction and wear and extending the life of tools and equipment. WD-40 Specialist Anti-Friction Dry PTFE Lubricant is also quick drying and leaves no residue and great as a mould release agent. The product can be used on metal, plastic and glass.

FEATURES AND BENEFITS

- ⊕ Dual action 'Smart Straw' applicator for wide area and precision spray applications
- ⊕ Use on metal, plastic and glass
- ⊕ Extend the life of tools and equipment
- ⊕ Reduce friction and wear
- ⊕ Enhanced lubrication & protection
- ⊕ Dry film that resists dirt, dust and oil

APPLICATIONS

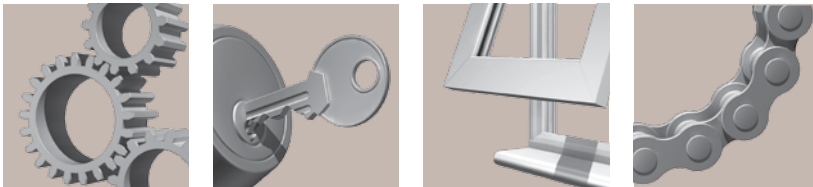

Gears · Locks · Tracks · Chains · Blades · Drill Bits · Power Tools and Equipment · Hinges

DIRECTIONS

Shake can well. Apply by spraying directly on surface to be lubricated and protected. Dries in seconds.

TECHNICAL

Product	Anti Friction Dry PTFE Lubricant
Appearance	Turbid white liquid when uniform. When left to settle: clear liquid with white precipitate on the bottom
Odour	Characteristic solvent odour
Specific Gravity (SG)	SG at 25°C (0.732 - 0.809)
Flammability	Classed as extremely flammable under current legislation
Compatibility	Safe to use on all metal and non-metal surfaces including glass and plastic

PACKAGING

Product Number	Unit Size	Case Size
21005	150g/219mL	6



WD-40 Company (Australia) Pty Ltd. PO Box 649, Epping NSW 1710,
Phone (02) 9868 2200 Fax (02) 9869 7512 platinum@wd40.com WD40.COM.AU