


## Double-pitch Chains

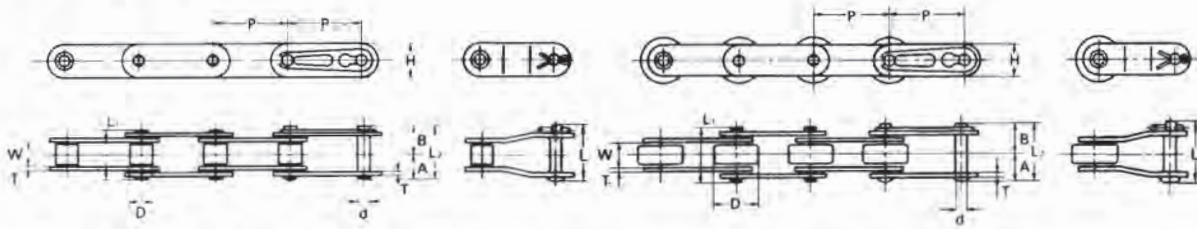

## Double-pitch Roller Chains (for conveyor)

Dimensions (millimeters)

KCM Chain Number	Pitch P	Width between inner plates W	Roller diameter D	Pin						Link plate		Maximum Allowable Load kgf (kN)	Approx weight (kg/m)	Links of 1 unit
				Diameter d	A	B	(A+A) L <sub>1</sub>	(A+B) L <sub>2</sub>	Offset L	Thickness T	Height H			
KCM C2040 SS KCM C2042 SS	25.40	7.95	7.95 15.88	3.97	8.07	10.28	16.15	18.35	19.05	1.5	11.7	45(0.44)	0.49 0.83	120
KCM C2050 SS KCM C2052 SS	31.75	9.53	10.16 19.05	5.09	10.17	12.13	20.35	22.30	23.05	2.0	14.6	70(0.69)	0.83 1.28	96
KCM C2060 SS KCM C2062 SS	38.10	12.70	11.91 22.23	5.96	12.70	15.40	25.40	28.10	29.55	2.4	17.5	105(1.03)	1.19 1.88	80
KCM C2060H SS KCM C2062H SS	38.10	12.70	11.91 22.23	5.96	14.35	17.05	28.76	31.40	32.85	3.2	17.5	105(1.03)	1.46 2.14	80
KCM C2080 SS KCM C2082 SS	50.80	15.88	15.88 28.58	7.94	16.15	19.25	32.30	35.40	37.16	3.2	23.0	180(1.77)	2.08 3.13	60
KCM C2080H SS KCM C2082H SS	50.80	15.88	15.88 28.58	7.94	17.80	20.90	35.60	38.70	40.40	4.0	23.0	180(1.77)	2.44 3.50	60

NOTE: For dimensions of the attachments, refer to pages 32 to 33