

Stainless Steel Hand Pump

L-SSHP



Self priming vertical lift pump with exceptional chemical resistance. Pump body made of 316 Stainless Steel. PTFE piston makes it suitable for use with wide variety of fluids.

316 Stainless Steel construction



Makes it suitable with wide variety of media

Lock nut for grounding

In-built lock nut for static discharge wire

Self priming vertical operation

Quick and easy delivery of fluid

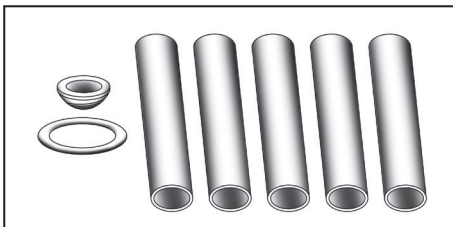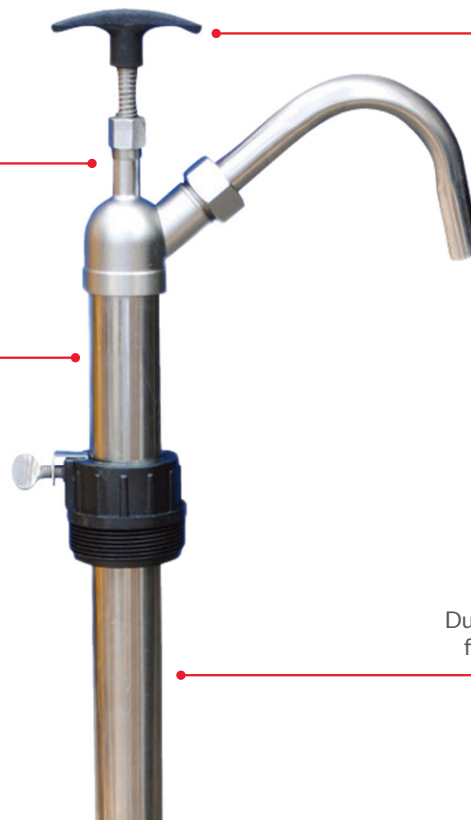








An extra set of spare seals and flow control tubes included with each pump


Bung adaptor

Dual thread bung adaptor suitable for both metal and plastic drums


TECHNICAL SPECIFICATIONS

-  Flow rate: Up to 600 ml/stroke
-  Container suitability: 50-205L drums
-  Outlet: Spout
-  Flow control tube can be inserted into lift handle to restrict the flow rate
-  2" Bung adaptor
-  Max. temperature: 60°C
-  Wetted components: 316 Stainless Steel, PTFE

RECOMMENDED USE WITH

-  Photographic chemicals/solvents, diesel, kerosene, thinners, acetone, benzene, naphtha, urea, DEF & light oils up to SAE 40.

INCLUDED IN THIS PACK

-  Stainless Steel hand pump, bung adaptor with dual threads, extra set of spare seals and flow control tubes