

BEAVER ELECTRIC WINCHES 240V 50HZ (SINGLE PHASE MODELS)

Robust Construction Suitable for Building Sites, Slipways & Industrial Use c/w 24 Volt IP65 Pendant Control with emergency stop

Product Code	Rated Capacity (kg)	Speed m/min	Motor Power HP	% ED	Effective Pull Height m	Wire Rope Dia. x Length mm	A	B mm	C mm	D mm	E mm	F mm	Weight Each (kg)
BPL1025	250	10-15	1.0	25	29	6 x 30	4 x 10.5 \emptyset	142	142	525	210	246	40
BPL1030	300	10-15	1.5	25	29	7 x 30	4 x 10.5 \emptyset	172	142	540	210	246	49


BEAVER ELECTRIC WINCHES 415V 50HZ (THREE PHASE MODELS)

Robust Construction Suitable for Building Sites, Slipways & Industrial Use.

c/w 24 Volt IP65 Pendant Control with emergency stop

Product Code	Rated Capacity (kg)	Speed m/min	Motor Power HP	% ED	Effective Pull Height m	Wire Rope Dia. x Length mm	A	B mm	C mm	D mm	E mm	F mm	Weight Each (kg)
BPL3050	500	12-18	2.5	25	58	9 x 60	4 x 10.5 \emptyset	400	330	922	372	430	136
BPL3100	1000	12-18	5.0	25	58	11 x 60	4 x 10.5 \emptyset	400	330	935	372	430	156
BPL3220	2200	7-12.5	7.5	25	97	16 x 100	4 x 12 \emptyset	600	499	1160	565	658	450

Single Phase Model

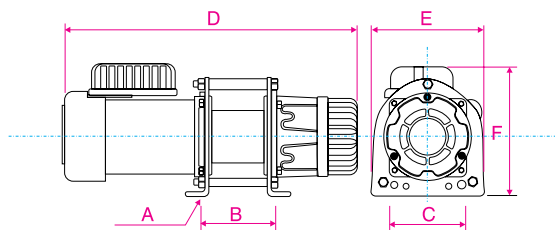

Three Phase Model

