# **TRADE RANGE**





Designed for tradesmen, apprentices and workers who take their boots off multiple times a day. The CARPENTER is a stylish boot at an attractive price point which features zip access saving workers time during the day to maximise time on the job.





**STEEL**Toecap

Complies with Australian/New Zealand (AS/NZ S2210.3), European (EN-ISO 20345: 2011) and American standards (ASTM F2413-11).

slipRESIST-C

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

150°cHeatResistant

TPU sole that is hard wearing and highly resistant to hydrolysis, microbial attack, oils, acids and organic fats.

fueloi/RESIST

Sole resists breakdown to fuel oil.

**ANTI-STATIC** 

Minimises static electricity build up for safety in volatile environments.

H<sub>2</sub>ORESISTANT

Footwear designed to shed water.

**ZIP**Closure

Upper designed for easy access and a quick exit.





# **HAZARD SOLUTION GUIDE**

### **COMBUSTIBLE MATERIALS**


 ANTI-STATIC certified footwear minimises static electricity build-up for safety in volatile environments.



### **FIT GRID**

# CARPENTER WIDE

# **SOLE SELECTION GRID**

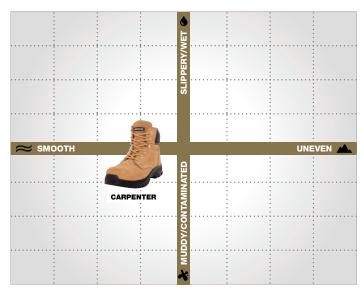

## MACKBOOTS.COM.AU | 1300 350 216

Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. "Weight disclaimer. Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies UK10 for women's shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the Product information in this document. This document must not be regarded as an infallible guide. **Mack Boots™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mack Boots™** to gain the latest information.



AS/NZS 2210 Australian /New Zealand Standards EN - ISO 20345 European Standards ASTM F2413 American Standards