

# TRACTION CONTROL RANGE



## HAUL

Ultra-lightweight WATERPROOF slip resistant safety boot for workers that are exposed to wet and slippery environments. Ideal for workers in the food processing, hospitality, cleaning and light industrial sectors.



**SIZES**  
**4-13**  
1/2 SIZES 6.5-10.5  
**HEIGHT**  
**135<sup>mm</sup>**  
**WEIGHT**  
**565<sup>g</sup>**

**COLOURS**



### PERFORMANCE SYSTEMS

#### SYST-M<sup>®</sup>

Integrated series of technologies and design features to provide movement specific support and flexibility.

#### articulatedFIT<sup>™</sup>

Upper design system to allow the natural movement of the foot and ankle from heel strike to toe-off.

#### asymBEVEL<sup>™</sup>

Heel shaped to match the natural heel strike position during walking to maximise contact area and provide a smooth ride.

#### Hydrodynamic<sup>™</sup>

Sole shape and tread pattern engineered to optimise fluid dispersion beneath the foot to minimise slips.

#### decoupleGROOVE<sup>™</sup>

Flex groove along the length of the sole to provide flexibility to allow a smooth transition from initial contact to foot flat and improve terrain adaption.

#### WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.



### SAFETY SYSTEMS

#### WATERPROOF

Footwear lined with a one-way breathable waterproof membrane.

#### COMPOSITE Toecap

Lightweight, metal-free, nonconductive, insulating and airport friendly safety toecap that complies with (AS/NZS 2210.3), (EN-ISO 20345) and (ASTM F2413-11) standards.

#### slipRESIST-C

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

#### fueloilRESIST

Sole resists breakdown to fuel oil.

#### ANTI-STATIC

Minimises static electricity build up for safety in volatile environments.

#### H<sub>2</sub>O RESISTANT

Footwear designed to shed water.

#### ScuffCAP

Improves durability in high wear zones.

#### LOWcatchsole

Low profile sole at the toe to reduce the risk of tripping.

# HAZARD SOLUTION GUIDE

## WATER EXPOSURE

- **WATERPROOF** Haul is lined with a one-way breathable waterproof membrane to provide additional protection to water resistant leather.

## SLIPS

- **asymBEVEL™** to match the natural heel strike position during walking to maximise ground contact area during initial contact.
- **Hydrodynamic™** sole shape and tread pattern engineered to optimise fluid dispersion beneath the foot to minimise slips.

## TRIPS & FALLS

- Lightweight design to reduce fatigue of the leg muscles that lift the toes.
- **LOWcatchsole** to improve swing phase ground clearance at the toe to reduce the risk of tripping.
- **asymBEVEL™** to match the natural heel strike position during walking to minimise fatigue of the leg muscles that lift the toes.



## PRODUCT DETAILS

### APPROVED STANDARDS

- AS/NZS 2210.3 (Class I S2 WR SRC)
- EN – ISO 20345 (Class I S2 WR SRC)
- ASTM F2413-11 (M/I/75/C/75/SD)

**OUTSOLE:** Rubber

**TOECAP:** Composite

**UPPER:** Waterproof Full Grain Leather


### PRODUCT CODES:

xxx represents sizing i.e. size 12 is 120 and size 9.5 is 095


**BLACK BOOT CODE:**  
MKHAUL-BBFxxx



## FIT GRID

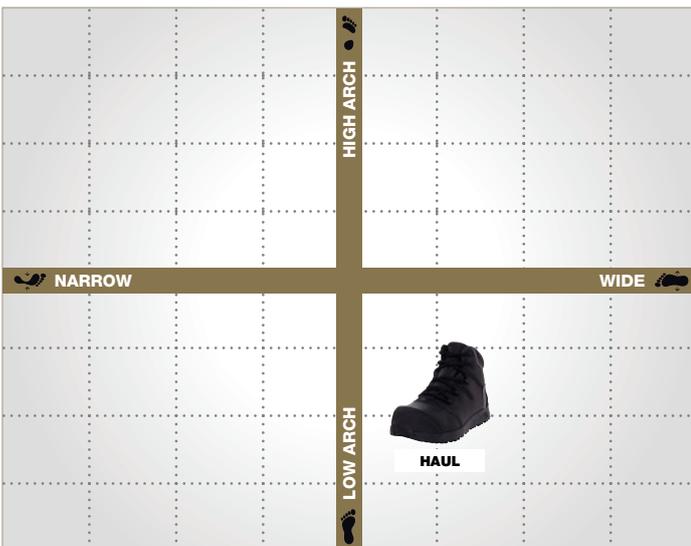

## SOLE SELECTION GRID

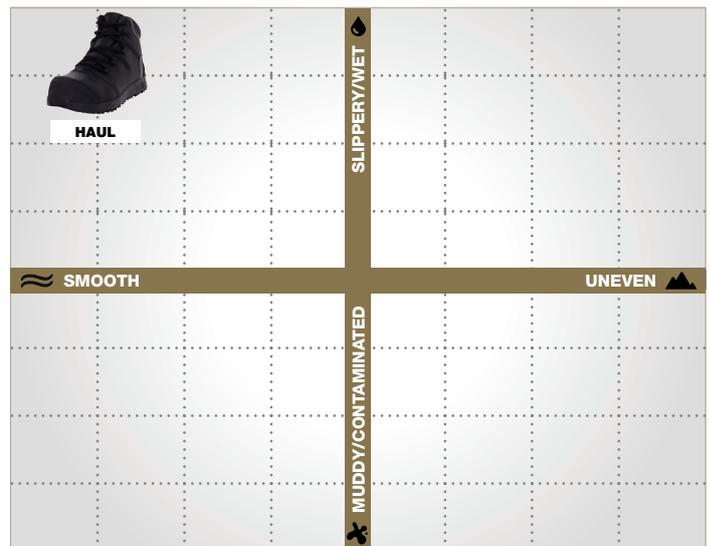

## MACKBOOTS.COM.AU | 1300 350 216

Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. \*Weight disclaimer. Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies UK10 for women's shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the Product information in this document. This document must not be regarded as an infallible guide. **Mack Boots™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mack Boots™** to gain the latest information.



AS/NZS 2210 Australian /New Zealand Standards  
EN - ISO 20345 European Standards  
ASTM F2413 American Standards