PRODUCT DATA

Hollow Wall Anchor

All metal (light duty) cavity fixing for plasterboard and other hollow wall materials up to 38mm in thickness.

Applications	Trades
• Electrical fittings • Light fixtures • Brackets • Hooks	• Electrical • Plumbing • Painters and decorators • Data and communications installation

Material	CS	Carbon Steel

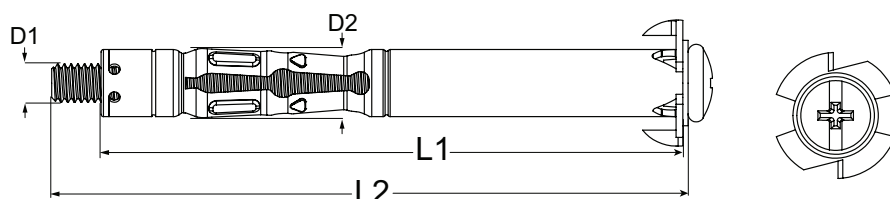| Finish	ZP	Zinc Plated

Anti-rotation barbs

Features

• Combination Drive: Philips/Slot
• Cavity Fixing: Plasterboard and other hollow wall materials
• Barbs: Anti-rotational spikes built onto the flange to prevent the anchor from spinning

Part	QFind	Size	Dia Ø	Body Length	Total Length	Wall Thickness	Clearance hole diameter	Pack Qty
			D_1 (mm)	L_1 (mm)	L_2 (mm)	(mm)	D_2 (mm)	
MWHDZPCM040030	**MWH100**	M4	4	23.5	30	0 - 4	8	100
MWHDZPCM040641	**MWH101**	M4	4	35.0	41	4 - 9	8	100
MWHDZPCM041147	**MWH102**	M4	4	40.0	47	9 - 15	8	100
MWHDZPCM041753	**MWH103**	M4	4	46.0	53	15 - 21	8	100
MWHDZPCM043167	**MWH104**	M4	4	60.0	67	30 - 38	8	100
MWHDZPCM050546	**MWH105**	M5	5	37.0	46	5 - 13	10	50
MWHDZPCM050759	**MWH106**	M5	5	50.0	59	5 - 17	10	50
MWHDZPCM060546	**MWH107**	M6	6	37.0	46	4 - 13	11	50
MWHDZPCM060759	**MWH108**	M6	6	50.0	59	5 - 18	11	50

191191DS

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS** SINCE 1935

Installation

191191DS

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

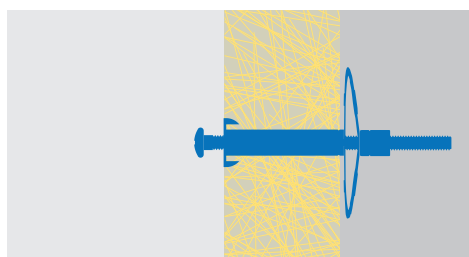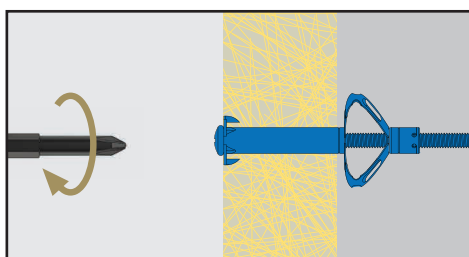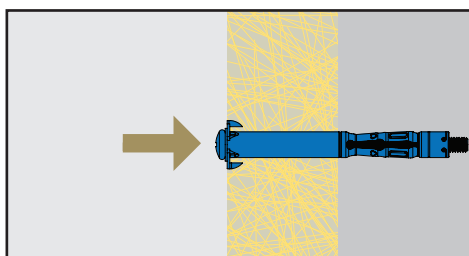hobson.com.au   **QUALITY FASTENERS** SINCE 1935