
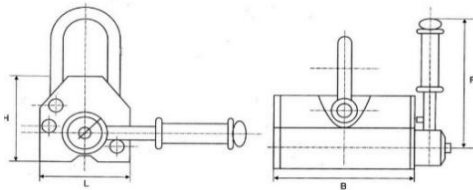


MSA Pro-Lift 300 Lifting Magnet


P/N: PL300

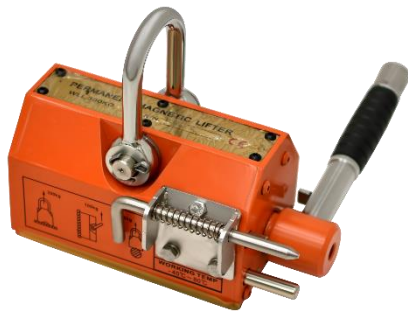

SPECIFICATIONS

Max Break away	900 kg
Safe Working Load	300 kg
Full Saturation Thickness	40 mm
Max Safe Shear	NA
Minimum Thickness for De-Stack	40 mm
Net Weight	10 kg
Height - Less Shackle	91 mm
Magnet Footprint (L x B)	92 mm x 162 mm
Handle Length - R	155 mm

MSA Pro-Lift 300kg Safe Working Load

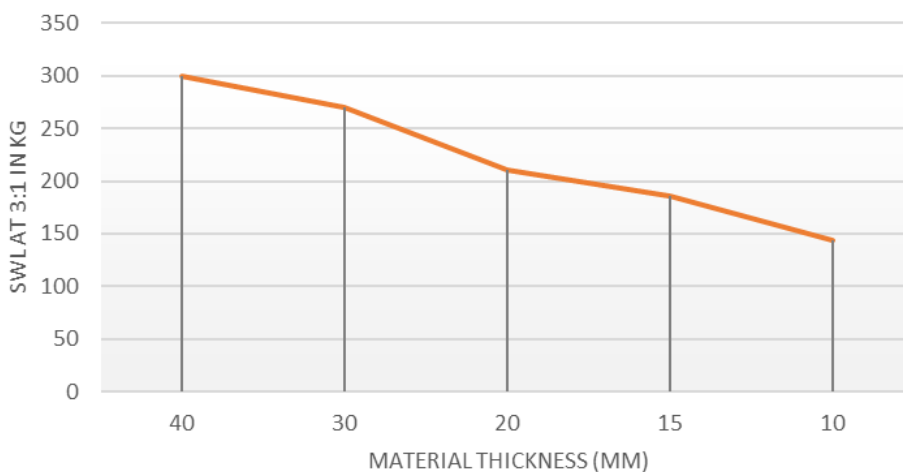

Fitted Safety Latch Included.

Complies with Lifting Devices Standard AS 4991-2004. Section 6.2.1 Load Control.

Material Thickness	SWL at 3:1 in KG
40 mm	300 kg
30 mm	270 kg
20 mm	210 kg
15 mm	186 kg
10 mm	144 kg

It is incumbent upon your company to:

- Undertake a risk assessment to identify the hazards prevalent at your workplace which could impact upon the safe operation of the equipment and take action to control those hazards.
- Review the Safety Operating Procedure (SOP) to ensure it captures all the steps involved in your specific use(s) of the equipment and modify accordingly.
- Ensure that staff operating the equipment have been adequately trained in its safe use, provided with the appropriate Personal Protective Equipment (PPE) identified in the SOP and provided with a copy of the Safety Operating Procedure.

Your company also agrees to undertake a risk assessment, review the SOP in light of that risk assessment, make any modifications to reflect how the equipment is to be used at their workplace and then adequately train those people who are going to use the equipment.