

# DID YOU KNOW?

about our...



**NEW  
PRODUCT**

## Lifting Eye Nut DIN 582

### LIFTING EYE NUT 316 STAINLESS / DIN 582 / GRADE A4


Part	QFind	Size	Overall Height H (mm)	Inside Eye ID (mm)	Working Load WLL (kg)	Pack Qty
ULEN16PD5M06	<b>EN16M6</b>	M6	36	20	75	50
ULEN16PD5M08	<b>EN16M8</b>	M8	36	20	140	50
ULEN16PD5M10	<b>EN16M10</b>	M10	45	25	230	25
ULEN16PD5M12	<b>EN16M12</b>	M12	53	30	340	10
ULEN16PD5M16	<b>EN16M16</b>	M16	62	35	700	10
ULEN16PD5M20	<b>EN16M20</b>	M20	71	40	1200	5
ULEN16PD5M24	<b>EN16M24</b>	M24	90	50	1800	2
ULEN16PD5M30	<b>EN16M30</b>	M30	109	60	3200	2

316




### FEATURES

- Eye nut approved and certified for lifting.
- Can be used in axial or angular loading.



### MARKINGS:

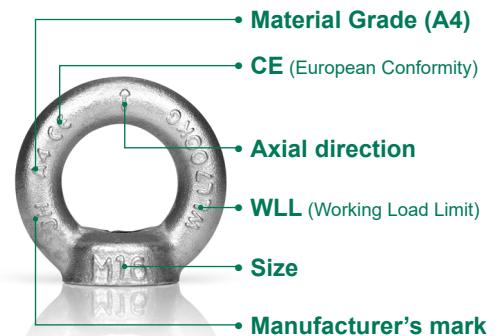

### APPLICATIONS

- Connection point for anchoring, rigging, pulling, lifting or hoisting.
- Can be used with ropes, cables, shackles and hooks.
- Threaded into steel equipment, machine and structures.
- Bolt through steel or timber profiles.



Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

**hobson.com.au** **QUALITY FASTENERS SINCE 1935**



2112131DYK