


MULTIBUFFERS

Including Multibuffer stainless

Multibuffers are designed for inexpensive and effective control of vibration shock and acoustic noise and are equally adaptable in controlling impact or for use as simple machine feet.

The Multibuffer face profile has been designed to provide a simple slip resistant surface whilst maintaining optimum impact and static properties

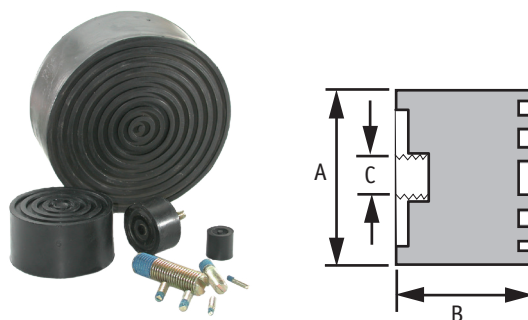

**Uses Optional Stud System. Refer to Multicushion Page 10
(Stainless Steel Studs Not available)**

Standard Part No.	Stainless Type 304 Part No.	A (mm)	B (mm)	C metric	Duro	Static		Buffing		Weight Kg
						Load Kg	Def mm	Load Kg	Def mm	
M12201855	M13201855	20	18	M6	55	26	2.5	57	5	0.01
M12252555	M13252555	25	25	M6	55	25	3	53	6	0.02
M12302055	M13302055	30	20	M8	55	46	2.5	105	5	0.03
M12303055	M13303055	30	30	M8	55	47	3.5	94	7	0.04
M12402055	M13402055	40	20	M8	55	78	2.5	184	5	0.05
M12403055	M13403055	40	30	M8	55	78	3.5	162	7	0.06
M12503555	M13503555	50	35	M10	55	157	4	316	8	0.1
M12754055		75	40	M10	55	323	4.5	696	9	0.3
M121003055		100	30	M16	55					0.5
M121004055		100	40	M16	55	637	4.5	1284	9	0.5
M121505555		150	55	M16	55	1382	6	2950	12	1.4


CYLINDRICAL BUFFERS

These buffers are equally adaptable when controlling impact or when used as machine feet; they also may be used as snubbing rubbers when excessive shock loads are encountered in resiliently mounted equipment.


A rugged rubber bonded to metal unit ensures simplicity of application and ease of installation.



M175



M174



Standard Part No.	A (mm)	B (mm)	C	Duro	D (mm)	Static		Buffing		Weight Kg
						Load Kg	Def mm	Load Kg	Def wmm	
M175	63	36	1/2 W	45	33	115	5	400	12	0.21
M174	50	50	3/8 UNF	60	16	125	6	600	20	0.15

Load must be placed on the metal surface and not on the stud.

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres



© Mackay Consolidated Industries Pty Ltd 2021
www.mackayrubber.com.au