



## H100 series Classical Timing Pulleys (Taper Lock)

Part No.	Type	Metal	Z	Bush	Max Bore	dp	de	Df	Dm	Di	F	L	R	Flang	Weight (kg)
14-H-100TL	16F	St	14	1108	28	56.60	55.22	63	-	40	31	22	9	309	0.25
15-H-100TL	16F	St	15	1108	28	60.64	59.27	66	-	44	31	22	9	310	0.33
16-H-100TL	16F	St	16	1108	28	64.68	63.31	71	-	45	31	22	9	311	0.42
17-H-100TL	16F	St	17	1108	28	68.72	67.35	75	-	49	31	22	9	312	0.45
18-H-100TL	16F	St	18	1210	32	72.77	71.39	79	-	52	31	25	6	313	0.49
19-H-100TL	16F	St	19	1210	32	76.81	75.66	83	-	56	31	25	6	314	0.58
20-H-100TL	16F	St	20	1210	32	80.85	79.48	87	-	60	31	25	6	315	0.69
21-H-100TL	16F	St	21	1210	32	84.89	83.52	91	-	64	32	25	7	316	0.80
22-H-100TL	16F	St	22	1210	32	88.94	87.56	93	-	67	32	25	7	317	0.94
23-H-100TL	16F	St	23	1610	42	92.98	91.61	97	-	70	32	25	7	318	0.97
24-H-100TL	16F	St	24	1610	42	97.02	95.65	103	-	73.5	32	25	7	320	1.05
25-H-100TL	16F	St	25	1610	42	101.06	99.69	106	-	77	32	25	7	321	1.13
26-H-100TL	16F	St	26	1610	42	105.11	103.73	111	-	82	32	25	7	322	1.27
27-H-100TL	16F	St	27	1610	42	109.15	107.78	115	-	85	32	25	7	323	1.35
28-H-100TL	16F	St	28	1610	42	113.19	111.82	119	-	90.5	32	25	7	325	1.54
30-H-100TL	16F	St	30	1610	42	121.28	119.90	127	-	98	32	25	7	327	1.85
32-H-100TL	17F	St	32	1610	42	129.36	127.99	135	90	106	32	25	7	328	2.05
36-H-100TL	17F	St	36	1610	42	145.53	144.16	152	92	121	32	25	7	334	2.39
40-H-100TL	17F	St	40	1610	42	161.70	160.33	168	92	138	32	25	7	338	2.78
44-H-100TL	21F	St	44	2012	50	177.87	176.50	184	106	152	32	32	-	339	3.68
48-H-100TL	21F	St	48	2012	50	194.04	192.67	200	200	169	32	32	-	340	4.00
60-H-100TL	20	GG	60	2012	50	242.55	241.18	-	-	223	34	32	1	342	4.32
72-H-100TL	20	GG	72	2012	50	291.06	289.69	-	-	270	34	32	1	-	5.47
84-H-100TL	20	GG	84	2012	50	339.57	338.20	-	-	318	34	32	1	-	6.45
96-H-100TL	14	GG	96	2517	60	388.08	386.71	-	-	366	34	45	5.5	-	8.30
120-H-100TL	14	GG	120	2517	60	485.10	483.73	-	-	462	34	45	5.5	-	10.99

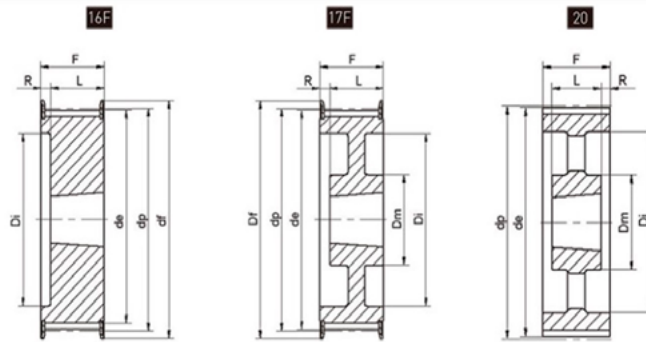

## H150 series Classical Timing Pulleys (Taper Lock)

Part No.	Type	Metal	Z	Bush	Max Bore	dp	de	Df	Dm	Di	F	L	R	Flang	Weight (kg)
15-H-150TL	16F	St	15	1108	28	60.64	59.27	66	-	44	45	22	23	310	0.51
16-H-150TL	16F	St	16	1108	28	66.68	63.31	71	-	46	45	22	23	311	0.59
18-H-150TL	16F	St	18	1210	32	72.88	71.39	79	-	52	45	25	20	313	0.65
19-H-150TL	16F	St	19	1210	32	76.81	75.44	83	-	56	45	25	20	314	0.72
20-H-150TL	16F	St	20	1210	32	80.85	79.48	87	-	60	45	25	20	315	0.88
21-H-150TL	16F	St	21	1210	32	84.89	83.52	91	-	64	45	25	20	316	1.11
22-H-150TL	16F	St	22	1210	32	88.94	87.56	93	-	67	45	25	20	317	1.13
23-H-150TL	16F	St	23	1610	42	92.98	91.61	97	-	70	45	25	20	318	1.27
24-H-150TL	16F	St	24	1610	42	97.02	95.65	103	-	73.5	45	25	20	320	1.32
25-H-150TL	16F	St	25	1610	42	101.06	99.69	106	-	77	45	25	20	321	1.41
26-H-150TL	16F	St	26	1610	42	105.11	103.73	111	-	82	45	25	20	322	1.55
27-H-150TL	16F	St	27	1610	42	109.15	107.78	115	-	85	45	25	20	323	1.65
28-H-150TL	16F	St	28	1610	42	113.19	111.82	119	-	90.5	45	25	20	325	1.88
30-H-150TL	16F	St	30	1610	42	121.28	119.90	127	-	98	45	25	20	327	2.18
32-H-150TL	17F	St	32	1610	42	129.36	127.99	135	90	106	45	25	20	328	2.30
36-H-150TL	17F	St	36	1610	42	145.33	144.16	152	92	121	45	25	20	334	2.77
40-H-150TL	17F	St	40	1610	42	161.70	160.33	168	92	138	45	25	20	338	3.27
44-H-150TL	17F	St	44	2012	50	177.87	176.50	184	106	152	45	32	13	339	4.17
48-H-150TL	17F	St	48	2012	50	194.04	192.67	200	106	169	45	32	13	342	7.45
60-H-150TL	20	GG	60	2012	50	242.55	241.18	-	106	223	46	32	7	-	5.33
72-H-150TL	20	GG	72	2012	50	291.06	289.69	-	106	270	46	32	7	-	6.30
84-H-150TL	20	GG	84	2012	50	339.57	338.20	-	106	320	46	32	7	-	7.48
96-H-150TL	20	GG	96	2517	60	388.08	386.71	-	119	366	46	45	0.5	-	9.60
120-H-150TL	20	GG	120	2517	60	485.10	483.73	-	119	462	46	45	0.5	-	12.85

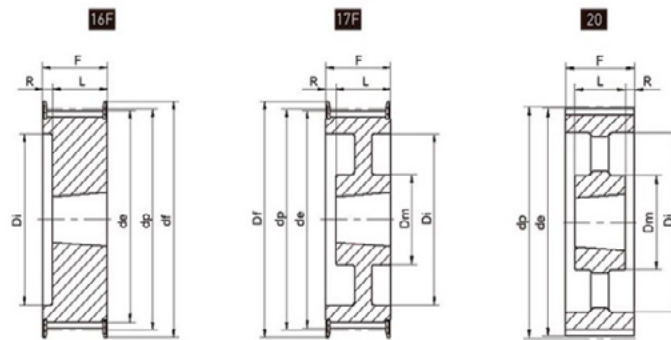

## H200 series Classical Timing Pulleys (Taper Lock)

Part No.	Type	Metal	Z	Bush	Max Bore	dp	de	Df	Dm	Di	F	L	R	Flang	Weight (kg)
16-H-200TL	16F	St	16	1108	28	64.68	63.31	71	-	45	58	22	36	311	0.70
18-H-200TL	16F	St	18	1210	32	72.77	71.39	79	-	52	58	25	33	313	0.81
20-H-200TL	16F	St	20	1610	42	80.85	79.48	87	-	60	58	25	33	315	0.91
22-H-200TL	16F	St	22	1610	42	88.94	87.56	93	-	67	58	25	33	317	1.20
24-H-200TL	16F	St	24	1610	42	97.02	95.45	103	-	73.5	58	25	33	320	1.50
26-H-200TL	16F	St	26	1610	42	105.11	103.73	111	-	82	58	25	33	322	1.84
28-H-200TL	16F	St	28	1610	42	113.19	111.82	119	-	90.5	58	25	33	325	2.71
30-H-200TL	16F	St	30	1610	42	121.28	119.9	127	-	98	58	25	33	327	2.50
32-H-200TL	16F	St	32	2012	50	129.36	127.99	135	-	106	58	32	26	328	2.92
36-H-200TL	17F	St	36	2012	50	145.53	144.16	152	102	121	58	32	26	334	3.62
40-H-200TL	17F	St	40	2012	50	161.7	160.33	168	106	138	58	32	26	338	4.12
44-H-200TL	17F	St	44	2012	50	177.87	176.5	184	106	152	58	32	26	339	4.81
48-H-200TL	17F	St	48	2517	60	194.04	192.67	200	119	169	58	45	13	342	6.5
60-H-200TL	20	GG	60	2517	60	242.55	241.18	-	119	223	60	45	7.5	-	6.3
72-H-200TL	20	GG	72	2517	60	291.06	289.69	-	119	270	60	45	7.5	-	7.64
84-H-200TL	20	GG	84	2517	60	339.57	338.2	-	119	320	60	45	7.5	-	9.10
96-H-200TL	20	GG	96	2517	60	388.08	386.71	-	119	366	60	45	7.5	-	11.50
120-H-200TL	20	GG	120	2517	60	485.1	483.73	-	119	462	60	45	7.5	-	14.70