

RETRACTA C1 SERIES AIR/WATER HOSE REELS



Designed in Australia, the C1 Series brings you a Retractable for small spaces. The C1 range of Poly Hose Reels are 35% smaller than the R3 Series. The Retractable C1 Air/Water Hose Reels are available with a hybrid polymer hose for flexibility, to lay flat and prevent tangles or kinking when under pressure.

UV Stabilised &
Resistant Poly Case

Hybrid Polymer Hose



3 Position Reel Swivel Locking

180° Swivel Bracket

TECHNICAL SPECIFICATIONS

Part Number	C1AW315B-01CB	C1AW412B-01CC
Case Colour	Blue	Blue
Hose Size (ID)	10mm (3/8")	12mm (1/2")
Hose Length	15m	12m
Working Pressure	250psi	250psi
Max Temperature	60° C	60° C
Feed Hose Inlet	3/8" BSPT (M)	3/8" BSPT (M)
Reel Inlet	3/8" BSPT (F)	3/8" BSPT (F)
Hose Outlet	1/4" BSPT (M)	3/8" BSPT (M)
Feed Hose Length	1.5m	1.5m

Applications:

Suitable for use across most industries

FEATURES AND BENEFITS

UV Stabilised & resistant poly case

Australian designed

180° Swivel bracket

3 Position Reel swivel locking

Powder coated steel bracket

Hybrid Polymer Hose for flexibility, to lay flat and prevent tangles or kinking under pressure



Bend Restrictor for increased durability

1.5 metre Feed Hose included

PACKAGE INCLUDES

Hose Reel - Air / Water

Feed Hose - 1.5 metre

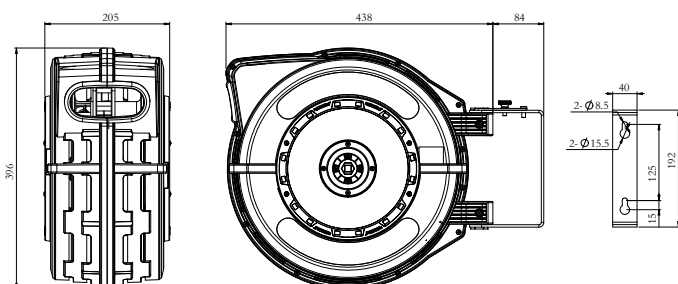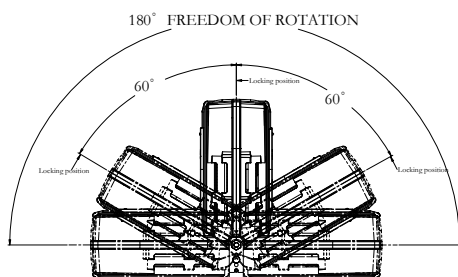

RETRACTA C1 SERIES HOT/COLD WATER HOSE REELS



Designed in Australia, the C1 Series brings you a Retractable for small spaces. The C1 range of Poly Hose Reels are 35% smaller than the R3 Series. The Retractable C1 Hot/Cold Water Hose Reels are ideal for applications requiring high temperature water and/or pressure for wash down areas.

UV Stabilised &
Resistant Poly Case

3 Position Reel Swivel Locking

Hot Wash Trigger Nozzle
(C1HC412R-01DD-SG only)

180° Swivel Bracket



TECHNICAL SPECIFICATIONS

Part Number	C1HC412R-01DD	C1HC412R-01DD-SG
Case Colour	Red	Red
Hose Size (ID)	1/2" (12mm)	1/2" (12mm)
Hose Length	12m	12m
Working Pressure	300psi	300psi
Max Temperature	80° C	80° C
Feed Hose Inlet	1/2" BSP (F) Swivel	1/2" BSP (F) Swivel
Reel Inlet	1/2" BSPT (F)	1/2" BSPT (F)
Hose Outlet	1/2" BSPT (M)	1/2" BSPT (M)
Feed Hose Length	1.5m	1.5m

Applications:

Suitable for use across food and industrial wash down applications.

FEATURES AND BENEFITS

UV Stabilised & resistant poly case

Australian designed

180° Swivel bracket

3 Position Reel swivel locking

Powder coated steel bracket

High Temperature hose rated to 80° C

Bend Restrictor for increased durability



1.5 metre Feed Hose included

PACKAGE INCLUDES

Hose Reel - Hot / Cold Water

Feed Hose - 1.5 metre

Hot Wash Trigger Nozzle (C1HC412R-01DD-SG only)

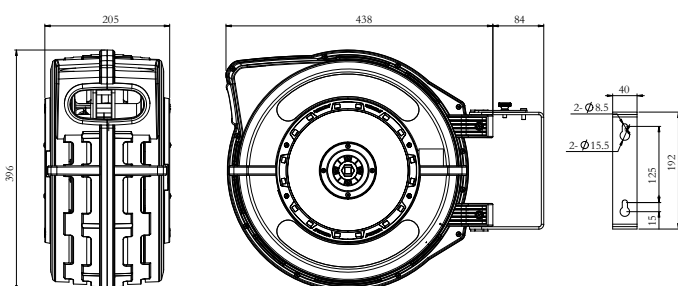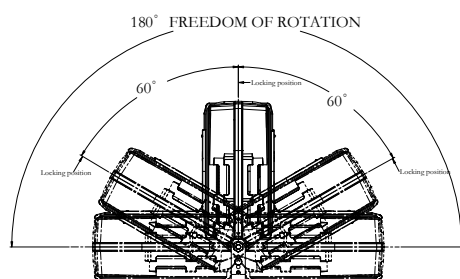

RETRACTA C1 SERIES GARDEN/ HORTICULTURE HOSE REELS



Designed in Australia, the C1 Series brings you a Retractable for small spaces. The C1 range of Poly Hose Reels are 35% smaller than the R3 Series. The Retractable C1 Garden/Horticulture Hose Reels are available with a hybrid polymer hose for flexibility, to lay flat and prevent tangles or kinking when under pressure.

UV Stabilised &
Resistant Poly Case

Trigger Nozzle with 7 adjustable
spray patterns, adjustable flow
control and hands free clip



3 Position Reel Swivel Locking

180° Swivel Bracket

TECHNICAL SPECIFICATIONS

Part Number	C1DR412D-03DD
Case Colour	Dark Grey
Hose Size (ID)	1/2" (12mm)
Hose Length	12m
Working Pressure	150psi
Max Temperature	60° C
Feed Hose Inlet	1/2" Quick Connector (F)
Reel Inlet	1/2" BSPT (F)
Hose Outlet	1/2" Quick Connector (F)
Feed Hose Length	1.5m

Applications:

Suitable for use across domestic outdoor, garden and horticultural applications.

FEATURES AND BENEFITS

UV Stabilised & resistant poly case

Australian designed

180° Swivel bracket

3 Position Reel swivel locking

Powder coated steel bracket

Hybrid Polymer Hose for flexibility, to lay flat and prevent tangles or kinking under pressure

1.5 metre Feed Hose included



Trigger Nozzle with 7 adjustable spray patterns, adjustable flow control and hands free clip

PACKAGE INCLUDES

Hose Reel - Horticulture / Garden

Feed Hose - 1.5 metre

Trigger Nozzle

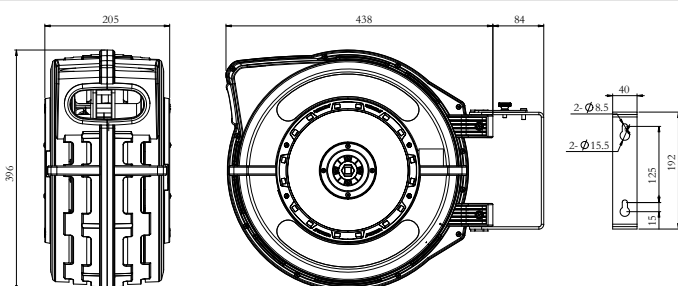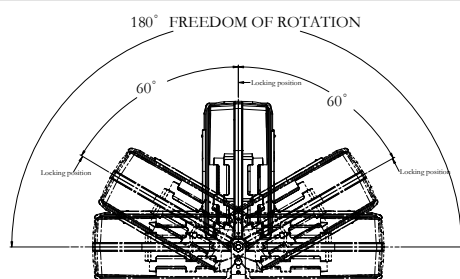

RETRACTA C1 SERIES WEEDICIDE/ PESTICIDE HOSE REELS



Designed in Australia, the C1 Series brings you a Retractable for small spaces. The C1 range of Poly Hose Reels are 35% smaller than the R3 Series. The Retractable C1 Weedicide/Pesticide Hose Reel is supplied with a 15 metre Weedicide/ Pesticide resistant PVC hose designed specifically to handle the transfer and dispensing of these agricultural chemicals.

UV Stabilised & Resistant Poly Case

Weedicide / Pesticide Resistant PVC Hose



3 Position Reel Swivel Locking

180° Swivel Bracket

TECHNICAL SPECIFICATIONS

Part Number	C1WD315R-01CB
Case Colour	Red
Hose Size (ID)	3/8" (10mm)
Hose Length	15m
Working Pressure	300psi
Max Temperature	60° C
Feed Hose Inlet	3/8" BSPT (M)
Reel Inlet	3/8" BSPT (F)
Hose Outlet	1/4" BSPT (M)
Feed Hose Length	1.5m

Applications:



Suitable for use across farming, horticultural and outdoor garden applications.

FEATURES AND BENEFITS

- UV Stabilised & resistant poly case
- Australian designed
- 180° Swivel bracket
- 3 Position Reel swivel locking
- Powder coated steel bracket
- Weedicide / Pesticide resistant PVC hose
- 1.5 metre Feed Hose included

PACKAGE INCLUDES

- Hose Reel - Weedicide / Pesticide
- Feed Hose - 1.5 metre

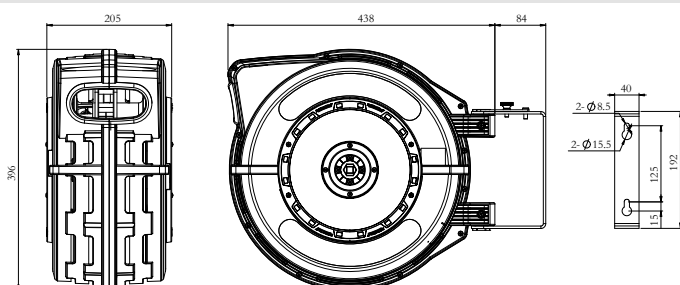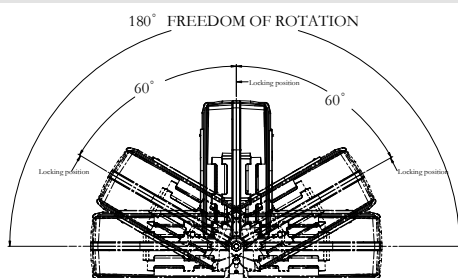

RETRACTA C1 SERIES SAFETY BARRIER REELS



Designed in Australia, the C1 Retractable Safety Barrier Reel is the ideal solution for efficient crowd control and safety management. The Retractable Safety Barrier Reel is designed with user convenience in mind. Its lightweight and compact design make it easy to transport and set up, making it an ideal choice for events, venues, construction sites, and more. The reel's smooth retraction mechanism ensures hassle-free storage when not in use, maximising space efficiency.


UV Stabilised &
Resistant Poly Case

Powder Coated Steel Bracket

3 Position Reel Swivel Locking

180° Swivel Bracket

25 Metre Tape Length
for Larger Barriers

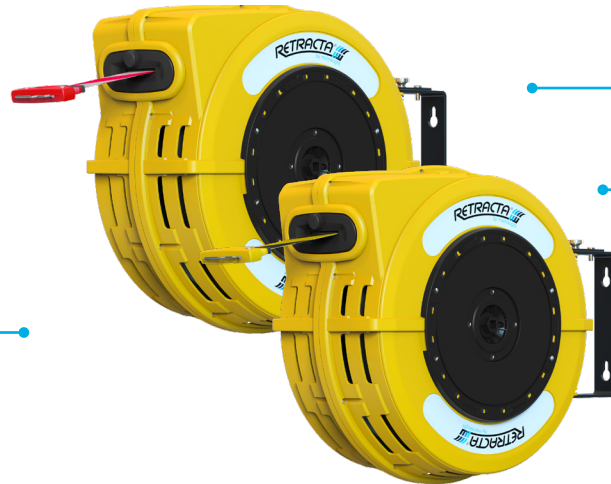

TECHNICAL SPECIFICATIONS

Part Number	C1BRW5025Y	C1BYB5025Y
Case Colour	Yellow	Yellow
Tape Length	25m	25m
Tape Colour	Red / White Stripe	Yellow / Black Stripe
Tape Width	48mm	48mm

PACKAGE INCLUDES

Barrier Reel - Red / White Striped Cloth Tape
(C1BRW5025Y only)

Barrier Reel - Yellow / Black Striped Cloth Tape
(C1BYB5025Y only)

Magnetic Tape Anchor Point

Eye Screw & Wall Anchor Plug

FEATURES AND BENEFITS

UV Stabilised & resistant poly case

Australian designed

180° Swivel bracket

3 Position Reel swivel locking

Powder coated steel bracket

Tape Lock Off function to maintain barrier tape tension

Magnetic tape attachment point



25 metre tape length for larger barriers

Red and white striped barrier tape to mark danger areas
(C1BRW5025Y only)

Yellow and black striped barrier tape to mark caution
areas (C1BYB5025Y only)

Applications:

For marking danger or caution areas.

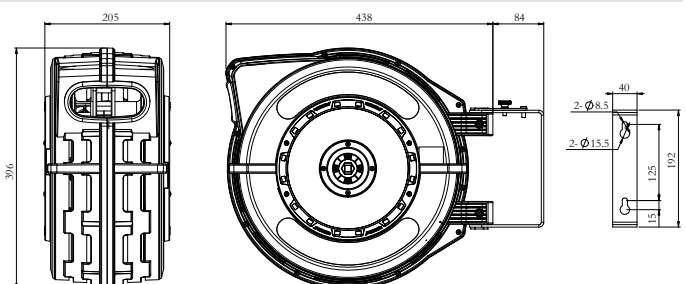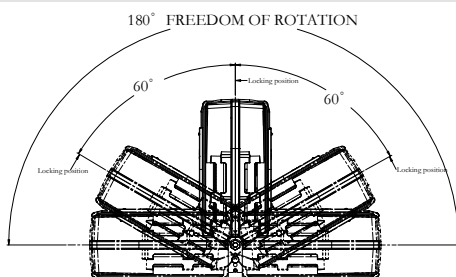


RETRACTA C1 SERIES ELECTRICAL CABLE REELS



Designed in Australia, the C1 Retractable Electrical Cable Reel is the ideal solution for organised and hassle-free cable management. Designed with convenience in mind, these retractable cable reels ensure efficient storage and easy access to electrical cables. Featuring a retractable mechanism, these cable reels allow for quick and effortless cable extension and retraction.

UV Stabilised &
Resistant Poly Case

SAA: AS/NZS 3105 Compliant

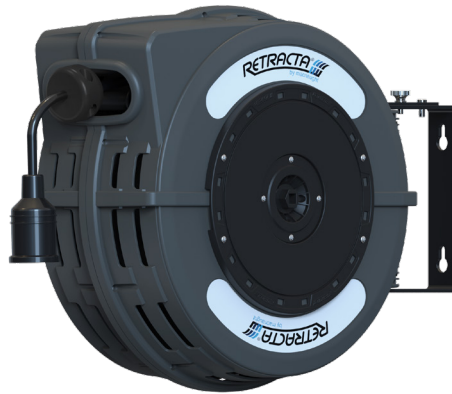

Powder Coated Steel Bracket

3 Position Reel Swivel Locking

180° Swivel Bracket

TECHNICAL SPECIFICATIONS

Part Number	C1EC10A20D-AU	C1EC15A20D-AU
Case Colour	Dark Grey	Dark Grey
Cable Length	20m	20m
Feed Cable Length	1.5m	1.5m
Plug Type (Inlet)	AU 3 Pin Flat - 10 A (M)	AU 3 Pin Flat - 15 A (M)
Plug Type (Onlet)	AU 3 Pin Flat - 10 A (F)	AU 3 Pin Flat - 15 A (F)
Maximum Voltage	240 V	240 V
Maximum Amperage	10 A	15 A
Maximum Wattage Coiled	1000 W	1600 W
Maximum Wattage Uncoiled	2000 W	3200 W
Cable Size	3 x 1.5mm ²	3 x 2.5mm ²
Compliance	SAA: AS/NZS 3105	SAA: AS/NZS 3105

FEATURES AND BENEFITS

- UV Stabilised & resistant poly case
- Australian designed
- 180° Swivel bracket
- 3 Position Reel swivel locking
- Powder coated steel bracket
- Automatic spring rewind
- Thermal overload protection
- SAA: AS/NZS 3105 compliant
- 15 Amp 3 pin flat plug for 15 A applications (C1EC15A20D-AU only)

PACKAGE INCLUDES

- Electrical Cable Reel - 10 A or 15 A (model dependent)
- Feed Cable - 1.5 metre

Applications:

Suitable for most workspaces where cable management is required.
Indoor use only.

