



PRODUCT INFORMATION

DECEMBER 2017



2006SS


20L Stainless Steel Drum Pump

The 2006SS 20L stainless steel drum pump available from Alemlube is the ideal pump for transferring soluble, corrosive, volatile, aggressive chemicals and solvents such as esters, ketones, alcohols, acids, hydrocarbons, chlorinated hydrocarbons and water based liquids.

The easy push/pull operation allows the user to have total control over the liquid being dispensed from 20 litre drums and delivers up to 230ml per stroke.

The self priming 2006SS 20L drum pump is manufactured with wetted parts of 316SS, 304SS, Teflon and is also suitable for transferring petroleum based fluids of light to medium viscosity such as automotive additives, diesel fuel, lube oils, kerosene, solvents, thinners, cleaning solutions, transmission fluids, machine oils and motor oils.

Always consult Alemlube for chemical compatibility for this pump.

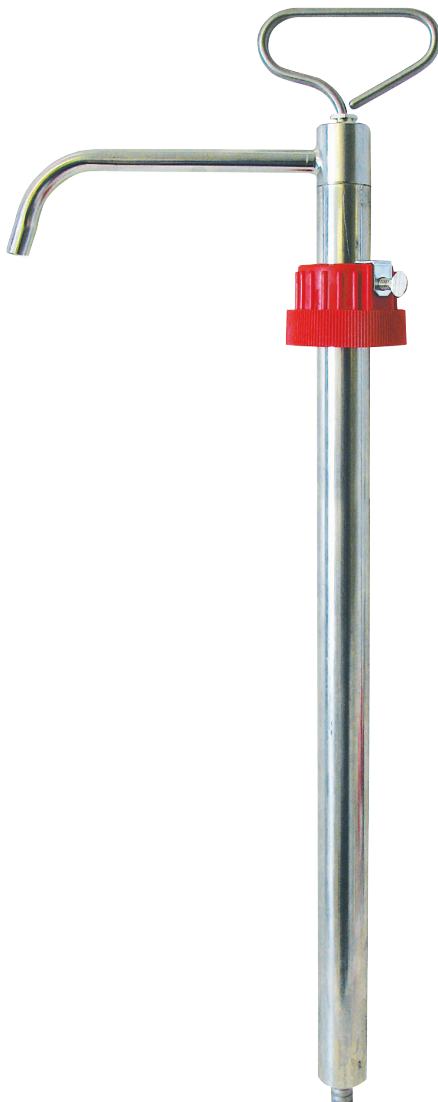

PRODUCT SPECIFICATIONS, FEATURES AND BENEFITS

Piston type pump with easy push pull action

Delivers up to 230ml per stroke

Suitable for corrosive, volatile, aggressive chemicals and solvents

Also suitable for light to medium viscosity petroleum based fluids

Wetted parts of 316SS, 304SS and Teflon

558mm long downtube

1/2" inlet and outlet

Suitable for the transfer of fluids up to a viscosity 5,000 SSU

Supplied complete with 2"(f) bung adaptor

Also available: 733

205L Stainless Steel Drum Pump

0.5L per stroke / 20L per minute

ORDERING INFORMATION

2006SS

20L Stainless Steel Drum Pump

